

**Los Angeles World Airports  
Van Nuys Airport Noisier Aircraft  
Phaseout Draft Environmental Impact  
Report**

**VOLUME 2  
Appendices**

*Prepared for:*

Los Angeles World Airports  
7301 World Way West, 3<sup>rd</sup> Floor  
Los Angeles, CA 90045  
Contact: Karen Hoo  
(310) 646-3853 x-1003

*Prepared by:*

ICF Jones & Stokes  
9775 Businesspark Ave, Suite 200  
San Diego, CA 92131  
Contact: Bob Stark, AICP  
858/578-8964

September 2008



**APPENDIX A**  
**DRAFT PHASEOUT ORDINANCE**





DRAFT PHASEOUT ORDINANCE WITH HISTORIC AND MAINTENANCE AIRCRAFT  
EXEMPTIONS

**ORDINANCE NO. \_\_\_\_\_(DRAFT – VNY)**

An ordinance approving a Regulation proposed by Resolution No. 17154 and revised by Resolution No. \_\_\_\_\_ of the Board of Airport Commissioners of the City of Los Angeles amending Ordinance No. 155,727, known as the Van Nuys Noise Abatement and Curfew Regulation, to add Sections 5.2 and 5.3, thereby adopting maximum noise levels for aircraft operations at Van Nuys Airport.

**THE PEOPLE OF THE CITY OF LOS ANGELES  
DO ORDAIN AS FOLLOWS:**

Section 1. The Regulation, proposed by Resolution No. 17154 of the Board of Airport Commissioners on June 13, 1990, and revised by Resolution No. \_\_\_\_\_, is hereby approved. The Regulation contained in Resolution No. \_\_\_\_\_ provides an additional noise abatement regulation for aircraft at Van Nuys Airport (VNY).

Sec. 2. Ordinance No. 155,727 of the City of Los Angeles is amended by adding two new sections to read as follows:

Sec. 5.2. Aircraft Operations - Maximum Noise Levels. No person shall pilot, operate, or permit to be operated any aircraft in violation of the following:

(a) On or after January 1, 2009: No aircraft may arrive or depart the Airport whose Advisory Circular 36-3A, as amended (AC-36-3), takeoff noise level equals or exceeds 85 dBA.

(b) On or after January 1, 2011: No aircraft may arrive or depart the Airport whose AC 36-3 takeoff noise level equals or exceeds 83 dBA.

(c) On or after January 1, 2014: No aircraft may arrive or depart the Airport whose AC 36-3 takeoff noise level equals or exceeds 80 dBA.

(d) On or after January 1, 2016: No aircraft may arrive or depart the Airport whose AC 36-3 takeoff noise level equals or exceeds 77 dBA.

Sec. 5.3. Exemptions from Maximum Noise Levels. The following aircraft shall be exempt from the provisions of Section 5.2 of this Regulation:

(a) Military aircraft and any government-owned or operated aircraft involved in law enforcement, emergency, fire or rescue operations.

(b) Aircraft of a type or class not included in AC 36-3 for which evidence has been furnished to the Board that the departure noise of the aircraft will not

exceed the applicable takeoff noise level restriction set forth in Section 5.2 of this Regulation. An applicant for an exemption under this subsection shall provide appropriate information to validate the aircraft's ability to comply with this Regulation. The Board reserves the right to validate the aircraft's compliance ability through the utilization of actual flight noise measurements.

(c) Aircraft that have been identified by the Federal Aviation Administration in writing as having a lower takeoff noise level than the applicable takeoff noise level restriction in Section 5.2.

(d) Aircraft engaged in a bona fide medical or life-saving emergency for which acceptable evidence has been submitted in writing to the General Manager within 72 hours prior to or subsequent to the arrival or departure.

(e) Aircraft exempted by federal or state law for a bona fide medical or life-saving emergency.

(f) Historic Aircraft: Exemptions shall be provided to historic aircraft under the following conditions:

(1) Aircraft of types first flown prior to January 1, 1950, shall be exempt from the provisions of Section 5.2 of this Regulation.

(2) Military aircraft of types first flown on or after January 1, 1950, shall be exempt from the provisions of Section 5.2 of this Regulation until January 1, 2016.

(3) The Board shall review the exemption provisions related to historic aircraft on or before January 1, 2019, and every ten years thereafter, to consider and recommend appropriate revisions to this section of the Regulation.

(g) Repair and Maintenance: Until January 1, 2016, exemptions shall be provided to aircraft conducting operations associated with performance of major repairs or major alterations, required maintenance inspections related to major repairs or major alterations, or systems installations and warranty work (collectively, "work") provided all of the following conditions are fully satisfied:

(1) Prior to the day of arrival of the aircraft the Airport Manager receives a written "work notice" containing the anticipated date of arrival, the name of the aircraft owner and operator, the aircraft type and registration "N" number, the name of the company or entity contracted to perform the work, a description of the work to be performed, and an estimate of the duration of the stay; and

- (2) The aircraft is not being charged a tie-down fee or other use fee by an Airport tenant; and
- (3) The aircraft owner or operator obtains a written permit from the Airport Manager authorizing an exemption under this subsection prior to or within 24 hours of arrival of the aircraft at the Airport; and
- (4) The application for the aforementioned written permit identifies any flight test operations that will be conducted at VNY that are associated with the work; and
- (5) The aircraft owner or operator complies with all conditions and terms stated in the written permit granted by the Airport Manager, including but not limited to mandatory daytime hours for flight arrivals, departures, and any test operations associated with the work; and
- (6) The aircraft owner or operator provides written notice of departure to the Airport Manager within 24 hours of departure from the Airport.

For purposes of this exemption, “major repairs” and “major alterations” are defined by FAR Part 43, Appendix A and do not include “preventive maintenance” as defined by FAR Part 43, Appendix A.

(h) Permanently departing aircraft: A one-time exemption shall be provided to an aircraft departing the Airport on a permanent basis provided the aircraft owner or operator obtains a written permit from the Airport Manager authorizing an exemption and the owner and operator complies with all conditions set forth in that permit.

Sec. 3. The City Clerk shall certify to the passage of this ordinance and have it published in accordance with Council policy, either in a daily newspaper circulated in the City of Los Angeles or by posting for ten days in three public places in the City of Los Angeles: one copy on the bulletin board located at the Main Street entrance to the Los Angeles City Hall; one copy on the bulletin board located at the Main Street entrance to the Los Angeles City Hall East; and one copy on the bulletin board located at the Temple Street entrance to the Los Angeles County Hall of Records.

I hereby certify that this ordinance was passed by the Council of the City of Los Angeles, at its meeting of \_\_\_\_\_.

FRANK T. MARTINEZ, City Clerk

By \_\_\_\_\_  
Deputy

Approved \_\_\_\_\_

\_\_\_\_\_  
Mayor

Approved as to Form and Legality

ROCKARD J. DELGADILLO, City Attorney

By \_\_\_\_\_  
LYNN MAYO  
Deputy City Attorney

Date \_\_\_\_\_

File No. \_\_\_\_\_

**APPENDIX A.1  
DRAFT PHASEOUT ORDINANCE  
(ALTERNATIVE 2)**



DRAFT PHASEOUT ORDINANCE WITH HISTORIC, MAINTENANCE, AND STAGE 3  
AND STAGE 4 AIRCRAFT EXEMPTIONS

**ORDINANCE NO. \_\_\_\_\_ (DRAFT – VNY)**

An ordinance approving a Regulation proposed by Resolution No. 17154 and revised by Resolution No. \_\_\_\_\_ of the Board of Airport Commissioners of the City of Los Angeles amending Ordinance No. 155,727, known as the Van Nuys Noise Abatement and Curfew Regulation, to add Sections 5.2 and 5.3, thereby adopting maximum noise levels for aircraft operations at Van Nuys Airport.

**THE PEOPLE OF THE CITY OF LOS ANGELES  
DO ORDAIN AS FOLLOWS:**

Section 1. The Regulation, proposed by Resolution No. 17154 of the Board of Airport Commissioners on June 13, 1990, and revised by Resolution No. \_\_\_\_\_, is hereby approved. The Regulation contained in Resolution No. \_\_\_\_\_ provides an additional noise abatement regulation for aircraft at Van Nuys Airport (VNY).

Sec. 2. Ordinance No. 155,727 of the City of Los Angeles is amended by adding two new sections to read as follows:

Sec. 5.2. Aircraft Operations - Maximum Noise Levels. No person shall pilot, operate, or permit to be operated any aircraft in violation of the following:

(a) On or after January 1, 2009: No aircraft may arrive or depart the Airport whose Advisory Circular 36-3A, as amended (AC-36-3), takeoff noise level equals or exceeds 85 dBA.

(b) On or after January 1, 2011: No aircraft may arrive or depart the Airport whose AC 36-3 takeoff noise level equals or exceeds 83 dBA.

(c) On or after January 1, 2014: No aircraft may arrive or depart the Airport whose AC 36-3 takeoff noise level equals or exceeds 80 dBA.

(d) On or after January 1, 2016: No aircraft may arrive or depart the Airport whose AC 36-3 takeoff noise level equals or exceeds 77 dBA.

Sec. 5.3. Exemptions from Maximum Noise Levels. The following aircraft shall be exempt from the provisions of Section 5.2 of this Regulation:

(a) Aircraft certificated as Stage 3 or Stage 4 pursuant to 14 Code of Federal Regulation Part 36.

(b) Military aircraft and any government-owned or operated aircraft involved in law enforcement, emergency, fire or rescue operations.

(c) Aircraft of a type or class not included in AC 36-3 for which evidence has been furnished to the Board that the departure noise of the aircraft will not exceed the applicable takeoff noise level restriction set forth in Section 5.2 of this Regulation. An applicant for an exemption under this subsection shall provide appropriate

information to validate the aircraft's ability to comply with this Regulation. The Board reserves the right to validate the aircraft's compliance ability through the utilization of actual flight noise measurements.

(c) Aircraft that have been identified by the Federal Aviation Administration in writing as having a lower takeoff noise level than the applicable takeoff noise level restriction in Section 5.2.

(d) Aircraft engaged in a bona fide medical or life-saving emergency for which acceptable evidence has been submitted in writing to the General Manager within 72 hours prior to or subsequent to the arrival or departure.

(e) Aircraft exempted by federal or state law for a bona fide medical or lifesaving emergency.

(f) Historic Aircraft: Exemptions shall be provided to historic aircraft under the following conditions:

(1) Aircraft of types first flown prior to January 1, 1950, shall be exempt from the provisions of Section 5.2 of this Regulation.

(2) Military aircraft of types first flown on or after January 1, 1950, shall be exempt from the provisions of Section 5.2 of this Regulation until January 1, 2016.

(3) The Board shall review the exemption provisions related to historic aircraft on or before January 1, 2019, and every ten years thereafter, to consider and recommend appropriate revisions to this section of the Regulation.

(g) Repair and Maintenance: Until January 1, 2016, exemptions shall be provided to aircraft conducting operations associated with performance of major repairs or major alterations, required maintenance inspections related to major repairs or major alterations, or systems installations and warranty work (collectively, "work") provided all of the following conditions are fully satisfied:

(1) Prior to the day of arrival of the aircraft the Airport Manager receives a written "work notice" containing the anticipated date of arrival, the name of the aircraft owner and operator, the aircraft type and registration "N" number, the name of the company or entity contracted to perform the work, a description of the work to be performed, and an estimate of the duration of the stay; and

(2) The aircraft is not being charged a tie-down fee or other use fee by an Airport tenant; and

(3) The aircraft owner or operator obtains a written permit from the Airport Manager authorizing an exemption under this subsection prior to or within 24 hours of arrival of the aircraft at the Airport; and

(4) The application for the aforementioned written permit identifies any flight test operations that will be conducted at VNY that are associated with the work; and

(5) The aircraft owner or operator complies with all conditions and terms stated in the



written permit granted by the Airport Manager, including but not limited to mandatory daytime hours for flight arrivals, departures, and any test operations associated with the work; and

(6) The aircraft owner or operator provides written notice of departure to the Airport Manager within 24 hours of departure from the Airport.

For purposes of this exemption, "major repairs" and "major alterations" are defined by FAR Part 43, Appendix A and do not include "preventive maintenance" as defined by FAR Part 43, Appendix A.

(h) Permanently departing aircraft: A one-time exemption shall be provided to an aircraft departing the Airport on a permanent basis provided the aircraft owner or operator obtains a written permit from the Airport Manager authorizing an exemption and the owner and operator complies with all conditions set forth in that permit.

Sec. 3. The City Clerk shall certify to the passage of this ordinance and have it published in accordance with Council policy, either in a daily newspaper circulated in the City of Los Angeles or by posting for ten days in three public places in the City of Los Angeles: one copy on the bulletin board located at the Main Street entrance to the Los Angeles City Hall; one copy on the bulletin board located at the Main Street entrance to the Los Angeles City Hall East; and one copy on the bulletin board located at the Temple Street entrance to the Los Angeles County Hall of Records.

I hereby certify that this ordinance was passed by the Council of the City of Los Angeles, at its meeting of

FRANK T. MARTINEZ, City Clerk

By \_\_\_\_\_  
Deputy

Approved \_\_\_\_\_

\_\_\_\_\_  
Mayor

Approved as to Form and Legality

ROCKARD J. DELGADILLO, City Attorney

LYNN MAYO, Deputy City Attorney

Date

File No.



# **APPENDIX B NOISE TECHNICAL REPORT**



**Van Nuys Airport Phaseout of Noisier  
Aircraft Project**

**Aircraft Operations Forecast and Noise  
Analysis Report**

*Prepared for:*

Los Angeles World Airports  
7301 World Way West, 3<sup>rd</sup> Floor  
Los Angeles, CA 90045  
Contact: Karen Hoo  
(310) 646-3853 x-1003

*Prepared by:*

Harris Miller Miller & Hanson, Inc.  
77 South Bedford Street  
Burlington, MA 01803  
Contact: Ted Baldwin  
(781) 229-0707

*And*

SH&E, an ICF International Company  
One Main Street  
Cambridge, MA 02142  
Contact: Peter Stumpp  
(617) 218-3522

September 2008



# TABLE OF CONTENTS

| <b>Section</b> | <b>Page</b>   |
|----------------|---|
| 1.0            | Introduction ..... 1  |
| 2.0            | CEQA Noise Analysis Requirements..... 2                                       |
| 2.1            | Determination of Compatible Land Uses ..... 3                                 |
| 2.2            | Identifying Significant Changes in Noise Exposure ..... 3                     |
| 3.0            | Application of Compatible Land Use and Significance<br>Thresholds ..... 4     |
| 4.0            | Noise Analysis Methodologies ..... 4  |
| 4.1            | Analysis Years ..... 5  |
| 5.0            | VNY Baseline and Forecast Aircraft Operations..... 6                          |
| 5.1            | Estimation of Baseline Aircraft Operations ..... 7                            |
| 5.2            | Baseline (2007) Activity ..... 12   |
| 5.3            | Historic and Forecast Growth in VNY Aircraft<br>Operations ..... 19           |
| 5.4            | Forecast (2014) Activity—Project ..... 23                                     |
| 5.5            | Forecast (2014) Activity—Alternative 1 ..... 30                               |
| 5.6            | Forecast (2014) Activity—Alternative 2 ..... 34                               |
| 6.0            | Overflight Operations..... 38   |
| 6.1            | Forecast Methodology ..... 38   |
| 6.2            | Baseline (2007) and Forecast (2014) Activity ..... 39                         |
| 7.0            | Potential Diversions to Other Airports..... 42                                |
| 7.1            | Impact of Project on GA Jet Operations at VNY ..... 42                        |
| 7.2            | Identifying Potential Diversion Airports ..... 44                             |
| 7.3            | Forecast of Aircraft Shifted from VNY to Other Airports ..... 47              |
| 8.0            | Underlying Operations at Displacement Airports ..... 55                       |
| 8.1            | Forecast Methodology ..... 55   |
| 8.2            | Baseline (2007) Activity at Diversion Airports ..... 59                       |
| 8.3            | Forecast (2014/2016) Activity ..... 77  |
| 9.0            | Project Analysis of CNEL Exposure at VNY ..... 90                             |
| 9.1            | AEM Calculations ..... 91   |
| 9.2            | CNEL Contour Analyses ..... 93  |
| 9.3            | Population, Dwelling Unit, and Sensitive-Receptor<br>Impact Analyses ..... 93 |
| 9.4            | Supplemental Threshold of Significance Analysis ..... 96                      |
| 9.5            | Effect of Historic Aircraft and Maintenance-Related<br>Operations ..... 97    |
| 10.0           | 2014/2016 Project Analysis at Diversion Airports ..... 97                     |
| 10.1           | Area Equivalent Method CNEL Screening Analysis ..... 97                       |
| 10.2           | Single-Event Noise Analysis (“Berkeley Jets”) ..... 102                       |
| 11.0           | VNY Noise Management Program ..... 104  |
| 11.1           | Major Noise Abatement Elements ..... 105                                      |
| 11.2           | Major Compatible Land Use Measures ..... 105                                  |

12.0 Significant Unavoidable Impacts..... 105

**Appendices**

- B.1 Noise Terminology**
- B.2 Aircraft Noise Effects**
- B.3 Noise/Land Use Compatibility**
- B.4 Development of VNY Noise Contours**
- B.5 Existing Noise Management Measures**
- B.6 VNY Noise Ordinances**
- B.7 Supplemental Noise Analysis Results**
- B.8 Supplemental Berkeley Jets Analysis**



# TABLES

|   | <b>Page</b> |
|---|-------------|
| 1. Total Aircraft Operations at VNY, 2004 .....   | 8           |
| 2. Estimated 2004 VNY Aircraft Operations by Aircraft<br>Category .....   | 9           |
| 3. Change in VNY Aircraft Operations, 2004–2007 .....   | 11          |
| 4. Estimated 2007 VNY Aircraft Operations by Aircraft<br>Category .....   | 12          |
| 5. Baseline 2007 Operations by Aircraft Category.....   | 13          |
| 6. Baseline 2007 Operations by Aircraft Category and Time of<br>Day .....   | 13          |
| 7. Baseline 2007 Operations by Aircraft Category, Time of<br>Day, and Direction .....                             | 14          |
| 8. Baseline 2007 Operations by INM Type .....   | 16          |
| 9. Baseline 2007 Jet Operations by Noise Stage, Direction,<br>and Time of Day .....                               | 18          |
| 10. Historic Aircraft Operations at VNY, 1995–2004 .....  | 20          |
| 11. Forecast Average Annual Growth in Aircraft Operations at<br>VNY by Aircraft Category, 2004–2014.....          | 21          |
| 12. Forecast 2014 Operations by Aircraft Category under the<br>Proposed Project .....                             | 24          |
| 13. Forecast 2014 Operations by Aircraft Category and Time<br>of Day under the Proposed Project.....              | 24          |
| 14. Forecast 2014 Operations by Aircraft Category, Time of<br>Day, and Direction under the Proposed Project ..... | 25          |

|     |  |    |
|-----|--|----|
| 15. | Forecast 2014 Operations by Aircraft Category and INM Type under the Proposed Project..... | 27 |
| 16. | Forecast 2014 Project Jet Operations by Noise Stage.....                                   | 30 |
| 17. | Forecast 2014 Operations by Aircraft Category, Project and Alternative 1.....              | 30 |
| 18. | Forecast 2014 Operations by Type and Time of Day, Project and Alternative 1.....           | 31 |
| 19. | Forecast 2014 Business Jet Operations by INM Type, Project and Alternative 1.....          | 33 |
| 20. | Forecast 2014 Jet Operations by Noise Stage, Project and Alternative 1.....                | 34 |
| 21. | Forecast 2014 Operations by Aircraft Category, Project and Alternative 2.....              | 35 |
| 22. | Forecast 2014 Operations by Direction and Time of Day, Project and Alternative 2.....      | 36 |
| 23. | Forecast 2014 Business Jet Operations by INM Type, Project and Alternative 2.....          | 37 |
| 24. | Forecast 2014 Jet Operations by Noise Stage, Project and Alternative 2.....                | 38 |
| 25. | Baseline and Forecast Overflights of VNY .....   | 38 |
| 26. | VNY Overflight Growth Assumptions.....   | 39 |
| 27. | Van Nuys Overflight Operations by INM Type.....  | 40 |
| 28. | VNY Jet Operations Affected by the Project.....  | 42 |
| 29. | VNY Flights by Individual Noisy Jet Aircraft in 2006.....                                  | 43 |
| 30. | Nineteen Los Angeles Area Airports.....  | 45 |
| 31. | Distance and Driving Times from Van Nuys to Nine Selected Los Angeles Area Airports.....   | 46 |
| 32. | GA Jet Operations Shifted from VNY in 2014.....  | 49 |
| 33. | 2014 Business Jet Operations Shifted from VNY to BUR .....                                 | 50 |
| 34. | 2014 Business Jet Operations Shifted from VNY to CMA.....                                  | 51 |

|     |  |    |
|-----|--|----|
| 35. | 2014 Business Jet Operations Shifted from VNY to LAX .....   | 52 |
| 36. | 2014 Business Jet Operations at BUR, CMA, and LAX .....  | 53 |
| 37. | 2016 Maintenance-Related Operations Shifted to WJF .....   | 54 |
| 38. | 2016 Privately Owned Military Jet Operations Shifted to<br>CNO.....  | 55 |
| 39. | Historic Business Jet Operations at Diversion Airports and<br>VNY, 2000 to 2006 .....  | 57 |
| 40. | Actual and Forecast Average Annual Growth in Business<br>Jet Operations at Diversion Airports.....                             | 57 |
| 41. | Forecast Average Annual Growth Rates for Non-Business<br>Jet Operations at Diversion Airports, 2006–2014 and<br>2014–2016..... | 58 |
| 42. | Forecast Growth Rate Assumptions for Aircraft Operations<br>at Diversion Airports, 2006–2007 .....                             | 59 |
| 43. | Estimated 2007 Baseline Operations at Diversion Airports<br>by Type of Activity.....   | 59 |
| 44. | 2007 Baseline Operations at Bob Hope Airport by Type of<br>Activity .....  | 60 |
| 45. | 2007 Baseline Operations at Bob Hope Airport by Type of<br>Activity and Time of Day .....                                      | 61 |
| 46. | 2007 Baseline Operations at Bob Hope Airport by Type of<br>Activity, Time of Day, and Direction.....                           | 61 |
| 47. | 2007 Baseline Operations at Bob Hope Airport by INM<br>Aircraft Type .....   | 62 |
| 48. | 2007 Baseline Business Jet Operations at Bob Hope<br>Airport by Noise Stage.....   | 63 |
| 49. | 2007 Baseline Operations at Camarillo Airport by Type of<br>Activity .....   | 64 |
| 50. | 2007 Baseline Operations at Camarillo Airport by Type of<br>Activity and Time of Day .....                                     | 64 |
| 51. | 2007 Baseline Operations at Camarillo Airport by Type of<br>Activity, Time of Day, and Direction.....                          | 65 |

|     |  |    |
|-----|--|----|
| 52. | 2007 Baseline Operations at Camarillo Airport by INM Aircraft Type .....   | 65 |
| 53. | 2007 Baseline Business Jet Operations at Camarillo Airport by Noise Stage.....                                     | 67 |
| 54. | 2007 Baseline Operations at Chino Airport by Type of Activity .....  | 67 |
| 55. | 2007 Baseline Operations at Chino Airport by Type of Activity and Time of Day .....                                | 67 |
| 57. | 2007 Baseline Operations at Chino Airport by Type of Activity, Time of Day and Direction .....                     | 68 |
| 58. | 2007 Baseline Operations at Chino Airport by INM Aircraft Type.....  | 68 |
| 59. | 2007 Baseline Business Jet Operations at Chino Airport by Noise Stage .....  | 69 |
| 60. | 2007 Baseline Operations at Los Angeles International Airport by Type of Activity .....                            | 70 |
| 61. | 2007 Baseline Operations at Los Angeles International Airport by Type of Activity and Time of Day.....             | 70 |
| 62. | 2007 Baseline Operations at Los Angeles International Airport by Type of Activity, Time of Day, and Direction..... | 71 |
| 63. | 2007 Baseline Operations at Los Angeles International Airport by INM Aircraft Type .....                           | 71 |
| 65. | 2007 Baseline Operations at Fox Field by Type of Activity .....  | 74 |
| 66. | 2007 Baseline Operations at Fox Field by Type of Activity and Time of Day .....                                    | 75 |
| 67. | 2007 Baseline Operations at Fox Field by Type of Activity, Time of Day, and Direction .....                        | 75 |
| 68. | 2007 Baseline Operations at Fox Field by INM Aircraft Type.....  | 76 |
| 69. | 2007 Baseline Business Jet Operations at Fox Field by Noise Stage .....  | 77 |

|     |   |    |
|-----|---|----|
| 70. | Baseline and Forecast Operations at Bob Hope Airport by Type of Activity .....                          | 77 |
| 71. | Baseline and Forecast Operations at Bob Hope Airport by Time of Day .....                               | 78 |
| 72. | Forecast Operations at Bob Hope Airport by INM Aircraft Type.....                                       | 78 |
| 73. | Baseline and Forecast Business Jet Operations at Bob Hope Airport by Noise Stage .....                  | 80 |
| 74. | Baseline and Forecast Operations at Camarillo Airport by Type of Activity .....                         | 80 |
| 75. | Baseline and Forecast Operations at Camarillo Airport by Time of Day .....                              | 81 |
| 76. | Forecast Operations at Camarillo Airport by INM Aircraft Type.....                                      | 81 |
| 77. | Baseline and Forecast Business Jet Operations at Camarillo Airport by Noise Stage.....                  | 82 |
| 78. | Baseline and Forecast Operations at Chino Airport by Type of Activity .....                             | 83 |
| 79. | Baseline and Forecast Operations at Chino Airport by Time of Day .....                                  | 83 |
| 80. | Forecast Operations at Chino Airport by INM Aircraft Type .....   | 83 |
| 81. | Baseline and Forecast Business Jet Operations at Chino Airport by Noise Stage.....                      | 84 |
| 82. | Baseline and Forecast Operations at Los Angeles International Airport by Type of Activity .....         | 85 |
| 83. | Baseline and Forecast Operations at Los Angeles International Airport by Time of Day .....              | 85 |
| 84. | Forecast Operations at Los Angeles International Airport by INM Aircraft Type .....                     | 85 |
| 85. | Baseline and Forecast Business Jet Operations at Los Angeles International Airport by Noise Stage ..... | 88 |

|      |   |     |
|------|---|-----|
| 86.  | Baseline and Forecast Operations at Fox Field by Type of Activity .....   | 89  |
| 87.  | Baseline and Forecast Operations at Fox Field by Time of Day .....  | 89  |
| 88.  | Forecast Operations at Fox Field by INM Aircraft Type.....  | 89  |
| 89.  | Baseline and Forecast Business Jet Operations at Fox Field by Noise Stage.....  | 90  |
| 90.  | AEM Analyses: 2014 Project and Alternatives vs. 2007 Baseline .....   | 92  |
| 91.  | AEM Analyses: 2014 Project and Alternative 2, Exempted Stage 3 and 4 Aircraft, vs. 2014 Alternative 1, No Project.....  | 92  |
| 92.  | Estimated Dwelling Units and Residents within 2007 and 2014 CNEL Contours (with and without sound insulation) .....   | 95  |
| 93.  | Supplemental Noise Analysis Results for the Los Angeles Baptist City Mission, at 16514 Nordhoff Street .....  | 96  |
| 94.  | LAX AEM Analyses: 2014 Project and Alternatives vs. 2007 Baseline .....   | 98  |
| 95.  | CMA AEM Analyses: 2014 Project and Alternatives vs. 2007 Baseline .....   | 99  |
| 96.  | CNO AEM Analyses: 2016 Project and Alternatives vs. 2007 Baseline .....   | 100 |
| 97.  | WJF AEM Analyses: 2016 Project and Alternatives vs. 2007 Baseline .....   | 100 |
| 98.  | BUR AEM Analyses: 2014 Project and Alternatives vs. 2007 Baseline .....   | 101 |
| 99.  | BUR AEM Analyses Utilizing BUR Forecast, with and without Proposed BUR Curfew .....   | 102 |
| 100. | Statistics Related to Frequency of Additional Operations that the Proposed Project and Alternative 2 (Exempted Stage 3 and 4 Aircraft Alternative) Would Divert to Other Airports ..... | 103 |

# FIGURES

|   | <b>Follows Page</b>   |
|---|---|
| 1 | Duration of 2006 VNY Flights in Noisier Jets..... on page 47  |
| 2 | Annual Departure Delays of 30 Minutes or More..... on page 48   |
| 3 | 2014 Proposed Project CNEL Compared to 2007 Baseline<br>CNEL ..... 94   |
| 4 | 2014 Proposed Project CNEL Compared to 2014 No-<br>Project (Alt. 1) ..... 94  |
| 5 | 2014 No-Project (Alt. 1) CNEL<br>Compared to 2007 Baseline CNEL..... 94   |
| 6 | 2014 Project CNEL Compared to Alt. 2, Exempted Stage 3<br>and 4 Aircraft CNEL..... 94   |
| 7 | Supplemental Threshold of Significance Analysis<br>Locations ..... 96   |
| 8 | Effects on 2014 Project CNEL Contours of Eliminating: (1)<br>Historic Aircraft Exemption and (2) Maintenance Operation<br>Exemption..... 98 |

This page left blank intentionally.



# NOISE ANALYSIS

## 1.0 Introduction

As discussed in Chapter 2, Project Description, the primary project objective is to reduce noise exposure around Van Nuys Airport (VNY) by gradually phasing out operations of noisier aircraft through a four-step lowering of a limit on departure noise levels as published in the current release of Federal Aviation Administration (FAA) Advisory Circular (AC) 36-3.<sup>1</sup>

The project would not involve any physical development or change in land use, and would not affect the manner in which operations are conducted at VNY (e.g., runway used, flight path followed, power settings, rates of climb or descent, or other factors that affect the noise exposure associated with a specific operation). Therefore, the only changes in noise exposure at VNY would result from changes in aircraft operations that aircraft operators make to comply with the limit. As discussed in Chapter 2.0, these responses would include cancelling operations, conducting operations at another regional airport, or substituting quieter aircraft that comply with the limit. Therefore, as this section presents, the project would decrease noise levels around VNY. Noise increases would occur at the airports to which operations are diverted; those increases are quantified and assessed.

This noise analysis documentation is presented in three primary steps:

### **Review of analysis and impact assessment requirements**

- CEQA noise analysis requirements (compatible land use),
- Application of compatible land use and significance thresholds,

### **Description of analysis methods, assumptions, and data**

- Noise analysis methodologies,
- VNY operations,
- Overflight operations,
- Potential diversions to other airports,
- Underlying operations at diversion airports ,

---

<sup>1</sup> U.S. Department of Transportation, Federal Aviation Administration. 2002. *Estimated Airplane Noise Levels in A-weighted Decibels*. Advisory Circular (AC) 36-3H (the current release is “H”; the next release will be “I,” “J,” etc.). Office of Environment and Energy. Washington, DC.

**Comparison of analytical results to impact assessment criteria**

- Project analysis of CNEL exposure at VNY,
- Project analysis at diversion airports,
- VNY noise management program,
- Significant unavoidable impacts.

Several appendices to this document provide reference and explanatory information:

- B.1 – Noise terminology,
- B.2 – Aircraft noise effects,
- B.3 – Noise/land use compatibility,
- B.4 – Development of VNY noise contours, and
- B.5 – Existing noise management measures.

## 2.0 CEQA Noise Analysis Requirements

California regulations require use of a decibel (dB) -based measure called Community Noise Equivalent Level (CNEL) to describe cumulative noise exposure resulting from aircraft operations.<sup>2</sup> In very simple terms, CNEL is a measure of long-term noise exposure (usually for an entire year in environmental impact report [EIR] noise analyses) that includes adjustments for increased sensitivity to noise during the evening (7 p.m.–10 p.m.) and night (10 p.m.–7 a.m.) time periods. Appendix B.1 provides an introduction to CNEL and other noise-related terms used in this EIR.

In airport noise assessments, such as noise elements of EIRs, CNEL projections have two principal functions:

- to provide a quantitative basis for assessing land use compatibility with aircraft noise exposure, and
- to provide a means for determining the significance of changes in noise exposure that might result from changes in airport layout, operations, or activity levels.

Both of these functions require the application of objective criteria, as discussed below.

---

<sup>2</sup> Title 21, California Code of Regulations, California Airport Noise Standards, Subchapter 6, Noise Standards, Article 1, General, Section 5001, Definitions, p 220.

## 2.1 Determination of Compatible Land Uses

The federal government defers to local land use jurisdictions for determination of the noise exposure that is acceptable for any given land use. Despite that deference, most local land use control jurisdictions and airport proprietors (including California, Los Angeles, and Los Angeles World Airports [LAWA]) base aircraft noise and land use compatibility decisions on federal guidelines set forth in Federal Aviation Regulation (FAR) Part 150.<sup>3</sup> Appendix B.3 presents the federal, state, city, and LAWA noise guidelines.

Table 1 in Appendix B.3 presents a detailed table of noise and land use compatibility criteria adopted by LAWA, which are consistent with City of Los Angeles, state, and federal guidelines and with all applicable California Environmental Quality Act (CEQA) requirements. At the most basic level, all of these government agencies consider all land uses to be compatible with cumulative noise exposure below 65 dB CNEL.

## 2.2 Identifying Significant Changes in Noise Exposure

The City of Los Angeles has adopted guidelines for conducting assessments of aircraft noise under CEQA, which define a “significance threshold” as follows: “A significant impact on ambient noise levels would normally occur if noise levels at a noise sensitive use attributable to airport operations exceed 65 dB and the project increases ambient noise levels by 1.5 dB CNEL or greater.”<sup>4</sup>

This threshold is consistent with the FAA policies and procedures for compliance with the National Environmental Policy Act (NEPA) as they apply to noise-sensitive land uses:<sup>5</sup>

- A significant impact would occur if the project-related action will cause noise-sensitive areas already at or above CNEL 65 dB to experience an increase in noise of CNEL 1.5 dB or greater when compared to no action; and
- If noise-sensitive areas at or above CNEL 65 dB will have an increase of CNEL 1.5 dB or more, noise-sensitive areas lying between CNEL 60 and 65 dB should be examined to identify whether increases of CNEL of 3 dB or more occur due to the proposed action. If so, noise mitigation measures should be considered.

<sup>3</sup> 14 Code of Federal Regulations (CFR) Part 150, *Airport Noise Compatibility Planning*.

<sup>4</sup> City of Los Angeles. 2006. *L.A. CEQA Thresholds Guide*. Environmental Affairs Department. Los Angeles, CA, p. I.4-3–I.4-5.

<sup>5</sup> Federal Aviation Administration. 2004. *Environmental Impacts: Policies and Procedures*. Order 1050.1E. Washington, DC. Appendix A, Section 14.4, p. A-61–A-63.

### 3.0 Application of Compatible Land Use and Significance Thresholds

Based on the preceding definitions of compatible land uses and thresholds of significance, CEQA guidelines require categorizing the calculated changes in noise exposure according to four categories:<sup>6</sup>

- Potentially significant impact,
- Less-than-significant impact with mitigation incorporation,
- Less-than-significant impact, and
- No impact.

The CEQA guidelines identify six specific questions to consider in assessing potential noise effects:

- Would the project result in exposure of persons to or generation of noise levels in excess of standards established in the local general plan or noise ordinance or applicable standards of other agencies?
- Would the project result in exposure of persons to or generation of excessive groundborne vibration or groundborne noise levels?
- Would the project result in a substantial permanent increase in ambient noise levels in the project vicinity above levels existing without the project?
- Would the project result in a substantial temporary or periodic increase in ambient noise levels in the project vicinity above levels existing without the project?
- For a project located within an airport land use plan or, where such a plan has not been adopted, within 2 miles of a public airport or public use airport, would the project expose people residing or working in the project area to excessive noise levels?
- For a project within the vicinity of a private airstrip, would the project expose people residing or working in the project area to excessive noise levels?

### 4.0 Noise Analysis Methodologies

Determining whether an action, such as the proposed project, will result in a significant change in noise exposure requires calculating CNEL values.

---

<sup>6</sup> California Code of Regulations (CCR). As amended July 27, 2007. Title 14, Chapter 3, *Guidelines for Implementation of the California Environmental Quality Act*. California Division of Aeronautics, Department of Transportation. Sacramento, CA. Appendix G, Environmental Checklist Form, p. 11.

City of Los Angeles CEQA guidelines require use of a recognized aircraft noise model to calculate CNEL.<sup>7</sup> The guidelines identify four candidate models. Two of the models apply to airports at which operations are dominated by helicopter or military operations. The other two models are the FAA's Area Equivalent Method (AEM) and the FAA's Integrated Noise Model (INM).<sup>8</sup> The INM is the most complex of these models and requires very extensive local data collection, processing, and entry. Appendix B.4 of this EIR provides a detailed description of the INM and data requirements.

The AEM model and associated user guide are available on the FAA web site.<sup>9</sup> The City of Los Angeles CEQA guidelines permit the use of this model "as a screening tool to determine whether the more sophisticated and time-consuming INM is warranted." This two-step process is consistent with the previously mentioned federal policies and procedures. Following these guidelines, the AEM was used as a screening tool at both VNY and the regional airports to which the phaseout would potentially cause certain operators to divert some flights (the "diversion" airports).

The AEM requires detailed information on airport operations (e.g., landings and takeoffs) for each scenario under consideration (e.g., proposed project or alternative and year). The INM requires more complex and detailed information on airport layout and physical aspects of operations (e.g., runway used, flight tracks followed, etc.). Since the scenarios considered in this EIR differ only in terms of airport activity, the other information is presented in Appendix B.4.

The following subsections describe the development of airport activity for VNY and the diversion airports, including baseline and forecast VNY operations (Section 5); overflight operations affecting the area around VNY (Section 6); VNY operations that might be diverted to other airports (Section 7); and baseline and forecast operations at the diversion airports unassociated with any diversions resulting from the VNY phaseout (Section 8).

Section 9 presents the noise analysis results for VNY. Section 10 presents the results for the diversion airports.

## 4.1 Analysis Years

As discussed in Chapter 2, the proposed project would affect operations at six airports: VNY and five regional airports to which it is anticipated some operations would be diverted, including Bob Hope Airport in Burbank (BUR), Camarillo

---

<sup>7</sup> Ibid. Appendix A, Section 14.4, p. A-61–A-63.

<sup>8</sup> Since the L.A. CEQA guidelines were updated in 2006, the FAA has released a version of the INM, which the federal government now requires for use in assessing noise associated with helicopter operations, even at airports where helicopter operations predominate. For that reason, today the AEM and INM meet federal guidelines for noise evaluations at all civil airports.

<sup>9</sup> Available: <[http://www.faa.gov/about/office\\_org/headquarters\\_offices/aep/models/aem\\_model/](http://www.faa.gov/about/office_org/headquarters_offices/aep/models/aem_model/)>.

Airport in Camarillo (CMA), Chino Airport in Chino (CNO), Los Angeles International in Los Angeles (LAX), and William J. Fox Airfield in Lancaster (WJF). As further discussed in Chapter 2, the maximum anticipated effect on operations at four of these airports (VNY, BUR, CMA, and LAX) would occur in 2014. There would be less effect at these airports in preceding and succeeding years. There would be no effect at CNO and WJF until 2016. These effects on operations are quantified in Chapter 2 (Tables 2.2, 2.3, and 2.4) and in the discussions of forecast operations at VNY and of diversions to other airports in Sections 5 and 7.

To identify the maximum potential effect on noise exposure, 2014 was used as the forecast year for analysis of the proposed project and alternatives at VNY, BUR, CMA, and LAX, while 2016 was used at CNO and WJF.

## 5.0 VNY Baseline and Forecast Aircraft Operations

This section presents the 2007 baseline estimate and 2014 forecasts of aircraft operations at VNY. Forecasts are presented for the proposed project, for Alternative 1 (no project), and Alternative 2 (project with a Stage 3 and Stage 4 exemption). These forecasts provide the basis for the analysis of the effects of the proposed project and the two alternatives on VNY noise contours.

The forecast of aircraft operations is based on developed previously forecasts for the ongoing VNY FAR Part 161 study. For that study, a detailed analysis of VNY aircraft operations was performed for the 2004 base year, and operations were projected for future analysis years, 2009 and 2014. The Part 161 base year was updated to 2007, and the forecast for 2014 was adopted for the VNY Noisier Aircraft Phaseout EIR.

General aviation (GA) activity at VNY encompasses a wide range of users and aircraft types, from pilot training schools using single-engine fixed- or rotary-wing aircraft to corporate flight departments and fractional jet operators flying long-range, high-performance business jets. To reflect the trends and operating profiles associated with these varied user groups, aircraft operations were projected for six distinct categories of activity:

- Business jets,
- Turboprops,
- Pistons,
- Helicopters,
- Active military, and
- Touch-and-go training.

There is no single data source that provides all the information needed to develop the fleet inputs for the INM, which requires average daily arrivals and departures by aircraft type and by time of day. Therefore, it was necessary to use several available data sources to compile a base-year fleet mix with the required inputs for noise impact analysis. These data sources include (1) FAA air traffic control tower (FAA Tower) counts, (2) LAWA curfew counts at VNY, (3) FAA Automated Radar Terminal System (ARTS) data, (4) the Van Nuys Database System (VNDS), (5) FAA Enhanced Traffic Management System counts; (6) data from helicopter count surveys conducted at VNY in December 2005 and April 2006,<sup>10</sup> (7) the 2001 baseline fleet mix for the Part 150 study, and (8) the fleet mix used by LAWA to produce the 2002–2004 noise contours for VNY.

## 5.1 Estimation of Baseline Aircraft Operations

### 2004 VNY Activity

The first step in compiling the base-year fleet mix was to identify the actual number of aircraft that arrived or departed from VNY in the 2004 base year. The primary sources for this analysis were the FAA Tower counts, the LAWA curfew counts, and the helicopter count surveys. The FAA Tower counts provided the number of air taxi, GA itinerant, GA local, military itinerant, and military local operations at VNY for the hours when the tower is staffed, 06:00 to 22:45. The FAA Tower counts were supplemented with daily aircraft counts conducted by the LAWA operations department at VNY from 22:45 to 06:59 to estimate annual aircraft operations, including activity during the curfew period.

Overflights recorded by the FAA Tower were excluded from the base-year 2004 operation counts so that the base-year data would reflect only the number of aircraft arriving at or departing from the VNY airfield. The overflights recorded by the FAA included fixed-wing aircraft and helicopters, which are tracked by VNY tower personnel. The 2004 FAA Tower counts included 56,564 fixed-wing overflights.<sup>11</sup> The number of fixed-wing overflights was determined directly from daily FAA Tower logs.

The FAA does not keep separate counts of helicopters that overfly the VNY airfield and helicopters that land at or depart from VNY. Hence, the number of helicopter operations that were overflights was estimated using data collected from the two helicopter count surveys. The survey data indicate that 28% of the itinerant helicopter operations recorded by the FAA, or 16,949 overflights, were transiting and not arriving or departing at VNY.

---

<sup>10</sup> The December 2005 survey was conducted by VNY operations personnel, and the April 2006 survey was conducted by CommuniQuest.

<sup>11</sup> VNY air traffic control tower counts do not include overflights of aircraft flying to or from Bob Hope Airport in Burbank, CA.

Both the FAA Tower counts and the LAWA curfew counts include activity from 06:00–6:59. To avoid duplication, the estimated number of operations for that period was excluded from the FAA Tower counts. The daily FAA Tower logs were used to estimate that the tower recorded 2,877 flights arriving at or departing from VNY from 06:00–06:59.

LAWA operations staff recorded 8,192 aircraft arrivals and departures between 22:45 and 06:59. These operations were added to the FAA Tower counts after adjustments for overflights and duplication, resulting in an estimated 380,483 aircraft operations at VNY in 2004. Table 1 shows the derivation of total arriving and departing aircraft operations at VNY in 2004.

**Table 1.** Total Aircraft Operations at VNY, 2004

| <b>Data Source</b>                               | <b>Operations</b> |
|--|-------------------|
| Counts (06:00–22:45)                             | 448,681           |
| Fixed Wing Overflights                           | (56,564)          |
| Estimated Helicopter Overflights                 | (16,949)          |
| Estimated Operations (06:00–06:59)               | (2,877)           |
| FAA Tower Counts (0:700–22:45)                   | 372,2911          |
| LAWA Curfew Counts (22:45–06:59)                 | 8,192             |
| <b>Total VNY Arriving and Departing Aircraft</b> | <b>380,483</b>    |

### **2004 Operations by Aircraft Category**

The next step in the base-year analysis was to estimate operations by aircraft category, which is shown in Table 2. Jets were estimated to account for 44,264 operations, or 11.6% of the 2004 total. Non-jet operations are the most prevalent, accounting for 42.5% of total activity. Approximately 15% of the non-jet activity is by single- or multi-engine turboprops, and 85% is by single- or multi-engine piston-powered aircraft. Total helicopter operations are estimated at 52,202, or 13.7% of total operations. Touch-and-go, or pilot training, operations accounted for nearly one-third of the airport's activity. Operations by military aircraft were estimated at 293.



**Table 2.** Estimated 2004 VNY Aircraft Operations by Aircraft Category

| Aircraft Category | Operations     |                |                | Share of Total |              |               |
|-------------------|----------------|----------------|----------------|----------------|--------------|---------------|
|                   | Itinerant      | Local          | Total          | Itinerant      | Local        | Total         |
| GA Jet            | 43,103         | 1,161          | 44,264         | 11.3%          | 0.3%         | 11.6%         |
| GA Non-Jet        | 157,145        | 4,532          | 161,677        | 41.3%          | 1.2%         | 42.5%         |
| Turboprop         | 24,197         | 677            | 24,874         | 6.4%           | 0.2%         | 6.5%          |
| Piston            | 132,948        | 3,854          | 136,803        | 34.9%          | 1.0%         | 36.0%         |
| Helicopter        | 45,228         | 6,974          | 52,202         | 11.9%          | 1.8%         | 13.7%         |
| Military          | 247            | 46             | 293            | 0.1%           | 0.0%         | 0.1%          |
| Touch and Go*     | —              | 122,047        | 122,047        | 0.0%           | 32.1%        | 32.1%         |
| <b>Total</b>      | <b>245,723</b> | <b>134,760</b> | <b>380,483</b> | <b>64.6%</b>   | <b>35.4%</b> | <b>100.0%</b> |

\* Each touch-and-go cycle is counted as two operations.

In 2004, 64.6% of the operations at VNY were itinerant.<sup>12</sup> The number of itinerant jet operations was based on counts from the ARTS data, supplemented with data from the LAWA curfew counts. The number of itinerant helicopter operations equals the FAA Tower counts for helicopters less the estimated number of transiting helicopters plus helicopter operations from the LAWA curfew counts. Itinerant military operations are based on the FAA Tower counts. Itinerant operations by non-jet aircraft were determined by subtracting itinerant operations for the other aircraft categories from total itinerant operations. Of the non-jet operations, it was assumed that 85% were piston-powered aircraft and 15% were turboprop aircraft. This assumption is similar to the assumptions used in the VNY Part 150 study and by LAWA to prepare the 2002–2004 VNY noise contours.

The number of local operations, 134,760, is based on the FAA Tower counts. The number of local helicopter operations was determined directly from the daily FAA Tower logs. Local military operations were based on reported FAA Tower counts. Of the remaining fixed-wing local operations, 96% were assumed to be touch-and-go operations. This assumption was based on the estimated number of touch-and-go operations in the VNY Part 150 study compared to total local operations for the years 1998–2001. The remaining fixed-wing local operations were distributed among jets, turboprops, and pistons in proportion to their share of itinerant operations.

<sup>12</sup> Itinerant operations include aircraft that arrive from or depart to airports located beyond a 20-mile radius of the airport.

## **Aircraft Operation Trends: 2004 to 2007**

Actual changes in aircraft operations were reviewed to update the 2004 base-year operations to 2007. Table 3 shows total VNY operations, compiled from FAA Tower Counts and LAWA curfew counts, for 2004, 2006, and January–September 2006 and 2007. Total VNY operations, including overflights, decreased by 12% between 2004 and 2006. For the first 9 months of 2007, operations declined by 4.8% over the same period in 2006. If the percent change for the first 9 months of 2007 is extrapolated to the calendar year, it is estimated that VNY operations, including overflights, declined by 16.2% from 2004 to 2007.

**Table 3.** Change in VNY Aircraft Operations, 2004–2007

| Period   | Tower Itinerant |         |                  |          |             | Curfew (22:45–5:59) Itinerant |         |        |          |              | Tower Local |          |             | Total Itin. + Local |
|--|-----------------|---------|------------------|----------|-------------|-------------------------------|---------|--------|----------|--------------|-------------|----------|-------------|---------------------|
|  | Air Taxi        | GA      | Subtotal AT + GA | Military | Total Itin. | Jet                           | Non-Jet | Helo   | Military | Total Curfew | GA          | Military | Total Local |                     |
| <b>Operations</b>  |                 |         |                  |          |             |                               |         |        |          |              |             |          |             |                     |
| 2004   | 16,016          | 297,658 | 313,674          | 247      | 313,921     | 2,761                         | 991     | 2,320  | —        | 6,072        | 134,714     | 46       | 134,760     | 454,753             |
| 2006   | 16,157          | 266,554 | 282,711          | 316      | 283,027     | 2,752                         | 675     | 1,726  | —        | 5,153        | 112,148     | 70       | 112,218     | 400,398             |
| Jan–Sep 2006   | 12,163          | 202,642 | 214,805          | 213      | 215,018     | 1,992                         | 518     | 1,286  | —        | 3,796        | 85,104      | 70       | 85,174      | 303,988             |
| Jan–Sep 2007   | 12,257          | 188,188 | 200,445          | 200      | 200,645     | 2,248                         | 632     | 1,360  | —        | 4,240        | 84,572      | 24       | 84,596      | 289,481             |
| <b>Percent Change</b>  |                 |         |                  |          |             |                               |         |        |          |              |             |          |             |                     |
| 2004–2006  | 0.9%            | -10.4%  | -9.9%            | 27.9%    | -9.8%       | -0.3%                         | -31.9%  | -25.6% | 0.0%     | -15.1%       | -16.8%      | 52.2%    | -16.7%      | -12.0%              |
| Jan-Sep 06–07  | 0.8%            | -7.1%   | -6.7%            | -6.1%    | -6.7%       | 12.9%                         | 22.0%   | 5.8%   | 0.0%     | 11.7%        | -0.6%       | -65.7%   | -0.7%       | -4.8%               |
| Est. Pct. Change 2004–2007   | 1.7%            | -16.8%  | -15.9%           | 20.1%    | -15.9%      | 12.5%                         | -16.9%  | -21.3% | 0.0%     | -5.2%        | -17.3%      | -47.8%   | -17.3%      | -16.2%              |
| Est. 2007 Operations   | 16,282          | 247,541 | 263,811          | 297      | 264,108     | 3,106                         | 824     | 1,825  | —        | 5,756        | 111,447     | 24       | 111,456     | 381,320             |
| Note: “GA Itinerant” includes fixed-wing and helicopter overflights. “GA Local” includes fixed-wing and helicopter local operations. |                 |         |                  |          |             |                               |         |        |          |              |             |          |             |                     |
| Source: LAWA.  |                 |         |                  |          |             |                               |         |        |          |              |             |          |             |                     |

## Estimated 2007 Baseline Aircraft Operations

The estimated 2007 FAA Tower counts and LAWA curfew counts were then used to develop the 2007 baseline level of operations by aircraft category using methodology and assumptions similar to those used to develop the 2004 baseline fleet mix. Table 4 presents the 2007 baseline activity levels by aircraft category and the estimated percent change from 2004. In 2007, there were an estimated 314,000 aircraft arriving or departing from the VNY airfield. Aircraft operations declined by an estimated 17.5% between 2004 and 2007. The overall decline masks an underlying change in the mix of activity at VNY. While total activity fell between 2004 and 2007, jet aircraft operations grew by 8.8%, to 48,143, accounting for 15% of VNY's operations. The sectors of activity that are most sensitive to rising fuel prices experienced steep declines. Operations by turboprop and piston aircraft fell by more than 30%, and touch-and-go training operations were 19% lower.

**Table 4.** Estimated 2007 VNY Aircraft Operations by Aircraft Category

| Aircraft Category | 2004           | 2007           | Percent Change | Average Annual Percent Change |
|-------------------|----------------|----------------|----------------|-------------------------------|
| GA Jet            | 44,264         | 48,143         | 8.8%           | 2.8%                          |
| Turboprop         | 24,874         | 15,728         | -36.8%         | -14.2%                        |
| Piston            | 136,273        | 89,143         | -34.6%         | -13.2%                        |
| Helo              | 52,202         | 61,298         | 17.4%          | 5.5%                          |
| Military          | 293            | 321            | 9.4%           | 3.0%                          |
| Private Military  | 659            | 659            | 0.0%           | 0.0%                          |
| Training          | 121,918        | 98,715         | -19.0%         | -6.8%                         |
| <b>Total</b>      | <b>380,483</b> | <b>314,007</b> | <b>-17.5%</b>  | <b>-6.2%</b>                  |

## 5.2. Baseline (2007) Activity

This section provides an overview of 2007 baseline aircraft activity levels at VNY, including activity by aircraft category, time of day, and INM aircraft type.

### Operations by Aircraft Category

Table 5 shows annual and average daily operations at VNY by aircraft category for the 2007 baseline. Non-training operations in light general aviation aircraft, turboprops, and pistons represented one-third of total operations. Touch-and-go training operations accounted for 31% of total aircraft activity. An estimated 20% of operations was performed by helicopters. Business jets conducted 48,000 operations

at VNY, approximately 15% of total aircraft activity. Less than 1% of total operations were by active or private military aircraft.

**Table 5.** Baseline 2007 Operations by Aircraft Category

| Aircraft Category | Annual         | Average Daily | Percent of Total |
|-------------------|----------------|---------------|------------------|
| Business Jets     | 48,143         | 131.9         | 15%              |
| Turboprop         | 15,728         | 43.1          | 5%               |
| Piston            | 89,143         | 244.2         | 28%              |
| Helicopter        | 61,298         | 167.9         | 20%              |
| Military          | 321            | 0.9           | 0%               |
| Private Military  | 659            | 1.8           | 0%               |
| Touch and Go      | 98,715         | 270.5         | 31%              |
| <b>Total</b>      | <b>314,007</b> | <b>860.3</b>  | <b>100%</b>      |

## Operations by Time of Day and Direction

Table 6 presents baseline operations by aircraft category and by time of day. The majority of the activity, 88.1%, was conducted during the day (07:00–18:59). The evening period (19:00–21:59) accounted for 8.4% of operations, and 3.5% of the activity occurred during the night period (22:00–06:59).

**Table 6.** Baseline 2007 Operations by Aircraft Category and Time of Day

| Aircraft Category | Operations by Time of Day |               |               |                | Percent of Total 24 Hours |             |             |
|-------------------|---------------------------|---------------|---------------|----------------|---------------------------|-------------|-------------|
|                   | Day                       | Evening       | Night         | Total          | Day                       | Evening     | Night       |
| Business Jets     | 38,496                    | 4,931         | 4,717         | 48,143         | 80.0%                     | 10.2%       | 9.8%        |
| Turboprop         | 13,628                    | 1,206         | 894           | 15,728         | 86.6%                     | 7.7%        | 5.7%        |
| Piston            | 81,305                    | 7,552         | 286           | 89,143         | 91.2%                     | 8.5%        | 0.3%        |
| Helicopter        | 49,679                    | 6,592         | 5,026         | 61,298         | 81.0%                     | 10.8%       | 8.2%        |
| Military          | 305                       | 16            | —             | 321            | 95.1%                     | 4.9%        | 0.0%        |
| Private Military  | 621                       | 34            | 5             | 659            | 94.2%                     | 5.1%        | 0.7%        |
| Touch and Go      | 92,518                    | 6,197         | —             | 98,715         | 93.7%                     | 6.3%        | 0.0%        |
| <b>Total</b>      | <b>276,551</b>            | <b>26,528</b> | <b>10,927</b> | <b>314,007</b> | <b>88.1%</b>              | <b>8.4%</b> | <b>3.5%</b> |

The time of day profile varies significantly by aircraft category. Business jets and helicopters had the highest percentage of operations during the evening and night periods, 20% and 19%, respectively. Business jets tend to have higher nighttime usage than other fixed-wing aircraft for many reasons. A key motivation for using private jet transportation services is the convenience and the ability to make a same-day business trip, which may require an early morning (i.e., before 07:00) departure and/or an evening or nighttime return. In addition, jet aircraft pilots have more training and are more experienced at nighttime operations than non-jet, fixed-wing pilots. The time-of-day profile for the helicopters is largely driven by the nature of the helicopter activity that occurs at VNY, particularly public safety operations and news and traffic reporting.

Non-jet, fixed-wing aircraft had lower percentages of evening and night operations than jet and rotary-wing aircraft. For turboprops, which may also be used for business travel, 13.4% of operations occurred during the evening and night periods. Pistons, which are mainly used for recreational flying, had an even lower percentage of operations during the evening and nighttime periods, 8.8%.

Only 6.3% of touch-and-go training operations occurred during the evening period, and none were conducted during the night period. VNY noise abatement regulations currently prohibit touch-and-go operations from 22:00–06:59 from June 21 to September 15 and from 21:00–06:59 from September 16 to June 20.

Table 7 shows the type of operation (i.e., arrival or departure) by time of day. Base-year operations during the day were almost evenly divided between arrivals and departures. In contrast, arrivals made up the majority of activity during the evening and night periods. Arrivals accounted for 56.7% of evening activity and 53.7% of night activity. Evening and night activity by business jets was even more heavily weighted toward arrivals. More than two-thirds of evening business jet operations were arrivals, and 57.7% of nighttime business jets operations were arrivals.

**Table 7.** Baseline 2007 Operations by Aircraft Category, Time of Day, and Direction

| Aircraft Category | Day          |              | Evening      |              | Night        |              |
|-------------------|--------------|--------------|--------------|--------------|--------------|--------------|
|                   | Arrivals     | Departures   | Arrivals     | Departures   | Arrivals     | Departures   |
| Business Jets     | 46.7%        | 53.3%        | 68.1%        | 31.9%        | 57.7%        | 42.3%        |
| Turboprops        | 48.2%        | 51.8%        | 70.7%        | 29.3%        | 49.6%        | 50.4%        |
| Piston            | 48.7%        | 51.3%        | 63.4%        | 36.6%        | 53.7%        | 46.3%        |
| Helicopter        | 50.7%        | 49.3%        | 44.0%        | 56.0%        | 50.7%        | 49.3%        |
| Military          | 48.3%        | 51.7%        | 82.5%        | 17.5%        | —            | —            |
| Private Military  | 48.9%        | 51.1%        | 76.5%        | 23.5%        | 3.0%         | 97.0%        |
| Touch and Go      | 50.0%        | 50.0%        | 50.0%        | 50.0%        | —            | —            |
| <b>Total</b>      | <b>49.2%</b> | <b>50.8%</b> | <b>56.7%</b> | <b>43.3%</b> | <b>53.7%</b> | <b>46.3%</b> |

## Operations by INM Type

Table 8 shows annual and average daily operations by aircraft category and INM type. The LEAR35 was used to model nearly 32% of business jet operations; it is the most prevalent INM type for the business jet category. In the turboprop category, the DHC6 and the CNA441 INM types represent more than 57.8% of turboprop operations. More than 96% of the piston operations are modeled as the BEC58P. Several INM types were used to model helicopter operations, including the SA350D, B206L, H500D, and R22, which collectively account for 83% of the 2007 baseline helicopter operations. The A3, which reflects the military aircraft operated by Raytheon at VNY, is the most prevalent INM type in the military category. Three types were used to model the touch-and-go training operations, the BEC58P, GASEPF, and GASEPV.

**Table 8.** Baseline 2007 Operations by INM Type

| Aircraft Category | INM Type | Annual        | Average Daily  | Percent of Aircraft Category | Percent of Total |
|-------------------|----------|---------------|----------------|------------------------------|------------------|
| Business Jet      | LEAR35   | 15,381        | 42.139         | 31.9%                        | 4.9%             |
| Business Jet      | MU3001   | 6,510         | 17.835         | 13.5%                        | 2.1%             |
| Business Jet      | GIV      | 6,250         | 17.122         | 13.0%                        | 2.0%             |
| Business Jet      | CL600    | 3,401         | 9.318          | 7.1%                         | 1.1%             |
| Business Jet      | CNA500   | 2,539         | 6.957          | 5.3%                         | 0.8%             |
| Business Jet      | CNA750   | 2,533         | 6.939          | 5.3%                         | 0.8%             |
| Business Jet      | GII      | 2,202         | 6.033          | 4.6%                         | 0.7%             |
| Business Jet      | IA1125   | 2,153         | 5.897          | 4.5%                         | 0.7%             |
| Business Jet      | GIIB     | 1,972         | 5.404          | 4.1%                         | 0.6%             |
| Business Jet      | GV       | 1,862         | 5.101          | 3.9%                         | 0.6%             |
| Business Jet      | FAL50    | 830           | 2.275          | 1.7%                         | 0.3%             |
| Business Jet      | 737700   | 659           | 1.806          | 1.4%                         | 0.2%             |
| Business Jet      | CIT3     | 528           | 1.448          | 1.1%                         | 0.2%             |
| Business Jet      | FAL900   | 513           | 1.406          | 1.1%                         | 0.2%             |
| Business Jet      | LEAR25   | 461           | 1.262          | 1.0%                         | 0.1%             |
| Business Jet      | FAL20    | 129           | 0.353          | 0.3%                         | 0.0%             |
| Business Jet      | EMB145   | 123           | 0.336          | 0.3%                         | 0.0%             |
| Business Jet      | CNA55B   | 33            | 0.092          | 0.1%                         | 0.0%             |
| Business Jet      | 727EM2   | 28            | 0.077          | 0.1%                         | 0.0%             |
| Business Jet      | 727EM1   | 17            | 0.046          | 0.0%                         | 0.0%             |
| Business Jet      | 737800   | 7             | 0.020          | 0.0%                         | 0.0%             |
| Business Jet      | CL601    | 7             | 0.020          | 0.0%                         | 0.0%             |
| Business Jet      | DC93LW   | 5             | 0.013          | 0.0%                         | 0.0%             |
| <b>Subtotal</b>   |          | <b>48,143</b> | <b>131.899</b> | <b>100.0%</b>                | <b>15.3%</b>     |
| Turboprop         | DHC6     | 9,095         | 24.918         | 57.8%                        | 2.9%             |
| Turboprop         | CNA441   | 4,338         | 11.884         | 27.6%                        | 1.4%             |
| Turboprop         | SD330    | 1,157         | 3.170          | 7.4%                         | 0.4%             |
| Turboprop         | GASEPF   | 857           | 2.347          | 5.4%                         | 0.3%             |
| Turboprop         | CNA210   | 144           | 0.396          | 0.9%                         | 0.0%             |
| Turboprop         | HS748A   | 90            | 0.248          | 0.6%                         | 0.0%             |
| Turboprop         | GASEPV   | 35            | 0.095          | 0.2%                         | 0.0%             |



| <b>Aircraft Category</b> | <b>INM Type</b> | <b>Annual</b> | <b>Average Daily</b> | <b>Percent of Aircraft Category</b> | <b>Percent of Total</b> |
|--------------------------|-----------------|---------------|----------------------|-------------------------------------|-------------------------|
| Turboprop                | DHC830          | 10            | 0.026                | 0.1%                                | 0.0%                    |
| Turboprop                | CVR580          | 2             | 0.005                | 0.0%                                | 0.0%                    |
| <b>Subtotal</b>          |                 | <b>15,728</b> | <b>43.090</b>        | <b>100.0%</b>                       | <b>5.0%</b>             |
| Piston                   | BEC58P          | 85,927        | 235.417              | 96.4%                               | 27.4%                   |
| Piston                   | PA31            | 2,407         | 6.595                | 2.7%                                | 0.8%                    |
| Piston                   | PA30            | 677           | 1.854                | 0.8%                                | 0.2%                    |
| Piston                   | DC3             | 132           | 0.362                | 0.1%                                | 0.0%                    |
| <b>Subtotal</b>          |                 | <b>89,143</b> | <b>244.227</b>       | <b>100.0%</b>                       | <b>28.4%</b>            |
| Helicopter               | SA350D          | 22,874        | 62.668               | 37.3%                               | 7.3%                    |
| Helicopter               | B206L           | 13,485        | 36.945               | 22.0%                               | 4.3%                    |
| Helicopter               | H500D           | 7,781         | 21.318               | 12.7%                               | 2.5%                    |
| Helicopter               | R22             | 6,670         | 18.273               | 10.9%                               | 2.1%                    |
| Helicopter               | BO105           | 4,016         | 11.004               | 6.6%                                | 1.3%                    |
| Helicopter               | S76             | 2,137         | 5.855                | 3.5%                                | 0.7%                    |
| Helicopter               | SA355F          | 1,701         | 4.660                | 2.8%                                | 0.5%                    |
| Helicopter               | A109            | 1,171         | 3.208                | 1.9%                                | 0.4%                    |
| Helicopter               | EC130           | 1,086         | 2.974                | 1.8%                                | 0.3%                    |
| Helicopter               | S65             | 145           | 0.396                | 0.2%                                | 0.0%                    |
| Helicopter               | SA341G          | 75            | 0.206                | 0.1%                                | 0.0%                    |
| Helicopter               | B222            | 71            | 0.194                | 0.1%                                | 0.0%                    |
| Helicopter               | B212            | 39            | 0.106                | 0.1%                                | 0.0%                    |
| Helicopter               | CH47D           | 38            | 0.103                | 0.1%                                | 0.0%                    |
| Helicopter               | SA330J          | 10            | 0.028                | 0.0%                                | 0.0%                    |
| <b>Subtotal</b>          |                 | <b>61,298</b> | <b>167.940</b>       | <b>100.0%</b>                       | <b>19.5%</b>            |
| Military                 | A3              | 270           | 0.739                | 84.1%                               | 0.1%                    |
| Military                 | C130            | 23            | 0.064                | 7.3%                                | 0.0%                    |
| Military                 | F-18            | 10            | 0.028                | 3.1%                                | 0.0%                    |
| Military                 | LEAR25          | 8             | 0.023                | 2.6%                                | 0.0%                    |
| Military                 | F16PW9          | 5             | 0.014                | 1.6%                                | 0.0%                    |
| Military                 | HS748A          | 2             | 0.006                | 0.7%                                | 0.0%                    |
| Military                 | F15E29          | 2             | 0.005                | 0.5%                                | 0.0%                    |
| <b>Subtotal</b>          |                 | <b>321</b>    | <b>0.879</b>         | <b>100.0%</b>                       | <b>0.1%</b>             |

| Aircraft Category | INM Type | Annual         | Average Daily  | Percent of Aircraft Category | Percent of Total |
|-------------------|----------|----------------|----------------|------------------------------|------------------|
| Private Military  | DC3      | 420            | 1.150          | 63.7%                        | 0.1%             |
| Private Military  | GASEPV   | 129            | 0.353          | 19.6%                        | 0.0%             |
| Private Military  | T-38A    | 97             | 0.265          | 14.7%                        | 0.0%             |
| Private Military  | T34      | 9              | 0.024          | 1.3%                         | 0.0%             |
| Private Military  | F5AB     | 5              | 0.013          | 0.7%                         | 0.0%             |
| <b>Subtotal</b>   |          | <b>659</b>     | <b>1.806</b>   | <b>100.0%</b>                | <b>0.2%</b>      |
| Touch and Go      | BEC58P   | 49,410         | 135.369        | 50.1%                        | 15.7%            |
| Touch and Go      | GASEPF   | 29,646         | 81.221         | 30.0%                        | 9.4%             |
| Touch and Go      | GASEPV   | 19,659         | 53.861         | 19.9%                        | 6.3%             |
| <b>Subtotal</b>   |          | <b>98,715</b>  | <b>270.452</b> | <b>100.0%</b>                | <b>31.4%</b>     |
| <b>TOTAL</b>      |          | <b>314,007</b> | <b>860.292</b> |                              | <b>100.0%</b>    |

### Jet Operations by Noise Stage Type

Stage 2 business jets accounted for approximately 10% of business jet operations at VNY in 2007 (see Table 9). The number of Stage 2 business jet operations has been declining as older Stage 2 aircraft are retired from the fleet. In the 2004 baseline fleet estimated for the VNY Part 161 study, Stage 2 business jets accounted for 15% of total business jet operations.

**Table 9.** Baseline 2007 Jet Operations by Noise Stage, Direction, and Time of Day

| Noise Stage             | Arrivals      |              |              |               | Departures    |              |              |               | Total Arrivals and Departures |
|-------------------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|-------------------------------|
|                         | Day           | Evening      | Night        | Total         | Day           | Evening      | Night        | Total         |                               |
| Stage 2                 | 1,708         | 390          | 284          | 2,382         | 2,146         | 219          | 16           | 2,382         | 4,764                         |
| Stage 3                 | 16,283        | 2,968        | 2,438        | 21,690        | 18,358        | 1,353        | 1,978        | 21,690        | 43,379                        |
| <b>Total</b>            | <b>17,991</b> | <b>3,358</b> | <b>2,722</b> | <b>24,072</b> | <b>20,504</b> | <b>1,572</b> | <b>1,995</b> | <b>24,072</b> | <b>48,143</b>                 |
| <b>Percent of Total</b> |               |              |              |               |               |              |              |               |                               |
| Stage 2                 | 3.5%          | 0.8%         | 0.6%         | 4.9%          | 4.5%          | 0.5%         | 0.0%         | 4.9%          | 9.9%                          |
| Stage 3                 | 33.8%         | 6.2%         | 5.1%         | 45.1%         | 38.1%         | 2.8%         | 4.1%         | 45.1%         | 90.1%                         |
| <b>Total</b>            | <b>37.4%</b>  | <b>7.0%</b>  | <b>5.7%</b>  | <b>50.0%</b>  | <b>42.6%</b>  | <b>3.3%</b>  | <b>4.1%</b>  | <b>50.0%</b>  | <b>100.0%</b>                 |

The time-of-day profile for Stage 2 and Stage 3 business jets is very similar. Of the Stage 2 jet operations, 19.1% occurred during the evening or night hours compared to 20.1% for Stage 3 operations. Because the VNY noise abatement and curfew regulations prohibit night departures by aircraft with estimated takeoff noise levels exceeding 74 dBA, almost no Stage 2 business jets depart during the night period. The small number of Stage 2 night departures that was estimated for 2007, fewer than 0.05 per day, represents exempted operators, violators of the noise policy, or minor differences in how departures are recorded in the ARTS data, which were the primary source for business jet activity by time period.

### **5.3 Historic and Forecast Growth in VNY Aircraft Operations**

Growth assumptions for each of the major categories of aircraft activity at VNY were developed based on a review of historic trends at VNY and the outlook for the United States general aviation industry. This section discusses actual trends at VNY based on historic activity and the growth assumptions underlying the forecast of future activity.

#### **Historic Aircraft Operation Trends: 1995 to 2004**

Historic data on VNY aircraft operations by aircraft category is limited. To assess historic trends, operations data from 1995 to 2004 were compiled from two sources, the VNY Part 150 study and the INM input files developed by LAWA to produce the 2002–2004 airport noise contours. These data are shown in Table 10. The operations shown for 2004 differ from the estimated 2004 baseline activity levels for several reasons. The analysis conducted for the Part 161 study utilized different data sources, excluded overflights, and employed a more detailed approach to estimating activity levels by aircraft category. Nevertheless, the data provide a reasonable basis for analyzing historic trends in aviation activity at VNY.

**Table 10.** Historic Aircraft Operations at VNY, 1995–2004

| Year   | Jets   | Non-Jet     |         |              |                        |               | Helos  | Total Airport |
|--|--------|-------------|---------|--------------|------------------------|---------------|--------|---------------|
|  |        | Turbo-props | Pistons | Touch and Go | Pistons + Touch and Go | Total Non-Jet |        |               |
| 1995   | 17,051 | 52,036      | 237,613 | 140,787      | 378,400                | 430,436       | 52,618 | 500,105       |
| 1996   | 18,778 | 58,382      | 229,760 | 140,796      | 370,556                | 428,938       | 52,643 | 500,359       |
| 1997   | 19,351 | 59,144      | 235,050 | 143,611      | 378,661                | 437,805       | 53,750 | 510,906       |
| 1998   | 22,157 | 69,206      | 236,675 | 148,972      | 385,647                | 454,853       | 56,066 | 533,076       |
| 1999   | 24,736 | 66,226      | 263,735 | 161,612      | 425,347                | 491,573       | 60,693 | 577,002       |
| 2000   | 30,985 | 51,006      | 221,692 | 137,247      | 358,939                | 409,945       | 51,729 | 492,659       |
| 2001   | 30,779 | 34,148      | 220,328 | 129,725      | 350,053                | 384,201       | 48,685 | 463,665       |
| 2002   | 35,560 | 52,447      | na      | na           | 365,679                | 418,126       | 52,207 | 505,893       |
| 2003   | 33,374 | 50,728      | na      | na           | 335,647                | 386,375       | 48,490 | 468,238       |
| 2004   | 41,021 | 52,382      | na      | na           | 314,682                | 367,064       | 47,188 | 455,274       |
| <b>Percent Change over Prior Year</b>  |        |             |         |              |                        |               |        |               |
| 1996   | 10.1%  | 12.2%       | -3.3%   | 0.0%         | -2.1%                  | -0.3%         | 0.0%   | 0.1%          |
| 1997   | 3.1%   | 1.3%        | 2.3%    | 2.0%         | 2.2%                   | 2.1%          | 2.1%   | 2.1%          |
| 1998   | 14.5%  | 17.0%       | 0.7%    | 3.7%         | 1.8%                   | 3.9%          | 4.3%   | 4.3%          |
| 1999   | 11.6%  | -4.3%       | 11.4%   | 8.5%         | 10.3%                  | 8.1%          | 8.3%   | 8.2%          |
| 2000   | 25.3%  | -23.0%      | -15.9%  | -15.1%       | -15.6%                 | -16.6%        | -14.8% | -14.6%        |
| 2001   | -0.7%  | -33.1%      | -0.6%   | -5.5%        | -2.5%                  | -6.3%         | -5.9%  | -5.9%         |
| 2002   | 15.5%  | 53.6%       | na      | na           | 4.5%                   | 8.8%          | 7.2%   | 9.1%          |
| 2003   | -6.1%  | -3.3%       | na      | na           | -8.2%                  | -7.6%         | -7.1%  | -7.4%         |
| 2004   | 22.9%  | 3.3%        | na      | na           | -6.2%                  | -5.0%         | -2.7%  | -2.8%         |
| <b>Average Annual Growth</b>   |        |             |         |              |                        |               |        |               |
| 1995 to 2004   | 10.2%  | 0.1%        | na      | na           | -2.0%                  | -1.8%         | -1.2%  | -1.0%         |
| na = Not Available   |        |             |         |              |                        |               |        |               |
| Notes:   |        |             |         |              |                        |               |        |               |
| Includes fixed-wing and helicopter overflights.  |        |             |         |              |                        |               |        |               |
| Helicopter operations are estimates and not actual operation counts. In the Part 150 study, helicopter operations were estimated at 10% of total FAA Tower counts plus LAWA curfew counts (22:45–05:59). |        |             |         |              |                        |               |        |               |
| Sources:   |        |             |         |              |                        |               |        |               |
| 1995–2001: Van Nuys Airport Part 150 Study, January 2003, Table 4.   |        |             |         |              |                        |               |        |               |
| 2002–2004: LAWA Noise Management Department, Van Nuys Operations for INM Modeling, except for helicopter operations, which are estimated using the Part 150 study methodology.                           |        |             |         |              |                        |               |        |               |

Over the 10-year period, total aircraft operations fell at an average annual rate of 1%. Operations by non-jet fixed-wing aircraft declined at a faster rate of 1.8% per year. However, operations by jet aircraft increased at an average annual rate of 10.2%. As a result, jet aircraft account for an increasing share of total aircraft activity at VNY. Declining activity by light GA aircraft, particularly pistons, and strong growth in jet aircraft operations is consistent with historic trends in the United States general aviation industry.

## Forecast Growth Rate Assumptions

Table 11 presents the growth rate assumptions underlying the forecast of 2014 aircraft operations at VNY. Growth rate assumptions were based on a review of historical trends at VNY, including actual operations for 2005 and 2006 (January to May), the general outlook for different segments of the GA market, assumptions regarding fuel prices, and the FAA's forecast for the United States general aviation market.

**Table 11.** Forecast Average Annual Growth in Aircraft Operations at VNY by Aircraft Category, 2004–2014

| Aircraft Category  | Van Nuys | FAA Industry* |
|--|----------|---------------|
| Business Jets  | 6.5%     | 10.5%         |
| Turboprops   | 0.8%     | 1.3%          |
| Pistons  | -2.8%    | 1.3%          |
| Helicopters  | 4.6%     | 4.6%          |
| Military   | 0.0%     | -0.5%         |
| Private Military   | 0.0%     | na            |
| Touch and Go   | -3.0%    | 1.5%          |
| *FAA, Aerospace Forecasts Fiscal Year (FY) 2006–FY 2017, March 2006. |          |               |

### Business Jets

The business jet segment has been the fastest growing segment of activity at VNY and within the United States general aviation industry. Increases in business jet operations have been driven by growing demand for private jet transportation services by businesses and wealthy individuals. Most of the growth in the business jet market has come from fractional jet ownership programs, jet card membership programs, and business aircraft charters rather than traditional corporate flight departments.

Fractional jet programs allow individuals to buy a share of an aircraft that is managed and operated by the fractional jet company, and in return, the fractional owner is entitled to fly a specified number of hours per year in that aircraft model. With jet

card programs, users prepay for a specified number of flight hours and are guaranteed access to business jet aircraft services for those allotted hours.

The business jet segment is expected to continue to grow over the forecast period through growth in these services as well as a new private transportation product, on-demand air taxi. The introduction of new technology, very light jets (VLJs), has led to the development of on-demand air taxi services, which is expected to stimulate growth in business jet operations over the forecast period. VLJs, also known as microjets, are small jet aircraft priced between \$1.5 million and \$2 million that can operate at cruising speeds of 325–375 miles per hour (mph) and a maximum altitude of close to 40,000 feet. They have an operating range of approximately 500 miles and can land and take-off from runways as short as 3,000 feet. In essence, the VLJs can achieve nearly the same performance as a small business jet but at a fraction of the cost. So far, the largest on-demand air taxi services utilizing VLJs are operating on the East Coast. DayJet has the largest fleet of Eclipse 500 VLJs and serves markets throughout Florida, Alabama, Georgia, and South Carolina.

At VNY, jet operations are forecast to increase at an average rate of 6.5% per year between 2004 and 2014, which is slower than the historic trend at VNY and slower than the FAA's projection of 10.5% per year for the United States market. This assumes that the rate of increase in jet operations slows significantly between 2004 and 2008 as a result of continued increases in the price of fuel but resumes the long-term historic trend of 10% per year in 2009 as fuel prices are assumed to moderate and decline slightly.

### **Turboprops**

Turboprop operations at VNY are forecast to increase by 0.8% annually from 2004 to 2014. This is slower than the FAA forecast for the United States, which projects hours flown in turboprop aircraft to increase by 1.2% per year through 2015. A slower rate of growth at VNY reflects recent historical data that show an actual decline in turboprop operations between 1999 and 2004 and the high and rising cost of fuel over the past few years.

### **Pistons**

Activity by piston-powered aircraft at VNY is projected to continue to decline over the forecast period by 2.8% per year. This assumes steep declines through 2007 as a result of high fuel prices, with modest growth resuming in 2008 and increasing to 1.2% per year in 2009.

### **Helicopters**

The forecast assumes that helicopter operations at VNY increase over the forecast period (2004–2014) by 4.6% per year. This assumption reflects annual growth of 5.5% through 2009, which was determined from interviews of operators based at VNY. From 2009 to 2014, helicopter operations are assumed to grow at the industry average rate projected by the FAA.

### **Military**

The A3 Sky Warrior accounts for the majority of the military flights at VNY. The A3 Sky Warriors, which are owned by the U.S. Navy, are flown by Raytheon to support

avionics hardware testing and development for the U.S. Department of Defense. The forecast assumes that this activity will continue at VNY at a constant level over the forecast period.

#### **Private Military**

Privately owned former military aircraft at VNY accounted for 659 operations in 2004. The forecast assumes that this level of activity remains constant over the forecast period.

#### **Training Operations**

Touch-and-go training operations at VNY have been declining for a number of years, consistent with a general decline in fixed-wing pilot training activities nationwide. The decline accelerated in recent years as the price of oil and aviation fuel skyrocketed. Over the forecast period, touch-and-go training operations are projected to decline at an average annual rate of 6.8%. This assumes steep declines through 2007 as a result of high fuel prices, with modest annual growth of 1.2% resuming in 2009.

## **5.4 Forecast (2014) Activity—Project**

This section describes the level and type of aircraft operations forecast for 2014 with the proposed noisier aircraft phaseout at VNY and compares forecast activity levels with the 2007 baseline activity.

### **Operations by Aircraft Category**

Table 12 compares forecast aircraft operations by aircraft category for 2014 under the project to activity levels for the 2007 baseline. Under the project, 386,433 aircraft are forecast to land or take off from the VNY in 2014. This represents a 23% increase in activity over the 2007 baseline. The mix of aircraft operations is forecast to change, with the business jet share growing from 15% in the baseline to 20% in 2014. Touch-and-go training activity, performed with piston aircraft, is projected to decline over the forecast period and account for only 23% of total 2014 aircraft operations.

**Table 12.**Forecast 2014 Operations by Aircraft Category under the Proposed Project

| Aircraft Category | Baseline 2007  | Percent of Total | Project Forecast 2014 | Percent of Total |
|-------------------|----------------|------------------|-----------------------|------------------|
| Business Jets     | 48,143         | 15%              | 83,101                | 22%              |
| Turboprops        | 15,728         | 5%               | 26,835                | 7%               |
| Piston            | 89,143         | 28%              | 102,979               | 27%              |
| Helicopter        | 61,298         | 20%              | 82,212                | 21%              |
| Military          | 321            | 0%               | 293                   | 0%               |
| Private Military  | 659            | 0%               | 659                   | 0%               |
| Touch and Go      | 98,715         | 31%              | 90,354                | 23%              |
| <b>Total</b>      | <b>314,007</b> | <b>100%</b>      | <b>386,433</b>        | <b>100%</b>      |

### Operations by Time of Day and Direction

As shown in Table 13, both the absolute number and the share of operations occurring during the night period increases with the proposed project in 2014. Total nighttime operations increase by 56%, from approximately 11,000 in the 2007 base year, to approximately 17,000 in 2014. The growth in night operations is primarily the result of growth in the number of jet and helicopter operations, which have a high proportion of activity during the night hours. As a result, the share of total VNY operations occurring during the night increases from 3.5% in the base year to 4.4% in 2014 with the proposed noisier aircraft phaseout.

**Table 13.**Forecast 2014 Operations by Aircraft Category and Time of Day under the Proposed Project

| Aircraft Category          | Operations by Time of Day |               |               |                | Percent of Total 24 Hours |             |             |
|----------------------------|---------------------------|---------------|---------------|----------------|---------------------------|-------------|-------------|
|                            | Day                       | Evening       | Night         | Total          | Day                       | Evening     | Night       |
| Business Jets              | 66,405                    | 8,304         | 8,392         | 83,101         | 79.9%                     | 10.0%       | 10.1%       |
| Turboprop                  | 23,252                    | 2,058         | 1,525         | 26,835         | 86.6%                     | 7.7%        | 5.7%        |
| Piston                     | 93,858                    | 8,788         | 334           | 102,979        | 91.1%                     | 8.5%        | 0.3%        |
| Helicopter                 | 66,629                    | 8,842         | 6,741         | 82,212         | 81.0%                     | 10.8%       | 8.2%        |
| Military                   | 279                       | 14            | —             | 293            | 95.1%                     | 4.9%        | 0.0%        |
| Private Military           | 621                       | 34            | 5             | 659            | 94.2%                     | 5.1%        | 0.7%        |
| Touch and Go               | 84,681                    | 5,672         | —             | 90,354         | 93.7%                     | 6.3%        | 0.0%        |
| <b>Total 2014 Project</b>  | <b>335,725</b>            | <b>33,712</b> | <b>16,996</b> | <b>386,433</b> | <b>86.9%</b>              | <b>8.7%</b> | <b>4.4%</b> |
| <b>Total 2007 Baseline</b> | <b>276,551</b>            | <b>26,528</b> | <b>10,927</b> | <b>314,007</b> | <b>88.1%</b>              | <b>8.4%</b> | <b>3.5%</b> |



The forecast overall arrival and departure mix by time of day under the project is similar to the 2007 baseline mix, as shown in Table 14. Operations during the day are almost evenly divided between arrivals (49.1%) and departures (50.9%), whereas 58% of evening operations and 53% of night operations are arrivals. Business jets have a slightly different profile than the overall airport average. Departures account for a greater share of business jet operations during the day, and evening and night activity by business jets is more heavily weighted toward arrivals. More than two-thirds of the forecast business jet operations during the evening are arrivals, and 56% of the forecast business jet operations during the night hours are arrivals.

**Table 14.** Forecast 2014 Operations by Aircraft Category, Time of Day, and Direction under the Proposed Project

| Aircraft Category   | Day      |            | Evening  |            | Night    |            |
|---------------------|----------|------------|----------|------------|----------|------------|
|                     | Arrivals | Departures | Arrivals | Departures | Arrivals | Departures |
| Business Jets       | 46.9%    | 53.1%      | 68.6%    | 31.4%      | 55.8%    | 44.2%      |
| Turboprops          | 48.2%    | 51.8%      | 70.7%    | 29.3%      | 49.6%    | 50.4%      |
| Piston              | 48.7%    | 51.3%      | 63.4%    | 36.6%      | 53.7%    | 46.3%      |
| Helicopter          | 50.7%    | 49.3%      | 44.0%    | 56.0%      | 50.7%    | 49.3%      |
| Military            | 48.3%    | 51.7%      | 82.5%    | 17.5%      | —        | —          |
| Private Military    | 48.9%    | 51.1%      | 76.5%    | 23.5%      | 3.0%     | 97.0%      |
| Touch and Go        | 50.0%    | 50.0%      | 50.0%    | 50.0%      | —        | —          |
| Total 2014 Project  | 49.1%    | 50.9%      | 57.8%    | 42.2%      | 53.1%    | 46.9%      |
| Total 2007 Baseline | 49.2%    | 50.8%      | 56.7%    | 43.3%      | 53.7%    | 46.3%      |

## Operations by INM Type

Forecast 2014 aircraft operations by INM under the proposed project are presented in Table 15. The most significant changes over the 2007 baseline involve aircraft types that are phased out by the proposed project. For example, there are no forecast operations by the LEAR25, 727EM1, or 727EM2 types in 2014 because these types meet or exceed the 80 dBA noise limit established by the proposed noisier aircraft phaseout. While Gulf IIs (GII) and Gulf IIIs (GIIB) also meet or exceed the 80 dBA limit, 260 operations by these types are forecast for 2014 because they are exempted by the provision that allows aircraft to continue to operate to and from VNY for maintenance purposes. The GII and GIIB types accounted for 4,174 operations in the 2007 baseline compared to a forecast of 260 in 2014 with the proposed project.

Other notable changes in the business jet fleet that result from the proposed project include the LEAR35 and GLF3 HK INM types. LEAR35 operations are forecast to increase from 4.9% of the total operations in 2007 to 7.3% in 2014. The disproportionate increase in operations by the LEAR35 reflects aircraft substitution

that results from the proposed project. With the noisier aircraft phaseout in place, some regular operators of LEAR25 aircraft are forecast to replace their older Stage 2 Lears with similar-size Stage 3 Lears, represented by the LEAR35 INM type. Likewise, some operators of GIIB aircraft are expected to outfit their aircraft with hushkits to be in compliance with the new regulation, which results in 1,262 operations with the GLF3 HK INM type in 2014.

**Table 15.** Forecast 2014 Operations by Aircraft Category and INM Type under the Proposed Project

| Aircraft Category         | INM Type | 2007 Baseline Operations | Percent of Total | 2014 Project Operations | Percent of Total |
|---------------------------|----------|--------------------------|------------------|-------------------------|------------------|
| Business Jet              | LEAR35   | 15,381                   | 4.9%             | 28,082                  | 7.3%             |
|                           | GIV      | 6,250                    | 2.0%             | 12,423                  | 3.2%             |
|                           | MU3001   | 6,510                    | 2.1%             | 11,489                  | 3.0%             |
|                           | CL600    | 3,401                    | 1.1%             | 6,524                   | 1.7%             |
|                           | CNA750   | 2,533                    | 0.8%             | 4,629                   | 1.2%             |
|                           | CNA500   | 2,539                    | 0.8%             | 4,427                   | 1.1%             |
|                           | IA1125   | 2,153                    | 0.7%             | 3,934                   | 1.0%             |
|                           | GV       | 1,862                    | 0.6%             | 3,701                   | 1.0%             |
|                           | FAL50    | 830                      | 0.3%             | 1,518                   | 0.4%             |
|                           | 737700   | 659                      | 0.2%             | 1,310                   | 0.3%             |
|                           | GLF3 HK  | —                        | 0.0%             | 1,262                   | 0.3%             |
|                           | CNA55B   | 33                       | 0.0%             | 1,217                   | 0.3%             |
|                           | FAL900   | 513                      | 0.2%             | 1,020                   | 0.3%             |
|                           | CIT3     | 528                      | 0.2%             | 966                     | 0.2%             |
|                           | EMB145   | 123                      | 0.0%             | 224                     | 0.1%             |
|                           | GII      | 2,202                    | 0.7%             | 130                     | 0.0%             |
|                           | GIIB     | 1,972                    | 0.6%             | 130                     | 0.0%             |
|                           | FAL20    | 129                      | 0.0%             | 77                      | 0.0%             |
|                           | 737800   | 7                        | 0.0%             | 15                      | 0.0%             |
|                           | CL601    | 7                        | 0.0%             | 14                      | 0.0%             |
| SABR80                    | —        | 0.0%                     | 7                | 0.0%                    |                  |
| DC93LW                    | 5        | 0.0%                     | 3                | 0.0%                    |                  |
| 727EM1                    | 17       | 0.0%                     | 0                | 0.0%                    |                  |
| 727EM2                    | 28       | 0.0%                     | 0                | 0.0%                    |                  |
| LEAR25                    | 461      | 0.1%                     | 0                | 0.0%                    |                  |
| <i>Business Jet Total</i> |          | <i>48,143</i>            | <i>15.3%</i>     | <i>83,101</i>           | <i>21.5%</i>     |
| Turboprop                 | DHC6     | 9,095                    | 2.9%             | 15,518                  | 4.0%             |
|                           | CNA441   | 4,338                    | 1.4%             | 7,401                   | 1.9%             |
|                           | SD330    | 1,157                    | 0.4%             | 1,974                   | 0.5%             |
|                           | GASEPF   | 857                      | 0.3%             | 1,462                   | 0.4%             |
|                           | CNA210   | 144                      | 0.0%             | 246                     | 0.1%             |

| <b>Aircraft Category</b> | <b>INM Type</b> | <b>2007 Baseline Operations</b> | <b>Percent of Total</b> | <b>2014 Project Operations</b> | <b>Percent of Total</b> |
|--------------------------|-----------------|---------------------------------|-------------------------|--------------------------------|-------------------------|
|                          | HS748A          | 90                              | 0.0%                    | 154                            | 0.0%                    |
|                          | GASEPV          | 35                              | 0.0%                    | 59                             | 0.0%                    |
|                          | DHC830          | 10                              | 0.0%                    | 16                             | 0.0%                    |
|                          | CVR580          | 2                               | 0.0%                    | 3                              | 0.0%                    |
| <i>Turboprop Total</i>   |                 | <i>15,728</i>                   | <i>5.0%</i>             | <i>26,835</i>                  | <i>6.9%</i>             |
|                          |                 |                                 |                         |                                |                         |
| Piston                   | BEC58P          | 85,927                          | 27.4%                   | 99,227                         | 25.7%                   |
|                          | PA31            | 2,407                           | 0.8%                    | 2,826                          | 0.7%                    |
|                          | PA30            | 677                             | 0.2%                    | 794                            | 0.2%                    |
|                          | DC3             | 132                             | 0.0%                    | 132                            | 0.0%                    |
| <i>Piston Total</i>      |                 | <i>89,143</i>                   | <i>28.4%</i>            | <i>102,979</i>                 | <i>26.6%</i>            |
|                          |                 |                                 |                         |                                |                         |
| Helicopter               | SA350D          | 22,874                          | 7.3%                    | 30,678                         | 7.9%                    |
|                          | B206L           | 13,485                          | 4.3%                    | 18,086                         | 4.7%                    |
|                          | H500D           | 7,781                           | 2.5%                    | 10,436                         | 2.7%                    |
|                          | R22             | 6,670                           | 2.1%                    | 8,945                          | 2.3%                    |
|                          | BO105           | 4,016                           | 1.3%                    | 5,387                          | 1.4%                    |
|                          | S76             | 2,137                           | 0.7%                    | 2,866                          | 0.7%                    |
|                          | SA355F          | 1,701                           | 0.5%                    | 2,281                          | 0.6%                    |
|                          | A109            | 1,171                           | 0.4%                    | 1,570                          | 0.4%                    |
|                          | EC130           | 1,086                           | 0.3%                    | 1,456                          | 0.4%                    |
|                          | S65             | 145                             | 0.0%                    | 194                            | 0.1%                    |
|                          | SA341G          | 75                              | 0.0%                    | 101                            | 0.0%                    |
|                          | B222            | 71                              | 0.0%                    | 95                             | 0.0%                    |
|                          | B212            | 39                              | 0.0%                    | 52                             | 0.0%                    |
|                          | CH47D           | 38                              | 0.0%                    | 51                             | 0.0%                    |
|                          | SA330J          | 10                              | 0.0%                    | 14                             | 0.0%                    |
| <i>Helicopter Total</i>  |                 | <i>61,298</i>                   | <i>19.5%</i>            | <i>82,212</i>                  | <i>21.3%</i>            |
| Military                 | A3              | 270                             | 0.1%                    | 247                            | 0.1%                    |
|                          | C130            | 23                              | 0.0%                    | 21                             | 0.0%                    |
|                          | F-18            | 10                              | 0.0%                    | 9                              | 0.0%                    |
|                          | LEAR25          | 8                               | 0.0%                    | 8                              | 0.0%                    |

| <b>Aircraft Category</b>      | <b>INM Type</b> | <b>2007 Baseline Operations</b> | <b>Percent of Total</b> | <b>2014 Project Operations</b> | <b>Percent of Total</b> |
|-------------------------------|-----------------|---------------------------------|-------------------------|--------------------------------|-------------------------|
|                               | F16PW9          | 5                               | 0.0%                    | 5                              | 0.0%                    |
|                               | HS748A          | 2                               | 0.0%                    | 2                              | 0.0%                    |
|                               | F15E29          | 2                               | 0.0%                    | 2                              | 0.0%                    |
| <i>Military Total</i>         |                 | <i>321</i>                      | <i>0.1%</i>             | <i>293</i>                     | <i>0.1%</i>             |
|                               |                 |                                 |                         |                                |                         |
| Private Military              | DC3             | 420                             | 0.1%                    | 420                            | 0.1%                    |
|                               | GASEPV          | 129                             | 0.0%                    | 129                            | 0.0%                    |
|                               | T-38A           | 97                              | 0.0%                    | 97                             | 0.0%                    |
|                               | T34             | 9                               | 0.0%                    | 9                              | 0.0%                    |
|                               | F5AB            | 5                               | 0.0%                    | 5                              | 0.0%                    |
| <i>Private Military Total</i> |                 | <i>659</i>                      | <i>0.2%</i>             | <i>659</i>                     | <i>0.2%</i>             |
|                               |                 |                                 |                         |                                |                         |
| Touch and Go                  | BEC58P          | 49,410                          | 15.7%                   | 45,241                         | 11.7%                   |
|                               | GASEPF          | 29,646                          | 9.4%                    | 27,145                         | 7.0%                    |
|                               | GASEPV          | 19,659                          | 6.3%                    | 17,968                         | 4.6%                    |
| <i>Touch-and-Go Total</i>     |                 | <i>98,715</i>                   | <i>31.4%</i>            | <i>90,354</i>                  | <i>23.4%</i>            |
|                               |                 |                                 |                         |                                |                         |
| <b>Grand Total</b>            |                 | <b>314,007</b>                  | <b>100.0%</b>           | <b>386,433</b>                 | <b>100.0%</b>           |

## Jet Operations by Noise Stage

Table 16 compares level and mix of Stage 2 and Stage 3 business jet operations forecast for 2014 under the project to the 2007 base-year conditions. Operations in Stage 2 business jet aircraft are forecast to decline by 93%, from 4,764 in the base year to 344 in 2014 with the proposed project. Stage 3 jet operations are forecast to increase by 91%, from 43,379 to 82,757. Under the proposed project, Stage 2 jet aircraft would account for 0.4% of business jet operations in 2014 compared to 9.9% in 2007.

**Table 16.** Forecast 2014 Project Jet Operations by Noise Stage

| Noise Stage | Baseline 2007 |               | Forecast 2014 Project |               | Percent Change 2007–2014 |
|-------------|---------------|---------------|-----------------------|---------------|--------------------------|
|             | Operations    | Percent Share | Operations            | Percent Share |                          |
| Stage 2     | 4,764         | 9.9%          | 344                   | 0.4%          | -92.8%                   |
| Stage 3     | 43,379        | 90.1%         | 82,757                | 99.6%         | 90.8%                    |
| Total       | 48,143        | 100.0%        | 83,101                | 100.0%        | 72.6%                    |

## 5.5 Forecast (2014) Activity—Alternative 1

This section compares forecast activity for 2014 for the proposed project to Alternative 1, which represents status quo conditions, or no project, at VNY.

### Operations by Aircraft Category

As shown in Table 17, if the proposed project to phase out noisier aircraft at VNY were not implemented, there would be 348 additional business jet operations at the airport in 2014. Under Alternative 1, forecast activity by all other aircraft categories is the same as the levels projected under the project.

**Table 17.** Forecast 2014 Operations by Aircraft Category, Project and Alternative 1

| Aircraft Category | Forecast 2014 |               | Alternative 1 vs. Project |
|-------------------|---------------|---------------|---------------------------|
|                   | Project       | Alternative 1 |                           |
| Business Jets     | 83,101        | 83,449        | 348                       |
| Turboprops        | 26,835        | 26,835        | —                         |
| Piston            | 102,979       | 102,979       | —                         |
| Helicopter        | 82,212        | 82,212        | —                         |
| Military          | 293           | 293           | —                         |
| Private Military  | 659           | 659           | —                         |
| Touch and Go      | 90,354        | 90,354        | —                         |
| Total             | 386,433       | 386,781       | 348                       |

### Operations by Time of Day and Direction

Table 18 presents forecast 2014 operations by type (i.e., arrival or departure) and time of day for Alternative 1 and the project. Almost two-thirds of the additional

business jet activity forecast under Alternative 1 occurs during the day time period. The majority of the 231 additional business jet operations forecast during the day are departures. During the evening hours, 78 additional business jet operations are forecast under the status quo. Night activity increases by 39 jet operations. Arrivals make up the majority of the additional activity forecast during the evening hours and nearly all of the additional operations forecast during the night period.

**Table 18.** Forecast 2014 Operations by Type and Time of Day, Project and Alternative 1

| Direction and Time of Day | Forecast 2014 |               | Alternative 1 vs. Project |
|---------------------------|---------------|---------------|---------------------------|
|                           | Project       | Alternative 1 |                           |
| Total Operations          | 386,433       | 386,781       | 348                       |
| Day                       | 335,725       | 335,956       | 231                       |
| Evening                   | 33,712        | 33,790        | 78                        |
| Night                     | 16,996        | 17,036        | 39                        |
| Arrivals                  | 193,217       | 193,391       | 174                       |
| Day                       | 164,696       | 164,784       | 88                        |
| Evening                   | 19,489        | 19,541        | 51                        |
| Night                     | 9,031         | 9,066         | 35                        |
| Departures                | 193,217       | 193,391       | 174                       |
| Day                       | 171,028       | 171,172       | 144                       |
| Evening                   | 14,223        | 14,249        | 26                        |
| Night                     | 7,965         | 7,969         | 4                         |

## Operations by INM Type

A comparison of the forecast 2014 fleet mix by INM aircraft type under Alternative 1 and the project is shown in Table 19. There are several key differences in the business jet fleet mix between Alternative 1 and the project. If the project were not implemented, there would be 1,956 additional operations in Stage 2 business jets, including GIIs, GIIBs, and Lear 24/25/28s (LEAR25s). The reduction of operations in these Stage 2 aircraft types under the project is a direct result of the proposed noisier aircraft phaseout. Under the project, 260 operations in GII and GIIB aircraft types remain in 2014 because they are exempted by the provision that allows aircraft to continue to operate to and from VNY for maintenance purposes.

There would also be 32 additional operations in large narrowbody jet aircraft types, represented by the INM types 727EM1 and 727EM2. While these are Stage 3 aircraft types, their noise levels equal or exceed the 80 dBA limit established by the VNY

noisier aircraft phaseout for 2014. Therefore, operations by these aircraft would occur under Alternative 1 but would not occur under the project scenario.

Under Alternative 1, there are also fewer operations in certain Stage 3 business jets. For example, there are 1,262 fewer operations by hushkitted GIIBs and 379 fewer operations by LEAR35s. Activity in these aircraft is greater under the project because some operators would choose to hushkit their GIIBs or upgrade from LEAR25s to LEAR35s if the project were implemented.



**Table 19.** Forecast 2014 Business Jet Operations by INM Type, Project and Alternative 1

| INM Type | Forecast 2014 |               | Alternative 1<br>vs. Project |
|----------|---------------|---------------|------------------------------|
|          | Project       | Alternative 1 |                              |
| 727EM1   | 0             | 12            | 12                           |
| 727EM2   | 0             | 20            | 20                           |
| 737700   | 1,310         | 1,310         | 0                            |
| 737800   | 15            | 15            | 0                            |
| CIT3     | 966           | 966           | 0                            |
| CL600    | 6,524         | 6,524         | 0                            |
| CL601    | 14            | 14            | 0                            |
| CNA500   | 4,427         | 4,427         | 0                            |
| CNA55B   | 1,217         | 1,217         | 0                            |
| CNA750   | 4,629         | 4,629         | 0                            |
| DC93LW   | 3             | 3             | 0                            |
| EMB145   | 224           | 224           | 0                            |
| FAL20    | 77            | 77            | 0                            |
| FAL50    | 1,518         | 1,518         | 0                            |
| FAL900   | 1,020         | 1,020         | 0                            |
| GII      | 130           | 766           | 636                          |
| GIIB     | 130           | 922           | 792                          |
| GIV      | 12,423        | 12,423        | 0                            |
| GLF3 HK  | 1,262         | —             | (1,262)                      |
| GV       | 3,701         | 3,701         | 0                            |
| IA1125   | 3,934         | 3,934         | 0                            |
| LEAR25   |               | 528           | 528                          |
| LEAR35   | 28,082        | 27,703        | (379)                        |
| MU3001   | 11,489        | 11,489        | 0                            |
| SABR80   | 7             | 7             | 0                            |
| Total    | 83,101        | 83,449        | 348                          |

## Jet Operations by Noise Stage

Table 20 summarizes forecast 2014 jet operations by noise stage for the project and Alternative 1. Stage 2 jets are forecast to perform 2,301 operations in 2014 under Alternative 1. This represents almost 2,000 additional operations in Stage 2 jets compared to the project scenario. With the project in place, some operators of Stage 2 jets are expected to replace their aircraft with Stage 3 aircraft and continue operating at VNY. As a result, 1,609 fewer operations in Stage 3 jets are forecast under Alternative 1 compared to the project. The net result is an additional 348 business jet operations forecast at VNY in 2014 if the project is not implemented.

**Table 20.** Forecast 2014 Jet Operations by Noise Stage, Project and Alternative 1

| Noise Stage | 2014 Project |               | 2014 Alternative 1 |               | Alternative 1 vs. Project |
|-------------|--------------|---------------|--------------------|---------------|---------------------------|
|             | Operations   | Percent Share | Operations         | Percent Share |                           |
| Stage 2     | 344          | 0.4%          | 2,301              | 2.8%          | 1,957                     |
| Stage 3     | 82,757       | 99.6%         | 81,148             | 97.2%         | (1,609)                   |
| Total       | 83,101       | 100.0%        | 83,449             | 100.0%        | 348                       |

## 5.6 Forecast (2014) Activity—Alternative 2

This section compares forecast activity for 2014 for the proposed project to Alternative 2, which includes the proposed noisier aircraft phaseout with an exemption for Stage 3 and Stage 4 aircraft.

### Operations by Aircraft Category

Table 21 summarizes forecast aircraft operations at VNY for the project and Alternative 2. If Stage 3 and Stage 4 aircraft were exempted from the noisier aircraft phaseout, there would be 32 additional business jet operations at VNY in 2014 compared to the project. Under Alternative 2, forecast activity by all other aircraft categories is the same as the levels projected under the project.

**Table 21.** Forecast 2014 Operations by Aircraft Category, Project and Alternative 2

| Aircraft Category | Forecast 2014  |                | Alternative 2<br>vs. Project |
|-------------------|----------------|----------------|------------------------------|
|                   | Project        | Alternative 2  |                              |
| Business Jets     | 83,101         | 83,133         | 32                           |
| Turboprops        | 26,835         | 26,835         | —                            |
| Piston            | 102,979        | 102,979        | —                            |
| Helicopter        | 82,212         | 82,212         | —                            |
| Military          | 293            | 293            | —                            |
| Private Military  | 659            | 659            | —                            |
| Touch and Go      | 90,354         | 90,354         | —                            |
| <b>Total</b>      | <b>386,433</b> | <b>386,465</b> | <b>32</b>                    |

### Operations by Time of Day and Direction

As shown in Table 22, three-fourths of the additional business jet operations under Alternative 2 would occur during the day time period. Business jet operations during the evening hours would increase by six operations, and night activity would only increase by two operations in 2014.

**Table 22.** Forecast 2014 Operations by Direction and Time of Day, Project and Alternative 2

| Direction and Time of Day                  | Forecast 2014  |                | Alternative 2 vs. Project |
|--|----------------|----------------|---------------------------|
|  | Project        | Alternative 2  |                           |
| Total Operations                           | 386,433        | 386,465        | 32                        |
| Day  | 335,725        | 335,749        | 24                        |
| Evening                                    | 33,712         | 33,718         | 6                         |
| Night                                      | 16,996         | 16,998         | 2                         |
| Arrivals                                   | 193,217        | 193,233        | 16                        |
| Day  | 164,696        | 164,708        | 11                        |
| Evening                                    | 19,489         | 19,493         | 4                         |
| Night                                      | 9,031          | 9,032          | 1                         |
| <b>Departures</b>                          | <b>193,217</b> | <b>193,233</b> | <b>16</b>                 |
| Day  | 171,028        | 171,042        | 13                        |
| Evening                                    | 14,223         | 14,224         | 2                         |
| Night                                      | 7,965          | 7,967          | 1                         |
| Note: Numbers may not add due to rounding. |                |                |                           |

### Operations by INM Type

Table 23 presents forecast business jet operations by INM for the project and Alternative 2. All of the additional business jet operations forecast under Alternative 2 would be use large narrowbody jet aircraft types, represented by the INM types 727EM1 and 727EM2. While the noise levels associated with these aircraft types equal or exceed the 80 dBA limit established by the VNY noisier aircraft phaseout for 2014, they would be exempt from the regulation under Alternative 2.

**Table 23.** Forecast 2014 Business Jet Operations by INM Type, Project and Alternative 2

| INM Type | Forecast 2014 |               | Alternative 2 vs. Project |
|----------|---------------|---------------|---------------------------|
|          | Project       | Alternative 2 |                           |
| 727EM1   | —             | 12            | 12                        |
| 727EM2   | —             | 20            | 20                        |
| 737700   | 1,310         | 1,310         | —                         |
| 737800   | 15            | 15            | —                         |
| CIT3     | 966           | 966           | —                         |
| CL600    | 6,524         | 6,524         | —                         |
| CL601    | 14            | 14            | —                         |
| CNA500   | 4,427         | 4,427         | —                         |
| CNA55B   | 1,217         | 1,217         | —                         |
| CNA750   | 4,629         | 4,629         | —                         |
| DC93LW   | 3             | 3             | —                         |
| EMB145   | 224           | 224           | —                         |
| FAL20    | 77            | 77            | —                         |
| FAL50    | 1,518         | 1,518         | —                         |
| FAL900   | 1,020         | 1,020         | —                         |
| GII      | 130           | 130           | —                         |
| GIIB     | 130           | 130           | —                         |
| GIV      | 12,423        | 12,423        | —                         |
| GLF3HK   | 1,262         | 1,262         | —                         |
| GV       | 3,701         | 3,701         | —                         |
| IA1125   | 3,934         | 3,934         | —                         |
| LEAR25   |               |               | —                         |
| LEAR35   | 28,082        | 28,082        | —                         |
| MU3001   | 11,489        | 11,489        | —                         |
| SABR80   | 7             | 7             | —                         |
| Total    | 83,101        | 83,133        | 32                        |

## Jet Operations by Noise Stage

All of the additional aircraft operations resulting from the exemption included in Alternative 2 are by definition Stage 3 aircraft. Since Alternative 2 results in only 32 additional Stage 3 operations compared to the project, the overall mix of Stage 2 and Stage 3 aircraft is the same for the project and Alternative 2, as shown in Table 24.

**Table 24.** Forecast 2014 Jet Operations by Noise Stage, Project and Alternative 2

| Noise Stage | 2014 Project |               | 2014 Alternative 2 |               | Alternative 2 vs. Project |
|-------------|--------------|---------------|--------------------|---------------|---------------------------|
|             | Operations   | Percent Share | Operations         | Percent Share |                           |
| Stage 2     | 344          | 0.4%          | 344                | 0.4%          | 0                         |
| Stage 3     | 82,757       | 99.6%         | 82,789             | 99.6%         | 32                        |
| Total       | 83,101       | 100.0%        | 83,133             | 100.0%        | 32                        |

## 6.0 Overflight Operations

Overflight operations were included in the 2004 FAA Tower counts and are shown in Table 25. In addition to those operations, there were also overflights arriving on Runway 8 at Bob Hope Airport in Burbank, California. Those operations were approximated by using the FAA Enhanced Traffic Management System counts. Assuming the traffic flows at Bob Hope Airport and VNY were similar (i.e., when VNY was arriving and departing to the south, Bob Hope Airport was arriving to the east and departing to the south), the number of jet aircraft arrivals to Bob Hope Airport Runway 8 and fleet mix were determined for the base year, 2004. Table 25 shows the overflights by category for 2004 and the forecast years. The overflights were assumed to be unaffected by the project or alternatives.

**Table 25.** Baseline and Forecast Overflights of VNY

| Overflight Category | 2004    | 2007    | 2014    |
|---------------------|---------|---------|---------|
| Fixed-Wing          | 56,564  | 56,904  | 62,490  |
| Helicopter          | 16,949  | 20,052  | 26,693  |
| BUR Arrivals        | 32,267  | 35,731  | 48,796  |
| Total               | 105,780 | 112,687 | 137,939 |

## 6.1 Forecast Methodology

The methodology for developing the overflight forecast included assumptions based on aircraft type, time of day, and growth rates within each general aircraft category:

- Fixed-wing overflights were assumed to consist of only piston aircraft;
- The aircraft fleet mix and operation time of day for piston overflights were assumed to be the same as VNY operations;
- Growth in piston overflights was based on the FAA Terminal Area Forecast (TAF) for Whiteman Airport due to its proximity to VNY and primary piston-aircraft operations;
- Growth in helicopter overflights was assumed to be the same as growth in VNY helicopter operations; and
- For Bob Hope Airport overflights, jet aircraft were grouped into three categories: Commercial Jet, GA Stage 2 Jet, and GA Stage 3 Jet. Commercial jets were forecast based on the FAA TAF for Bob Hope Airport, while GA Stage 2 and Stage 3 jets used the growth rate assumed for VNY GA Stage 2 and Stage 3 jet operations.
- The resulting growth rate assumptions for the overflights during two 5-year time periods are shown in Table 26.

**Table 26.** VNY Overflight Growth Assumptions

| <b>Overflight Category</b> | <b>2004–2009</b> | <b>2009–2014</b> |
|----------------------------|------------------|------------------|
| Fixed-Wing                 | 0.2%             | 1.9%             |
| Helicopter                 | 5.5%             | 3.8%             |
| BUR Arrivals               | 3.1%             | 5.2%             |
| Total                      | 2.0%             | 3.4%             |

## 6.2 Baseline (2007) and Forecast (2014) Activity

Table 27 shows the annual and daily operations by aircraft category and INM type for the 2007 baseline and 2014 forecast.

**Table 27.** Van Nuys Overflight Operations by INM Type

| Aircraft Category | INM Type | 2007   |               | 2014   |               |
|-------------------|----------|--------|---------------|--------|---------------|
|                   |          | Annual | Average Daily | Annual | Average Daily |
| Fixed-Wing        | BEC58P   | 54,145 | 148.3418      | 59,460 | 162.9038      |
| Fixed-Wing        | DC3      | 721    | 1.9753        | 792    | 2.1691        |
| Fixed-Wing        | PA30     | 447    | 1.2250        | 491    | 1.3455        |
| Fixed-Wing        | PA31     | 1,591  | 4.3592        | 1,747  | 4.7874        |
| Subtotal          |          | 56,904 | 155.9014      | 62,490 | 171.2058      |
|                   |          |        |               |        |               |
| Helicopter        | A109     | 356    | 0.9741        | 473    | 1.2966        |
| Helicopter        | B206L    | 4,140  | 11.3416       | 5,511  | 15.0977       |
| Helicopter        | B212     | 10     | 0.0284        | 14     | 0.0377        |
| Helicopter        | B222     | 5,545  | 15.1905       | 7,381  | 20.2211       |
| Helicopter        | BO105    | 1,259  | 3.4491        | 1,676  | 4.5910        |
| Helicopter        | CH47D    | 10     | 0.0276        | 13     | 0.0366        |
| Helicopter        | EC130    | 332    | 0.9090        | 442    | 1.2103        |
| Helicopter        | H500D    | 2,305  | 6.3160        | 3,069  | 8.4077        |
| Helicopter        | R22      | 1,999  | 5.4771        | 2,661  | 7.2911        |
| Helicopter        | S65      | 40     | 0.1106        | 54     | 0.1474        |
| Helicopter        | S76      | 625    | 1.7120        | 832    | 2.2791        |
| Helicopter        | SA330J   | 23     | 0.0621        | 30     | 0.0824        |
| Helicopter        | SA341G   | 20     | 0.0550        | 27     | 0.0731        |
| Helicopter        | SA350D   | 2,875  | 7.8778        | 3,827  | 10.4866       |
| Helicopter        | SA355F   | 513    | 1.4066        | 683    | 1.8723        |
| Subtotal          |          | 20,052 | 54.9376       | 26,693 | 73.1307       |
|                   |          |        |               |        |               |
| BUR Arrivals      | 727EM2   | 23     | 0.0619        | 26     | 0.0724        |
| BUR Arrivals      | 737300   | 10,900 | 29.8617       | 12,739 | 34.9020       |
| BUR Arrivals      | 737400   | 410    | 1.1229        | 479    | 1.3125        |
| BUR Arrivals      | 737500   | 2,408  | 6.5965        | 2,814  | 7.7100        |
| BUR Arrivals      | 737700   | 5,696  | 15.6051       | 6,657  | 18.2391       |
| BUR Arrivals      | 737800   | 20     | 0.0546        | 23     | 0.0637        |
| BUR Arrivals      | 737N17   | 5      | 0.0149        | 6      | 0.0174        |



| Aircraft Category                             | INM Type | 2007           |                 | 2014           |                 |
|---|----------|----------------|-----------------|----------------|-----------------|
|   |          | Annual         | Average Daily   | Annual         | Average Daily   |
| BUR Arrivals                                  | 757PW    | 250            | 0.6842          | 292            | 0.7997          |
| BUR Arrivals                                  | 767300   | 1              | 0.0025          | 1              | 0.0029          |
| BUR Arrivals                                  | A30062   | 442            | 1.2097          | 516            | 1.4139          |
| BUR Arrivals                                  | A310     | 52             | 0.1438          | 61             | 0.1680          |
| BUR Arrivals                                  | A319     | 293            | 0.8032          | 343            | 0.9388          |
| BUR Arrivals                                  | A320     | 462            | 1.2667          | 540            | 1.4806          |
| BUR Arrivals                                  | BAC111   | 169            | 0.4632          | 78             | 0.0058          |
| BUR Arrivals                                  | CIT3     | 105            | 0.2884          | 195            | 4.2070          |
| BUR Arrivals                                  | CL600    | 191            | 0.5238          | 355            | 1.1908          |
| BUR Arrivals                                  | CL601    | 3,138          | 8.5964          | 5,821          | 2.9235          |
| BUR Arrivals                                  | CNA500   | 267            | 0.7327          | 496            | 0.2129          |
| BUR Arrivals                                  | CNA750   | 461            | 1.2617          | 854            | 0.0346          |
| BUR Arrivals                                  | DC93LW   | 2              | 0.0053          | 4              | 0.3936          |
| BUR Arrivals                                  | EMB145   | 2              | 0.0050          | 2              | 0.4031          |
| BUR Arrivals                                  | FAL20    | 27             | 0.0752          | 13             | 0.1391          |
| BUR Arrivals                                  | FAL900   | 376            | 1.0290          | 697            | 0.5349          |
| BUR Arrivals                                  | GII      | 313            | 0.8563          | 144            | 0.9716          |
| BUR Arrivals                                  | GIIB     | 320            | 0.8767          | 147            | 15.9481         |
| BUR Arrivals                                  | GIV      | 1,125          | 3.0815          | 2,087          | 1.3593          |
| BUR Arrivals                                  | GV       | 1,405          | 3.8486          | 2,606          | 2.3407          |
| BUR Arrivals                                  | IA1125   | 595            | 1.6294          | 1,103          | 0.0098          |
| BUR Arrivals                                  | LEAR25   | 110            | 0.3025          | 51             | 5.7168          |
| BUR Arrivals                                  | LEAR35   | 2,447          | 6.7053          | 4,540          | 7.1398          |
| BUR Arrivals                                  | MD81     | 1,314          | 3.5995          | 1,536          | 3.0228          |
| BUR Arrivals                                  | MD82     | 372            | 1.0188          | 435            | 12.4395         |
| BUR Arrivals                                  | MD83     | 913            | 2.5013          | 1,067          | 5.6579          |
| BUR Arrivals                                  | MU3001   | 1,113          | 3.0498          | 2,065          | 1.9089          |
| BUR Arrivals                                  | T-38A    | 6              | 0.0154          | 3              | 0.0071          |
| <i>Subtotal</i>                               |          | <i>35,731</i>  | <i>97.8933</i>  | <i>48,796</i>  | <i>133.6885</i> |
| <b>Total</b>                                  |          | <b>112,687</b> | <b>308.7323</b> | <b>137,939</b> | <b>378.0250</b> |
| Numbers may not add directly due to rounding. |          |                |                 |                |                 |

## 7.0 Potential Diversions to Other Airports

### 7.1 Impact of Project on GA Jet Operations at VNY

The project will affect a small number of VNY jet operations in 2009 and 2011 as well as an estimated 1,989 operations in 2014 and 1,886 in 2016. Table 28 shows the number of operations that would be affected by type of aircraft. “Other” includes operations by early model Sabreliners and Hawkers.

**Table 28.** VNY Jet Operations Affected by the Project

| Aircraft Type          | 2009 | 2011 | 2014  | 2016  |
|------------------------|------|------|-------|-------|
| Boeing 727             | 38   | 35   | 32    | 19    |
| Learjet 24, 25, 28     | —    | —    | 522   | 435   |
| Gulfstream II/III      | —    | —    | 1,428 | 1,358 |
| Falcon 20              | —    | —    | —     | 63    |
| Other                  | —    | 7    | 7     | 11    |
| Total                  | 38   | 42   | 1,989 | 1,886 |
| Source: SH&E analysis. |      |      |       |       |

The frequency with which individual noisy jets operate at VNY will affect the responses to the project. Table 28 shows the number of flights per year that individual noisy jets flew at VNY in 2006, based on FAA Aircraft Situation Display to Industry (ASDI) data.<sup>13</sup> Of the 342 noisy GA jet aircraft that were identified at VNY, 205 aircraft had only one or two VNY flights, 87 had 3 to 11 flights, and 50 noisy jets flew 12 or more flights at VNY. Owners of the 50 noisy aircraft that flew 12 or more flights in 2006 (24 or more operations) are expected to replace or hushkit their aircraft so they can continue to operate at VNY. Aircraft owners who operate less frequently at VNY are expected to shift to other airports in the region that have less-stringent noise limits to avoid the cost of replacing or hushkitting their aircraft.

<sup>13</sup> Aircraft Situation Display to Industry (ASDI) includes near real-time flight data for all instrument flight rule (IFR) aircraft receiving radar services within the National Airspace System, filtered to remove military and other sensitive operations.

**Table 29.** VNY Flights by Individual Noisy Jet Aircraft in 2006

|   | <b>1 to 2 per Year</b> | <b>3 to 5 per Year</b> | <b>6 to 11 per Year</b> | <b>12 or More per Year</b> | <b>Total</b> |
|---|------------------------|------------------------|-------------------------|----------------------------|--------------|
| Boeing 727                                  | 1                      | 2                      | 1                       | —                          | 4            |
| Learjet 24, 25, 28                          | 47                     | 11                     | 2                       | 7                          | 67           |
| Gulfstream II/III                           | 124                    | 41                     | 22                      | 41                         | 228          |
| Other                                       | 33                     | 6                      | 2                       | 2                          | 43           |
| <b>Total</b>                                | <b>205</b>             | <b>60</b>              | <b>27</b>               | <b>50</b>                  | <b>342</b>   |
| Share                                       | 60%                    | 18%                    | 8%                      | 15%                        | 100%         |
| Source: SH&E analysis of FAA ASDI database. |                        |                        |                         |                            |              |

The data show that a small number of noisy jets that operate frequently at VNY account for most of the noisy operations. The 50 jets that had 12 or more flights accounted for 73% of the noisy jet operations in 2006, while 205 noisy jets that had one or two flights at VNY in 2006 accounted for only 9% of the total noisy jet operations.

ASDI data also indicate that 78% of the Gulfstream II and 72% of the Gulfstream III operations at VNY are by aircraft with 12 or more flights a year at VNY. These frequent operators are expected to replace or modify their aircraft so they can continue to operate at VNY, while Gulfstream II/III owners who fly less than once a month to VNY are expected to shift operations to other airports in the region. Interviews with Gulfstream operators indicate that it is not a good investment to hushkit Gulfstream II aircraft but that a hushkitted Gulfstream III can be expected to operate cost effectively for many years. As a result, Gulfstream III owners are expected to hushkit their aircraft, and Gulfstream II owners who want to continue operating at VNY are expected to replace their current aircraft with hushkitted Gulfstream IIIs.

ASDI data also show that 73% of the LEAR24/25 operations at VNY involve aircraft flying to and from VNY at least 12 times a year. Owners of these aircraft are expected to replace these aircraft with LEAR35s that meet the project noise limits, while LEAR24/25 owners who are infrequent operators at VNY are expected to shift operations to other airports.

A small number of GA jet operations in Boeing 727, Hawker 125-600A, Sabre 60, and LEAR28 aircraft will also be affected by the project noise limits. These aircraft operate infrequently at VNY; these operations are expected to shift to other airports.

## 7.2 Identifying Potential Diversion Airports

The diversion analysis began by identifying a set of 19 Los Angeles area airports that are within roughly 60 driving miles of VNY (see Table 30). These included facilities as far east as Ontario, south to John Wayne Airport, and north to the Antelope Valley area. The characteristics of each airport were reviewed to screen out airports that are unlikely to accommodate displaced VNY business jet operations. The screening criteria included runway length and width, the current level of GA jet aircraft activity, the availability of jet fuel for the potentially diverted aircraft, driving distance and travel time from VNY, and the existence of any noise restrictions that would preclude diverted VNY aircraft from operating at the respective airports.

Eight of the 19 airports were eliminated as potential candidates because their main runways are less than 5,000 feet long or under 100 feet wide or because they had fewer than 500 GA jet operations in 2006.<sup>14</sup> These include Brackett, Cable, Corona, El Monte, Fullerton, Palmdale, Torrance, and Whiteman. In addition, Santa Monica was eliminated as a candidate for flights diverted from VNY because its noise rules prohibit operations by the types of aircraft that the project would exclude from VNY.

---

<sup>14</sup> Runway length of 5,100 feet and width of 100 feet are the preferred minimums for Gulfstream jet operations.

**Table 30.** Nineteen Los Angeles Area Airports

| <b>Airport</b> | <b>Code</b> | <b>Road Miles from VNY</b> | <b>Main Runway</b> | <b>Noise Restrictions</b>   | <b>2006 GA Jet Operations</b> |
|----------------|-------------|----------------------------|--------------------|---|-------------------------------|
| Brackett       | POC         | 50                         | 4,839 x 75         | None  | 321                           |
| Bob Hope       | BUR         | 9                          | 6,886 x 150        | Voluntary airline curfew<br>2200–0700   | 19,857                        |
| Cable          | CCB         | 52                         | 3,864 x 75         | None  | na                            |
| Camarillo      | CMA         | 39                         | 6,013 x 150        | Departure curfew<br>2400–0500   | 4,650                         |
| Chino          | CNO         | 61                         | 7,000 x 150        | None  | 1,480                         |
| Corona         | AJO         | 67                         | 3,200 x 60         | None  | Na                            |
| El Monte       | EMT         | 34                         | 3,995 x 75         | None  | 30                            |
| Fox Field      | WJF         | 60                         | 7,201 x 150        | None  | 500                           |
| Fullerton      | FUL         | 42                         | 3,120 x 75         | None  | 29                            |
| Hawthorne      | HHR         | 20                         | 4,956 x 100        | None  | 546                           |
| Long Beach     | LGB         | 41                         | 10,000 x 200       | Noise budget, airline curfew<br>2200–0600   | 12,322                        |
| Los Angeles    | LAX         | 22                         | 12,090 x 150       | None  | 20,250                        |
| Ontario        | ONT         | 61                         | 12,198 x 150       | None  | 6,892                         |
| Oxnard         | OXR         | 47                         | 5,950 x 100        | None  | 1,741                         |
| Palmdale       | PMD         | 52                         | 12,002 x 150       | None  | 81                            |
| Santa Monica   | SMO         | 16                         | 4,973 x 150        | Night departure curfew,<br>voluntary night arrival<br>curfew, aircraft noise limits | 19,267                        |
| John Wayne     | SNA         | 61                         | 5,701 x 150        | Airline night curfew,<br>GA aircraft noise limits                                   | 32,176                        |
| Torrance       | TOA         | 32                         | 5,001 x 150        | None  | 439                           |
| Whiteman       | WHP         | 10                         | 4,120 x 75         | None  | 4                             |

Source: AirNav, Boeing airport noise web site, individual airport web sites.

Table 31 shows the distance and driving times to the nine airports that pass the first screening. Because the Los Angeles metropolitan area is the most congested large urban area in the nation,<sup>15</sup> highway driving time under normal and congested conditions represents an important measure of accessibility, as does highway distance.

<sup>15</sup> The 2007 Urban Mobility Report, Texas Transportation Institute, Texas A&M University, September 2007.

**Table 31.** Distance and Driving Times from Van Nuys to Nine Selected Los Angeles Area Airports

| Potential Diversion Airport | Code | Distance (miles) | Normal Driving Time | Congested Driving Time |
|-----------------------------|------|------------------|---------------------|------------------------|
| Bob Hope                    | BUR  | 9                | 0:25                | 0:30                   |
| Los Angeles International   | LAX  | 22               | 0:33                | 1:20                   |
| Camarillo                   | CMA  | 39               | 0:47                | 0:55                   |
| Long Beach                  | LGB  | 41               | 0:48                | 1:50                   |
| Oxnard                      | OXR  | 47               | 0:59                | 1:10                   |
| Fox Field                   | WJF  | 60               | 1:04                | 1:30                   |
| John Wayne                  | SNA  | 61               | 1:05                | 2:10                   |
| Ontario                     | ONT  | 61               | 1:06                | 2:20                   |
| Chino                       | CNO  | 61               | 1:10                | 3:10                   |


Source: Google Maps.

Bob Hope Airport offers the shortest driving time under both normal and congested driving conditions. At 33 minutes, the estimated driving time to LAX under normal driving conditions is slightly longer than the driving time to Bob Hope Airport, but driving time to LAX increases to 1 hour 20 minutes under congested conditions.<sup>16</sup> Camarillo is 47 minutes away under normal driving conditions, increasing by only 8 minutes when traffic is congested.

Driving to Long Beach takes only slightly longer than Camarillo under normal conditions, but driving time to Long Beach increases sharply under congested conditions. Oxnard is 12 to 15 minutes beyond Camarillo, and there is no apparent reason why an aircraft operator would bypass Camarillo for a similar facility farther away. Driving time to the remaining airports is more than an hour under normal driving conditions, and it can take 2 to 3 hours to drive to John Wayne, Ontario, or Chino when highways are congested.

Driving time to potential alternative airports should be viewed in the context of typical flight times. Figure 1 shows the shares of 2006 operations at VNY by flight time for the noisy jets that will be affected by the project. More than 43% of the flights in noisy GA jets were under 1 hour, with an additional 23% of the flights lasting 1 to 2 hours. Aircraft owners are unlikely to switch operations to airports where the driving time to the airport equals or exceeds typical flight times. For this reason, driving time is a critical factor in determining which airports receive the flights diverted from VNY.

<sup>16</sup>The Urban Mobility Report estimates that “rush hour” congestion in the Los Angeles area lasts 8 hours a day.

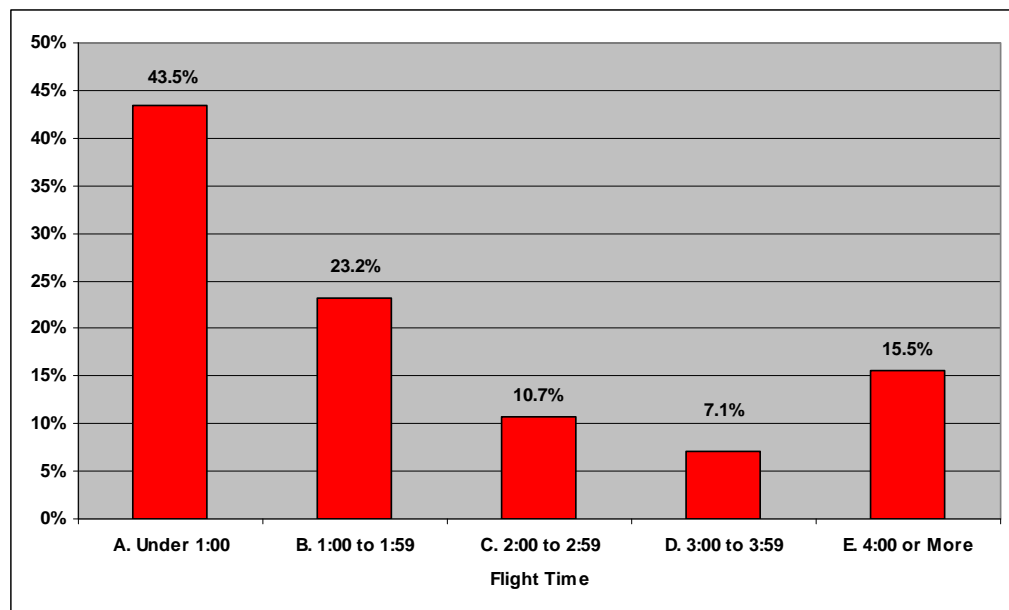**Figure 1.** Duration of 2006 VNY Flights in Noisier Jets

Source: FAA ASDI data.

### 7.3 Forecast of Aircraft Shifted from VNY to Other Airports

Three airports represent the most likely alternatives for aircraft shifted from VNY: Bob Hope, Camarillo, and LAX. The shares that would shift to each of these alternatives will depend largely on two factors: driving time and convenience of aircraft operations.

Driving times to the alternative airports will have an inverse effect on the number of operations shifted to these airports. For example, if Airport A is 40 minutes away from VNY and Airport B is 60 minutes away, Airport A would have an attraction factor of 1/40 and Airport B an attraction factor of 1/60. In this case, Airport A would attract 60% of the operations that shift from VNY, and Airport B would attract 40%.


The driving time analysis is based on the average time under normal and congested conditions. Los Angeles highways are congested approximately 8 hours a day, and 8 hours represents half of the time period when most aircraft departures take place, from 0600 to 2200. If driving time is the sole consideration, Bob Hope Airport would attract 50% of the operations that shift from VNY, LAX would attract 24%, and Camarillo 26%.

Operating convenience at the alternative airports will also play an important role in determining where operations are shifted. Camarillo, exclusively a general aviation airport, is expected to offer operating convenience equal to VNY. Bob Hope Airport

and LAX are both commercial service airports where general aviation operators can expect to face some inconvenience.

Departure delays at these airports provide a measure of the inconvenience that general aviation operators can face at large commercial airports. Figure 2 shows annual departure delays of 30 minutes or more reported at Bob Hope Airport and LAX from 1987 through 2006.

**Figure 2.** Annual Departure Delays of 30 Minutes or More

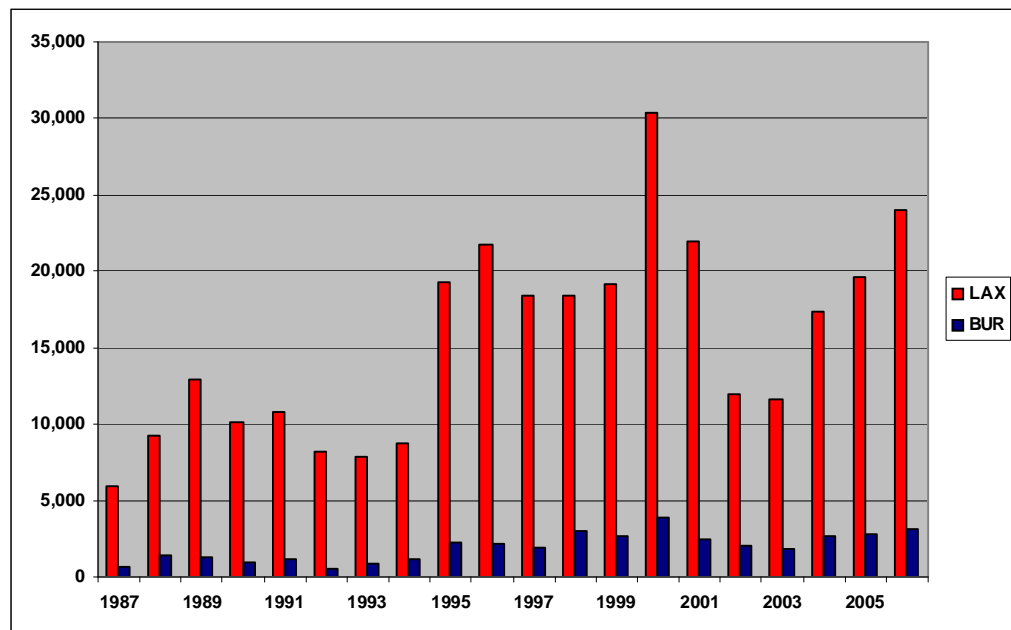

Source: USDOT, BTS, Airline On-Time Performance Data.

In 2006, scheduled airlines at LAX reported more than 24,000 departure delays of 30 minutes or more compared to 3,142 at Bob Hope Airport. Since 2002, departure delays have been rising rapidly at LAX but much more slowly at Bob Hope Airport.

Weighting factors were developed to reflect the potential impact of departure delays and other operating challenges at the alternative airports. A factor of 1.0 was assigned to Camarillo based on the view that general aviation operators will face no special difficulties at this airport. A factor of 0.9 was assigned to Bob Hope Airport, reflecting minor inconveniences associated with general aviation operations at this airport. A factor of 0.3 was assigned to LAX, indicating that general aviation operators can expect to face substantial operating inconveniences at this airport, particularly at times of peak activity. Although the value assigned to the weighting factors is subjective, sensitivity analysis shows that moderate changes upward or downward in these factors has relatively little impact on the overall results.



The forecast shift in operations from VNY to alternative airports is based primarily on the combined impact of driving time and operating inconvenience factors. Using this approach, Bob Hope Airport would attract 57% of the business jet operations shifted from VNY, Camarillo would attract 34%, and LAX would attract 9%. Boeing 727s that have been converted to GA use represent an exception to this rule. All 727 operations at VNY are expected to shift to LAX where this aircraft type operates frequently and can be more readily serviced.

Table 32 shows the forecast of GA jet operations shifted from VNY to Bob Hope, Camarillo, and LAX in 2014. GA jet operations at Bob Hope Airport would increase by 0.5 operations per day, with smaller increases at Camarillo and LAX.

**Table 32.** GA Jet Operations Shifted from VNY in 2014

| Aircraft Type          | To BUR | To CMA | To LAX |
|------------------------|--------|--------|--------|
| GLF2                   | 22     | 13     | 3      |
| GLF3                   | 73     | 44     | 12     |
| LJ25                   | 75     | 45     | 12     |
| LJ24                   | 17     | 10     | 3      |
| B727                   | —      | —      | 15     |
| B721                   | —      | —      | 12     |
| B722                   | —      | —      | 5      |
| H25A                   | 2      | 1      | —      |
| SBR1                   | 2      | 1      | —      |
| LJ28                   | 1      | 1      | —      |
| Total                  | 192    | 115    | 62     |
| Per Day                | 0.5    | 0.3    | 0.2    |
| Source: SH&E analysis. |        |        |        |

Table 33 shows the day-evening-night distribution of departures and arrivals that would shift from VNY to Bob Hope Airport, assuming that the aircraft would continue to operate at the alternative airports at the same times they operate at VNY.

**Table 33.** 2014 Business Jet Operations Shifted from VNY to BUR

| Aircraft Type  | Day        | Evening   | Night    | Total      |
|--|------------|-----------|----------|------------|
| <b>Departures</b>  |            |           |          |            |
| GLF3   | 30         | 6         | 0        | 37         |
| GLF2   | 10         | 1         | 0        | 11         |
| LJ25   | 33         | 4         | 0        | 38         |
| LJ24   | 7          | 1         | 0        | 9          |
| All Other  | 2          | 0         | 0        | 3          |
| Total  | 83         | 12        | 1        | 96         |
| <b>Arrivals</b>  |            |           |          |            |
| GLF3   | 26         | 6         | 4        | 37         |
| GLF2   | 8          | 2         | 1        | 11         |
| LJ25   | 31         | 4         | 3        | 38         |
| LJ24   | 7          | 1         | 1        | 9          |
| All Other  | 2          | 0         | 0        | 3          |
| <i>Total</i>   | <i>75</i>  | <i>13</i> | <i>8</i> | <i>96</i>  |
| <b>Grand Total</b>   | <b>158</b> | <b>25</b> | <b>9</b> | <b>192</b> |
| Note: Totals may not equal sum of columns due to rounding. |            |           |          |            |
| Source: FAA ASDI data, SH&E analysis.                      |            |           |          |            |

The VNY phaseout would increase Bob Hope Airport activity in 2014 by 158 day operations, 25 evening operations, and nine night operations, with arrivals accounting for almost all night activity.

Table 34 shows the increase in GA jet operations at Camarillo.

**Table 34.** 2014 Business Jet Operations Shifted from VNY to CMA

| Aircraft Type  | Day       | Evening   | Night    | Total      |
|--|-----------|-----------|----------|------------|
| <b>Departures</b>  |           |           |          |            |
| GLF3   | 18        | 4         | 0        | 22         |
| GLF2   | 6         | 1         | 0        | 7          |
| LJ25   | 20        | 2         | 0        | 23         |
| LJ24   | 4         | 1         | 0        | 5          |
| All Other  | 1         | 0         | 0        | 2          |
| <i>Total</i>   | <i>50</i> | <i>7</i>  | <i>0</i> | <i>58</i>  |
| <b>Arrivals</b>  |           |           |          |            |
| GLF3   | 16        | 4         | 2        | 22         |
| GLF2   | 5         | 1         | 1        | 7          |
| LJ25   | 19        | 2         | 2        | 23         |
| LJ24   | 4         | 0         | 0        | 5          |
| All Other  | 1         | 0         | 0        | 2          |
| <i>Total</i>   | <i>45</i> | <i>8</i>  | <i>5</i> | <i>58</i>  |
| <b>Grand Total</b>   | <b>94</b> | <b>15</b> | <b>5</b> | <b>115</b> |
| Note: Totals may not equal sum of columns due to rounding. |           |           |          |            |
| Source: SH&E analysis.                                     |           |           |          |            |

The VNY phaseout would increase Camarillo activity in 2014 by 94 day operations, 15 evening operations, and five night operations. There would be only one additional night departure at Camarillo, with the 0000 to 0500 night departure curfew assumed to remain in effect.

Table 35 shows the increase in annual GA jet operations at LAX.

**Table 35.** 2014 Business Jet Operations Shifted from VNY to LAX

| Aircraft Type  | Day       | Evening  | Night    | Total     |
|--|-----------|----------|----------|-----------|
| <b>Departures</b>  |           |          |          |           |
| GLF3   | 5         | 1        | 0        | 6         |
| GLF2   | 1         | 0        | 0        | 2         |
| LJ25   | 5         | 1        | 0        | 6         |
| LJ24   | 1         | 0        | 0        | 2         |
| All Other  | 14        | 1        | 1        | 16        |
| <i>Total</i>   | <i>27</i> | <i>3</i> | <i>1</i> | <i>31</i> |
| <b>Arrivals</b>  |           |          |          |           |
| GLF3   | 4         | 1        | 1        | 6         |
| GLF2   | 1         | 0        | 0        | 2         |
| LJ25   | 5         | 1        | 0        | 6         |
| LJ24   | 1         | 0        | 0        | 2         |
| All Other  | 13        | 2        | 1        | 16        |
| <i>Total</i>   | <i>24</i> | <i>4</i> | <i>2</i> | <i>31</i> |
| <b>Grand Total</b>   | <b>51</b> | <b>8</b> | <b>3</b> | <b>62</b> |
| Note: Totals may not equal sum of columns due to rounding. |           |          |          |           |
| Source: SH&E analysis.                                     |           |          |          |           |

The VNY phaseout would increase LAX activity in 2014 by 69 day operations, 11 evening operations, and four night operations.

Table 36 summarizes the differences in 2014 operations at the three alternative airports under the project and Alternative 1 scenarios.

**Table 36.** 2014 Business Jet Operations at BUR, CMA, and LAX

| <b>Scenario</b>           | <b>BUR</b>    | <b>CMA</b>   | <b>LAX</b>    |
|---------------------------|---------------|--------------|---------------|
| <b>Project</b>            |               |              |               |
| Stage 2                   | 563           | 217          | 1,010         |
| Stage 3                   | 32,373        | 8,662        | 27,537        |
| <i>Total</i>              | <i>32,936</i> | <i>8,879</i> | <i>28,516</i> |
| <b>Stage 2 Percentage</b> | <b>1.7%</b>   | <b>2.5%</b>  | <b>3.5%</b>   |
| <b>Alternative 1</b>      |               |              |               |
| Stage 2                   | 371           | 102          | 596           |
| Stage 3                   | 32,373        | 8,662        | 27,858        |
| <i>Total</i>              | <i>32,744</i> | <i>8,764</i> | <i>28,454</i> |
| <b>Stage 2 Percentage</b> | <b>1.1%</b>   | <b>1.2%</b>  | <b>2.1%</b>   |
| Source: SH&E analysis.    |               |              |               |

Compared to Alternative 1, the project would increase the Stage 2 share of business jet operations at Bob Hope Airport from 1.1% to 1.7%, the share at Camarillo from 1.2% to 2.5%, and the share at LAX from 2.1% to 3.5%. In addition, the number of annual general aviation 727 operations at LAX would increase by 32. Except for the 727s at LAX, the number of Stage 3 business jet operations at these airports would not be affected.

Under Alternative 2 which exempts all Stage 3 operations from the phaseout, the general aviation 727 operations at VNY would not shift to LAX. Except for this, there is no difference in diversion between the Project and Alternative 2.

The proposed phaseout has the greatest impact on noisy jet operations at Bob Hope Airport, Camarillo, and LAX in 2014, but it will also affect operations in 2016 at Fox Field and Chino when exemptions on noisy aircraft maintenance activity and privately owned military jet operations at VNY expire. Table 37 shows the shift in operations from VNY to Fox Field in 2016.

**Table 37.** 2016 Maintenance-Related Operations Shifted to WJF

| <b>Aircraft Type</b>   | <b>Day</b> | <b>Evening</b> | <b>Night</b> | <b>Total</b> |
|------------------------|------------|----------------|--------------|--------------|
| <b>Departures</b>      |            |                |              |              |
| GLF3                   | 65         | 0              | 0            | 65           |
| GLF2                   | 65         | 0              | 0            | 65           |
| <i>Total</i>           | <i>130</i> | <i>0</i>       | <i>0</i>     | <i>130</i>   |
| <b>Arrivals</b>        |            |                |              |              |
| GLF3                   | 65         | 0              | 0            | 65           |
| GLF2                   | 65         | 0              | 0            | 65           |
| <i>Total</i>           | <i>130</i> | <i>0</i>       | <i>0</i>     | <i>130</i>   |
| <b>Grand Total</b>     | <b>260</b> | <b>0</b>       | <b>0</b>     | <b>260</b>   |
| Source: SH&E analysis. |            |                |              |              |

A total of 260 annual operations are expected to shift to Fox Field, based on 65 maintenance visits with one arrival, one departure, and one test flight per visit. The maintenance activity is expected to involve Gulfstream II and Gulfstream III aircraft, and all operations are expected to occur during daytime hours.

Privately owned military jets that cannot operate at VNY in 2016 are expected to shift to Chino, which is a center for military aircraft restoration. Table 38 shows the expected shift in operations, a total of 100 annual operations.

**Table 38.** 2016 Privately Owned Military Jet Operations Shifted to CNO

| Aircraft Type          | Day       | Evening  | Night    | Total      |
|------------------------|-----------|----------|----------|------------|
| <b>Departures</b>      |           |          |          |            |
| F5                     | 2         | 0        | 0        | 2          |
| L39                    | 25        | 4        | 0        | 29         |
| T38                    | 15        | 0        | 4        | 19         |
| Total                  | 42        | 4        | 4        | 50         |
| <b>Arrivals</b>        |           |          |          |            |
| F5                     | 2         | 0        | 0        | 2          |
| L39                    | 29        | 0        | 0        | 29         |
| T38                    | 19        | 0        | 0        | 19         |
| Total                  | 50        | 0        | 0        | 50         |
| <b>Grand Total</b>     | <b>92</b> | <b>4</b> | <b>4</b> | <b>100</b> |
| Source: SH&E analysis. |           |          |          |            |

The types of military jets are expected to include United States-made T38 and F5 aircraft and Czech L39 Albatros trainers. Given current usage patterns at VNY, most operations are expected to occur during daytime hours, with a small number of evening and night flights.

## 8.0 Underlying Operations at Displacement Airports

This section describes the methodology for developing forecast operations at the diversion airports and presents the 2007 baseline and 2014/2016 forecasts of aircraft operations under Alternative 1, status quo conditions. The airports that are forecast to receive operations diverted from VNY as a result of the project include Bob Hope Airport, Camarillo, Chino, LAX, and Fox Field. These forecasts and the forecasts of diverted operations, described in Section 7, provide the basis for the analysis of the environmental impacts of the proposed project and the two alternatives on the diversion airports.

### 8.1 Forecast Methodology

A detailed approach was used to forecast business jets operations, including fleet mix and time of day profiles, for each of the diversion airports. Forecasts of other segments of activity, such as commercial airline operations or non-jet general aviation, at all diversion airports except LAX were based on growth projections from

the FAA's Terminal Area Forecasts (December 2006). Baseline and forecast operations for LAX were based on existing forecasts prepared for LAWA for the Los Angeles International Airport Senior and Subordinate Revenue Bonds Series 2008 - Final Official Statement. Derivative forecasts for operations by aircraft type and by time of day were derived from several available data sources, such as the U.S. Department of Transportation (USDOT) T100 database, FAA ATADS, FAA ETMSC, ASDI, the Official Airline Guide, 2006 INM modeling inputs for LAX, and individual airport master plans obtained for Chino, Camarillo, and Fox Field.

## **Business Jet Forecast Assumptions**

The level of business jet operations at the diversion airports was determined from the FAA's ETMSC database, which also provided information on aircraft type. Actual business jet operations were reviewed from 2000, the earliest year available in ETMSC, to 2006 to assess historic growth trends at the diversion airports. Table 39 presents the ETMSC business jet operations from 2000 to 2006 for each of the diversion airports and VNY.

Of the five diversion airports, LAX and Bob Hope Airport accommodated the most business jet activity in 2006, with approximately 20,000 operations each. However, VNY accommodated more than 40,000 business jets operations, more than twice as many as Bob Hope Airport and LAX. The other diversion airports handled significantly fewer business jet operations. In 2006, there were 4,600 business jets operations at Camarillo, 1,500 at Chino, and only 500 at Fox Field. VNY accommodated more than twice as many business jet operations as Bob Hope Airport and LAX.

Business jet operations at the diversion airports grew at various rates, from 2.6% per year at Fox Field to 10.2% per year at Camarillo. While Bob Hope Airport and LAX accommodated similar levels of business jet operations, activity at Bob Hope Airport has been growing faster, at 8.1% per year, compared to 5.5% at LAX. The ETMSC data indicate that business jet activity at VNY grew at an average rate of 8.1% per year from 2000 to 2006, the same rate as business jet operations at Bob Hope Airport.



**Table 39.** Historic Business Jet Operations at Diversion Airports and VNY, 2000 to 2006

| Year   | BUR    | CMA   | CNO   | LAX    | WJF  | VNY    |
|--|--------|-------|-------|--------|------|--------|
| 2000   | 12,466 | 2,592 | 1,048 | 14,664 | 428  | 27,106 |
| 2001   | 13,719 | 2,729 | 713   | 14,292 | 341  | 29,188 |
| 2002   | 15,175 | 3,612 | 1,176 | 15,019 | 387  | 35,631 |
| 2003   | 15,792 | 4,213 | 1,122 | 15,825 | 473  | 38,025 |
| 2004   | 17,980 | 4,630 | 1,194 | 18,323 | 547  | 41,919 |
| 2005   | 19,659 | 5,000 | 1,238 | 19,987 | 561  | 43,112 |
| 2006   | 19,857 | 4,650 | 1,480 | 20,250 | 500  | 43,349 |
| <b>Average Annual Growth</b>   |        |       |       |        |      |        |
| 2000–2006  | 8.1%   | 10.2% | 5.9%  | 5.5%   | 2.6% | 8.1%   |
| Note: VNY operations are from ETMSC and differ slightly from ARTS data for VNY and the estimated base-year (2004) level of VNY jet operations. |        |       |       |        |      |        |
| Source: FAA, ETMSC, 2000–2006.   |        |       |       |        |      |        |

Table 40 summarizes forecast growth assumptions for business jet operations at each of the diversion airports. Forecast growth rates are based on historical growth trends and projected growth for the business jet industry. At Bob Hope Airport, long-term forecast growth in business jet operations is similar to the forecast rate for VNY. Business jet operations are forecast to grow the fastest Camarillo and the slowest at Fox Field, consistent with historic growth trends.

**Table 40.** Actual and Forecast Average Annual Growth in Business Jet Operations at Diversion Airports

| Year             | BUR  | CMA   | CNO  | LAX  | WJF  |
|------------------|------|-------|------|------|------|
| Actual 2000–2006 | 8.1% | 10.2% | 5.9% | 5.5% | 2.6% |
| <b>Forecast</b>  |      |       |      |      |      |
| 2006–2014        | 6.5% | 8.2%  | 4.7% | 4.3% | 1.9% |
| 2014–2016        | 6.9% | 8.9%  | 5.0% | 4.6% | 1.9% |
| Source: SH&E.    |      |       |      |      |      |

## Forecast Assumptions for Other Aviation Activity

Other types of aviation activity at the diversion airports include civil general aviation operations in non-jet aircraft, civilian training operations (GA non-jet local), and operations performed by the military. In addition, Bob Hope Airport and LAX have a substantial number of commercial airline operations, including activity by passenger and all-cargo carriers and regional/commuter airlines. For all diversion airports

except LAX, forecast growth rates for all non-business jet activity at the diversion airports were based on the FAA Terminal Area Forecasts. For LAX, forecasts of all non-business jet activity were based on existing forecasts prepared for LAWA for the Los Angeles International Airport Senior and Subordinate Revenue Bonds Series 2008 - Final Official Statement. Table 41 summarizes the forecast growth assumptions for each type of activity for each of the diversion airports.

**Table 41.** Forecast Average Annual Growth Rates for Non-Business Jet Operations at Diversion Airports, 2006–2014 and 2014–2016

| Period    | Activity Type                | BUR  | CMA  | CNO  | LAX  | WJF  |
|-----------|------------------------------|------|------|------|------|------|
| 2006–2014 | Air Carrier                  | 1.5% | na   | na   | 1.0% | na   |
|           | Commuter                     | 2.5% | na   | na   | 1.5% | na   |
|           | Itinerant GA Non-Jet         | 2.3% | 1.6% | 1.7% | 1.4% | 0.5% |
|           | Local GA Non-Jet             | 0.8% | 0.0% | 0.0% | Na   | 0.5% |
|           | Military (Itinerant + Local) | 0.0% | 0.0% | 0.0% | 1.0% | 0.0% |
| 2014–2016 | Air Carrier                  | 1.5% | na   | na   | 1.5% | na   |
|           | Commuter                     | 2.5% | na   | na   | 0.9% | na   |
|           | Itinerant GA Non-Jet         | 1.3% | 1.0% | 1.1% | 1.2% | 0.4% |
|           | Local GA Non-Jet             | 0.8% | 0.0% | 0.0% | na   | 0.5% |
|           | Military (Itinerant + Local) | 0.0% | 0.0% | 0.0% | 0.0% | 0.0% |

Source: FAA Terminal Area Forecasts, December 2006 (BUR, CMA, CNO and WJF)  
LAWA, Los Angeles International Airport Senior and Subordinate Revenue Bonds Series 2008 - Final Official Statement (LAX)

## Estimation of 2007 Baseline Aircraft Operations

Actual changes in aircraft operations as reported in the FAA ATADS and FAA ETMSC databases were reviewed and used to estimate activity levels for the 2007 baseline for all diversion airports except LAX. Growth rate assumptions were developed and applied to calendar year (CY) 2006 activity to estimate the 2007 baseline activity at each of the diversion airports. The 2007 baseline activity levels for LAX were based on actual data reported by LAWA in the Los Angeles International Airport Senior and Subordinate Revenue Bonds Series 2008 - Final Official Statement. Table 42 presents the growth rate assumptions used to estimate 2007 baseline operations by type for the diversion airports other than LAX and summarizes actual 2006-2007 growth rates for LAX.

**Table 42.** Forecast Growth Rate Assumptions for Aircraft Operations at Diversion Airports, 2006–2007

| Activity Type                | BUR*   | CMA    | CNO   | LAX ** | WJF   |
|------------------------------|--------|--------|-------|--------|-------|
| Business Jet                 | -5.0%  | 5.0%   | 37.6% | 3.8%   | 1.5%  |
| Air Carrier                  | 5.7%   | na     | na    | 0.0%   | na    |
| Commuter                     | -4.4%  | na     | na    | 7.1%   | na    |
| Itinerant GA Non-Jet         | -10.5% | -6.4%  | 3.4%  | 2.9%   | -5.3% |
| Local GA Non-Jet             | -35.2% | -1.5%  | -4.7% | na     | 3.9%  |
| Military (Itinerant + Local) | -4.8%  | 125.2% | 51.1% | 0.0%   | -0.1% |

Note: Actual growth for year to date (YTD) September 2006–2007 based on FAA ATADS and ETMSC, except where noted.

\* Actual growth for YTD September 2006–2007 for business jets based on FAA, ETMSC; actual YTD November 2006–2007 growth rates for major air carriers and commuter airlines based on USDOT T-100 database; actual CY 2006–2007 growth for non-jet GA and military based on FAA ATADS.

\*\* LAWA, Los Angeles International Airport Senior and Subordinate Revenue Bonds Series 2008 - Final Official Statement (LAX)

Estimated 2007 baseline operations for the diversion airports are summarized in Table 43. The level of aircraft activity at the diversion airports ranges from 66,000 annual operations at Fox Field to 664,000 at LAX. Only Bob Hope Airport and LAX have operations by scheduled commercial airlines (major air carriers and commuter airlines). The majority of the activity at the other airports consists of itinerant and local non-jet aircraft operations. Section 8.2 provides a more detailed description of baseline operations for each diversion airport.

**Table 43.** Estimated 2007 Baseline Operations at Diversion Airports by Type of Activity

| Activity Type                | BUR            | CMA            | CNO            | LAX            | WJF           |
|------------------------------|----------------|----------------|----------------|----------------|---------------|
| Business Jet                 | 18,863         | 4,883          | 2,037          | 21,013         | 508           |
| Air Carrier                  | 58,629         | na             | na             | 454,946        | na            |
| Commuter                     | 11,819         | na             | na             | 173,081        | na            |
| Itinerant GA Non-Jet         | 26,174         | 74,601         | 67,590         | 11,981         | 31,738        |
| Local GA Non-Jet             | 5,060          | 63,860         | 96,376         | —              | 32,291        |
| Military (Itinerant + Local) | 265            | 1,740          | 594            | 2,488          | 1,513         |
| <b>Total</b>                 | <b>120,810</b> | <b>145,083</b> | <b>166,596</b> | <b>663,509</b> | <b>66,049</b> |

## 8.2 Baseline (2007) Activity at Diversion Airports

This section describes the 2007 baseline level of aircraft activity at each of the diversion airports.

## Bob Hope Airport

As shown in Table 44, there were an estimated 121,000 operations, excluding overflights, at Bob Hope Airport in the 2007 baseline. Major air carriers and commuter airlines accounted for 58% of total airport operations. GA non-jet itinerant operations, which include air taxis and the cargo operations of Ameriflight, represented 22% of total activity. Business jets were responsible for 16% of total operations in the base year. Because of the high level of regularly scheduled commercial airline services at Bob Hope Airport, local operations, including training activity, is minimal.

**Table 44.** 2007 Baseline Operations at Bob Hope Airport by Type of Activity

| Activity Type                | Annual         | Average Daily | Percent of Total |
|------------------------------|----------------|---------------|------------------|
| Air Carrier/Commuter         | 70,448         | 193.0         | 58%              |
| Business Jet                 | 18,863         | 51.7          | 16%              |
| GA Non-Jet Itinerant         | 26,174         | 71.7          | 22%              |
| GA Non-Jet Local             | 5,060          | 13.9          | 4%               |
| Military (Itinerant + Local) | 265            | 0.7           | 0%               |
| <b>Total</b>                 | <b>120,810</b> | <b>331.0</b>  | <b>100%</b>      |

Table 45 presents estimated baseline operations for Bob Hope Airport by type and by time of day. Approximately 75% of total aircraft operations were performed during the day. The evening period accounted for 16% of operations, and nearly 9% of activity occurred during the night. The GA non-jet category had the highest percentage of activity during the night period, at 27.2%. This category includes the Ameriflight cargo operations, which contribute to the high nighttime share for this category of activity. Almost 12% of business jet operations occurred during the night but only 2.1% of commercial airline activity. The limited amount of commercial airline activity at night illustrates the effect of the current voluntary nighttime curfew for air carriers at Bob Hope Airport.

**Table 45.** 2007 Baseline Operations at Bob Hope Airport by Type of Activity and Time of Day

| Activity Type                | Operations by Time of Day |               |               |                | Percent of Total 24 Hours |              |             |
|------------------------------|---------------------------|---------------|---------------|----------------|---------------------------|--------------|-------------|
|                              | Day                       | Evening       | Night         | Total          | Day                       | Evening      | Night       |
| Air Carrier/Commuter         | 54,226                    | 14,754        | 1,468         | 70,448         | 77.0%                     | 20.9%        | 2.1%        |
| Business Jet                 | 14,721                    | 1,948         | 2,194         | 18,863         | 78.0%                     | 10.3%        | 11.6%       |
| GA Non-Jet Itinerant         | 16,207                    | 2,852         | 7,115         | 26,174         | 61.9%                     | 10.9%        | 27.2%       |
| GA Non-Jet Local             | 4,742                     | 318           | —             | 5,060          | 93.7%                     | 6.3%         | 0.0%        |
| Military (Itinerant + Local) | 253                       | 12            | —             | 265            | 95.3%                     | 4.7%         | 0.0%        |
| <b>Total</b>                 | <b>90,149</b>             | <b>19,884</b> | <b>10,777</b> | <b>120,810</b> | <b>74.6%</b>              | <b>16.5%</b> | <b>8.9%</b> |

As shown in Table 46, departing flights accounted for 52.2% of daytime operations at Bob Hope Airport. Evening operations were heavily weighted toward arrivals, which accounted for 63.8% of evening activity. Departures represented nearly 57% of nighttime operations. While scheduled airlines drive the mix of arriving and departing flights during the day and evening periods, GA non-jet itinerant flights drive the mix of activity during the night period. GA non-jet itinerant operations, which include Ameriflight cargo operations, accounted for 66% of total nighttime operations; 57.8% of these were departures.

**Table 46.** 2007 Baseline Operations at Bob Hope Airport by Type of Activity, Time of Day, and Direction

| Activity Type                | Day          |              | Evening      |              | Night        |              |
|------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
|                              | Arrivals     | Departures   | Arrivals     | Departures   | Arrivals     | Departures   |
| Air Carrier/Commuter         | 46.9%        | 53.1%        | 63.8%        | 36.2%        | 26.4%        | 73.6%        |
| Business Jet                 | 47.3%        | 52.7%        | 62.2%        | 37.8%        | 57.5%        | 42.5%        |
| GA Non-Jet Itinerant         | 50.5%        | 49.5%        | 66.5%        | 33.5%        | 42.2%        | 57.8%        |
| GA Non-Jet Local             | 50.0%        | 50.0%        | 50.0%        | 50.0%        | —            | —            |
| Military (Itinerant + Local) | 47.6%        | 52.4%        | 100.0%       | 0.0%         | —            | —            |
| <b>Total</b>                 | <b>47.8%</b> | <b>52.2%</b> | <b>63.8%</b> | <b>36.2%</b> | <b>43.1%</b> | <b>56.9%</b> |

The 2007 baseline fleet mix for Bob Hope Airport is summarized by INM type in Table 47. The top five types accounted for nearly 53% of total aircraft operations. Narrowbody commercial aircraft, such as Boeing 737s, represented by INM types 737300 and 737700, were among the most prevalent types in the Bob Hope Airport fleet mix and together accounted for 36% of Bob Hope Airport's total aircraft operations. The CL601 INM type represents regional jets operated by scheduled airlines and accounted for 6.1% of total aircraft operations. The DHC6 type, which represents GA non-jet operations and some military operations, accounted for 5.7% of aircraft activity. The GV INM type, which represents business jet activity and

some scheduled airline regional jet operations, was the fifth most prevalent type in the Bob Hope Airport fleet mix, with a 4.9% share of baseline activity.

**Table 47.** 2007 Baseline Operations at Bob Hope Airport by INM Aircraft Type

| <b>INM Type</b> | <b>Annual Operations</b> | <b>Percent of Total</b> |
|-----------------|--------------------------|-------------------------|
| 737300          | 21,915                   | 18.1%                   |
| 737700          | 21,592                   | 17.9%                   |
| CL601           | 7,418                    | 6.1%                    |
| DHC6            | 6,861                    | 5.7%                    |
| GV              | 5,907                    | 4.9%                    |
| LEAR35          | 4,806                    | 4.0%                    |
| GASEPV          | 4,703                    | 3.9%                    |
| MD81            | 4,694                    | 3.9%                    |
| A320-211        | 3,928                    | 3.3%                    |
| BEC58P          | 3,635                    | 3.0%                    |
| CNA441          | 3,615                    | 3.0%                    |
| CNA172          | 3,330                    | 2.8%                    |
| MU3001          | 3,329                    | 2.8%                    |
| SD330           | 3,092                    | 2.6%                    |
| GASEPF          | 2,786                    | 2.3%                    |
| CNA206          | 2,451                    | 2.0%                    |
| GIV             | 2,202                    | 1.8%                    |
| 737500          | 2,019                    | 1.7%                    |
| IA1125          | 1,813                    | 1.5%                    |
| A319-131        | 1,585                    | 1.3%                    |
| CL600           | 1,470                    | 1.2%                    |
| CNA750          | 1,237                    | 1.0%                    |
| A310-304        | 1,109                    | 0.9%                    |
| 737800          | 895                      | 0.7%                    |
| CNA500          | 885                      | 0.7%                    |
| 1900D           | 832                      | 0.7%                    |
| FAL900          | 422                      | 0.3%                    |
| GIIB            | 411                      | 0.3%                    |
| A300-622R       | 395                      | 0.3%                    |
| FAL50           | 300                      | 0.2%                    |

| <b>INM Type</b> | <b>Annual Operations</b> | <b>Percent of Total</b> |
|-----------------|--------------------------|-------------------------|
| 737400          | 237                      | 0.2%                    |
| GII             | 215                      | 0.2%                    |
| CIT3            | 167                      | 0.1%                    |
| 757PW           | 134                      | 0.1%                    |
| 757RR           | 133                      | 0.1%                    |
| PA28            | 105                      | 0.1%                    |
| LEAR25          | 92                       | 0.1%                    |
| FAL20           | 52                       | 0.0%                    |
| PA30            | 16                       | 0.0%                    |
| C130            | 11                       | 0.0%                    |
| F16A            | 5                        | 0.0%                    |
| F-18            | 4                        | 0.0%                    |
| CNA55B          | 3                        | 0.0%                    |
| <b>Total</b>    | <b>120,810</b>           | <b>100.0%</b>           |

As shown in Table 48, there were 757 operations in Stage 2 business jet aircraft (excluding military operations) at Bob Hope Airport in 2007. Stage 2 types in the Bob Hope Airport fleet are represented by the following INM types: GIIB (411 operations), GII (212 operations), LEAR25 (81 operations), and FAL20 (52 operations). Stage 3 aircraft types accounted for 96% of Bob Hope Airport's total business jet operations in the baseline case.

**Table 48.** 2007 Baseline Business Jet Operations at Bob Hope Airport by Noise Stage

| <b>Noise Stage</b> | <b>Annual Operations</b> | <b>Percent of Total</b> |
|--------------------|--------------------------|-------------------------|
| Stage 2            | 757                      | 4.0%                    |
| Stage 3            | 18,106                   | 96.0%                   |
| <b>Total</b>       | <b>18,863</b>            | <b>100.0%</b>           |

## **Camarillo Airport**

In 2007, there were 145,000 aircraft operations at Camarillo Airport. As shown in Table 49, GA non-jet aircraft accounted for 95% of total airport operations. More than 40% of the airport's operations are local operations, which include pilot training activity, such as touch-and-go operations; flights that remain within the local traffic pattern; and flights between the airport and a practice area within a 20-mile radius of

the tower. Business jet aircraft accounted for less than 5,000 annual operations, or 3% of total activity.

**Table 49.** 2007 Baseline Operations at Camarillo Airport by Type of Activity

| Activity Type                | Annual         | Average Daily | Percent of Total |
|------------------------------|----------------|---------------|------------------|
| Air Carrier/Commuter         | 0              | —             | 0.0%             |
| Business Jet                 | 4,883          | 13.4          | 3.4%             |
| GA Non-Jet Itinerant         | 74,601         | 204.4         | 51.4%            |
| GA Non-Jet Local             | 63,860         | 175.0         | 44.0%            |
| Military (Itinerant + Local) | 1,740          | 4.8           | 1.2%             |
| <b>Total</b>                 | <b>145,083</b> | <b>397.5</b>  | <b>100.0%</b>    |

Table 50 summarizes 2007 aircraft activity at Camarillo by type and by time of day. Nearly 92% of aircraft operations at Camarillo occurred during the daytime. The high percentage of daytime activity reflects the high percentage of non-jet itinerant and training operations that occur predominantly during daytime hours. Approximately 6% of aircraft operations occurred during evening hours, and only 2% operated during the night. The time-of-day pattern for business jets differs from the time-of-day pattern for non-jet aircraft, with a higher percentage of activity occurring during the evening and night periods. In 2007, 8% of business jet operations were in the evening, and 7% were at night.

**Table 50.** 2007 Baseline Operations at Camarillo Airport by Type of Activity and Time of Day

| Activity Type                | Operations by Time of Day |              |              |                | Percent of Total 24 Hours |             |             |
|------------------------------|---------------------------|--------------|--------------|----------------|---------------------------|-------------|-------------|
|                              | Day                       | Evening      | Night        | Total          | Day                       | Evening     | Night       |
| Air Carrier/Commuter         | —                         | —            | —            | —              | —                         | —           | —           |
| Business Jet                 | 4,134                     | 408          | 341          | 4,883          | 84.7%                     | 8.4%        | 7.0%        |
| GA Non-Jet Itinerant         | 68,297                    | 4,399        | 1,904        | 74,601         | 91.6%                     | 5.9%        | 2.6%        |
| GA Non-Jet Local             | 58,909                    | 3,752        | 1,198        | 63,860         | 92.2%                     | 5.9%        | 1.9%        |
| Military (Itinerant + Local) | 1,593                     | 103          | 44           | 1,740          | 91.6%                     | 5.9%        | 2.6%        |
| <b>Total</b>                 | <b>132,933</b>            | <b>8,663</b> | <b>3,487</b> | <b>145,083</b> | <b>91.6%</b>              | <b>6.0%</b> | <b>2.4%</b> |

As shown in Table 51, daytime operations were evenly balanced between arrivals and departures. The evening period was not balanced, with departures accounting for 53% of evening operations. During the night period there was a higher percentage of arrivals than departures, 52% and 48%, respectively. Business jet activity at Camarillo had a different time-of-day pattern than the overall airport average. For business jets, departures represented more than half of daytime activity, while



arrivals were the most frequent type of business jet operation during the evening and night periods.

**Table 51.** 2007 Baseline Operations at Camarillo Airport by Type of Activity, Time of Day, and Direction

| Activity Type                | Day          |              | Evening      |              | Night        |              |
|------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
|                              | Arrivals     | Departures   | Arrivals     | Departures   | Arrivals     | Departures   |
| Air Carrier/Commuter         | —            | —            | —            | —            | —            | —            |
| Business Jet                 | 46.9%        | 53.1%        | 65.2%        | 34.8%        | 69.3%        | 30.7%        |
| GA Non-Jet Itinerant         | 50.5%        | 49.5%        | 41.9%        | 58.1%        | 49.6%        | 50.4%        |
| GA Non-Jet Local             | 50.0%        | 50.0%        | 50.0%        | 50.0%        | —            | —            |
| Military (Itinerant + Local) | 50.5%        | 49.5%        | 41.9%        | 58.1%        | —            | —            |
| <b>Total</b>                 | <b>50.2%</b> | <b>49.8%</b> | <b>46.5%</b> | <b>53.5%</b> | <b>51.6%</b> | <b>48.4%</b> |

Table 52 summarizes the 2007 baseline aircraft fleet for Camarillo Airport by aircraft INM type. The generic types for single-engine variable-pitch (GASEPV) and single-engine fixed-pitch (GASEPF) aircraft account for nearly three-quarters of the aircraft types operating at Camarillo. Other prevalent types in the Camarillo fleet include twin-engine pistons, represented by the BEC58P INM type; other single-engine pistons, represented by CNA172; and light turboprops, represented by CNA411. Together, these five INM types account for 93% of the aircraft in the Camarillo fleet.

**Table 52.** 2007 Baseline Operations at Camarillo Airport by INM Aircraft Type

| INM Type | Annual Operations | Percent of Total |
|----------|-------------------|------------------|
| GASEPV   | 57,833            | 39.9%            |
| GASEPF   | 46,279            | 31.9%            |
| BEC58P   | 16,567            | 11.4%            |
| CNA172   | 9,033             | 6.2%             |
| CNA441   | 5,512             | 3.8%             |
| DHC6     | 2,094             | 1.4%             |
| CNA206   | 1,707             | 1.2%             |
| MU3001   | 1,075             | 0.7%             |
| LEAR35   | 934               | 0.6%             |
| CL600    | 582               | 0.4%             |
| CNA500   | 582               | 0.4%             |
| DC3      | 514               | 0.4%             |
| GV       | 449               | 0.3%             |

| <b>INM Type</b> | <b>Annual Operations</b> | <b>Percent of Total</b> |
|-----------------|--------------------------|-------------------------|
| SD330           | 399                      | 0.3%                    |
| GIV             | 331                      | 0.2%                    |
| CNA750          | 252                      | 0.2%                    |
| IA1125          | 186                      | 0.1%                    |
| GIIB            | 132                      | 0.1%                    |
| DC6             | 128                      | 0.1%                    |
| FAL50           | 109                      | 0.1%                    |
| FAL900          | 74                       | 0.1%                    |
| CNA55B          | 69                       | 0.0%                    |
| CIT3            | 49                       | 0.0%                    |
| C130            | 46                       | 0.0%                    |
| LEAR25          | 46                       | 0.0%                    |
| PA28            | 42                       | 0.0%                    |
| LEAR25          | 35                       | 0.0%                    |
| GII             | 19                       | 0.0%                    |
| FAL20           | 3                        | 0.0%                    |
| SABR80          | 2                        | 0.0%                    |
| <b>Total</b>    | <b>145,083</b>           | <b>100.0%</b>           |

Table 53 shows the business jet fleet mix at Camarillo by noise classification stage. In 2007, approximately 4% of Camarillo's business jet operations were performed by Stage 2 jets.

**Table 53.** 2007 Baseline Business Jet Operations at Camarillo Airport by Noise Stage

| <b>Noise Stage</b> | <b>Annual Operations</b> | <b>Percent of Total</b> |
|--------------------|--------------------------|-------------------------|
| Stage 2            | 191                      | 3.9%                    |
| Stage 3            | 4,691                    | 96.1%                   |
| <b>Total</b>       | <b>4,883</b>             | <b>100.0%</b>           |

## Chino Airport

Chino Airport accommodated 167,000 aircraft operations in 2007. As shown in Table 54, civilian GA non-jet aircraft accounted for 99% of operations at Chino. More than half of airport operations were local operations, including pilot training and touch-and-go maneuvers.

**Table 54.** 2007 Baseline Operations at Chino Airport by Type of Activity

| Activity Type                | Annual         | Average Daily | Percent of Total |
|------------------------------|----------------|---------------|------------------|
| Air Carrier/Commuter         | —              | —             | 0%               |
| Business Jet                 | 2,037          | 5.6           | 1%               |
| GA Non-Jet Itinerant         | 67,590         | 185.2         | 41%              |
| GA Non-Jet Local             | 96,376         | 264.0         | 58%              |
| Military (Itinerant + Local) | 594            | 1.6           | 0%               |
| <b>Total</b>                 | <b>166,596</b> | <b>456.4</b>  | <b>100%</b>      |

Table 55 presents Chino Airport operations by type and by time of day. Because of the high proportion of activity by non-jet aircraft, particularly local operations, more than 90% of total aircraft operations at Chino occurred during the daytime. Six percent of operations occurred during the evening, and 1% occurred during the night. A much higher percentage of jet aircraft operations occurred during the evening and night periods. Of the 2,000 annual jet operations, 11% operated during the evening, and approximately 12% operated during the night.

**Table 55.** 2007 Baseline Operations at Chino Airport by Type of Activity and Time of Day

| Activity Type                | Operations by Time of Day |               |              |                | Percent of Total 24 Hours |             |             |
|------------------------------|---------------------------|---------------|--------------|----------------|---------------------------|-------------|-------------|
|                              | Day                       | Evening       | Night        | Total          | Day                       | Evening     | Night       |
| Air Carrier/Commuter         | —                         | —             | —            | —              | —                         | —           | —           |
| Business Jet                 | 1,570                     | 231           | 236          | 2,037          | 77.1%                     | 11.4%       | 11.6%       |
| GA Non-Jet Itinerant         | 61,677                    | 4,210         | 1,703        | 67,590         | 91.3%                     | 6.2%        | 2.5%        |
| GA Non-Jet Local             | 89,938                    | 6,438         | —            | 96,376         | 93.3%                     | 6.7%        | 0.0%        |
| Military (Itinerant + Local) | 542                       | 37            | 15           | 594            | 91.3%                     | 6.2%        | 2.5%        |
| <b>Total</b>                 | <b>153,726</b>            | <b>10,916</b> | <b>1,954</b> | <b>166,596</b> | <b>92.3%</b>              | <b>6.6%</b> | <b>1.2%</b> |

As shown in Table 56 daytime and nighttime activity is almost evenly balanced between arrivals and departures. However, during the evening period, 42% of total airport operations are arrivals, and 58% are departures. Business jets have a different pattern of operation than the airport average, which is heavily influenced by non-jet aircraft. Of the business jet activity, 53% of daytime operations were departures, 32% of evening operations were departures, and 49% of night operations were departures.

**Table 57.** 2007 Baseline Operations at Chino Airport by Type of Activity, Time of Day and Direction

| Activity Type | Day      |            | Evening  |            | Night    |            |
|---------------|----------|------------|----------|------------|----------|------------|
|               | Arrivals | Departures | Arrivals | Departures | Arrivals | Departures |

|                              |              |              |              |              |              |              |
|------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Air Carrier/Commuter         | —            | —            | —            | —            | —            | —            |
| Business Jet                 | 47.2%        | 52.8%        | 68.3%        | 31.7%        | 50.7%        | 49.3%        |
| GA Non-Jet Itinerant         | 51.5%        | 48.5%        | 28.3%        | 71.7%        | 50.5%        | 49.5%        |
| GA Non-Jet Local             | 50.0%        | 50.0%        | 50.0%        | 50.0%        | —            | —            |
| Military (Itinerant + Local) | 51.5%        | 48.5%        | 28.3%        | 71.7%        | 50.5%        | 49.5%        |
| <b>Total</b>                 | <b>50.6%</b> | <b>49.4%</b> | <b>42.0%</b> | <b>58.0%</b> | <b>50.5%</b> | <b>49.5%</b> |

Aircraft operations at Chino are summarized by INM aircraft type in Table 58. Five INM types, representing light general aviation aircraft, accounted for 95% of the 2007 baseline operations at Chino. Four of the top INM types are single-engine piston types (GASEPV, CNA172, CNA206, and GASEPF) and the BEC58P represents a twin-engine piston type.

**Table 58.** 2007 Baseline Operations at Chino Airport by INM Aircraft Type

| INM Type | Annual Operations | Percent of Total |
|----------|-------------------|------------------|
| GASEPV   | 48,562            | 29.1%            |
| CNA172   | 39,051            | 23.4%            |
| CNA206   | 26,833            | 16.1%            |
| BEC58P   | 26,447            | 15.9%            |
| GASEPF   | 17,528            | 10.5%            |
| CNA441   | 3,022             | 1.8%             |
| PA28     | 1,555             | 0.9%             |
| DHC6     | 934               | 0.6%             |
| LEAR35   | 613               | 0.4%             |
| SD330    | 563               | 0.3%             |
| MU3001   | 353               | 0.2%             |
| CNA500   | 315               | 0.2%             |
| CL600    | 252               | 0.2%             |
| GII      | 198               | 0.1%             |
| GIIB     | 84                | 0.1%             |
| IA1125   | 84                | 0.1%             |
| FAL20    | 63                | 0.0%             |
| C130     | 36                | 0.0%             |
| LEAR25   | 31                | 0.0%             |
| F-18     | 29                | 0.0%             |

| <b>INM Type</b> | <b>Annual Operations</b> | <b>Percent of Total</b> |
|-----------------|--------------------------|-------------------------|
| CNA750          | 13                       | 0.0%                    |
| FAL50           | 7                        | 0.0%                    |
| CNA55B          | 7                        | 0.0%                    |
| GIV             | 6                        | 0.0%                    |
| FAL900          | 4                        | 0.0%                    |
| CIT3            | 3                        | 0.0%                    |
| GV              | 3                        | 0.0%                    |
| <b>Total</b>    | <b>166,596</b>           | <b>100.0%</b>           |

While there were only 2,000 operations in business jet aircraft at Chino during the base year (approximately), 18% were performed by Stage 2 jets, as shown in Table 59.

**Table 59.** 2007 Baseline Business Jet Operations at Chino Airport by Noise Stage

| <b>Noise Stage</b> | <b>Annual Operations</b> | <b>Percent of Total</b> |
|--------------------|--------------------------|-------------------------|
| Stage 2            | 376                      | 18.5%                   |
| Stage 3            | 1,661                    | 81.5%                   |
| <b>Total</b>       | <b>2,037</b>             | <b>100.0%</b>           |

## LAX

Baseline operations at LAX are summarized by type of activity in Table 60. There were approximately 664,000 aircraft operations at LAX in 2007. Nearly 95% were performed by commercial passenger or cargo airlines. Business jets accounted for 3% of total aircraft operations, and civilian GA non-jets performed less than 2% of operations.

**Table 60.** 2007 Baseline Operations at Los Angeles International Airport by Type of Activity

| <b>Activity Type</b>         | <b>Annual</b>  | <b>Average Daily</b> | <b>Percent of Total</b> |
|------------------------------|----------------|----------------------|-------------------------|
| Air Carrier/Commuter         | 628,027        | 1,720.6              | 94.7%                   |
| Business Jet                 | 21,013         | 57.6                 | 3.2%                    |
| GA Non-Jet Itinerant         | 11,981         | 32.8                 | 1.8%                    |
| GA Non-Jet Local             | —              | —                    | 0.0%                    |
| Military (Itinerant + Local) | 2,488          | 6.8                  | 0.4%                    |
| <b>Total</b>                 | <b>663,509</b> | <b>1,817.8</b>       | <b>100.0%</b>           |

Table 61 presents 2007 operations at LAX by type and by time of day. Slightly more than two-thirds of all aircraft operations occurred during the daytime. Compared to the other diversion airports, LAX had the highest percentage of operations occurring during the evening and nighttime. In 2007, approximately 16% of operations were performed during the evening, and 16% occurred at night. The high percentage of evening and night operations reflects the airport's role as a large-hub commercial service airport and international gateway, with many Asian and eastbound domestic flights departing during the evening and nighttime hours. Of the business jets that operated at LAX in 2007, 76% operated during the daytime, and 24% operated during the evening and nighttime hours.

**Table 61.** 2007 Baseline Operations at Los Angeles International Airport by Type of Activity and Time of Day

| Activity Type                | Operations by Time of Day |         |         |         | Percent of Total 24 Hours |              |       |
|------------------------------|---------------------------|---------|---------|---------|---------------------------|--------------|-------|
|                              | Day                       | Evening | Night   | Total   | Day                       | Evening      | Night |
| Air Carrier/Commuter         | 427,554                   | 98,361  | 102,112 | 628,027 | 68.1%                     | 15.7%        | 16.3% |
| Business Jet                 | 15,994                    | 2,388   | 2,631   | 21,013  | 76.1%                     | 11.4%        | 12.5% |
| GA Non-Jet Itinerant         | 7,662                     | 3,109   | 1,210   | 11,981  | 64.0%                     | 25.9%        | 10.1% |
| GA Non-Jet Local             | —                         | —       | —       | —       | 0.0%                      | 0.0%         | 0.0%  |
| Military (Itinerant + Local) | 104                       | 124     | 2,260   | 2,488   | 4.2%                      | 5.0%         | 90.8% |
| <b>Total</b>                 | 451,314                   | 103,982 | 108,213 | 663,509 | 68.0%                     | <b>15.7%</b> | 16.3% |

Table 62 summarizes baseline operations at LAX by type, time of day, and direction. Total daytime activity was evenly balanced between arrivals and departures. Arrivals made up 60% of evening activity, and departures accounted for almost 59% of nighttime operations. While departures accounted for the majority of night activity by air carriers, 53% of nighttime business jet operations were arrivals.

**Table 62** 2007 Baseline Operations at Los Angeles International Airport by Type of Activity, Time of Day, and Direction

| Activity Type                | Day          |              | Evening      |              | Night        |              |
|------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
|                              | Arrivals     | Departures   | Arrivals     | Departures   | Arrivals     | Departures   |
| Air Carrier/Commuter         | 49.7%        | 50.3%        | 60.6%        | 39.5%        | 41.1%        | 58.9%        |
| Business Jet                 | 47.6%        | 52.4%        | 62.9%        | 37.1%        | 52.9%        | 47.1%        |
| GA Non-Jet Itinerant         | 51.4%        | 48.6%        | 51.0%        | 49.0%        | 38.3%        | 61.7%        |
| GA Non-Jet Local             | —            | —            | —            | —            | —            | —            |
| Military (Itinerant + Local) | 0.0%         | 100.0%       | 100.0%       | 0.0%         | 49.6%        | 50.4%        |
| <b>Total</b>                 | <b>49.7%</b> | <b>50.3%</b> | <b>60.3%</b> | <b>39.7%</b> | <b>41.5%</b> | <b>58.5%</b> |

Table 63 summarizes 2007 baseline operations at LAX by INM type. The aircraft fleet operating at LAX primarily consists of a diverse mix of large and small commercial transport aircraft. The commercial airline fleet at LAX includes narrowbody jets, such as the Boeing 737-300 (737300) and the Airbus A320 (A32023); widebody jets, such as the Boeing 747-400 (747400) and Boeing 767-300 (767300); and small turboprop aircraft, such as the Embraer Brasilia (EMB120) and Saab 340 (SF340). The business jet fleet at LAX is also diverse and includes long-range widebody corporate jets, such as the Canadair Challenger 601 (CL600) and Gulfstream IV (GIV); medium-size corporate jets, such as the Falcon 20 (FAL20); and light corporate jets, such as the LEAR35 and Cessna Citation 500 (CNA500).

**Table 63.** 2007 Baseline Operations at Los Angeles International Airport by INM Aircraft Type

| INM Type | Annual Operations | Percent of Total |
|----------|-------------------|------------------|
| 737300   | 78,903            | 12.0%            |
| EMB120   | 78,334            | 11.5%            |
| 757PW    | 48,221            | 7.3%             |
| CL601    | 44,116            | 6.5%             |
| A32023   | 41,230            | 6.3%             |
| A319     | 35,958            | 5.5%             |
| SF340    | 34,939            | 5.1%             |
| 747400   | 31,822            | 4.8%             |
| 737400   | 26,259            | 4.0%             |
| 757RR    | 23,277            | 3.5%             |
| 737800   | 21,882            | 3.3%             |
| 767300   | 20,431            | 3.1%             |
| CL600    | 17,047            | 2.5%             |
| MD83     | 15,951            | 2.4%             |
| MD82     | 14,922            | 2.3%             |
| 737700   | 14,811            | 2.3%             |
| 767CF6   | 10,436            | 1.6%             |
| DHC8     | 9,122             | 1.3%             |
| 777200   | 8,436             | 1.3%             |
| 757300   | 6,914             | 1.1%             |
| 737500   | 6,897             | 1.1%             |
| A32123   | 5,811             | 0.9%             |
| 767400   | 5,112             | 0.8%             |
| A340     | 4,874             | 0.7%             |

| <b>INM Type</b> | <b>Annual Operations</b> | <b>Percent of Total</b> |
|-----------------|--------------------------|-------------------------|
| DC1010          | 4,665                    | 0.7%                    |
| LEAR35          | 4,188                    | 0.6%                    |
| MU3001          | 4,077                    | 0.6%                    |
| 74720B          | 3,227                    | 0.5%                    |
| MD11GE          | 2,675                    | 0.4%                    |
| A7D             | 2,488                    | 0.4%                    |
| GIV             | 2,456                    | 0.4%                    |
| 7373B2          | 2,205                    | 0.3%                    |
| 737N9           | 2,112                    | 0.3%                    |
| A30062          | 2,078                    | 0.3%                    |
| MD9028          | 2,003                    | 0.3%                    |
| 727EM2          | 1,855                    | 0.3%                    |
| CNA750          | 1,834                    | 0.3%                    |
| A300            | 1,617                    | 0.2%                    |
| MD11PW          | 1,438                    | 0.2%                    |
| DC870           | 1,339                    | 0.2%                    |
| GV              | 1,306                    | 0.2%                    |
| DC1030          | 1,248                    | 0.2%                    |
| IA1125          | 1,224                    | 0.2%                    |
| EMB14L          | 1,163                    | 0.2%                    |
| 747200          | 1,075                    | 0.2%                    |
| MD81            | 1,061                    | 0.2%                    |
| 777300          | 1,022                    | 0.2%                    |
| CNA441          | 977                      | 0.1%                    |
| A310            | 814                      | 0.1%                    |
| FAL900          | 765                      | 0.1%                    |
| 737N17          | 695                      | 0.1%                    |
| GIIB            | 694                      | 0.1%                    |
| GASEPV          | 640                      | 0.1%                    |
| 74710Q          | 616                      | 0.1%                    |
| A330            | 559                      | 0.1%                    |
| CNA500          | 557                      | 0.1%                    |
| FAL50           | 504                      | 0.1%                    |
| DHC6            | 455                      | 0.1%                    |



| <b>INM Type</b> | <b>Annual Operations</b> | <b>Percent of Total</b> |
|-----------------|--------------------------|-------------------------|
| GII             | 372                      | 0.1%                    |
| CIT3            | 368                      | 0.1%                    |
| BEC58P          | 293                      | 0.0%                    |
| DC8QN           | 232                      | 0.0%                    |
| CNA206          | 185                      | 0.0%                    |
| SD330           | 129                      | 0.0%                    |
| CNA172          | 123                      | 0.0%                    |
| LEAR25          | 95                       | 0.0%                    |
| 707QN           | 71                       | 0.0%                    |
| GASEPF          | 54                       | 0.0%                    |
| FAL20           | 49                       | 0.0%                    |
| 74720A          | 38                       | 0.0%                    |
| 767JT9          | 36                       | 0.0%                    |
| DC1040          | 34                       | 0.0%                    |
| 727EM1          | 28                       | 0.0%                    |
| L1011           | 28                       | 0.0%                    |
| DC93LW          | 13                       | 0.0%                    |
| 747SP           | 11                       | 0.0%                    |
| DC95HW          | 10                       | 0.0%                    |
| CNA55B          | 4                        | 0.0%                    |
| DC3             | 2                        | 0.0%                    |
| CNA20T          | 1                        | 0.0%                    |
| SABR80          | 1                        | 0.0%                    |
| <b>Total</b>    | <b>663,509</b>           | <b>100.0%</b>           |

As shown in Table 64, 94% of the business jets that operated at LAX in 2007 were Stage 3 aircraft. Only 1,200 of the business jet operations were by Stage 2 aircraft.

**Table 64.** 2007 Baseline Business Jet Operations at Los Angeles International Airport by Noise Stage

| <b>Noise Stage</b> | <b>Annual Operations</b> | <b>Percent of Total</b> |
|--------------------|--------------------------|-------------------------|
| Stage 2            | 1,211                    | 5.8%                    |
| Stage 3            | 19,802                   | 94.2%                   |
| <b>Total</b>       | <b>21,013</b>            | <b>100.0%</b>           |

## William J. Fox Field

William J. Fox Field handled 66,000 aircraft operations in the 2007. Civilian GA non-jet aircraft accounted for almost all of the activity (see Table 65). Local operations, including training maneuvers, represented almost half of all aircraft operations. Business jets accounted for only 508 annual operations, or slightly less than 1% of total activity.

**Table 65.**2007 Baseline Operations at Fox Field by Type of Activity

| Activity Type                | Annual        | Average Daily | Percent of Total |
|------------------------------|---------------|---------------|------------------|
| Air Carrier/Commuter         | —             | —             | 0%               |
| Business Jet                 | 508           | 1.4           | 1%               |
| GA Non-Jet Itinerant         | 31,738        | 87.0          | 48%              |
| GA Non-Jet Local             | 32,291        | 88.5          | 49%              |
| Military (Itinerant + Local) | 1,513         | 4.1           | 2%               |
| <b>Total</b>                 | <b>66,049</b> | <b>181.0</b>  | <b>100%</b>      |

Table 66 summarizes baseline operations by type and time of day. Because activity is dominated by GA non-jet aircraft with a high percentage of local operations, 85% of aircraft operations occurred during the daytime. An estimated 14% of total operations occurred during the evening hours, and only 1% occurred during the more noise-sensitive night period.

**Table 66.**2007 Baseline Operations at Fox Field by Type of Activity and Time of Day

| Activity Type                | Operations by Time of Day |              |            |               | Percent of Total 24 Hours |              |             |
|------------------------------|---------------------------|--------------|------------|---------------|---------------------------|--------------|-------------|
|                              | Day                       | Evening      | Night      | Total         | Day                       | Evening      | Night       |
| Air Carrier/Commuter         | —                         | —            | —          | —             | —                         | —            | —           |
| Business Jet                 | 470                       | 18           | 19         | 508           | 92.6%                     | 3.6%         | 3.8%        |
| GA Non-Jet Itinerant         | 26,984                    | 4,449        | 304        | 31,738        | 85.0%                     | 14.0%        | 1.0%        |
| GA Non-Jet Local             | 27,454                    | 4,515        | 322        | 32,291        | 85.0%                     | 14.0%        | 1.0%        |
| Military (Itinerant + Local) | 1,286                     | 212          | 15         | 1,513         | 85.0%                     | 14.0%        | 1.0%        |
| <b>Total</b>                 | <b>56,195</b>             | <b>9,195</b> | <b>660</b> | <b>66,049</b> | <b>85.1%</b>              | <b>13.9%</b> | <b>1.0%</b> |

Total activity across all three time periods is well balanced, with a 50/50 mix of arrivals and departures (see Table 67). However, arrivals accounted for 60% of nighttime business jet operations.

**Table 67.** 2007 Baseline Operations at Fox Field by Type of Activity, Time of Day, and Direction

| Activity Type                | Day          |              | Evening      |              | Night        |              |
|------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
|                              | Arrivals     | Departures   | Arrivals     | Departures   | Arrivals     | Departures   |
| Air Carrier/Commuter         | —            | —            | —            | —            | —            | —            |
| Business Jet                 | 49.6%        | 50.4%        | 48.9%        | 51.1%        | 60.3%        | 39.7%        |
| GA Non-Jet Itinerant         | 50.0%        | 50.0%        | 50.1%        | 49.9%        | 49.8%        | 50.2%        |
| GA Non-Jet Local             | 50.0%        | 50.0%        | 50.0%        | 50.0%        | 50.0%        | 50.0%        |
| Military (Itinerant + Local) | 50.0%        | 50.0%        | 50.1%        | 49.9%        | 49.8%        | 50.2%        |
| <b>Total</b>                 | <b>50.0%</b> | <b>50.0%</b> | <b>50.0%</b> | <b>50.0%</b> | <b>50.2%</b> | <b>49.8%</b> |

The aircraft fleet at Fox Field, summarized by INM type in Table 68, is dominated by light, single-engine piston aircraft. The generic types for GASEPF and GASEPV accounted for more than 70% of aircraft operations at Fox Field in the 2007 baseline fleet.

**Table 68.** 2007 Baseline Operations at Fox Field by INM Aircraft Type

| <b>INM Type</b> | <b>Annual Operations</b> | <b>Percent of Total</b> |
|-----------------|--------------------------|-------------------------|
| GASEPF          | 33,066                   | 50.1%                   |
| GASEPV          | 13,694                   | 20.7%                   |
| BEC58P          | 7,192                    | 10.9%                   |
| CNA441          | 4,652                    | 7.0%                    |
| DC3             | 2,280                    | 3.5%                    |
| BO105           | 2,117                    | 3.2%                    |
| DC6             | 1,528                    | 2.3%                    |
| C130            | 1,012                    | 1.5%                    |
| LEAR35          | 156                      | 0.2%                    |
| CNA500          | 93                       | 0.1%                    |
| MU3001          | 70                       | 0.1%                    |
| IA1125          | 51                       | 0.1%                    |
| GIV             | 33                       | 0.0%                    |
| GV              | 31                       | 0.0%                    |
| CL600           | 24                       | 0.0%                    |
| CIT3            | 15                       | 0.0%                    |
| LEAR25          | 10                       | 0.0%                    |
| CNA750          | 8                        | 0.0%                    |
| GIIB            | 8                        | 0.0%                    |
| GII             | 5                        | 0.0%                    |
| FAL50           | 4                        | 0.0%                    |
| CNA55B          | 1                        | 0.0%                    |
| <b>Total</b>    | <b>66,049</b>            | <b>100.0%</b>           |

As shown in Table 69, only 4% of business jet operations were performed by Stage 2 aircraft.

**Table 69.** 2007 Baseline Business Jet Operations at Fox Field by Noise Stage

| Noise Stage  | Annual Operations | Percent of Total |
|--------------|-------------------|------------------|
| Stage 2      | 22                | 4.4%             |
| Stage 3      | 485               | 95.6%            |
| <b>Total</b> | <b>508</b>        | <b>100.0%</b>    |

### 8.3 Forecast (2014/2016) Activity

This section describes forecast aircraft operations for each of the diversion airports under Alternative 1 but excludes any diverted operations that may result from implementation of the project. Forecast operations are presented for 2014 and 2016, and in some cases forecast activity is compared to the 2007 baseline activity.

#### Bob Hope Airport

Table 70 summarizes baseline and forecast aircraft operations at Bob Hope Airport by type of activity. In 2014, aircraft operations at Bob Hope Airport are forecast at 148,000, a 23% increase over the 2007 baseline level of activity. Business jets are forecast to be the fastest growing segment of activity and will account for 33,000 operations, or 22% of total operations, in 2014 compared to 16% in 2007. Aircraft operations are forecast to reach 156,000 in 2016, with the business jet operations growing to 37,000, or 24% of the total.

**Table 70.** Baseline and Forecast Operations at Bob Hope Airport by Type of Activity

| Activity Type                | 2007 Baseline  | Percent of Total | 2014 Forecast  | Percent of Total | 2016 Forecast  | Percent of Total |
|------------------------------|----------------|------------------|----------------|------------------|----------------|------------------|
| Air Carrier/Commuter         | 70,448         | 58.3%            | 79,086         | 53.4%            | 81,741         | 52.3%            |
| Business Jet                 | 18,863         | 15.6%            | 32,744         | 22.1%            | 37,439         | 24.0%            |
| GA Non-Jet Itinerant         | 26,174         | 21.7%            | 30,626         | 20.7%            | 31,446         | 20.1%            |
| GA Non-Jet Local             | 5,060          | 4.2%             | 5,332          | 3.6%             | 5,413          | 3.5%             |
| Military (Itinerant + Local) | 265            | 0.2%             | 265            | 0.2%             | 265            | 0.2%             |
| <b>Total</b>                 | <b>120,810</b> | <b>100.0%</b>    | <b>148,053</b> | <b>100.0%</b>    | <b>156,303</b> | <b>100.0%</b>    |

The number of operations occurring during the noise-sensitive evening and night hours is forecast to increase from approximately 31,000 in 2007 to 37,000 in 2014 and 39,000 in 2016. As shown in Table 71, the percentage of total operations occurring during the night period increases over the forecast period from 8.9% to

9.3% because of growth in business jet operations and their increased share of total forecast activity.

**Table 71.** Baseline and Forecast Operations at Bob Hope Airport by Time of Day

| Year          | Operations by Time of Day |         |        |         | Percent of Total 24 Hours |         |       |
|---------------|---------------------------|---------|--------|---------|---------------------------|---------|-------|
|               | Day                       | Evening | Night  | Total   | Day                       | Evening | Night |
| 2007 Baseline | 90,149                    | 19,884  | 10,777 | 120,810 | 74.6%                     | 16.5%   | 8.9%  |
| 2014 Forecast | 110,742                   | 23,530  | 13,781 | 148,053 | 74.8%                     | 15.9%   | 9.3%  |
| 2016 Forecast | 117,070                   | 24,634  | 14,600 | 156,303 | 74.9%                     | 15.8%   | 9.3%  |

Table 72 summarizes forecast aircraft operations at Bob Hope Airport by INM aircraft type.

**Table 72.** Forecast Operations at Bob Hope Airport by INM Aircraft Type

| INM Type | 2014 Operations | Percent of Total | 2016 Operations | Percent of Total |
|----------|-----------------|------------------|-----------------|------------------|
| 737300   | 24,312          | 16.4%            | 25,039          | 16.0%            |
| 737700   | 23,953          | 16.2%            | 24,669          | 15.8%            |
| LEAR35   | 8,922           | 6.0%             | 10,317          | 6.6%             |
| CL601    | 8,814           | 6.0%             | 9,260           | 5.9%             |
| DHC6     | 8,026           | 5.4%             | 8,241           | 5.3%             |
| GV       | 7,475           | 5.0%             | 7,933           | 5.1%             |
| MU3001   | 6,111           | 4.1%             | 7,044           | 4.5%             |
| GASEPV   | 5,382           | 3.6%             | 5,513           | 3.5%             |
| MD81     | 5,208           | 3.5%             | 5,363           | 3.4%             |
| A320-211 | 4,358           | 2.9%             | 4,488           | 2.9%             |
| CNA441   | 4,230           | 2.9%             | 4,343           | 2.8%             |
| IA1125   | 3,449           | 2.3%             | 4,015           | 2.6%             |
| BEC58P   | 3,942           | 2.7%             | 4,014           | 2.6%             |
| CNA172   | 3,895           | 2.6%             | 3,999           | 2.6%             |
| SD330    | 3,617           | 2.4%             | 3,714           | 2.4%             |
| GIV      | 3,290           | 2.2%             | 3,575           | 2.3%             |
| GASEPF   | 3,083           | 2.1%             | 3,146           | 2.0%             |
| CNA206   | 2,860           | 1.9%             | 2,936           | 1.9%             |
| CNA750   | 2,352           | 1.6%             | 2,739           | 1.8%             |

| INM Type     | 2014 Operations | Percent of Total | 2016 Operations | Percent of Total |
|--------------|-----------------|------------------|-----------------|------------------|
| CL600        | 2,426           | 1.6%             | 2,718           | 1.7%             |
| 737500       | 2,240           | 1.5%             | 2,307           | 1.5%             |
| CNA500       | 1,607           | 1.1%             | 1,846           | 1.2%             |
| A319-131     | 1,758           | 1.2%             | 1,811           | 1.2%             |
| A310-304     | 1,230           | 0.8%             | 1,267           | 0.8%             |
| 737800       | 992             | 0.7%             | 1,022           | 0.7%             |
| 1900D        | 973             | 0.7%             | 999             | 0.6%             |
| CNA55B       | 486             | 0.3%             | 742             | 0.5%             |
| FAL900       | 631             | 0.4%             | 686             | 0.4%             |
| FAL50        | 571             | 0.4%             | 664             | 0.4%             |
| A300-622R    | 438             | 0.3%             | 452             | 0.3%             |
| CIT3         | 317             | 0.2%             | 369             | 0.2%             |
| 737400       | 263             | 0.2%             | 270             | 0.2%             |
| GIIB         | 262             | 0.2%             | 234             | 0.1%             |
| 757PW        | 148             | 0.1%             | 153             | 0.1%             |
| 757RR        | 147             | 0.1%             | 151             | 0.1%             |
| PA28         | 122             | 0.1%             | 126             | 0.1%             |
| GII          | 64              | 0.0%             | 48              | 0.0%             |
| FAL20        | 24              | 0.0%             | 20              | 0.0%             |
| LEAR25       | 35              | 0.0%             | 30              | 0.0%             |
| PA30         | 18              | 0.0%             | 19              | 0.0%             |
| C130         | 11              | 0.0%             | 11              | 0.0%             |
| F16A         | 5               | 0.0%             | 5               | 0.0%             |
| F-18         | 4               | 0.0%             | 4               | 0.0%             |
| <b>Total</b> | <b>148,053</b>  | <b>100.0%</b>    | <b>156,303</b>  | <b>100.0%</b>    |

Business jet operations in Stage 2 aircraft are projected to decline by more than 50% over the forecast period as older aircraft are retired. Between the 2007 baseline and 2016, business jet operations in Stage 3 aircraft are expected to more than double, from 18,000 to 37,000. By 2016, Stage 2 business jets are projected to account for less than 1% of total business jet operations at Bob Hope Airport (see Table 73).

**Table 73.** Baseline and Forecast Business Jet Operations at Bob Hope Airport by Noise Stage

| Noise Stage  | 2007<br>Baseline | Percent of<br>Total | 2014<br>Operations | Percent of<br>Total | 2016<br>Operations | Percent of<br>Total |
|--------------|------------------|---------------------|--------------------|---------------------|--------------------|---------------------|
| Stage 2      | 757              | 4.0%                | 371                | 1.1%                | 318                | 0.8%                |
| Stage 3      | 18,106           | 96.0%               | 32,373             | 98.9%               | 37,121             | 99.2%               |
| <b>Total</b> | <b>18,863</b>    | <b>100.0%</b>       | <b>32,744</b>      | <b>100.0%</b>       | <b>37,439</b>      | <b>100.0%</b>       |

## Camarillo Airport

Baseline and forecast aircraft operations at Camarillo Airport are summarized by type of activity in Table 74. Total aircraft operations are projected to increase by 17%, from 145,000 in 2007 to 169,000 in 2016. Business jet operations are forecast to be the fastest growing, more than doubling over the forecast period. However, non-jet general aviation will continue to be the dominant type of activity at Camarillo, accounting for 93% of 2016 operations.

**Table 74.** Baseline and Forecast Operations at Camarillo Airport by Type of Activity

| Activity Type                   | 2007<br>Baseline | Percent of<br>Total | 2014<br>Forecast | Percent of<br>Total | 2016<br>Forecast | Percent of<br>Total |
|---------------------------------|------------------|---------------------|------------------|---------------------|------------------|---------------------|
| Air Carrier/Commuter            | —                | 0.0%                | —                | 0.0%                | —                | 0.0%                |
| Business Jet                    | 4,883            | 3.4%                | 8,764            | 5.3%                | 10,395           | 6.1%                |
| GA Non-Jet Itinerant            | 74,601           | 51.4%               | 90,386           | 54.6%               | 92,157           | 54.5%               |
| GA Non-Jet Local                | 63,860           | 44.0%               | 64,781           | 39.1%               | 64,781           | 38.3%               |
| Military (Itinerant +<br>Local) | 1,740            | 1.2%                | 1,740            | 1.1%                | 1,740            | 1.0%                |
| <b>Total</b>                    | <b>145,083</b>   | <b>100.0%</b>       | <b>165,671</b>   | <b>100.0%</b>       | <b>169,073</b>   | <b>100.0%</b>       |

Because business jet operations are forecast to account for only 6.1% of activity by 2016, the time-of-day profile for the airport changes very little over the forecast period. As shown in Table 75, 8% to 9% of Camarillo operations are forecast to occur during the evening and night periods, compared to 8.4% in the 2007 baseline.



**Table 75.** Baseline and Forecast Operations at Camarillo Airport by Time of Day

| Year          | Operations by Time of Day |         |       |         | Percent of Total 24 Hours |         |       |
|---------------|---------------------------|---------|-------|---------|---------------------------|---------|-------|
|               | Day                       | Evening | Night | Total   | Day                       | Evening | Night |
| 2007 Baseline | 132,933                   | 8,663   | 3,487 | 145,083 | 91.6%                     | 6.0%    | 2.4%  |
| 2014 Forecast | 151,499                   | 9,983   | 4,189 | 165,671 | 91.4%                     | 6.0%    | 2.5%  |
| 2016 Forecast | 154,488                   | 10,230  | 4,355 | 169,073 | 91.4%                     | 6.1%    | 2.6%  |

Forecast Camarillo operations by INM aircraft type are presented in Table 76.

**Table 76.** Forecast Operations at Camarillo Airport by INM Aircraft Type

| INM Type | 2014 Operations | Percent of Total | 2016 Operations | Percent of Total |
|----------|-----------------|------------------|-----------------|------------------|
| GASEPV   | 63,937          | 38.6%            | 64,572          | 38.2%            |
| GASEPF   | 51,499          | 31.1%            | 52,047          | 30.8%            |
| BEC58P   | 19,304          | 11.7%            | 19,607          | 11.6%            |
| CNA172   | 9,624           | 5.8%             | 9,679           | 5.7%             |
| CNA441   | 6,669           | 4.0%             | 6,799           | 4.0%             |
| DHC6     | 2,483           | 1.5%             | 2,527           | 1.5%             |
| CNA206   | 1,986           | 1.2%             | 2,017           | 1.2%             |
| LEAR35   | 1,727           | 1.0%             | 2,032           | 1.2%             |
| MU3001   | 1,626           | 1.0%             | 1,818           | 1.1%             |
| CL600    | 1,299           | 0.8%             | 1,608           | 1.0%             |
| GV       | 1,050           | 0.6%             | 1,316           | 0.8%             |
| GIV      | 774             | 0.5%             | 970             | 0.6%             |
| CNA500   | 707             | 0.4%             | 735             | 0.4%             |
| DC3      | 623             | 0.4%             | 635             | 0.4%             |
| CNA750   | 498             | 0.3%             | 594             | 0.4%             |
| SD330    | 483             | 0.3%             | 493             | 0.3%             |
| IA1125   | 368             | 0.2%             | 439             | 0.3%             |
| FAL50    | 214             | 0.1%             | 256             | 0.2%             |
| FAL900   | 174             | 0.1%             | 218             | 0.1%             |
| DC6      | 155             | 0.1%             | 158             | 0.1%             |
| CNA55B   | 130             | 0.1%             | 206             | 0.1%             |
| CIT3     | 97              | 0.1%             | 115             | 0.1%             |

| INM Type     | 2014 Operations | Percent of Total | 2016 Operations | Percent of Total |
|--------------|-----------------|------------------|-----------------|------------------|
| GIIB         | 81              | 0.0%             | 72              | 0.0%             |
| PA28         | 51              | 0.0%             | 52              | 0.0%             |
| C130         | 46              | 0.0%             | 46              | 0.0%             |
| LEAR25       | 46              | 0.0%             | 46              | 0.0%             |
| LEAR25       | 11              | 0.0%             | 8               | 0.0%             |
| GII          | 6               | 0.0%             | 4               | 0.0%             |
| FAL20        | 2               | 0.0%             | 2               | 0.0%             |
| SABR80       | 2               | 0.0%             | 2               | 0.0%             |
| <b>Total</b> | <b>165,671</b>  |                  | <b>169,073</b>  | <b>100.0%</b>    |

Table 77 summarizes baseline and forecast business jet activity at Camarillo by noise stage classification. As older Stage 2 business jets, such as the LEAR25 and Gulfstream II, are retired, the number of Stage 2 business jet operations at Camarillo is expected to decline over the forecast period. However, Stage 3 business jet operations are forecast to increase, from approximately 4,700 in 2007 to 10,300 in 2016. As a result, Stage 3 aircraft will account for 99% of total business jet operations at Camarillo in 2016, compared to 96% in the baseline year.

**Table 77.** Baseline and Forecast Business Jet Operations at Camarillo Airport by Noise Stage

| Noise Stage  | 2007 Baseline | Percent of Total | 2014 Operations | Percent of Total | 2016 Operations | Percent of Total |
|--------------|---------------|------------------|-----------------|------------------|-----------------|------------------|
| Stage 2      | 191           | 3.9%             | 102             | 1.2%             | 88              | 0.8%             |
| Stage 3      | 4,691         | 96.1%            | 8,662           | 98.8%            | 10,307          | 99.2%            |
| <b>Total</b> | <b>4,883</b>  | <b>100.0%</b>    | <b>8,764</b>    | <b>100.0%</b>    | <b>10,395</b>   | <b>100.0%</b>    |

## Chino Airport

As shown in Table 78, total aircraft operations at Chino Airport are forecast to increase by 8.4%, from 167,000 in 2007 to 181,000 in 2016. Business jets are forecast to grow at a faster rate, increasing by 15%, but still remain a small portion of total airport activity.

**Table 78.** Baseline and Forecast Operations at Chino Airport by Type of Activity

| Activity Type                   | 2007<br>Baseline | Percent of<br>Total | 2014<br>Forecast | Percent of<br>Total | 2016<br>Forecast | Percent of<br>Total |
|---------------------------------|------------------|---------------------|------------------|---------------------|------------------|---------------------|
| Air Carrier/Commuter            | —                | 0.0%                | —                | 0.0%                | —                | 0.0%                |
| Business Jet                    | 2,037            | 1.2%                | 2,132            | 1.2%                | 2,349            | 1.3%                |
| GA Non-Jet Itinerant            | 67,590           | 40.6%               | 74,983           | 41.9%               | 76,567           | 42.4%               |
| GA Non-Jet Local                | 96,376           | 57.8%               | 101,121          | 56.5%               | 101,121          | 56.0%               |
| Military (Itinerant +<br>Local) | 594              | 0.4%                | 594              | 0.3%                | 594              | 0.3%                |
| <b>Total</b>                    | <b>166,596</b>   | <b>100.0%</b>       | <b>178,830</b>   | <b>100.0%</b>       | <b>180,631</b>   | <b>100.0%</b>       |

The time-of-day operating profile for Chino Airport remains constant over the forecast period, with approximately 8% of aircraft operations occurring during the evening and night periods (see Table 79).

**Table 79.** Baseline and Forecast Operations at Chino Airport by Time of Day

| Year          | Operations by Time of Day |         |       |         | Percent of Total 24 Hours |         |       |
|---------------|---------------------------|---------|-------|---------|---------------------------|---------|-------|
|               | Day                       | Evening | Night | Total   | Day                       | Evening | Night |
| 2007 Baseline | 153,726                   | 10,916  | 1,954 | 166,596 | 92.3%                     | 6.6%    | 1.2%  |
| 2014 Forecast | 164,992                   | 11,694  | 2,144 | 178,830 | 92.3%                     | 6.5%    | 1.2%  |
| 2016 Forecast | 166,610                   | 11,814  | 2,206 | 180,631 | 92.2%                     | 6.5%    | 1.2%  |

Table 80 presents forecast operations at Chino by INM aircraft type.

**Table 80.** Forecast Operations at Chino Airport by INM Aircraft Type

| INM Type | 2014<br>Operations | Percent of<br>Total | 2016<br>Operations | Percent of Total |
|----------|--------------------|---------------------|--------------------|------------------|
| GASEPV   | 51,661             | 28.9%               | 52,056             | 28.8%            |
| CNA172   | 42,073             | 23.5%               | 42,451             | 23.5%            |
| CNA206   | 28,905             | 16.2%               | 29,164             | 16.1%            |
| BEC58P   | 27,429             | 15.3%               | 27,700             | 15.3%            |
| GASEPF   | 18,953             | 10.6%               | 19,125             | 10.6%            |
| CNA441   | 3,717              | 2.1%                | 3,771              | 2.1%             |
| PA28     | 1,675              | 0.9%                | 1,691              | 0.9%             |
| DHC6     | 1,377              | 0.8%                | 1,402              | 0.8%             |

| INM Type     | 2014 Operations | Percent of Total | 2016 Operations | Percent of Total |
|--------------|-----------------|------------------|-----------------|------------------|
| SD330        | 842             | 0.5%             | 858             | 0.5%             |
| LEAR35       | 755             | 0.4%             | 853             | 0.5%             |
| MU3001       | 419             | 0.2%             | 468             | 0.3%             |
| CNA500       | 371             | 0.2%             | 414             | 0.2%             |
| CL600        | 257             | 0.1%             | 276             | 0.2%             |
| IA1125       | 109             | 0.1%             | 125             | 0.1%             |
| GIIB         | 53              | 0.0%             | 47              | 0.0%             |
| CNA55B       | 30              | 0.0%             | 45              | 0.0%             |
| GII          | 57              | 0.0%             | 42              | 0.0%             |
| C130         | 36              | 0.0%             | 36              | 0.0%             |
| F-18         | 29              | 0.0%             | 29              | 0.0%             |
| FAL20        | 29              | 0.0%             | 24              | 0.0%             |
| CNA750       | 17              | 0.0%             | 20              | 0.0%             |
| FAL50        | 10              | 0.0%             | 11              | 0.0%             |
| LEAR25       | 9               | 0.0%             | 7               | 0.0%             |
| GIV          | 6               | 0.0%             | 6               | 0.0%             |
| FAL900       | 4               | 0.0%             | 5               | 0.0%             |
| CIT3         | 4               | 0.0%             | 4               | 0.0%             |
| GV           | 3               | 0.0%             | 3               | 0.0%             |
| <b>Total</b> | <b>178,830</b>  | <b>100.0%</b>    | <b>180,631</b>  | <b>100.0%</b>    |

Stage 2 business jet operations at Chino are forecast to decline over the forecast period, from approximately one per day in 2007 to one every third day by 2016, as shown in Table 81. Stage 3 jets are forecast to account for all the growth in business jet operations at Chino. As a result, the Stage 2 share of business jet operations will decline, from 18.5% in 2007 to 5.1% in 2016.

**Table 81.** Baseline and Forecast Business Jet Operations at Chino Airport by Noise Stage

| Noise Stage  | 2007 Baseline | Percent of Total | 2014 Operations | Percent of Total | 2016 Operations | Percent of Total |
|--------------|---------------|------------------|-----------------|------------------|-----------------|------------------|
| Stage 2      | 376           | 18.5%            | 148             | 6.9%             | 120             | 5.1%             |
| Stage 3      | 1,661         | 81.5%            | 1,984           | 93.1%            | 2,229           | 94.9%            |
| <b>Total</b> | <b>2,037</b>  | <b>100.0%</b>    | <b>2,132</b>    | <b>100.0%</b>    | <b>2,349</b>    | <b>100.0%</b>    |

## LAX

Table 82 summarizes baseline and forecast aircraft operations at LAX by activity type. Total aircraft operations are forecast to grow from 664,000 in 2007 to 739,379 in 2016. Business jets operations are forecast to reach 31,000 by 2016 and account for 4.2% of total airport activity.

**Table 82.** Baseline and Forecast Operations at Los Angeles International Airport by Type of Activity

| Activity Type                | 2007 Baseline  | Percent of Total | 2014 Forecast  | Percent of Total | 2016 Forecast  | Percent of Total |
|------------------------------|----------------|------------------|----------------|------------------|----------------|------------------|
| Air Carrier/Commuter         | 628,027        | 94.7%            | 674,332        | 93.9%            | 692,196        | 93.6%            |
| Business Jet                 | 21,013         | 3.2%             | 28,454         | 4.0%             | 31,131         | 4.2%             |
| GA Non-Jet Itinerant         | 11,981         | 1.8%             | 13,035         | 1.8%             | 13,352         | 1.8%             |
| GA Non-Jet Local             | —              | 0.0%             | —              | 0.0%             | —              | 0.0%             |
| Military (Itinerant + Local) | 2,488          | 0.4%             | 2,700          | 0.4%             | 2,700          | 0.4%             |
| <b>Total</b>                 | <b>663,509</b> | <b>100.0%</b>    | <b>718,520</b> | <b>100.0%</b>    | <b>739,379</b> | <b>100.0%</b>    |

Because commercial airline services are forecast to continue to be the dominant type of activity at LAX, the time-of-day profile for airport operations is unchanged over the forecast period. Approximately 32% of LAX aircraft operations occur during the evening and night periods in the baseline and forecast years, as summarized in Table 83.

**Table 83.** Baseline and Forecast Operations at Los Angeles International Airport by Time of Day

| Year          | Operations by Time of Day |         |         |         | Percent of Total 24 Hours |         |       |
|---------------|---------------------------|---------|---------|---------|---------------------------|---------|-------|
|               | Day                       | Evening | Night   | Total   | Day                       | Evening | Night |
| 2007 Baseline | 451,314                   | 103,982 | 108,213 | 663,509 | 68.0%                     | 15.7%   | 16.3% |
| 2014 Forecast | 488,948                   | 112,307 | 117,265 | 718,520 | 68.0%                     | 15.6%   | 16.3% |
| 2016 Forecast | 503,245                   | 115,474 | 120,660 | 739,379 | 68.1%                     | 15.6%   | 16.3% |

Forecast aircraft operations at LAX are summarized by INM aircraft type in Table 84.

**Table 84.** Forecast Operations at Los Angeles International Airport by INM Aircraft Type

| INM Type | 2014 Operations | Percent of Total | 2016 Operations | Percent of Total |
|----------|-----------------|------------------|-----------------|------------------|
| 737300   | 85,454          | 11.9%            | 87,974          | 11.9%            |

| <b>INM Type</b> | <b>2014 Operations</b> | <b>Percent of Total</b> | <b>2016 Operations</b> | <b>Percent of Total</b> |
|-----------------|------------------------|-------------------------|------------------------|-------------------------|
| EMB120          | 82,195                 | 11.4%                   | 83,706                 | 11.3%                   |
| 757PW           | 52,225                 | 7.3%                    | 53,765                 | 7.3%                    |
| CL601           | 46,291                 | 6.4%                    | 47,142                 | 6.4%                    |
| A32023          | 44,653                 | 6.2%                    | 45,969                 | 6.2%                    |
| A319            | 38,943                 | 5.4%                    | 40,091                 | 5.4%                    |
| SF340           | 36,661                 | 5.1%                    | 37,335                 | 5.0%                    |
| 747400          | 34,464                 | 4.8%                    | 35,480                 | 4.8%                    |
| 737400          | 28,439                 | 4.0%                    | 29,277                 | 4.0%                    |
| 757RR           | 25,210                 | 3.5%                    | 25,953                 | 3.5%                    |
| 737800          | 23,699                 | 3.3%                    | 24,398                 | 3.3%                    |
| 767300          | 22,127                 | 3.1%                    | 22,779                 | 3.1%                    |
| CL600           | 18,891                 | 2.6%                    | 19,563                 | 2.6%                    |
| MD83            | 17,275                 | 2.4%                    | 17,785                 | 2.4%                    |
| MD82            | 16,161                 | 2.2%                    | 16,637                 | 2.3%                    |
| 737700          | 16,041                 | 2.2%                    | 16,513                 | 2.2%                    |
| 767CF6          | 11,302                 | 1.6%                    | 11,636                 | 1.6%                    |
| 777200          | 9,924                  | 1.4%                    | 10,165                 | 1.4%                    |
| DHC8            | 9,137                  | 1.3%                    | 9,406                  | 1.3%                    |
| 757300          | 7,488                  | 1.0%                    | 7,709                  | 1.0%                    |
| 737500          | 7,469                  | 1.0%                    | 7,690                  | 1.0%                    |
| A32123          | 5,953                  | 0.8%                    | 6,564                  | 0.9%                    |
| 767400          | 6,294                  | 0.9%                    | 6,479                  | 0.9%                    |
| A340            | 5,396                  | 0.8%                    | 5,832                  | 0.8%                    |
| LEAR35          | 5,536                  | 0.8%                    | 5,700                  | 0.8%                    |
| DC1010          | 5,278                  | 0.7%                    | 5,434                  | 0.7%                    |
| MU3001          | 5,052                  | 0.7%                    | 5,201                  | 0.7%                    |
| 74720B          | 3,451                  | 0.5%                    | 3,788                  | 0.5%                    |
| GIV             | 3,495                  | 0.5%                    | 3,598                  | 0.5%                    |
| MD11GE          | 2,711                  | 0.4%                    | 3,020                  | 0.4%                    |
| 7373B2          | 2,897                  | 0.4%                    | 2,983                  | 0.4%                    |
| CNA750          | 2,700                  | 0.4%                    | 2,700                  | 0.4%                    |
| 737N9           | 2,388                  | 0.3%                    | 2,459                  | 0.3%                    |
| A30062          | 2,287                  | 0.3%                    | 2,355                  | 0.3%                    |

| <b>INM Type</b> | <b>2014 Operations</b> | <b>Percent of Total</b> | <b>2016 Operations</b> | <b>Percent of Total</b> |
|-----------------|------------------------|-------------------------|------------------------|-------------------------|
| MD9028          | 2,251                  | 0.3%                    | 2,317                  | 0.3%                    |
| 727EM2          | 2,169                  | 0.3%                    | 2,233                  | 0.3%                    |
| A7D             | 2,009                  | 0.3%                    | 2,068                  | 0.3%                    |
| A300            | 1,809                  | 0.3%                    | 2,015                  | 0.3%                    |
| IA1125          | 1,835                  | 0.3%                    | 2,014                  | 0.3%                    |
| GV              | 1,751                  | 0.2%                    | 1,803                  | 0.2%                    |
| MD11PW          | 1,557                  | 0.2%                    | 1,603                  | 0.2%                    |
| DC870           | 1,450                  | 0.2%                    | 1,493                  | 0.2%                    |
| DC1030          | 1,352                  | 0.2%                    | 1,391                  | 0.2%                    |
| EMB14L          | 1,220                  | 0.2%                    | 1,243                  | 0.2%                    |
| 747200          | 1,165                  | 0.2%                    | 1,199                  | 0.2%                    |
| MD81            | 1,149                  | 0.2%                    | 1,182                  | 0.2%                    |
| 777300          | 1,076                  | 0.1%                    | 1,181                  | 0.2%                    |
| FAL900          | 1,107                  | 0.2%                    | 1,140                  | 0.2%                    |
| A310            | 1,063                  | 0.1%                    | 1,089                  | 0.1%                    |
| CNA441          | 881                    | 0.1%                    | 907                    | 0.1%                    |
| 737N17          | 745                    | 0.1%                    | 830                    | 0.1%                    |
| 74710Q          | 751                    | 0.1%                    | 773                    | 0.1%                    |
| FAL50           | 691                    | 0.1%                    | 732                    | 0.1%                    |
| A330            | 696                    | 0.1%                    | 713                    | 0.1%                    |
| CNA500          | 667                    | 0.1%                    | 686                    | 0.1%                    |
| GASEPV          | 605                    | 0.1%                    | 623                    | 0.1%                    |
| CIT3            | 544                    | 0.1%                    | 607                    | 0.1%                    |
| DHC6            | 495                    | 0.1%                    | 507                    | 0.1%                    |
| GIIB            | 441                    | 0.1%                    | 394                    | 0.1%                    |
| BEC58P          | 319                    | 0.0%                    | 327                    | 0.0%                    |
| DC8QN           | 251                    | 0.0%                    | 259                    | 0.0%                    |
| CNA206          | 202                    | 0.0%                    | 207                    | 0.0%                    |
| SD330           | 140                    | 0.0%                    | 143                    | 0.0%                    |
| CNA172          | 134                    | 0.0%                    | 137                    | 0.0%                    |
| 707QN           | 77                     | 0.0%                    | 79                     | 0.0%                    |
| GII             | 107                    | 0.0%                    | 78                     | 0.0%                    |
| GASEPF          | 59                     | 0.0%                    | 60                     | 0.0%                    |

| INM Type     | 2014 Operations | Percent of Total | 2016 Operations | Percent of Total |
|--------------|-----------------|------------------|-----------------|------------------|
| 74720A       | 41              | 0.0%             | 42              | 0.0%             |
| 767JT9       | 39              | 0.0%             | 40              | 0.0%             |
| DC1040       | 37              | 0.0%             | 38              | 0.0%             |
| 727EM1       | 30              | 0.0%             | 31              | 0.0%             |
| L1011        | 30              | 0.0%             | 31              | 0.0%             |
| FAL20        | 23              | 0.0%             | 19              | 0.0%             |
| DC93LW       | 24              | 0.0%             | 17              | 0.0%             |
| LEAR25       | 14              | 0.0%             | 14              | 0.0%             |
| 747SP        | 11              | 0.0%             | 12              | 0.0%             |
| DC95HW       | 11              | 0.0%             | 12              | 0.0%             |
| DC3          | 3               | 0.0%             | 3               | 0.0%             |
| CNA20T       | 1               | 0.0%             | 1               | 0.0%             |
| SABR80       | 1               | 0.0%             | 1               | 0.0%             |
| CNA55B       | -               | 0.0%             | -               | 0.0%             |
| <b>Total</b> | <b>718,520</b>  | <b>100.0%</b>    | <b>739,379</b>  | <b>100.0%</b>    |

As the fleet of Stage 2 business jets shrinks over the forecast period, the number of Stage 2 business jet operations at LAX is also expected to decline. By 2016, approximately 500 annual operations in Stage 2 business jets are expected at LAX compared to 1,200 in 2007. As a result, the Stage 2 aircraft share of business jet activity at LAX will fall from 5.8% in 2007 to less than 2% in 2016 (see Table 85).

**Table 85.** Baseline and Forecast Business Jet Operations at Los Angeles International Airport by Noise Stage

| Noise Stage  | 2007 Baseline | Percent of Total | 2014 Operations | Percent of Total | 2016 Operations | Percent of Total |
|--------------|---------------|------------------|-----------------|------------------|-----------------|------------------|
| Stage 2      | 1,211         | 5.8%             | 596             | 2.1%             | 509             | 1.6%             |
| Stage 3      | 19,802        | 94.2%            | 27,858          | 97.9%            | 30,622          | 98.4%            |
| <b>Total</b> | <b>21,013</b> | <b>100.0%</b>    | <b>28,454</b>   | <b>100.0%</b>    | <b>31,131</b>   | <b>100.0%</b>    |

### William J. Fox Field

Aircraft activity at Fox Field is forecast to increase by 6% over the forecast period, reaching 70,000 annual operations in 2016 (see Table 86). Business jet operations are



forecast to increase at a faster rate but remain less than 1% of total activity in the outer forecast year.

**Table 86.** Baseline and Forecast Operations at Fox Field by Type of Activity

| Activity Type                   | 2007<br>Baseline | Percent of<br>Total | 2014<br>Forecast | Percent of<br>Total | 2016<br>Forecast | Percent of<br>Total |
|---------------------------------|------------------|---------------------|------------------|---------------------|------------------|---------------------|
| Air Carrier/Commuter            | —                | 0.0%                | —                | 0.0%                | —                | 0.0%                |
| Business Jet                    | 508              | 0.8%                | 583              | 0.8%                | 606              | 0.9%                |
| GA Non-Jet Itinerant            | 31,738           | 48.1%               | 35,048           | 50.4%               | 35,304           | 50.3%               |
| GA Non-Jet Local                | 32,291           | 48.9%               | 32,394           | 46.6%               | 32,716           | 46.6%               |
| Military (Itinerant +<br>Local) | 1,513            | 2.3%                | 1,513            | 2.2%                | 1,513            | 2.2%                |
| <b>Total</b>                    | <b>66,049</b>    | <b>100.0%</b>       | <b>69,537</b>    | <b>100.0%</b>       | <b>70,139</b>    | <b>100.0%</b>       |

The percentage of Fox Field operations occurring during the evening and night hours remains unchanged over the forecast period, as shown in Table 87.

**Table 87.** Baseline and Forecast Operations at Fox Field by Time of Day

| Year          | Operations by Time of Day |         |       |        | Percent of Total 24 Hours |         |       |
|---------------|---------------------------|---------|-------|--------|---------------------------|---------|-------|
|               | Day                       | Evening | Night | Total  | Day                       | Evening | Night |
| 2007 Baseline | 56,195                    | 9,195   | 660   | 66,049 | 85.1%                     | 13.9%   | 1.0%  |
| 2014 Forecast | 59,154                    | 9,677   | 706   | 69,537 | 85.1%                     | 13.9%   | 1.0%  |
| 2016 Forecast | 59,668                    | 9,759   | 712   | 70,139 | 85.1%                     | 13.9%   | 1.0%  |

Table 88 presents forecast aircraft operations at Fox Field by INM aircraft type.

**Table 88.** Forecast Operations at Fox Field by INM Aircraft Type

| INM Type | 2014<br>Operations | Percent of<br>Total | 2016<br>Operations | Percent of<br>Total |
|----------|--------------------|---------------------|--------------------|---------------------|
| GASEPF   | 33,461             | 48.1%               | 33,783             | 48.2%               |
| GASEPV   | 13,131             | 18.9%               | 13,232             | 18.9%               |
| BEC58P   | 9,962              | 14.3%               | 10,032             | 14.3%               |
| CNA441   | 5,751              | 8.3%                | 5,791              | 8.3%                |
| BO105    | 2,105              | 3.0%                | 2,120              | 3.0%                |
| C130     | 2,019              | 2.9%                | 2,033              | 2.9%                |
| DC3      | 1,512              | 2.2%                | 1,522              | 2.2%                |

|              |               |               |               |               |
|--------------|---------------|---------------|---------------|---------------|
| DC6          | 1,013         | 1.5%          | 1,020         | 1.5%          |
| LEAR35       | 181           | 0.3%          | 187           | 0.3%          |
| CNA500       | 102           | 0.1%          | 104           | 0.1%          |
| MU3001       | 78            | 0.1%          | 80            | 0.1%          |
| IA1125       | 61            | 0.1%          | 64            | 0.1%          |
| GIV          | 42            | 0.1%          | 45            | 0.1%          |
| GV           | 39            | 0.1%          | 42            | 0.1%          |
| CL600        | 30            | 0.0%          | 32            | 0.0%          |
| CIT3         | 18            | 0.0%          | 18            | 0.0%          |
| CNA55B       | 9             | 0.0%          | 12            | 0.0%          |
| CNA750       | 10            | 0.0%          | 10            | 0.0%          |
| FAL50        | 5             | 0.0%          | 5             | 0.0%          |
| GIIB         | 5             | 0.0%          | 4             | 0.0%          |
| LEAR25       | 2             | 0.0%          | 2             | 0.0%          |
| GII          | 1             | 0.0%          | 1             | 0.0%          |
| <b>Total</b> | <b>69,537</b> | <b>100.0%</b> | <b>70,139</b> | <b>100.0%</b> |

The retirement of older Stage 2 business jets is projected to result in fewer Stage 2 jet operations at Fox Field. By 2016, Stage 2 aircraft will account for only 1% of total business jet operations, compared to 4% in the 2007 base year (see Table 89).

**Table 89.** Baseline and Forecast Business Jet Operations at Fox Field by Noise Stage

| Noise Stage  | 2007<br>Baseline | Percent of<br>Total | 2014<br>Operations | Percent of<br>Total | 2016<br>Operations | Percent of<br>Total |
|--------------|------------------|---------------------|--------------------|---------------------|--------------------|---------------------|
| Stage 2      | 22               | 4.4%                | 8                  | 1.4%                | 7                  | 1.2%                |
| Stage 3      | 485              | 95.6%               | 575                | 98.6%               | 599                | 98.8%               |
| <b>Total</b> | <b>508</b>       | <b>100.0%</b>       | <b>583</b>         | <b>100.0%</b>       | <b>606</b>         | <b>100.0%</b>       |

## 9.0 Project Analysis of CNEL Exposure at VNY

The VNY noise analysis includes the following elements:

- Section 9.1: AEM-based estimates of percentage change in area within 65 dB CNEL<sup>17</sup> and decibel change in CNEL;<sup>18</sup>
- Section 9.2: Preparation of full CNEL contours using the INM;
- Section 9.3: Estimates of residential population, dwelling units, and sensitive receptors within 65 dB CNEL;
- Section 9.4: Supplemental grid point threshold-of-significance analysis; and
- Section 9.5: Discussion of exemptions for historic aircraft and maintenance activity.

As discussed in Section 4, CEQA guidelines permit the use of the AEM as a screening tool to determine if a project will result in a 1.5 dB increase in CNEL, which would trigger the more detailed INM-based analyses involved in the second through fourth steps listed above. As discussed in Section 9.1, AEM analyses found that the proposed project and Alternative 2 (Exempted Stage 3 and 4 Aircraft) would reduce exposure compared to the No-Project (Alternative 1) conditions. For CEQA purposes, the noise analysis could have been considered complete with these AEM results. However, the additional contour, population, and supplemental grid-point analyses were undertaken to illustrate the benefits of the proposed project.

The Section 9.5 discussion addresses the effect of two elements of the proposed project (i.e., the exemption of (1) historic aircraft and (2) maintenance-related operations). Section 10 presents noise analyses for the diversion airports.

## 9.1 AEM Calculations

The VNY operations summarized in Section 5 for the 2007 and 2014 scenarios under consideration were entered into the AEM to compare the 2014 proposed project and both alternatives to the 2007 baseline, as required by CEQA. In addition, the 2014 proposed project and 2014 Exempted Stage 3 and 4 Aircraft Alternative (Alternative 2) were compared to the 2014 No-Project Alternative (Alternative 1) to illustrate the estimated benefit of these two actions.

---

<sup>17</sup> The AEM spreadsheet is designed to calculate the percent change in the area within the 65 dB Day-Night Average Sound Level (DNL) contour. As discussed in Appendix B.1.8, DNL applies a 10-fold weighting “penalty” to night (10 p.m.–7 a.m.) operations. As discussed in Appendix B.1.9, CNEL adds a three-fold weighting penalty to evening (7 p.m.–10 p.m.) operations. Evening operations were adjusted by this factor to reflect this penalty and to properly calculate CNEL rather than simply using DNL as a surrogate for CNEL.

<sup>18</sup> The calculated change in area was translated into a decibel change using the AEM assumption that a 17% change in area is equivalent to a 1-decibel change in noise exposure.

## 2014 Project and Alternatives Compared to 2007 Baseline

Table 90 presents the AEM analysis results for the 2014 proposed project and alternatives compared to the 2007 baseline. As the table shows, the proposed project and Alternative 2, Exempted Stage 3 and 4 Aircraft, would both reduce the area within the 65 dB CNEL compared to the No-Project Alternative (Alternative 1). In all cases, the changes are well below the 1.5 dB threshold of significance.

**Table 90.** AEM Analyses: 2014 Project and Alternatives vs. 2007 Baseline

| Scenario  | AEM-Estimated Changes Compared to 2007 Baseline |                |
|---|---|----------------|
|   | Area within 65 dB CNEL                          | Change in CNEL |
| 2014 Proposed Project                               | 6.6%  | 0.4 dB         |
| 2014 Alternative 1, No Project                      | 13.3%   | 0.8 dB         |
| 2014 Alternative 2, Exempted Stage 3 and 4 Aircraft | 6.8%  | 0.4 dB         |
| Source: HMMH 2008                                   |   |                |

## 2014 Project and Alternative 2 (the Exempted Stage 3 and 4 Aircraft Alternative) Compared to Alternative 1 (the No-Project Alternative)

To further illustrate the benefits of the phaseout variations, Table 91 presents the AEM analysis results for the 2014 proposed project and the Exempted Stage 3 and 4 Aircraft Alternative (Alternative 2) compared to the 2014 No-Project Alternative (Alternative 1). As the table shows, the two phaseout variations would reduce the area within the 65 dB CNEL by approximately 6 percent and slightly reduce CNEL.

**Table 91.** AEM Analyses: 2014 Project and Alternative 2, Exempted Stage 3 and 4 Aircraft, vs. 2014 Alternative 1, No Project

| Scenario  | AEM-Estimated Changes Compared to 2014 Alternative 1, No Project |                |
|---|--|----------------|
|   | Area within 65 dB CNEL   | Change in CNEL |
| 2014 Proposed Project                               | -6.0%  | -0.4 dB        |
| 2014 Alternative 2, Exempted Stage 3 and 4 Aircraft | -5.8%  | -0.4 dB        |
| Source: HMMH 2008.                                  |  |                |

## 9.2 CNEL Contour Analyses

While the preceding AEM screening does not trigger a requirement for more detailed analysis, CNEL contours were prepared to further demonstrate the benefit of the phaseout variations under consideration.<sup>19</sup> Figures 3 through 6 present the following CNEL comparisons:

- Figure 3: 2014 Project Compared to 2007 Baseline;
- Figure 4: 2014 Project Compared to Alternative 1, No-Project Alternative;
- Figure 5: 2014 Alternative 1, No-Project Alternative, Compared to 2007 Baseline; and
- Figure 6: 2014 Project Compared to Alternative 2, Exempted Stage 3 and 4 Aircraft.

These figures show graphically the following results, consistent with the AEM analysis:

- While the proposed project noise exposure in 2014 is greater than the 2007 baseline noise exposure (Figure 3), the increase is the result of projected growth in airport activity that would occur *independent of the project*, since the 2014 proposed project CNEL contours are smaller than the 2014 No-Project contours (Figure 4);
- The growth in noise exposure from 2007 to 2014 without the project (Figure 5) is noticeably greater than the growth from 2007 to 2014 with the proposed project (Figure 3) ( i.e., *the proposed project mitigates the projected growth in exposure*); and
- The proposed project noise exposure is essentially identical to Alternative 2, Exempted Stage 3 and 4 Aircraft (Figure 5); the exemption permits such a small number of aircraft to continue operating that the benefit of the restriction is not noticeably affected.

The population impact analysis (following the figures) quantifies these comparisons.

## 9.3 Population, Dwelling Unit, and Sensitive-Receptor Impact Analyses

To further quantify the benefits of the proposed project, land use analyses were undertaken to estimate the residential dwelling units, residential population, and other potentially sensitive land uses within the contours presented in the preceding figures.


---

<sup>19</sup> In addition, the INM incorporates extensive refinements undertaken to model significant noise abatement departure procedures flown at VNY, for which FAA approved “user-defined profile” adjustments to the INM based on extensive engineering analysis summarized in Appendix B.4, Section B.4.8.2.

The land use data within the base maps used in the contour figures were updated through field surveys on a parcel-by-parcel basis within an area that completely encompassed the outermost contours. Dwelling unit and population counts were developed from 2000 census block-level data and applied to the field-verified land uses.

The top half of Table 92 presents the total estimated residential dwelling units and population within the 65–70 and 70–75 dB CNEL contour bands (the only two bands encompassing any residential use).

As discussed in Appendix B.5, Section B.5.3.1, LAWA is committed to sound insulating all residential dwelling units within the 65 dB CNEL contour (where the owner accepts the offer of treatment). The bottom half of the table presents the estimated dwelling units and population that are outside the area within which LAWA expects to have completed sound insulation treatment by the end of 2009.

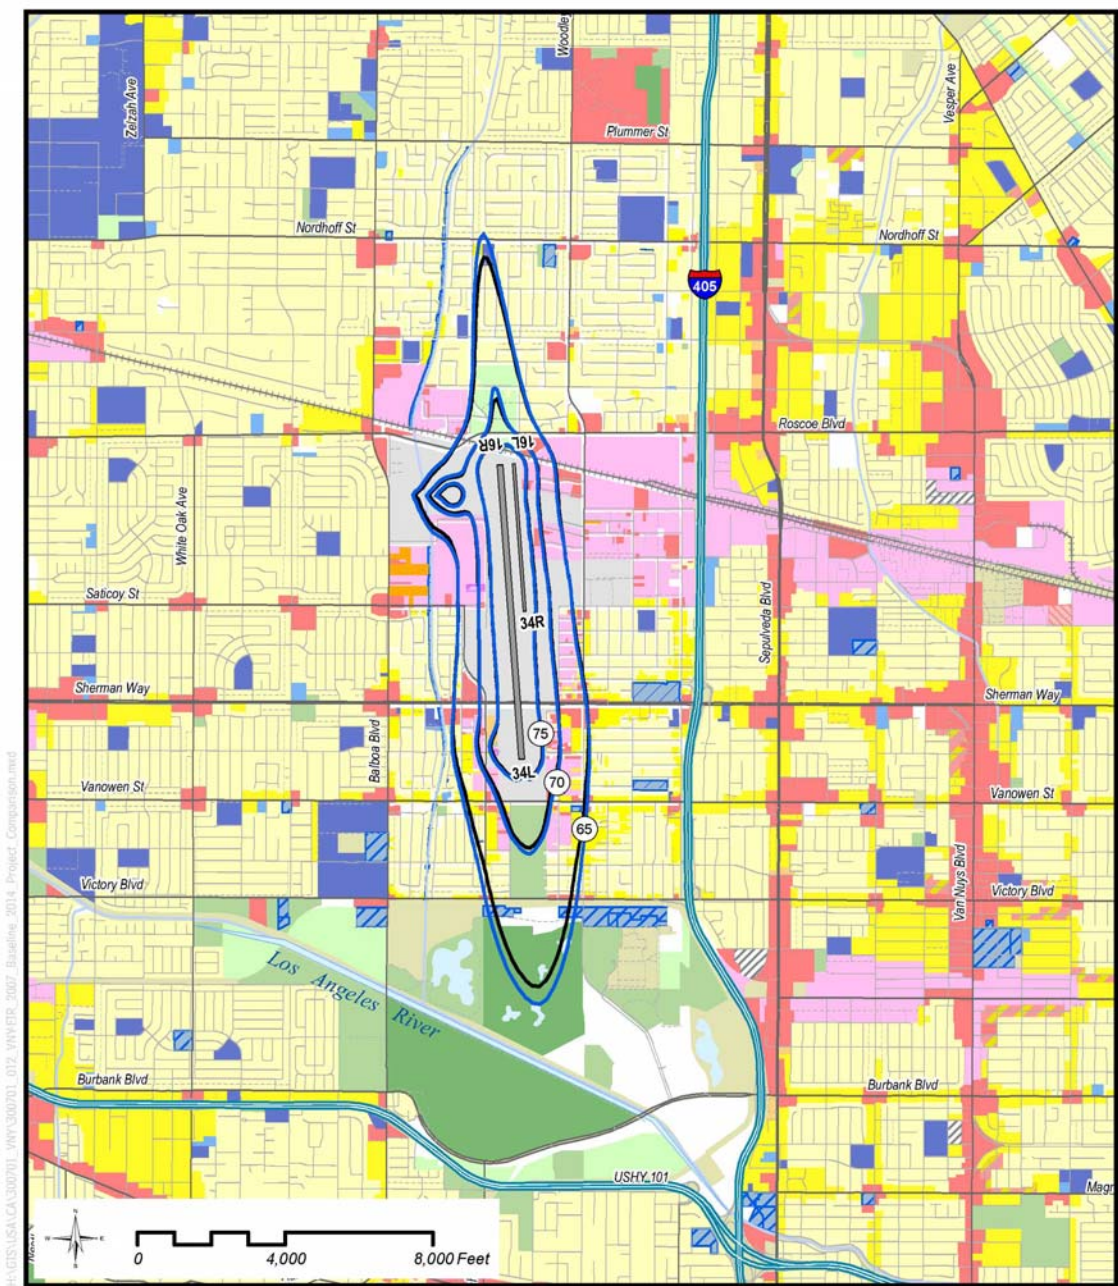

H:\GIS\USA\CA\300701\_012\_VNY\ER\_2007\_Baseline\_2014\_Project\_Companson.mxd

- |                                  |                              |                    |
|----------------------------------|------------------------------|--------------------|
| Residential - Single Family      | Industrial - Manufacturing   | 2007 Baseline CNEL |
| Residential Multi-Family         | Industrial - Airport Related | 2014 Project CNEL  |
| Res. - Mobile Home, Trailer Park | Public/Government Service    |                    |
| Mixed Residential                | Golf Courses                 |                    |
| Transient Lodging                | Recreation / Open Space      |                    |
| Airport Ownership                | Agriculture                  |                    |
| School                           | Trans, Comm, and Utilities   |                    |
| Church - Religious Organization  | Vacant                       |                    |
| Commercial                       | Undefined                    |                    |
| Mixed Use                        | Water                        |                    |


**Van Nuys Airport**  
2014 Project CNEL Compared to 2007 Baseline CNEL

Basemap: Southern California Association of Governments (SCAG), Environmental Systems Research Institute (ESRI), United States Geological Survey (USGS)  
**HARRIS MILLER MILLER & HANSON INC.**

**Figure 3**  
**2014 Proposed Project CNEL**  
**Compared to 2007 Baseline CNEL**





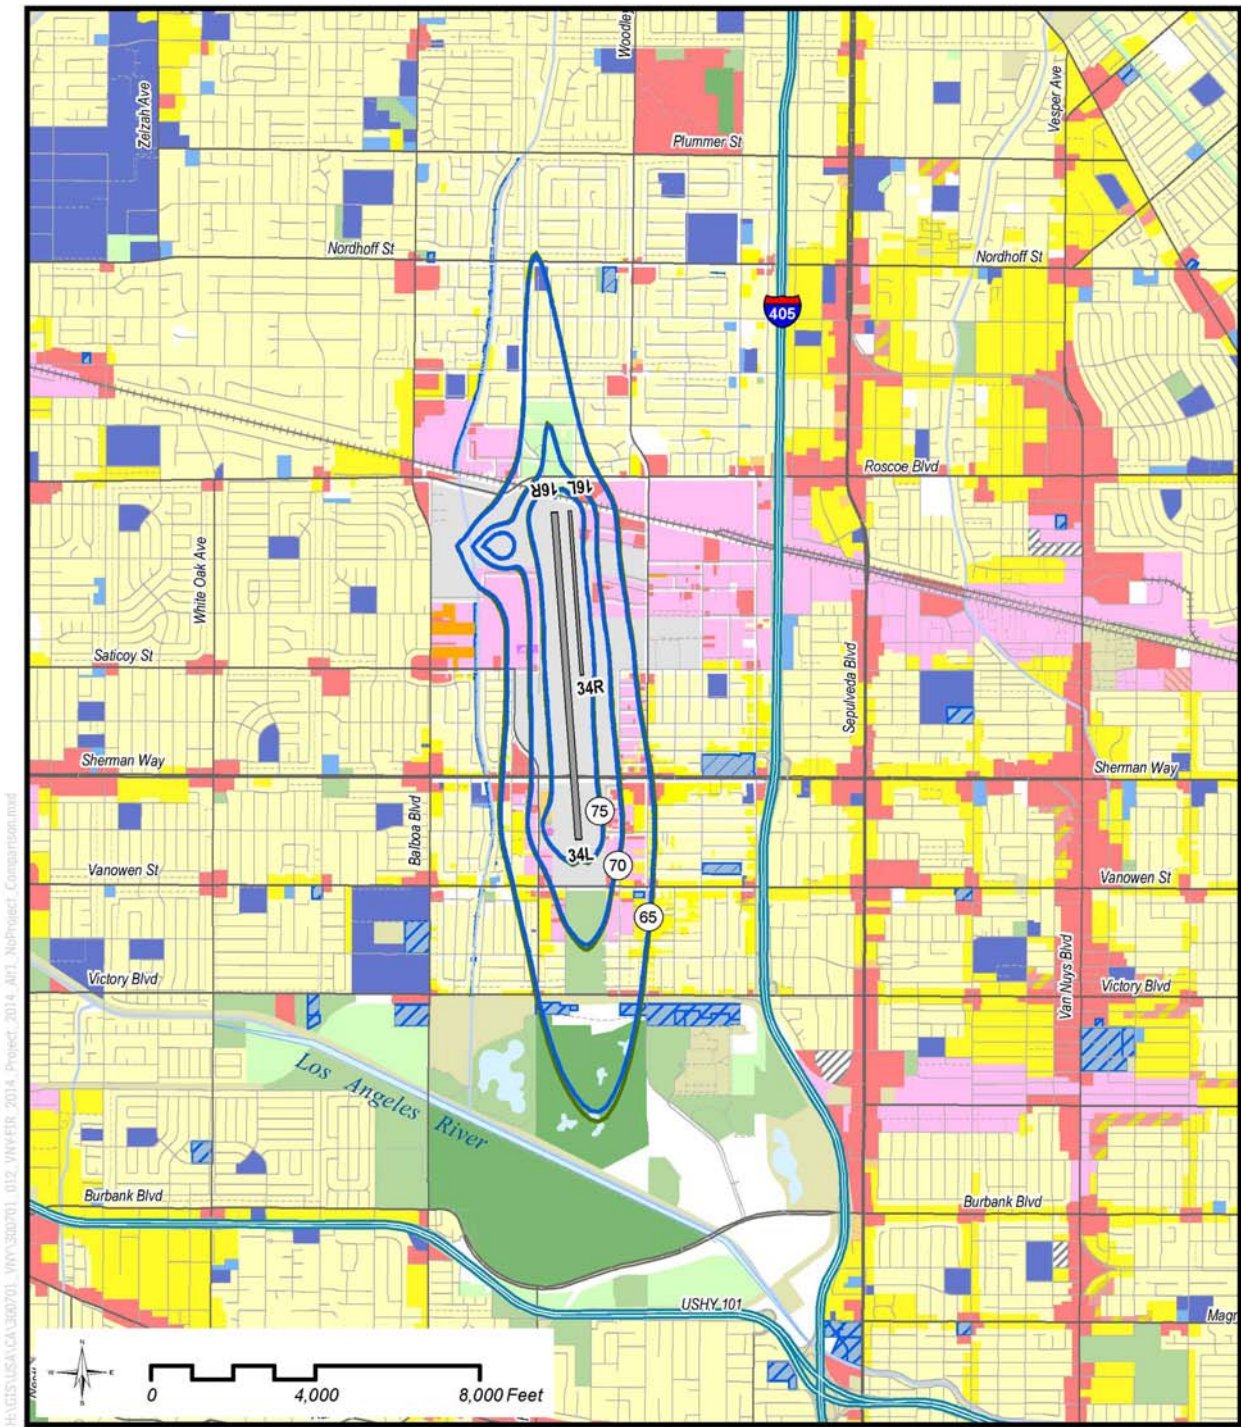

H:\GIS\USA\CA\360770\_1\WY\360770\_012\_VNWER\_2014\_Project\_2014\_Alt\_NoProject\_Comparison.mxd

- |                                  |                              |
|----------------------------------|------------------------------|
| Residential - Single Family      | Industrial - Manufacturing   |
| Residential Multi-Family         | Industrial - Airport Related |
| Res. - Mobile Home, Trailer Park | Public/Government Service    |
| Mixed Residential                | Golf Courses                 |
| Transient Lodging                | Recreation / Open Space      |
| Airport Ownership                | Agriculture                  |
| School                           | Trans, Comm, and Utilities   |
| Church - Religious Organization  | Vacant                       |
| Commercial                       | Undefined                    |
| Mixed Use                        | Water                        |

- 2014 Alternative 1 - No Project CNEL
- 2014 Project CNEL

**Van Nuys Airport**  
 2014 Project CNEL Compared to  
 2014 Alternative 1 - No Project CNEL

Basemap: Southern California Association of Governments (SCAG), Environmental Systems Research Institute (ESRI), United States Geological Survey (USGS)




XXXXXX

**Figure 4**  
**2014 Proposed Project CNEL**  
**Compared to 2014 No-Project (Alt. 1)**





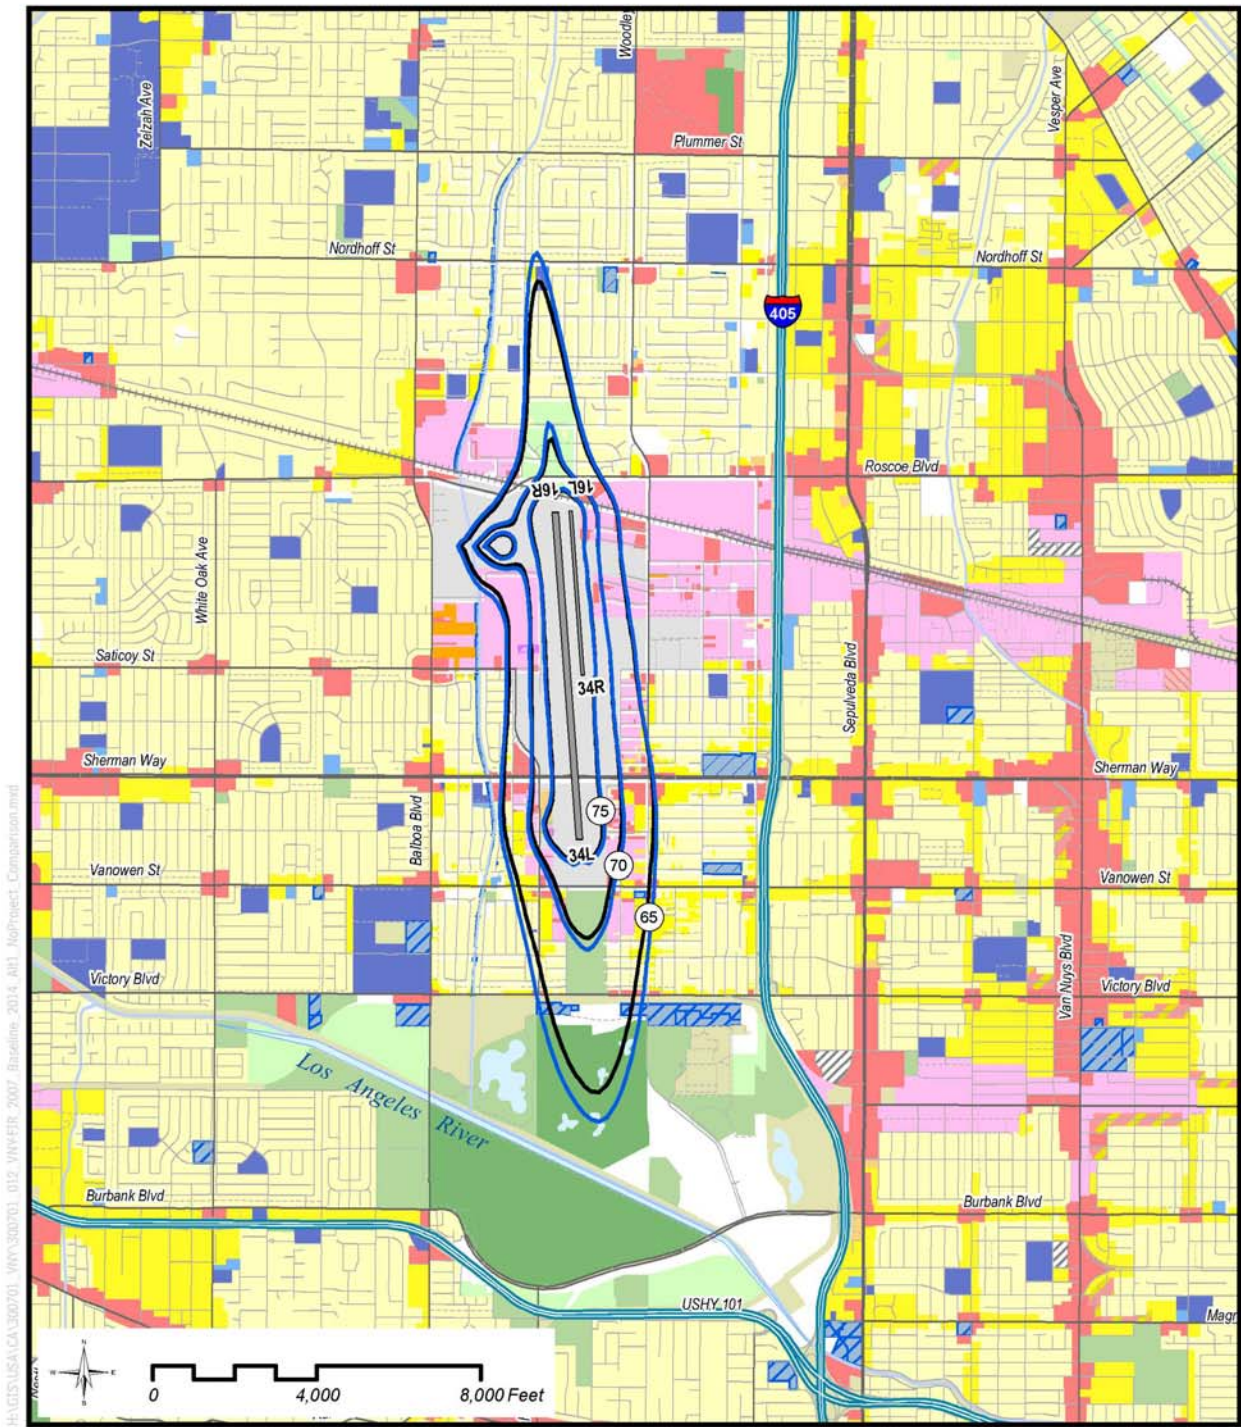

H:\GIS\USA\CA\300701\_WNY\300701\_012\_WNY\FIR\_2007\_Baseline\_2014\_Alt\_1\_NoProject\_Comparison.mxd

- |                                  |                              |
|----------------------------------|------------------------------|
| Residential - Single Family      | Industrial - Manufacturing   |
| Residential Multi-Family         | Industrial - Airport Related |
| Res. - Mobile Home, Trailer Park | Public/Government Service    |
| Mixed Residential                | Golf Courses                 |
| Transient Lodging                | Recreation / Open Space      |
| Airport Ownership                | Agriculture                  |
| School                           | Trans, Comm, and Utilities   |
| Church - Religious Organization  | Vacant                       |
| Commercial                       | Undefined                    |
| Mixed Use                        | Water                        |

- 2007 Baseline CNEL
- 2014 Alternative 1 - No Project CNEL

**Van Nuys Airport**  
 2014 Alternative 1 - No Project CNEL Compared to  
 2007 Baseline CNEL

Basemap: Southern California Association of Governments (SCAG), Environmental Systems Research Institute (ESRI), United States Geological Survey (USGS)


**HARRIS MILLER MILLER & HANSON INC.**

XXXXXX

**Figure 5**  
**2014 No-Project (Alt. 1) CNEL**  
**Compared to 2007 Baseline CNEL**





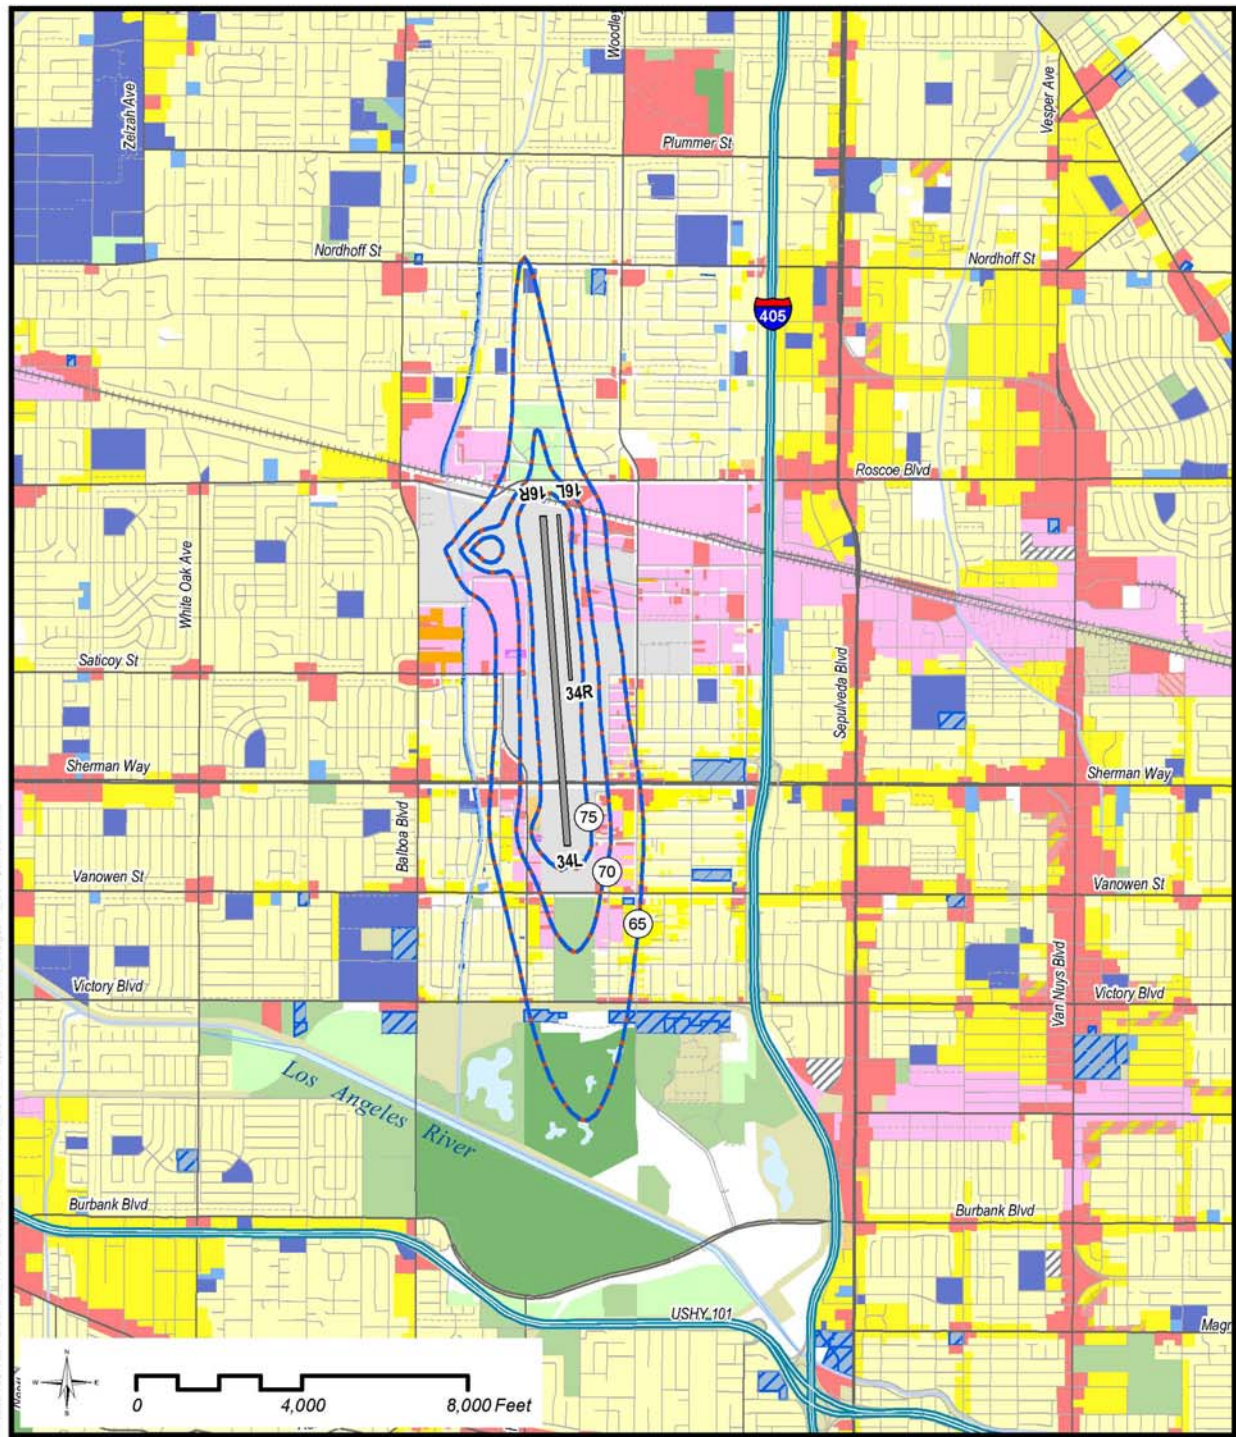


- |                                  |                              |
|----------------------------------|------------------------------|
| Residential - Single Family      | Industrial - Manufacturing   |
| Residential Multi-Family         | Industrial - Airport Related |
| Res. - Mobile Home, Trailer Park | Public/Government Service    |
| Mixed Residential                | Golf Courses                 |
| Transient Lodging                | Recreation / Open Space      |
| Airport Ownership                | Agriculture                  |
| School                           | Trans, Comm, and Utilities   |
| Church - Religious Organization  | Vacant                       |
| Commercial                       | Undefined                    |
| Mixed Use                        | Water                        |

- 2014 Alternative 2 - Stage 3 and 4 Exemption CNEL
- 2014 Project CNEL

**Van Nuys Airport**  
 2014 Project CNEL Compared to  
 2014 Alternative 2 - Stage 3 and 4 Exemption CNEL

Basemap: Southern California Association of Governments (SCAG), Environmental Systems Research Institute (ESRI), United States Geological Survey (USGS)



XXXX-XX

**Figure 6**  
**2014 Project CNEL Compared to Alt. 2, Exempted Stage 3 and 4 Aircraft CNEL**



**Table 92.** Estimated Dwelling Units and Residents within 2007 and 2014 CNEL Contours (with and without sound insulation)

| Basis for Counts                                    | Type of Count* | Analysis Year, Case, and CNEL Contour Interval |            |       |            |            |       |                    |            |       |                     |            |       |  |
|---|----------------|--|------------|-------|------------|------------|-------|--------------------|------------|-------|---------------------|------------|-------|--|
|   |                | 2007   |            |       | 2014       |            |       |                    |            |       |                     |            |       |  |
|   |                | Baseline                                       |            |       | Project    |            |       | Alt. 1, No Project |            |       | Alt. 2, St. 3/4 Ex. |            |       |  |
|   |                | 65-70 CNEL                                     | 70-75 CNEL | Total | 65-70 CNEL | 70-75 CNEL | Total | 65-70 CNEL         | 70-75 CNEL | Total | 65-70 CNEL          | 70-75 CNEL | Total |  |
| All dwelling units, regardless of sound insulation  | S.F. D.U.      | 411  | 8          | 419   | 626        | 9          | 635   | 688                | 9          | 697   | 627                 | 9          | 636   |  |
|   | S.F. Pop.      | 1,320  | 39         | 1,359 | 1,957      | 42         | 1,999 | 2,138              | 42         | 2,180 | 1,960               | 42         | 2,002 |  |
|   | M.F. D.U.      | 1,600  | 27         | 1,627 | 1,922      | 110        | 2,032 | 1,958              | 170        | 2,128 | 1,922               | 110        | 2,032 |  |
|   | M.F. Pop.      | 5,451  | 104        | 5,555 | 6,421      | 438        | 6,859 | 6,496              | 663        | 7,159 | 6,421               | 438        | 6,859 |  |
|   | Total D.U.     | 2,100  | 35         | 2,135 | 2,548      | 119        | 2,667 | 2,646              | 179        | 2,825 | 2,549               | 119        | 2,668 |  |
|   | Total Pop.     | 6,771  | 143        | 6,914 | 8,378      | 480        | 8,858 | 8,634              | 705        | 9,339 | 8,381               | 480        | 8,861 |  |
| Dwellings anticipated to require sound insulation** | S.F. D.U.      | 400  | 0          | 400   | 615        | 1          | 616   | 677                | 1          | 678   | 616                 | 1          | 617   |  |
|   | S.F. Pop.      | 1,286  | 0          | 1,286 | 1,927      | 4          | 1,931 | 2,104              | 4          | 2,108 | 1,926               | 4          | 1,930 |  |
|   | M.F. D.U.      | 1,379  | 0          | 1,379 | 1,784      | 0          | 1,784 | 1,820              | 60         | 1,880 | 1,784               | 0          | 1,784 |  |
|   | M.F. Pop.      | 4,659  | 0          | 4,659 | 5,963      | 0          | 5,963 | 6,038              | 225        | 6,263 | 5,963               | 0          | 5,963 |  |
|   | Total D.U.     | 1,779  | 0          | 1,779 | 2,399      | 1          | 2,400 | 2,497              | 61         | 2,558 | 2,400               | 1          | 2,401 |  |
|   | Total Pop.     | 5,945  | 0          | 5,945 | 7,890      | 4          | 7,894 | 8,142              | 229        | 8,371 | 7,889               | 4          | 7,893 |  |

\*S.F. = single family, M.F. = multifamily, D.U. = dwelling units. \*\*See discussion and figure in Appendix B.5.3.1.

Source: HMMH 2008.

As the table shows, the proposed project reduces the number of dwelling units that would require sound insulation in 2014, from 2,558 (Alternative 1, No Project) to 2,400. Alternative 2, Exempted Stage 3 and 4 Aircraft, adds one dwelling unit requiring sound insulation compared to the proposed project.

As discussed in Section 2, CEQA analyses must consider all potentially sensitive land uses within 65 dB CNEL. Section 2.1 discusses the land use compatibility criteria that apply to LAWA airports and that are consistent with City of Los Angeles, state, and federal guidelines and all applicable CEQA requirements. Following those criteria, there is only one parcel containing potentially noise-sensitive nonresidential land uses within any of the noise contours presented in the preceding figures. That parcel is occupied by the Los Angeles Baptist City Mission, at 16514 Nordhoff Street (North Hills). The property includes a house of worship and school. It is identified in Figure 7 and discussed further in the following section.

## 9.4 Supplemental Threshold of Significance Analysis

To further illustrate the AEM-based conclusion that the proposed project does not result in a significant increase in exposure, a “supplemental” noise analysis was undertaken that involved calculating CNEL values for the baseline conditions, project, and alternatives at 1,255 specific locations in the vicinity of the airport. These locations are depicted in Figure 7. One of the locations is the Los Angeles Baptist City Mission, at 16514 Nordhoff Street. The CNEL calculation for the mission was prepared for the center of the shaded parcel. The remaining 1,254 locations are on the rectangular grid centered on VNY. The CNEL grid calculations were prepared for points centered in each labeled square. The points are spaced 500 feet apart on both north-south and east-west axes.

Table 93 presents the detailed supplemental noise analysis results for the mission. As the table shows, CNEL in 2014 with the proposed project would be only 1.1 dB above the 2007 baseline and would be 0.1 dB less than in 2014 No-Project conditions (i.e., the proposed project would reduce noise exposure in 2014).


**Table 93.** Supplemental Noise Analysis Results for the Los Angeles Baptist City Mission, at 16514 Nordhoff Street

| 2007 Baseline<br>CNEL | 2014 Project<br>CNEL | 2014 Alt. 1,<br>No-Project<br>CNEL | 2014 Alt. 2,<br>Exempted<br>Stage 3 and 4<br>Aircraft<br>CNEL | CNEL Difference<br>2014 Project CNEL Minus: |                                    |   |
|-----------------------|----------------------|------------------------------------|---|---|------------------------------------|---|
|                       |                      |                                    |   | 2007 Baseline<br>CNEL                       | 2014 Alt. 1,<br>No-Project<br>CNEL | 2014 Alt. 2,<br>Exempted<br>Stage 3 and 4<br>Aircraft<br>CNEL |
| 64.3 dB               | 65.4 dB              | 65.5 dB                            | 65.4 dB   | 1.1 dB                                      | -0.1 dB                            | 0.0 dB  |

Source: HMMH 2008.

Appendix B.7 presents the same supplemental noise analysis results for the 1,254 grid points shown in Figure 7. The analysis reveals that there are no grid points



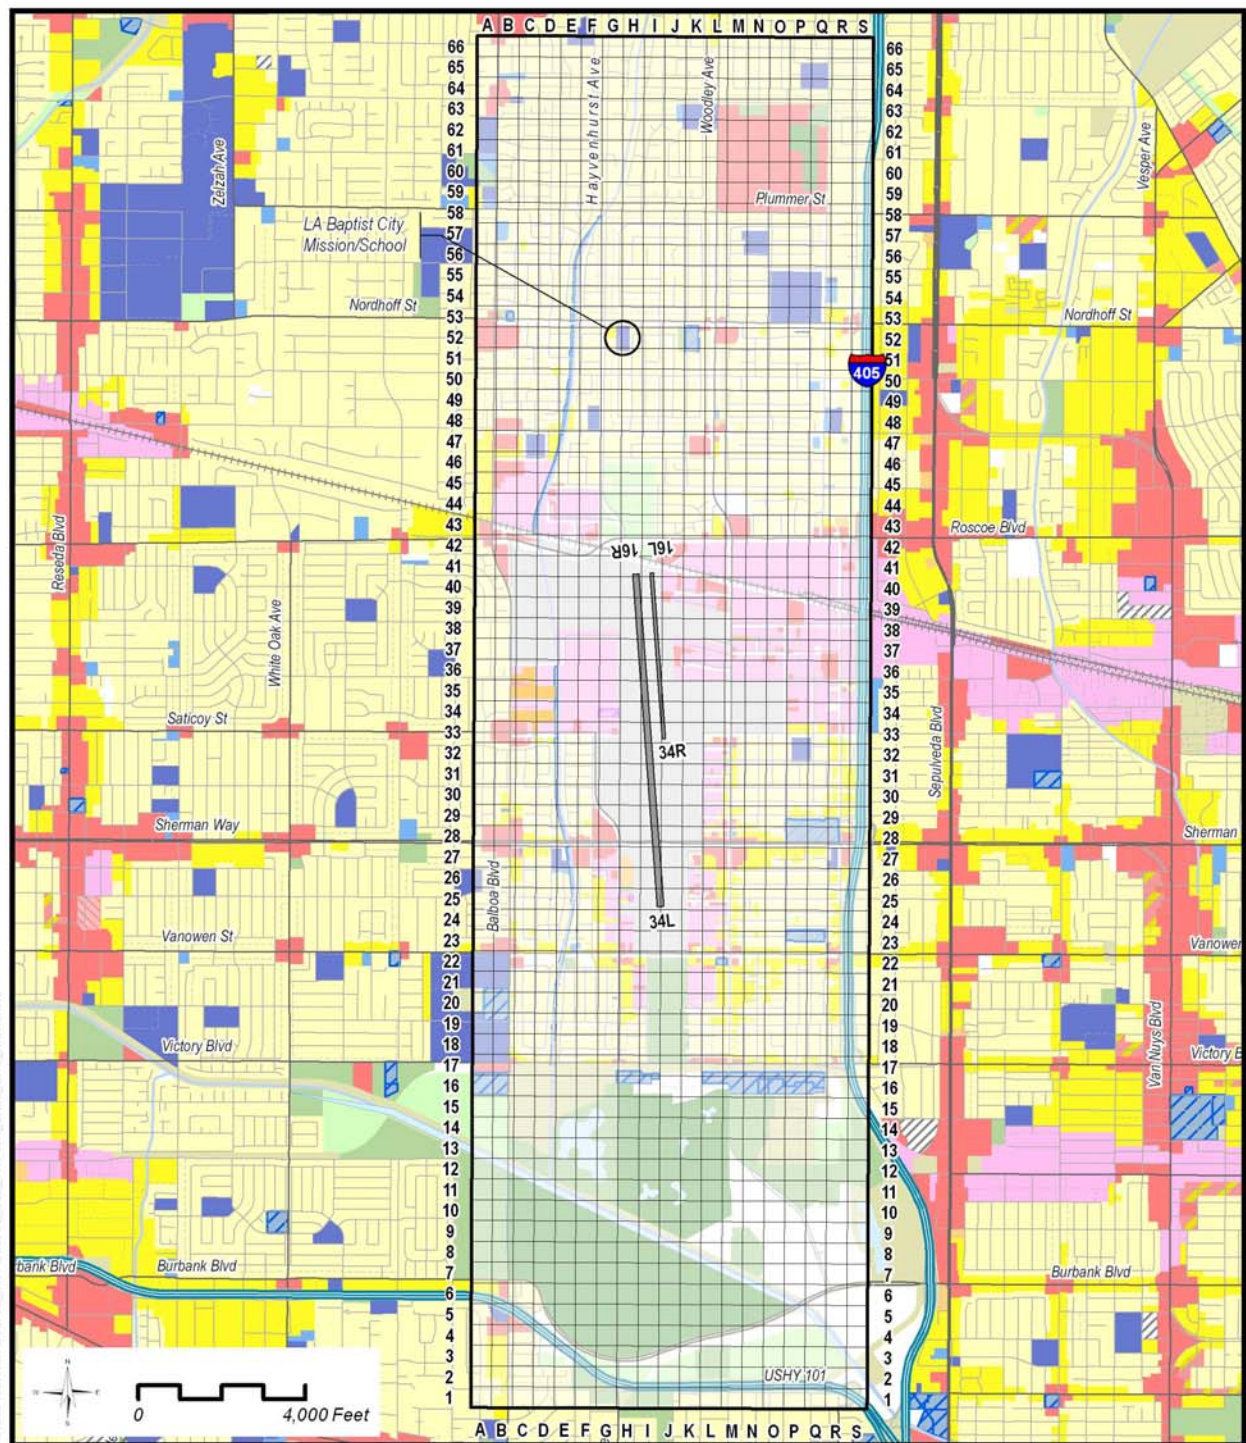

- |                                  |                              |
|----------------------------------|------------------------------|
| Residential - Single Family      | Industrial - Manufacturing   |
| Residential Multi-Family         | Industrial - Airport Related |
| Res. - Mobile Home, Trailer Park | Public/Government Service    |
| Mixed Residential                | Golf Courses                 |
| Transient Lodging                | Recreation / Open Space      |
| Airport Ownership                | Agriculture                  |
| School                           | Trans, Comm, and Utilities   |
| Church - Religious Organization  | Vacant                       |
| Commercial                       | Undefined                    |
| Mixed Use                        | Water                        |

**Van Nuys Airport**  
CNEL Grid Point Analysis Index

Basemap: Southern California Association of Governments (SCAG), Environmental Systems Research Institute (ESRI), United States Geological Survey (USGS)



XXXXXX

**Figure 7**  
**Supplemental Threshold of Significance**  
**Analysis Locations**



at which the CNEL difference between the 2014 project and the 2007 baseline reaches the 1.5 dB threshold of significance; the greatest difference is 1.3 dB. Moreover, the proposed project either would result in the same or less noise exposure in 2014 compared to No-Project conditions.

## 9.5 Effect of Historic Aircraft and Maintenance-Related Operations

As discussed in Chapter 2, the proposed project includes exemptions for operations of historic aircraft and for operations related to maintenance services conducted at VNY. These exemptions would permit a small number of operations by aircraft that exceed the departure noise limits; the maximum forecast of exempted operations is 362 per year, slightly less than one per day, in 2014. To illustrate the negligible effect of these additional operations, Figure 8 presents a comparison of 2014 CNEL contours for the proposed project compared to separate contours that include each of the two categories of exempted operations. As the figure indicates, the effect of the small number of exempted operations is minimal.

## 10.0 2014/2016 Project Analysis at Diversion Airports

As discussed in Chapter 2, it is anticipated that the proposed project would divert some operations from VNY to BUR, CMA, CNO, LAX, and WJF.

Two types of noise analysis were conducted for these “diversion” airports: (1) an AEM screening to determine if the additional operations would result in an increase in noise exposure, in terms of CNEL, that reaches the CEQA threshold of significance and (2) a so-called “Berkeley Jets” analysis to consider potential effects of changes in the numbers of additional flights—in particular, additional flights that are likely to be noticeable from a noise perspective. The Berkeley Jets analysis is commonly referred to as a type of “single event” analysis, in that it focuses on noise exposure associated with *individual* aircraft operations, in contrast to (and to augment) the CNEL-based assessment of *cumulative* exposure. Section 10.1 presents the AEM analyses. Section 10.2 presents the Berkeley Jets analyses.

### 10.1 Area Equivalent Method CNEL Screening Analysis

As discussed in Section 4, CEQA guidelines permit the use of the AEM as a screening tool to determine whether more sophisticated analyses are warranted. For each of the diversion airports, the VNY operations summarized in Section 5 for the 2007 and 2014 scenarios under consideration were entered into the AEM to compare the 2014 proposed project and both alternatives to the 2007 baseline, as required by CEQA. In addition, the 2014 proposed project and 2014 Exempted Stage 3 and 4

Aircraft Alternative (Alternative 2) were compared to the 2014 No-Project Alternative (Alternative 1) to illustrate the estimated benefit of these two actions.

As discussed in Section 4.1, since the maximum anticipated effect on operations at BUR, CMA, and LAX would occur in 2014, it was used as the forecast year for analysis at those airports. Since there would be no effect on operations at CNO and WJF until 2016, it was used as the forecast year for analyses at those airports.

## Los Angeles International Airport

Table 94 presents AEM analysis results for the 2014 proposed project and alternatives compared to the 2007 baseline and 2014 forecast conditions at LAX. As the table shows, forecast growth in activity at LAX, independent of any action at VNY, will result in approximately a 6.0% increase in the area within the 65 dB CNEL contour and approximately a 0.4 dB overall increase in CNEL compared to the 2007 baseline. However, the proposed project and alternatives under consideration at VNY have no effect on the area within the 65 dB CNEL or overall CNEL exposure in 2014. Normal forecast growth in activity at LAX overwhelms any change associated with diversions from VNY.

Neither the proposed project nor either of the alternatives under consideration at VNY would result in a change in noise exposure that meets or exceeds the 1.5 dB CEQA threshold of significance, compared to either the 2014 baseline or 2014 forecast conditions at LAX.

**Table 94.** LAX AEM Analyses: 2014 Project and Alternatives vs. 2007 Baseline

|                   | 2014 VNY Proposed Project |        | 2014 VNY Alternative 1, No-Project Alternative |        | 2014 VNY Alternative 2, Exempted Stage 3 and 4 Aircraft |        |
|-------------------|---------------------------|--------|--|--------|---|--------|
|                   | Area                      | CNEL   | Area   | CNEL   | Area  | CNEL   |
| 2007 LAX Baseline | 6.0%                      | 0.4 dB | 6.0%   | 0.4 dB | 6.0%  | 0.4 dB |
| 2014 LAX Baseline | 0.0%                      | 0.0 dB | 0.0%   | 0.0 dB | 0.0%  | 0.0 dB |


Note: Percent change in area within 65 dB CNEL and approximate decibel change in CNEL for cases listed above compared to baseline listed on left (i.e., case listed above minus case listed on left; positive entry means case listed above is “noisier”).

Source: HMMH 2008.

## Camarillo Airport

Table 95 presents AEM analysis results for the 2014 proposed project and alternatives compared to the 2007 baseline and 2014 forecast conditions at CMA. As the table shows, the 2014 Alternative 1, No-Project Alternative (i.e., normal growth in activity at CMA, independent of any action at VNY), will result in approximately



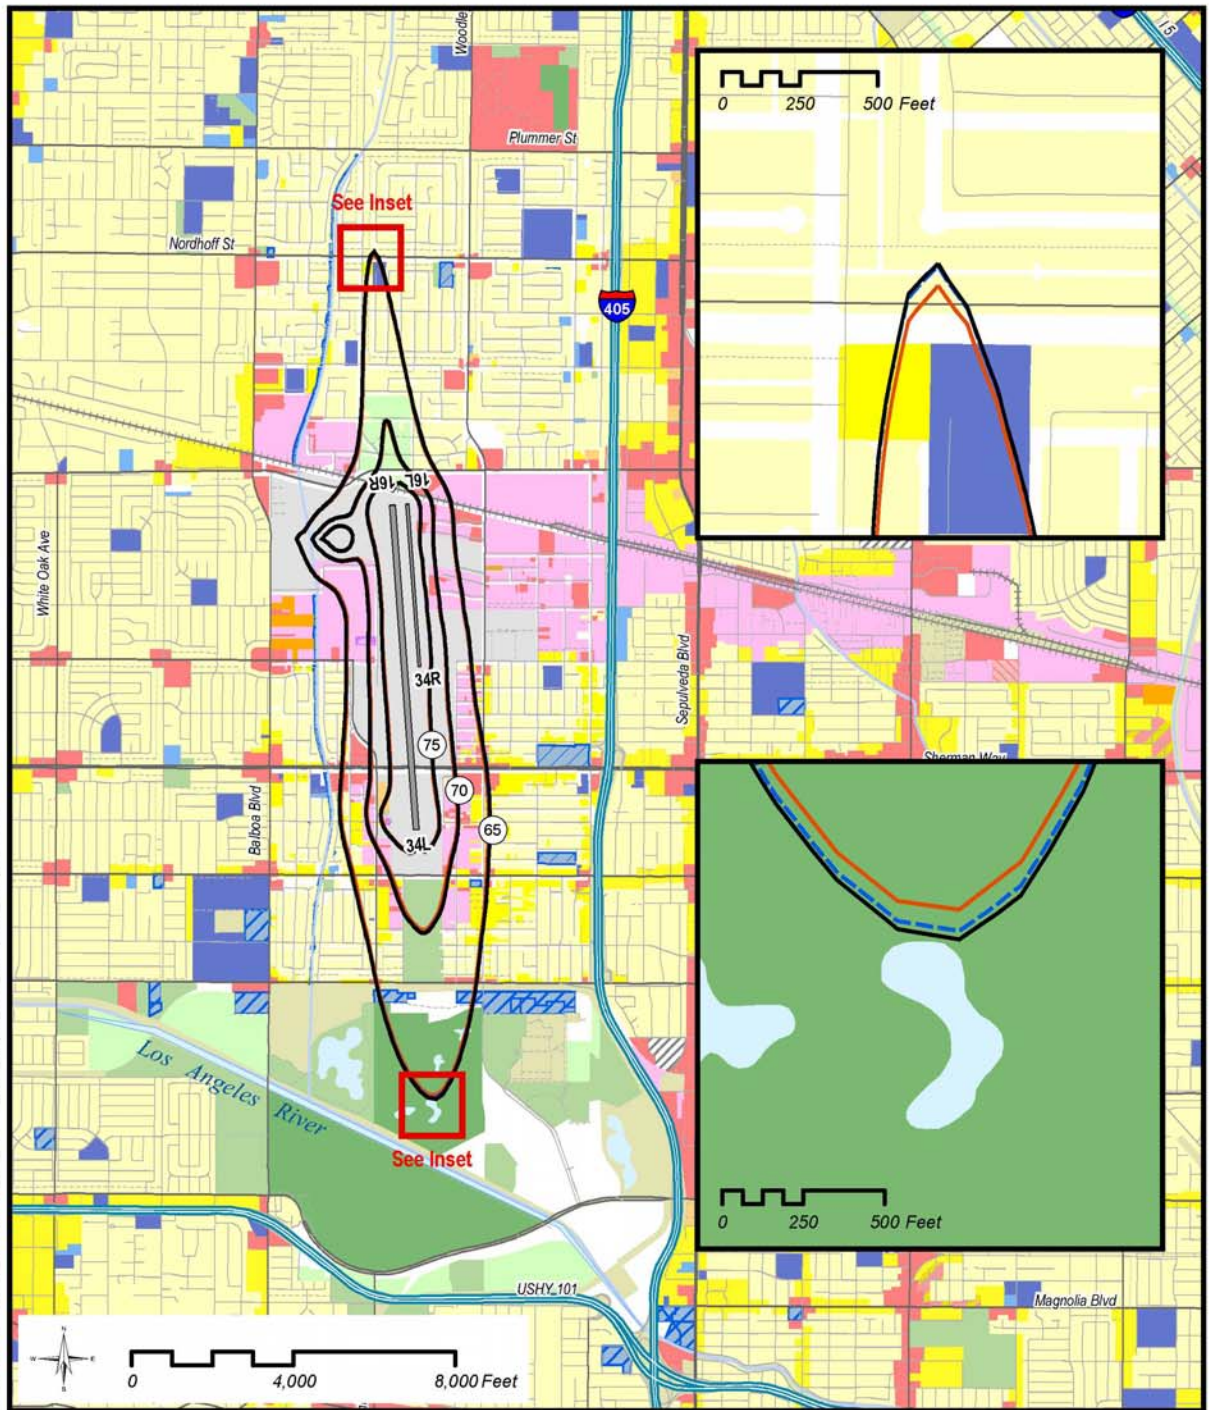

- |                                  |                              |
|----------------------------------|------------------------------|
| Residential - Single Family      | Industrial - Manufacturing   |
| Residential Multi-Family         | Industrial - Airport Related |
| Res. - Mobile Home, Trailer Park | Public/Government Service    |
| Mixed Residential                | Golf Courses                 |
| Transient Lodging                | Recreation / Open Space      |
| Airport Ownership                | Agriculture                  |
| School                           | Trans, Comm, and Utilities   |
| Church - Religious Organization  | Vacant                       |
| Commercial                       | Undefined                    |
| Mixed Use                        | Water                        |

- |  |
|--|
| 2014 Project CNEL                          |
| 2014 Project without Historic Exemption    |
| 2014 Project without Maintenance Exemption |

### Van Nuys Airport Part 161 Study

Comparison of CNEL for 2014 Project to:  
 2014 Project without Historic Aircraft Exemption  
 2014 Project without Maintenance Operation Exemption

Basemap: Southern California Association of Governments (SCAG), Environmental Systems Research Institute (ESRI), United States Geological Survey (USGS)

HARRIS MILLER MILLER & HANSON INC.

XXXX-XX

**Figure 8**  
**Effects on 2014 Project CNEL Contours of**  
**Eliminating: (1) Historic Aircraft Exemption**  
**and (2) Maintenance Operation Exemption**



a 13.8% increase in the area within the 65 dB CNEL contour and approximately a 0.8 dB overall increase in CNEL. The proposed project and Alternative 2 (Exempted Stage 3 and 4 Aircraft) would result in approximately a 19.8% increase in the area within the 65 dB CNEL contour and approximately a 1.1 dB overall increase in CNEL compared to the 2007 baseline but only a 5.3% increase in area and 0.3 dB increase in CNEL exposure in 2014.

**Table 95.** CMA AEM Analyses: 2014 Project and Alternatives vs. 2007 Baseline

|                   | 2014 VNY Proposed Project |        | 2014 VNY Alternative 1, No-Project Alternative |        | 2014 VNY Alternative 2, Exempted Stage 3 and 4 Aircraft |        |
|-------------------|---------------------------|--------|--|--------|---|--------|
|                   | Area                      | CNEL   | Area   | CNEL   | Area  | CNEL   |
| 2007 CMA Baseline | 19.8%                     | 1.1 dB | 13.8%  | 0.8 dB | 19.8%   | 1.1 dB |
| 2014 CMA Baseline | 5.3%                      | 0.3 dB | 0.0%   | 0.0 dB | 5.3%  | 0.3 dB |

Note: Percent change in area within 65 dB CNEL and approximate decibel change in CNEL for cases listed above compared to baseline listed on left (i.e., case listed above minus case listed on left; positive entry means case listed above is “noisier”).

Source: HMMH 2008.

Neither the proposed project nor either of the alternatives under consideration at VNY would result in a change in noise exposure that meets or exceeds the 1.5 dB CEQA threshold of significance compared to either the 2014 baseline or 2014 forecast conditions at CMA.

## Chino Airport

Table 96 presents the AEM analysis results for the 2016 proposed project and alternatives compared to the 2007 baseline and 2016 forecast conditions at CNO. As the table shows, the 2016 Alternative 1, No-Project Alternative (i.e., normal change in activity at CNO, independent of any action at VNY), will result in approximately a 1.5% decrease in the area within the 65 dB CNEL contour and approximately a 0.1 dB overall decrease in CNEL. The proposed project and Alternative 2 (Exempted Stage 3 and 4 Aircraft) would result in approximately a 5.9% increase in the area within the 65 dB CNEL contour and approximately a 0.4 dB overall increase in CNEL compared to the 2007 baseline and a 7.5% increase in area and 0.5 dB increase in CNEL exposure in 2016.

Neither the proposed project nor either of the alternatives under consideration at VNY would result in a change in noise exposure that meets or exceeds the 1.5 dB CEQA threshold of significance compared to either the 2016 baseline or 2016 forecast conditions at CNO.

**Table 96.**CNO AEM Analyses: 2016 Project and Alternatives vs. 2007 Baseline

|                   | <b>2016 VNY Proposed Project</b> |             | <b>2016 VNY Alternative 1, No-Project Alternative</b> |             | <b>2016 VNY Alternative 2, Exempted Stage 3 and 4 Aircraft</b> |             |
|-------------------|----------------------------------|-------------|---|-------------|--|-------------|
|                   | <b>Area</b>                      | <b>CNEL</b> | <b>Area</b>   | <b>CNEL</b> | <b>Area</b>  | <b>CNEL</b> |
| 2007 CNO Baseline | 5.9%                             | 0.4 dB      | -1.5%   | -0.1 dB     | 5.9%   | 0.4 dB      |
| 2016 CNO Baseline | 7.5%                             | 0.5 dB      | 0.0%  | 0.0 dB      | 7.5%   | 0.5 dB      |

Note: Percent change in area within 65 dB CNEL and approximate decibel change in CNEL for cases listed above compared to baseline listed on left (i.e., case listed above minus case listed on left; positive entry means case listed above is “noisier”).

Source: HMMH 2008.

### William J. Fox Airfield

Table 97 presents the AEM analysis results for the 2016 proposed project and alternatives compared to the 2007 baseline and 2016 forecast conditions at WJF. As the table shows, the 2016 Alternative 1, No-Project Alternative (i.e., normal growth in activity at WJF, independent of any action at VNY), will result in approximately a 8.5% decrease in the area within the 65 dB CNEL contour and approximately a 0.5 dB overall decrease in CNEL. The proposed project and Alternative 2 (Exempted Stage 3 and 4 Aircraft) would result in approximately a 4.9% decrease in the area within the 65 dB CNEL contour and approximately a 0.3 dB overall decrease in CNEL compared to the 2007 baseline and a 3.9% increase in area and 0.2 dB increase in CNEL exposure in 2016.

Neither the proposed project nor either of the alternatives under consideration at VNY would result in a change in noise exposure that meets or exceeds the 1.5 dB CEQA threshold of significance compared to either the 2016 baseline or 2016 forecast conditions at WJF.

**Table 97.**WJF AEM Analyses: 2016 Project and Alternatives vs. 2007 Baseline

|                   | <b>2016 VNY Proposed Project</b> |             | <b>2016 VNY Alternative 1, No-Project Alternative</b> |             | <b>2016 VNY Alternative 2, Exempted Stage 3 and 4 Aircraft</b> |             |
|-------------------|----------------------------------|-------------|---|-------------|--|-------------|
|                   | <b>Area</b>                      | <b>CNEL</b> | <b>Area</b>   | <b>CNEL</b> | <b>Area</b>  | <b>CNEL</b> |
| 2007 WJF Baseline | -4.9%                            | -0.3 dB     | -8.5%   | -0.5 dB     | -4.9%  | -0.3 dB     |
| 2016 WJF Baseline | 3.9%                             | 0.2 dB      | 0.0%  | 0.0 dB      | 3.9%   | 0.2 dB      |

Note: Percent change in area within 65 dB CNEL and approximate decibel change in CNEL for cases listed above compared to baseline listed on left (i.e., case listed above minus case listed on left; positive entry means case listed above is “noisier”).

Source: HMMH 2008.



## Bob Hope Airport

Table 98 presents AEM analysis results for the 2014 proposed project and alternatives compared to the 2007 baseline and 2014 baseline conditions at BUR. As the table shows, the 2014 Alternative 1, No-Project Alternative (i.e., normal growth in activity at BUR, independent of any action at VNY), will result in approximately a 14.6% increase in the area within the 65 dB CNEL contour and approximately a 0.9 dB overall increase in CNEL. The proposed project and Alternative 2 (Exempted Stage 3 and 4 Aircraft) would result in approximately a 16.3% increase in the area within the 65 dB CNEL contour and approximately a 1.0 dB overall increase in CNEL compared to the 2007 baseline but only a 1.5% increase in area and 0.1 dB increase in CNEL exposure in 2014.

Neither the proposed project nor either of the alternatives under consideration at VNY would result in a change in noise exposure that meets or exceeds the 1.5 dB CEQA threshold of significance compared to either the 2014 baseline or 2014 forecast conditions at BUR.

**Table 98.** BUR AEM Analyses: 2014 Project and Alternatives vs. 2007 Baseline

|                   | 2014 VNY Proposed Project |        | 2014 VNY Alternative 1, No-Project Alternative |        | 2014 VNY Alternative 2, Exempted Stage 3 and 4 Aircraft |        |
|-------------------|---------------------------|--------|--|--------|---|--------|
|                   | Area                      | CNEL   | Area   | CNEL   | Area  | CNEL   |
| 2007 BUR Baseline | 16.3%                     | 1.0 dB | 14.6%  | 0.9 dB | 16.3%   | 1.0 dB |
| 2014 BUR Baseline | 1.5%                      | 0.1 dB | 0.0%   | 0.0 dB | 1.5%  | 0.1 dB |

Note: Percent change in area within 65 dB CNEL and approximate decibel change in CNEL for cases listed above compared to baseline listed on left (i.e., case listed above minus case listed on left; positive entry means case listed above is “noisier”).

Source: HMMH 2008.

The Burbank-Glendale-Pasadena Airport Authority has recently released an “Official Draft Part 161 Application for a Proposed Curfew at Bob Hope Airport.”<sup>20</sup> That application uses a 2015 forecast year. Table 99 presents the results of an AEM analysis that applied the forecast 2014 VNY diversions to the BUR 2015 forecast, both with and without the BUR curfew in place. Since the noise level limit at VNY would be the same in 2015 as in 2014, and since operations in the aircraft types that would be affected by phaseout are expected to decrease slowly over time, even in the absence of the phaseout, the 2014 diversions provide a slightly conservatively high (i.e., “worst-case”) assumption to assess at BUR.

<sup>20</sup> Jacobs Consultancy. 2008. Official Draft FAR Part 161 Application for a Proposed Curfew at Bob Hope Airport. Prepared for Burbank-Glendale-Pasadena Airport Authority, Burbank, CA. March.

**Table 99.** BUR AEM Analyses Utilizing BUR Forecast, with and without Proposed BUR Curfew

|                   | Effect of VNY Proposed Project |        | Effect of VNY Alternative 1, No-Project Alternative |        | Effect of VNY Alternative 2, Exempted Stage 3 and 4 Aircraft |        |
|-------------------|--------------------------------|--------|---|--------|--|--------|
|                   | Area                           | CNEL   | Area  | CNEL   | Area   | CNEL   |
| 2015 BUR Baseline | 0.9%                           | 0.1 dB | 0.0%  | 0.0 dB | 0.9%   | 0.1 dB |
| 2015 BUR Curfew   | 1.5%                           | 0.1 dB | 0.0%  | 0.0 dB | 1.5%   | 0.1 dB |

Note: Percent change in area within 65 dB CNEL and approximate decibel change in CNEL for cases listed above compared to baseline listed on left (i.e., case listed above minus case listed on left; positive entry means case listed above is “noisier”).

Source: HMMH 2008.

Table 99 reveals that neither the proposed project nor either of the alternatives under consideration at VNY would result in a significant change in noise exposure compared to 2015 forecast conditions at BUR, with or without the adoption of a curfew at that airport.

## 10.2 Single-Event Noise Analysis (“Berkeley Jets”)

In a 2001 decision, the California Court of Appeal found that, for purposes of preparing an EIR that complies with CEQA, sole reliance on the CNEL metric is not necessarily sufficient to provide adequate information on potential noise impacts in areas outside 65 dB CNEL.<sup>21</sup> This decision, commonly referred to as “Berkeley Jets,” addressed an increase in nighttime operations associated with a proposed airport development program at Oakland International Airport (OAK).

“The flaw in the EIR’s noise analysis was its failure to provide, in addition to a community noise equivalent level, (a community noise measure) analysis, the most fundamental information about the project’s noise impacts, which specifically included the number of additional nighttime flights that would occur under the project, the frequency of those flights, and their effect on sleep.”

Nighttime activity was the issue of concern in the assessment of the OAK development proposal. Therefore, Berkeley Jets has most often been applied to assess nighttime noise. However, at a more fundamental level, the Berkeley Jets decision addresses the inadequacy of CNEL to fully describe potential noise impacts of individual aircraft “noise events,” regardless of the time of day.

As discussed in the preceding section, it is anticipated that so few operations would be diverted from VNY that they would not cause significant CNEL increases at any of the airports anticipated to accommodate the diversions. However, consistent with

<sup>21</sup> Berkeley Keep Jets Over the Bay Committee v. Board of Port Commissioners, (2001) 91 Cal. App. 4th 1344.

the spirit of the Berkeley Jets decision, this EIR goes beyond CNEL analysis to provide detailed information about the frequency and single-event noise levels of the diverted operations. Moreover, this analysis goes beyond the customary application of the decision to assess the extent to which the diverted activity would increase the frequency of relatively noisy operations during the CNEL day and evening time periods (7 a.m.–7 p.m. and 7 p.m.–10 p.m., respectively) as well at night (10 p.m.–7 a.m.).

Table 100 provides a summary of relevant statistics related to the number and frequency of operations that the proposed project and Alternative 2 (Exempted Stage 3 and 4 Aircraft Alternative) would divert to other airports. Since Alternative 1 (No-Project Alternative) would not involve any new restriction at VNY, it would not divert any operations to other airports.

**Table 100.** Statistics Related to Frequency of Additional Operations that the Proposed Project and Alternative 2 (Exempted Stage 3 and 4 Aircraft Alternative) Would Divert to Other Airports

| Airport | Statistics Related to Diverted Operations by CNEL Time Period |                                     |                                   |   |   |                                   |   |                                       |                                   |
|---------|---|-------------------------------------|-----------------------------------|---|---|-----------------------------------|---|---------------------------------------|-----------------------------------|
|         | Day (7 a.m.–7 p.m.)   |                                     |                                   | Evening (7 p.m.–10 p.m.)                      |   |                                   | Night (10 p.m.–7 a.m.)                      |                                       |                                   |
|         | Approx. No. of Diverted Day Ops (per day)                     | Approx. Percent Increase in Day Ops | Approx. Days between Diverted Ops | Approx. No. of Diverted Evening Ops (per day) | Approx. Percent Increase in Evening Ops | Approx. Days between Diverted Ops | Approx. No. of Diverted Night Ops (per day) | Approx. Percent Increase in Night Ops | Approx. Days between Diverted Ops |
| BUR     | 0.4313  | 0.142%                              | 2                                 | 0.0618  | 0.096%                                  | 16                                | 0.0331                                      | 0.088%                                | 30                                |
| CMA     | 0.2572  | 0.062%                              | 4                                 | 0.0371  | 0.135%                                  | 27                                | 0.0200                                      | 0.174%                                | 50                                |
| CNO     | 0.2514  | 0.055%                              | 4                                 | 0.0109  | 0.034%                                  | 92                                | -0.0109                                     | 0.181%                                | 92                                |
| LAX*    | 0.1155  | 0.009%                              | 9                                 | 0.0466  | 0.015%                                  | 21                                | 0.0078                                      | 0.002%                                | 128                               |
| WJF     | 0.7104  | 0.435%                              | 1                                 | 0.0000  | 0.000%                                  | --                                | 0.0000                                      | 0.000%                                | --                                |

\* No operations would divert to LAX under Alternative 2 (Exempted Stage 3 and 4 Aircraft Alternative).

Source: HMMH 2008.

As the preceding table shows, the absolute number of diverted operations to other airports and the relative increase in operations at those airports are extremely small; in every case, the increase is less than one-half of a percent. Moreover, the diversions would be so small in number that, for the daytime CNEL time period, they would occur no more frequently than once per day, on average. At night, the time period of particular interest in the Berkeley Jets decision, the diversions would occur at most once every 30 days.

This straightforward summary clearly demonstrates that the number and frequency of diverted operations would be so small that they would represent an increase in activity that is far less than normal day-to-day variation in activity at the airports.

One further step was undertaken to supplement this analysis to take into consideration the fact that the diverted operations would be in relatively noisy aircraft. To take this factor into account, the number and frequency of potential diversions were categorized according to their relative “noisiness” and compared to the underlying frequency of operations at the airports in the same categories. The fundamental purpose of this supplemental analysis was to determine whether the diversions would result in a dramatic shift in the overall distribution of operations by noisiness. The result of this additional analysis was consistent with the preceding AEM and overall statistical reviews ( i.e., the diversions would not result in a significant change in activity at the airports). Because of the length of this supplemental review, it is presented in Appendix B.5.8.

## 11.0 VNY Noise Management Program

LAWA considers noise compatibility to be a high-priority, continuing process; over many decades of effort, it has established an extensive noise compatibility program at VNY. The VNY Noise Management Program (NMP)—and LAWA’s continuing commitment to its implementation and improvement—is recognized for its innovation and benefits across the United States and internationally.

LAWA is proposing the phaseout of noisier aircraft at VNY to complement this existing program. The existing airport operations, noise exposure, and surrounding land use compatibility data collected and analyzed in this EIR reflect the past effects and current status of the program.

Major NMP components include:

- aircraft noise abatement measures to reduce noise exposure or shift it away from sensitive land uses ,
- remedial land use measures to address existing incompatible land uses that cannot be corrected through noise abatement, and
- preventive land use measures to deter introduction of new incompatible land uses.

The agency devotes significant staff and financial resources to program administration, publicity, implementation, monitoring, enforcement, review, and refinement. These program elements are implemented by numerous LAWA staff, including staff in the Noise Management Division (NMD), based at LAWA headquarters, and in the VNY Noise Management Office (NMO), assisted by administrative, operational, public affairs, environmental, and other staff at VNY and LAWA headquarters.

The NMD and VNY NMO operate an extensive noise and operations monitoring system at VNY, LAX, and L.A./Ontario International Airport (ONT). The system supports program monitoring and enforcement, pilot training, reporting, complaint analysis, and other program implementation functions. LAWA is in the process of upgrading the system to ensure it provides state-of-the-art capabilities.

Appendix Sections B.5.2 and B.5.3 summarize the purpose, details, and implementation of major noise abatement and compatible land use elements of the NMP, including:

## 11.1 Major Noise Abatement Elements

Major noise abatement elements of the VNY noise management program include:

- Quiet Jet Departure Program,
- No Early Turn Program,
- Departure Techniques,
- Run-Up Restriction,
- Helicopter and Route Deviation Program,
- Partial Curfew,
- Non-Addition Rule,

## 11.2 Major Compatible Land Use Measures

LAWA, City of Los Angeles, and California programs and regulations include the following major compatible land use measures at VNY:

- Sound Insulation,
- Avigation and Noise Easements,
- Compatible Building Code, and
- Noise Disclosure.

## 12.0 Significant Unavoidable Impacts

As demonstrated by the analysis provided in this section and the appendices to this EIR, none of the alternatives under consideration at VNY would produce a significant increase in noise impacts. Therefore, the proposed project would not result in any significant impacts, and no mitigation measures are required.



# B.1

## NOISE TERMINOLOGY

### B.1.1 Introduction

To assist reviewers in interpreting the complex noise metrics used in evaluating airport noise, we present below an introduction to relevant fundamentals of acoustics and noise terminology.

Eight acoustical descriptors of noise are introduced here, roughly in increasing degree of complexity:

- Decibel, dB
- A-Weighted Decibel, dBA
- Maximum A-Weighted Sound Level, L<sub>max</sub>
- Sound Exposure Level, SEL
- Single-Event Noise Exposure Level, SENEL
- Equivalent A-Weighted Sound Level, L<sub>eq</sub>
- Day-Night Average Sound Level, DNL
- Community Noise Equivalent Level, CNEL

These noise metrics form the basis for the majority of noise analysis conducted at airports in California and the United States as a whole.

### B.1.2 Decibel, dB

All sounds come from a sound source—a musical instrument, a voice speaking, an airplane passing overhead. It takes energy to produce sound. The sound energy produced by any sound source is transmitted through the air in sound waves—tiny, quick oscillations of pressure just above and just below atmospheric pressure. These oscillations, or sound pressures, impinge on the ear, creating the sound we hear.

Our ears are sensitive to a wide range of sound pressures. Although the loudest sounds that we hear without pain have about one million times more energy than the quietest sounds we hear, our ears are incapable of detecting small differences in these

pressures. Thus, to better match how we hear this sound energy, we compress the total range of sound pressures to a more meaningful range by introducing the concept of sound pressure level.

Sound pressure levels are measured in decibels (or dB). Decibels are logarithmic quantities reflecting the ratio of the two pressures, the numerator being the pressure of the sound source of interest, and the denominator being a reference pressure (the quietest sound we can hear).

The logarithmic conversion of sound pressure to sound pressure level (SPL) means that the quietest sound that we can hear (the reference pressure) has a sound pressure level of about 0 dB, while the loudest sounds that we hear without pain have sound pressure levels of about 120 dB. Most sounds in our day-to-day environment have sound pressure levels on the order of 30 to 100 dB.

Because decibels are logarithmic quantities, combining decibels is unlike common arithmetic. For example, if two sound sources each produce 100 dB operating individually, then operated together, they produce 103 dB—not the 200 decibels we might expect. Four equal sources operating simultaneously produce another 3 dB of noise, resulting in a total sound pressure level of 106 dB. For every doubling of the number of equal sources, the sound pressure level goes up another 3 dB. A tenfold increase in the number of sources makes the sound pressure level go up 10 dB. A hundredfold increase makes the level go up 20 dB, and it takes a thousand equal sources to increase the level 30 dB.

If one noise source is much louder than another, the two sources operating together will produce virtually the same sound pressure level (and sound to our ears) that the louder source would produce alone. For example, a 100 dB source plus an 80 dB source produce approximately 100 dB of noise when operating together (actually, 100.04 dB). The louder source "masks" the quieter one. But if the quieter source gets louder, it will have an increasing effect on the total sound pressure level such that, when the two sources are equal, as described above, they produce a level 3 dB above the sound of either one by itself.

Conveniently, people also hear in a logarithmic fashion, which affects the manner in which they interpret, or perceive. Two useful rules of thumb to remember when comparing sound levels are as follows: (1) A 6 to 10 dB increase in the sound pressure level is sometimes described to be about a doubling of loudness, and (2) changes in sound pressure level of less than about 3 dB are not readily detectable outside of a laboratory environment.

### **B.1.3 A-Weighted Decibel, dBA**

An important characteristic of sound is its frequency, or "pitch." This is the per-second rate of repetition of the sound pressure oscillations as they reach our ear, expressed in units known as Hertz (Hz), formerly called cycles per second.




When analyzing the total noise of any source, acousticians often break the noise into frequency components (or bands) to determine how much is low-frequency noise, how much is middle-frequency noise, and how much is high-frequency noise. This breakdown is important for two reasons:

- Our ear is better equipped to hear mid-range and high frequencies and is less sensitive to lower frequencies. Thus, we find mid- and high-frequency noise more annoying.
- Engineering solutions to a noise problem are different for different frequency ranges. Low-frequency noise is generally harder to control.

The normal frequency range of hearing for most people extends from a low of about 20 Hz to a high of about 10,000 to 15,000 Hz. People respond to sound most readily when the predominant frequency is in the range of normal conversation, typically around 1,000 to 2,000 Hz. The acoustical community has defined several “filters,” which approximate this sensitivity of our ear and, thus, help us to judge the relative loudness of various sounds made up of many different frequencies.

The "A" filter (or “A weighting”) does this best for most environmental noise sources. A-weighted sound levels are measured in decibels, just like unweighted. To avoid ambiguity, A-weighted sound levels should be identified as such (e.g., "an A-weighted sound level of 85 dB") or in an abbreviated form (e.g., "a sound level of 85 dBA") where the "A" indicates that the sound level has been A-weighted.

Figure B.1.1 depicts the A-weighting adjustments to sound in frequencies from approximately 20 Hz to 10,000 Hz.

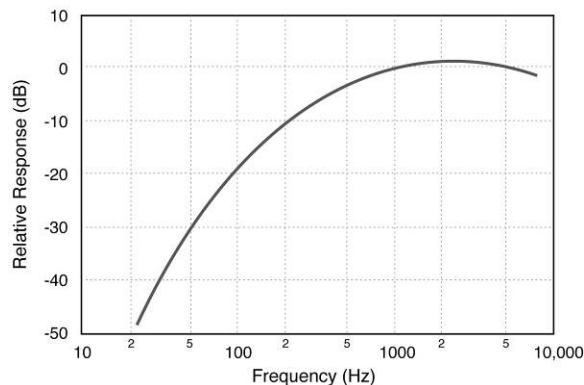

**Figure B.1.1 A-Weighting Frequency Response**


Source: HMMH

The A-weighted filter significantly de-emphasizes those parts of the total noise that occur at lower frequencies (those below about 500 Hz) and also at very high frequencies, above 10,000 Hz, which we do not hear as well. The filter has very little effect, or is nearly "flat," in the middle range of frequencies, between 500 and 10,000 Hz, which we hear quite easily. Because this filter generally matches our

ears' sensitivity, sounds having higher A-weighted sound levels are usually judged to be louder than those with lower A-weighted sound levels, a relationship that otherwise might not be true. It is for this reason that acousticians normally use A-weighted sound levels to evaluate environmental noise sources.

Government agencies in the United States (and most governments worldwide)<sup>1</sup> recommend or require the use of A-weighted sound levels for measuring, modeling, describing, and assessing aircraft sound levels (and sound levels from most other transportation and environmental sources).

Figure B.1.2 depicts representative A-weighted sound levels for a variety of common environmental sounds.

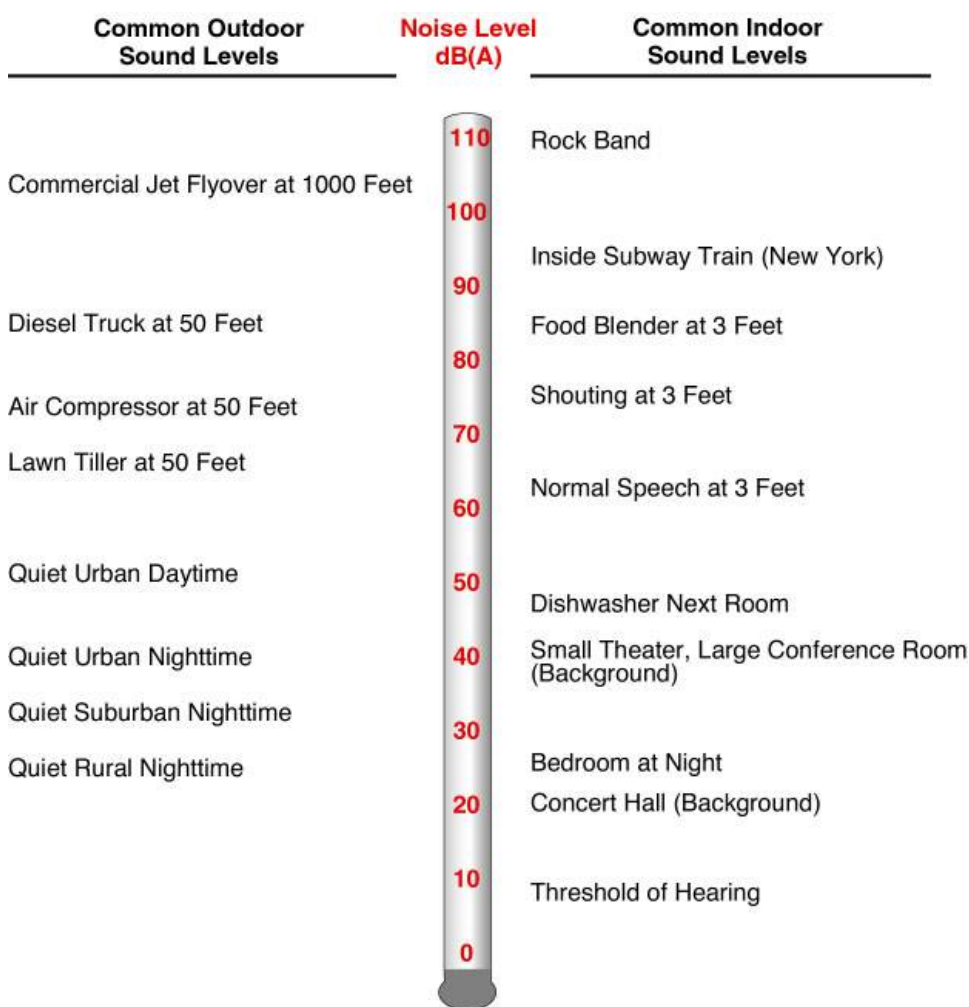

<sup>1</sup> Of relevance to this project, these agencies include the California Department of Transportation, Division of Aeronautics; California Environmental Protection Agency; U.S. Environmental Protection Agency; and Federal Aviation Administration.

### Figure B.1.2 Representative A-Weighted Sound Levels

Source: HMMH

## B.1.4 Maximum A-Weighted Sound Level, $L_{max}$

An additional dimension to environmental noise is that A-weighted levels vary with time. For example, the sound level increases as an aircraft approaches, then falls and blends into the background as the aircraft recedes into the distance (though even the background varies as birds chirp, the wind blows, or a vehicle passes by). This is illustrated in Figure B.1.3.

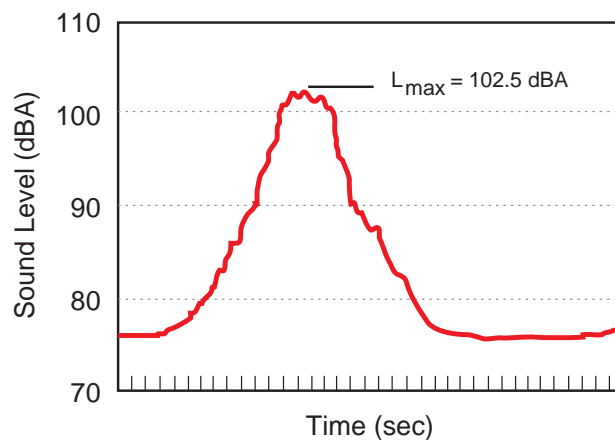


Figure B.1.3 Variation in the A-Weighted Sound Level over Time

Source: HMMH

Because of this variation, it is often convenient to describe a particular noise "event" by its maximum sound level, abbreviated as  $L_{max}$  (or  $L_{Amax}$ , if the decibel abbreviation dB is used). In Figure B.1.3 the  $L_{max}$  is approximately 102.5 dBA.

While the maximum level is easy to understand, it suffers from a serious drawback when used to describe the relative "noisiness" of an event such as an aircraft flyover; i.e., it describes only one dimension of the event and provides no information on the event's overall, or *cumulative*, noise exposure. In fact, two events with identical maximum levels may produce very different total exposures. One may be of very short duration, while the other may continue for an extended period and be judged much more annoying. The next sections introduce two closely related measures that account for this concept of a noise "dose," or the *cumulative* exposure associated with an individual "noise event" such as an aircraft flyover.

## B.1.5 Sound Exposure Level, SEL

The most commonly used measure of cumulative noise exposure for an individual noise event, such as an aircraft flyover, is the Sound Exposure Level, or SEL. SEL is a summation of the A-weighted sound energy over the *entire duration* of a noise event. SEL expresses the accumulated energy in terms of the 1-second-long steady-state sound level that would contain the same amount of energy as the actual time-varying level. In simple terms, SEL “compresses” the energy into a single second. Figure B.1.4 depicts this compression:

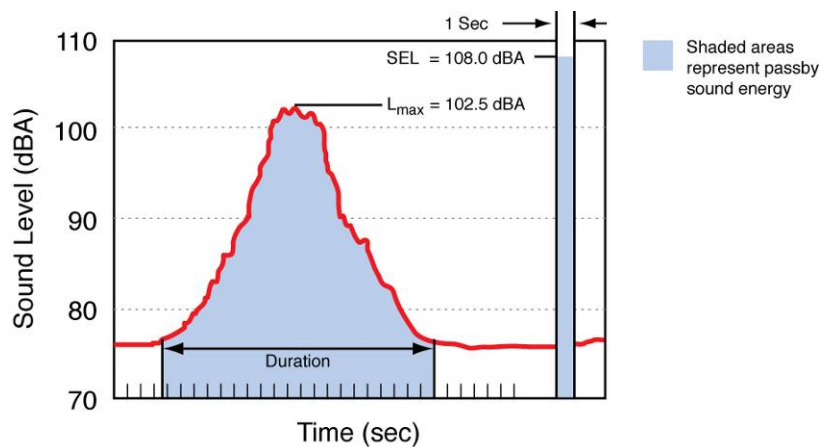


Figure B.1.4 Graphical Depiction of Sound Exposure Level

Source: HMMH

Note that because SEL is normalized to 1 second, it almost always will be a higher value than the event’s  $L_{max}$ . In fact, for most aircraft flyovers, SEL is on the order of 5 to 12 dB higher than  $L_{max}$ .

## B.1.6 Single-Event Noise Exposure Level, SENEL

California regulations require use of a measure called the Single-Event Noise Exposure Level, or SENEL, to describe the cumulative noise exposure for an individual noise event, such as an aircraft flyover.<sup>2</sup> SENEL is a very slight variation on SEL. Just like SEL, it is the 1-second-long steady-state level that contains the same amount of energy as the actual time-varying level. However, unlike SEL, it is calculated only over the period when the level exceeds a selected threshold.

<sup>2</sup> Title 21, California Code of Regulations, California Airport Noise Standards, Subchapter 6, Noise Standards, Article 1, General, Section 5001, Definitions, p. 220.

Figure B.1.5 depicts the SENEL concept for the noise event used in the Figure B.1.4 SEL example but with an 80 dB SENEL threshold value. Note that even though the SENEL is calculated over a shorter duration, both metrics have the value of 108 dB. This situation is typical for most noise events; for all but very unusual noise events, as long as the threshold is at least 10 dB below the maximum level, the SEL and SENEL values will be within 0.1 dB.

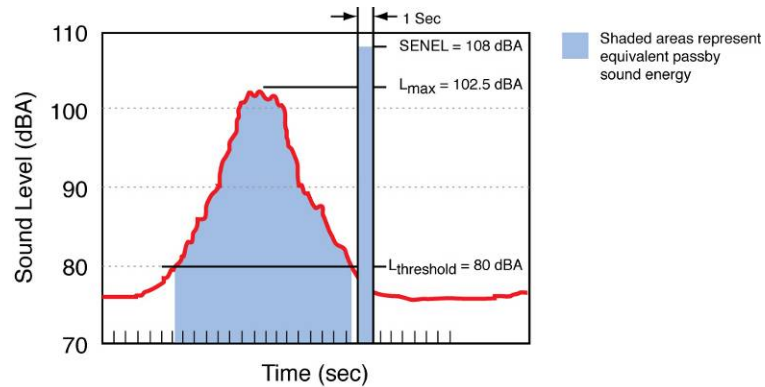


Figure B.1.5 Graphical Depiction of Single-Event Noise Exposure Level

Source: HMMH

Because SENEL is a cumulative measure, a higher SENEL can result from either a louder or longer event or some combination. Figure B.1.6 provides a representative example. The longer duration noise event on the right results in a higher SENEL than the event on the left, even though it has a lower L<sub>max</sub>.

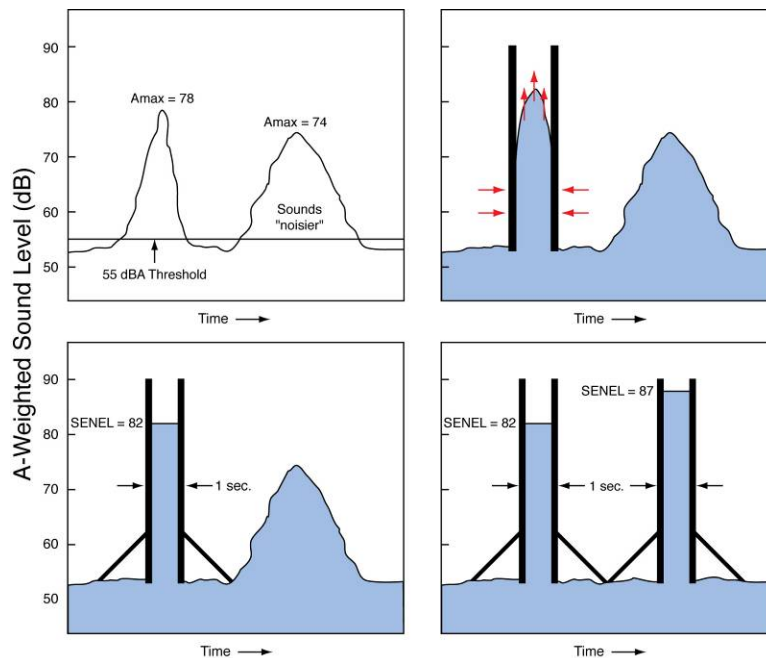


Figure B.1.6 Graphical Depiction of Single-Event Noise Exposure Level for Two Noise Events with Different Maximums and Durations

Source: HMMH

SEL and SENEL provide bases for comparing noise events that generally match our impression of their overall “noisiness,” including the effects of both duration and level; the higher the SEL or SENEL, the more annoying a noise event is likely to be.

## B.1.7 Equivalent A-Weighted Sound Level, Leq

The Equivalent Sound Level, abbreviated Leq, is a measure of the exposure resulting from the accumulation of sound levels over a particular period of interest (e.g., an hour, an 8-hour school day, nighttime, or a full 24-hour day). The applicable period should always be identified or clearly understood when discussing the metric.

Leq may be thought of as a constant sound level over the period of interest that contains as much sound energy as the actual varying level. It is a way of assigning a single number to a time-varying sound level. This is illustrated in Figure B.1.7.

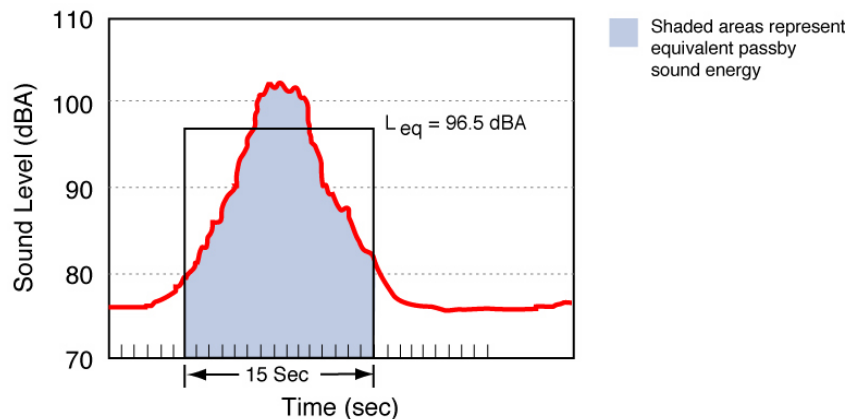


Figure B.1.7 Example of a 1-Minute Equivalent Sound Level

Source: HMMH

In airport noise applications,  $L_{eq}$  is often presented for consecutive 1-hour periods to illustrate how the hourly noise dose rises and falls throughout a 24-hour period as well as how certain hours are significantly affected by a few loud aircraft.

## B.1.8 Day-Night Average Sound Level, DNL or Ldn

The previous sections address noise measures that account for short-term fluctuations in A-weighted levels as sound sources come and go, affecting the overall noise environment. The Day-Night Average Sound Level (DNL or Ldn) represents a 24-hour A-weighted noise dose. DNL is essentially equal to the 24-hour A-weighted  $L_{eq}$ , with one important adjustment: Noise occurring at night—from 10 p.m. through 7 a.m.—is “factored up.” The factoring up can be made in one of two ways:

- Weighting, by counting each nighttime noise contribution 10 times; e.g., if DNL is calculated by summing the SEL of aircraft operations over a 24-hour period, each nighttime operation is represented by 10 identical daytime operations.
- Penalizing, by adding 10 dB to all nighttime noise contributions; e.g., if DNL is calculated from the SEL of aircraft operations occurring over a 24-hour period, 10 dB are added to the SEL values for nighttime operations.

The 10 dB adjustment accounts for our greater sensitivity to nighttime noise and the fact lower ambient levels at night tend to make noise events, such as aircraft flyovers, more intrusive.

Figure B.1.8 depicts this adjustment graphically.

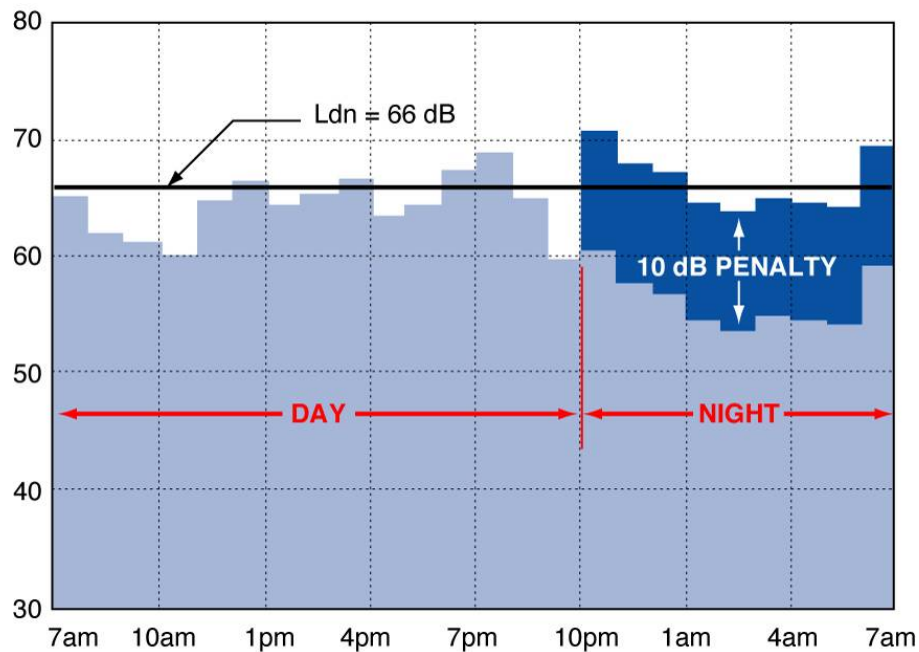


Figure B.1.8 Example of a Day-Night Average Sound Level Calculation

Source: HMMH

Most aircraft noise studies utilize computer-generated estimates of DNL, determined by adding up the energy from the SELs from each event, with the 10 dB penalty/weighting applied to night operations. Computed values of DNL are often depicted as noise contours, reflecting lines of equal exposure around an airport (much as topographic maps indicate contours of equal elevation). The contours usually reflect long-term (annual average) operating conditions, taking into account the average flights per day, how often each runway is used throughout the year, and where over the surrounding communities the aircraft normally fly. Alternative time frames may also be helpful in understanding shorter term aspects of a noise environment.

Why is DNL used to describe noise around airports? The U.S. Environmental Protection Agency identified DNL as the most appropriate measure of evaluating airport noise based on the following considerations:

- It is applicable to the evaluation of pervasive long-term noise in various defined areas and under various conditions over long periods of time.
- It correlates well with known effects of noise on individuals and the public.
- It is simple, practical, and accurate. In principal, it is useful for planning as well as for enforcement or monitoring purposes.
- The required measurement equipment, with standard characteristics, is commercially available.
- It is closely related to existing methods currently in use.



Representative values of DNL in our environment range from a low of 40 to 45 dB in extremely quiet, isolated locations to highs of 80 or 85 dB immediately adjacent to a busy truck route. DNL would typically be in the range of 50 to 55 dB in a quiet residential community and 60 to 65 dB in an urban residential neighborhood. Figure B.1.9 presents representative outdoor DNL values measured at various locations in the United States.

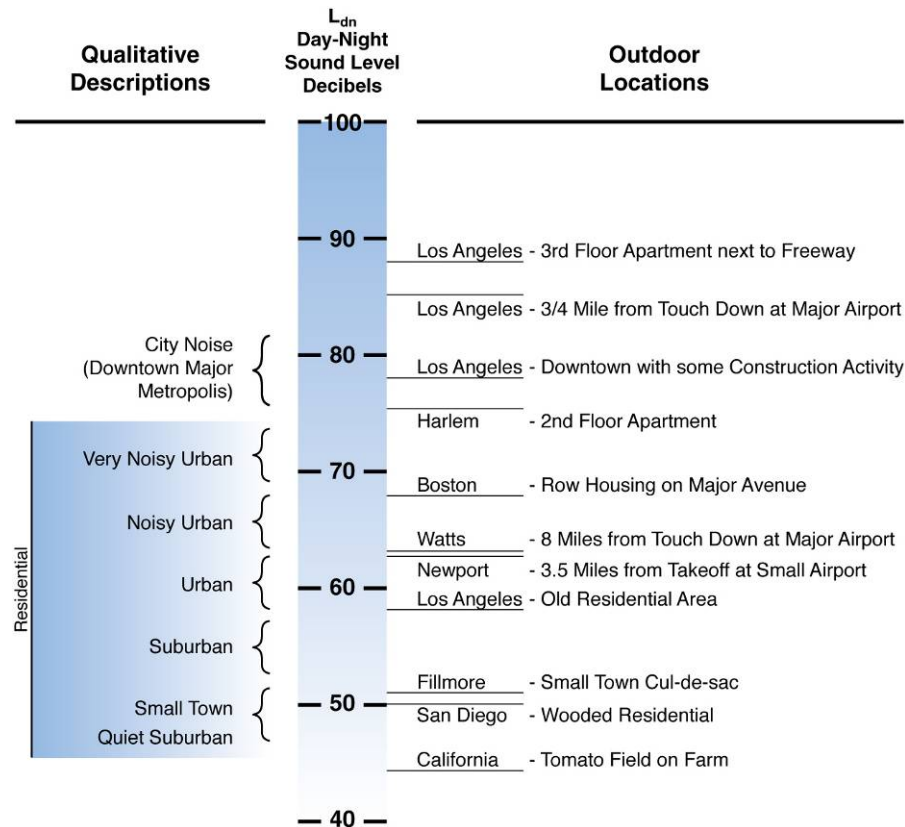


Figure B.1.9 Examples of Measured Day-Night Average Sound Levels

Source: USEPA 1974, p.14.

Most public agencies dealing with noise exposure, including the Federal Aviation Administration (FAA), Department of Defense, and Department of Housing and Urban Development (HUD), have adopted DNL in their guidelines and regulations. As noted in the following section, the state of California requires the use of a variant of DNL for use in airport noise assessments.

When preparing environmental noise analyses, the FAA considers a change of 1.5 dB within the DNL 65 dB contour to be “significant.” If a change of 1.5 dB is observed, analysts should look between the 60 and 65 dB contours to see if there are areas of change of 3 dB or more; this is also considered a “significant impact.”

Section B.1.2 provided rules of thumb for interpreting moment-to-moment changes in sound level. The following guidelines may be helpful in interpreting changes in cumulative exposure:

| DNL Change | Community Response                       | Mitigation                      |
|------------|--|---------------------------------|
| 0–2 dB     | May be noticeable                        | Abatement may be beneficial     |
| 2–5 dB     | Generally noticeable                     | Abatement should be beneficial  |
| Over 5 dB  | A change in community reaction is likely | Abatement definitely beneficial |

### B.1.9 Community Noise Equivalent Level, CNEL

The California regulations referenced in the discussion of SENEL (Section B.1.6) require use of a slight variation of DNL to express cumulative A-weighted noise exposure over any number of days—the Community Noise Equivalent Level (CNEL).<sup>3</sup> CNEL differs from DNL in one way: It adds an “evening” (7 p.m.–10 p.m.) period during which noise events are weighted by a factor of three, which is mathematically equivalent to adding approximately a 4.77 dB penalty. Figure B.1.10 depicts this adjustment graphically.

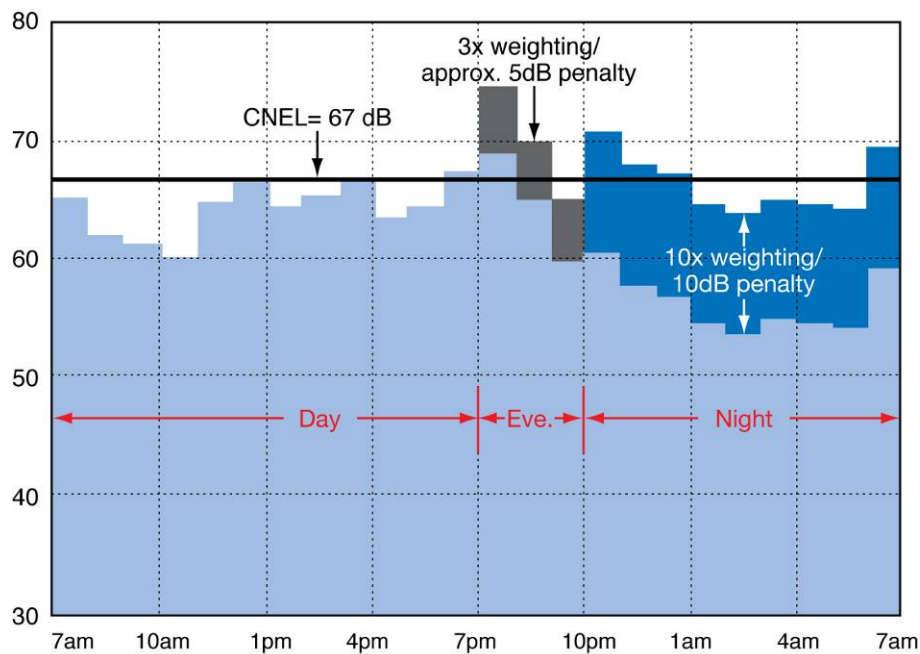


Figure B.1.10 Example of a Community Noise Equivalent Level Calculation

Source: HMMH

<sup>3</sup> Title 21, California Code of Regulations, California Airport Noise Standards, Subchapter 6, Noise Standards, Article 1. General, Section 5001, Definitions, p. 220.

Unless noise exposure is calculated for an unlikely situation where there is no noise-producing activity during the evening period (an unlikely situation), CNEL will always be greater than DNL. However, from a practical standpoint this difference is rarely more than 1 decibel, as it was in hypothetical data used in Figures B.1.8 and B.1.10. For this reason, the DNL values shown in Figure B.1.9 are reasonably representative of CNEL values for the same environments, as are guidelines for interpreting changes in exposure discussed in Section B.1.8. FAA applies the same criteria for thresholds of significant change in CNEL that they have set for DNL.



# B.2

## AIRCRAFT NOISE EFFECTS

### B.2.1 Introduction

The primary effects of noise on people are behavioral ( i.e., those that produce annoyance or that are associated with activity interference, such as communication, rest or and sleep). Sections B.2.2–B.2.4 address those categories. Potential health effects fall into two areas: auditory (i.e., hearing loss) and non-auditory (e.g., cardiovascular disease and hypertension). As discussed in Sections B.2.5 and B.2.6, there is no conclusive scientific evidence that exposure to aircraft noise results in either auditory or non-auditory health effects.

### B.2.2 Speech Interference

One of the primary effects of aircraft noise is its tendency to drown out or "mask" speech, making it difficult or impossible to carry on a normal conversation without interruption. Satisfactory conversation does not always require hearing every word; 95% intelligibility is acceptable for many conversations. This is because a few unheard words can be inferred when they occur in a familiar context. However, in relaxed conversation, we have higher expectations of hearing speech and require 100% intelligibility.

Figure B.2.1 presents typical distances between talker and listener for satisfactory outdoor conversations in the presence of different steady A-weighted background noise levels for raised, normal, and relaxed vocal effort. As the background level increases, the talker must raise his/her voice or the individuals must get closer together to continue their conversation. Any combination of talker-listener distances and background noise that falls below the bottom line in the figure represents an ideal environment for outdoor speech communication and is considered necessary for acceptable indoor conversation as well.

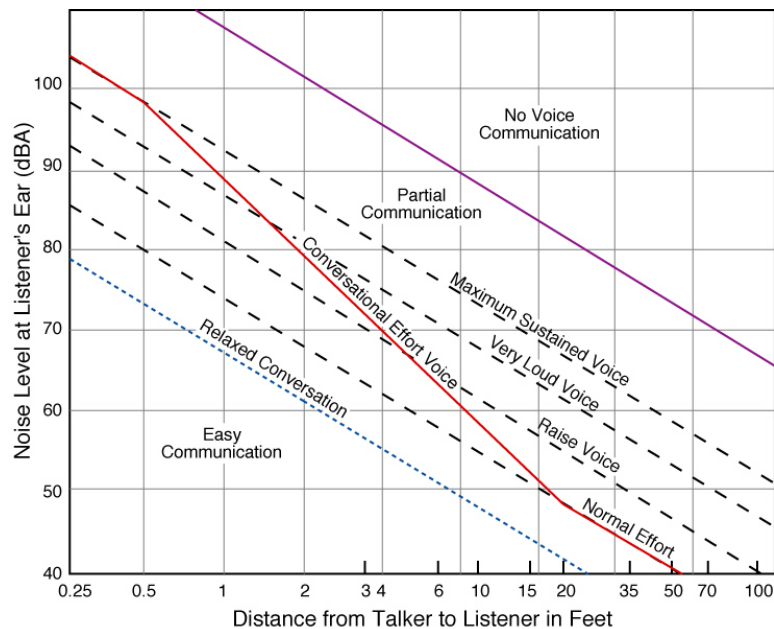


Figure B.2.1 Distances at Which Ordinary Speech Can Be Understood

Source: HMMH

One implication of the relationships in the figure is that for typical communication distances of 3 or 4 feet (1 to 1.5 meters), acceptable outdoor conversations where 95% intelligibility is acceptable can be carried on in a normal voice as long as the background noise outdoors is less than about 65 dBA. If 100% intelligibility is desired, the interior background level must be less than about 45 dBA. If the noise exceeds either of these levels, as might occur when an aircraft passes overhead, intelligibility is lost unless vocal effort is increased or communication distance decreased.

## B.2.3 Sleep Interference

The effect of aviation noise on sleep is a long-recognized concern of those interested in addressing the impacts of noise on people. Sleep disturbance has been studied in laboratories and in “field” studies in which subjects were exposed to noise in their own homes using real or simulated noise.

A comparison of laboratory and field results led to the conclusion that laboratory studies result in higher awakening (Pearsons 1989). As a result, in 1997, the Federal Interagency Committee on Aircraft Noise (FICAN) recommended a new dose-response curve for predicting awakening based on the upper limit of *field* studies (FICAN 1997). The field study results are denoted by circles in Figure B.2.2. The figure also depicts a curve prepared by the Federal Interagency Committee on Noise (FICON), which preceded FICAN and represented a “best fit” to data that included

both laboratory and field studies (FICON 1992); the curve is above the FICAN data, reflecting the effect of laboratory results.

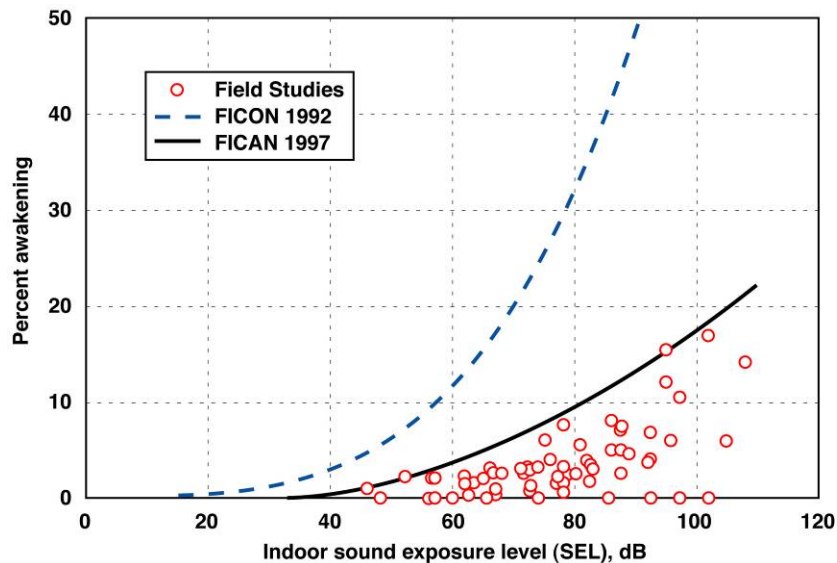


Figure B.2.2 Recommended FICAN Awakening Dose-Response Relationship

Source: HMMH

The solid line in the figure (the “FICAN curve”) represents the *upper limit* of the field study data, which should be interpreted as predicting the “maximum percent of the exposed population expected to be behaviorally awakened,” or the “maximum % awakened.” FICAN notes that the dose-response relationship represented by the curve uses behavioral awakening as the indicator of sleep disturbance (i.e., it does not reflect changes in sleep state). FICAN cautions that the curve should be applied only to adults in long-term residential settings.

## B.2.4 Community Annoyance

Social survey data have long made it clear that individual reactions to noise vary widely for a given noise level. Nevertheless, as a group, people's aggregate response to factors such as speech and sleep interference and desire for an acceptable environment is predictable and relates well to measures of cumulative noise exposure such as DNL. A wide variety of responses have been investigated in social survey research. The concept of “percent highly annoyed” in sample populations seems to provide the most consistent response of a community to a particular noise source.

The most widely recognized relationship between noise and the percentage of people highly annoyed by it, regardless of the noise source, was developed by Schultz in the late 1970s. Schultz based his analysis on data from 18 surveys conducted worldwide; the curve indicates that at levels as low as DNL 55, approximately 5% of the people

will still be highly annoyed, with the percentage increasing more rapidly as exposure increases above DNL 65.

FICON (1992) reconfirmed Schultz' relationship, taking into account more recent survey results provided by the U.S. Air Force (USAF) Armstrong Laboratories.

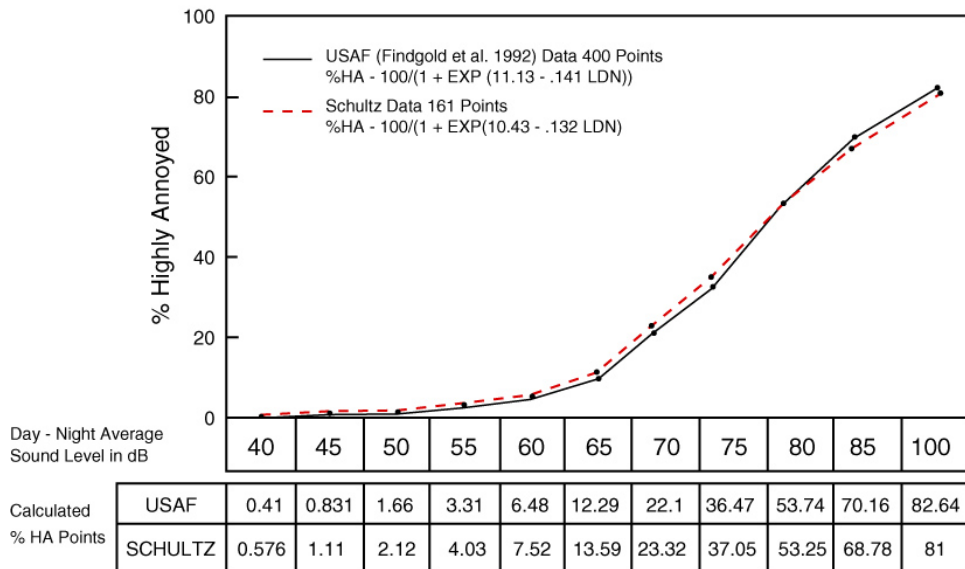


Figure B.2.3 Comparison of Schultz Data (1978) and USAF Data (1992) on Annoyance

Source: FICON 1992, page 3-6.

## B.2.5 Noise-Induced Hearing Loss

Hearing loss is measured as "threshold shift." Threshold refers to the quietest sound a person can hear. When a threshold shift occurs, the sound must be louder before it can be heard (i.e., a person's hearing is not as sensitive as it was before the threshold shift). The natural decrease of hearing sensitivity with age is called presbycusis. For hundreds of years it has been known that excessive exposure to loud noises can lead to noise-induced temporary threshold shifts, which in time can result in permanent hearing impairment, causing individuals to experience difficulty in understanding speech. For example, with a threshold shift of 25 dB, a person could correctly understand only about 90% of the sentences spoken in a conversational level at a 3-foot (1-meter) distance in a quiet room.

A temporary threshold shift (TTS) usually precedes a noise-induced permanent threshold shift (NIPTS); i.e., after exposure to high noise levels for a short time or lower noise levels for a much longer time, a person's threshold of audibility is temporarily shifted to higher levels. After continuous noise exposure on an 8-hour shift, such TTS can amount to more than 20 dB. However, as its name indicates, it is only temporary, and the ear recovers fully after several hours. If such exposures are



repeated daily, or if the ear is not allowed to recover from this "auditory fatigue" over a quiet night before it is exposed to noise again, TTS can lead to a permanent threshold shift (PTS).

Research over the last 40 years on industrial and military populations gives a reasonable understanding of the development of noise-induced hearing loss, including the amount of hearing loss caused by combinations of noise level, frequency spectrum, and duration of exposure. Detailed international criteria have been developed that identify maximum noise exposures that do not produce noise-induced hearing loss in any segment of the population exposed. The U.S. Occupational Safety and Health Administration (OSHA) identifies the maximum permissible A-weighted exposure to be 90 dB Leq for 8 hours.

*It is extremely unlikely that aircraft noise around airports could ever produce hearing loss.* For example, it would take more than 9,000 over flights per day with an average sound exposure level of 90 dB to produce an 8-hour Leq of 85 dB on the ground. If this occurred 5 days a week for 40 years, and if people were exposed to this outdoors without any attenuation from buildings, the resultant noise exposure would start to produce a NIPTS of less than 10 dB in the most sensitive 10% of the population.

Studies in many countries have demonstrated that the possibility for permanent hearing loss in communities due to aircraft noise exposure is remote, even under the most intense commercial take-off and landing patterns. For example, an FAA-funded study compared the hearing of the population near Los Angeles International Airport with the hearing of the population in a quiet area without aircraft noise.<sup>4</sup> There was no significant difference between the hearing levels of the two populations and no correlation of the hearing level with the length of time people lived in the airport neighborhood. A similar, extensive, more recent study in the vicinity of London's Heathrow Airport came to the same conclusions.

## B.2.6 Non-Auditory Health Effects

In spite of considerable worldwide research, there is little solid evidence supporting a claim that noise affects human physical and mental health in the workplace or in communities. Most authoritative reviews, such as the World Health Organization (WHO) Environmental Health Criteria Document on noise, agree that "research on this subject has not yielded any positive evidence, so far, that disease is caused or aggravated by noise exposure [that is] insufficient to cause hearing impairment" (WHO 1980).

For practical noise control considerations, the present status of our knowledge means that the criteria for evaluating a noise impact, with respect to its direct and indirect

---

<sup>4</sup> Parnell, Nagel, and Cohen. 1972. *Evaluation of Hearing Levels of Residents Living near a Major Airport*. FAA-RD-72-72. U.S. Department of Transportation, Federal Aviation Administration. Washington, DC.

effects on health, are the same criteria as those applied to prevent any hearing impairment. In other words, by using criteria that prevent noise-induced hearing loss, minimize speech and sleep disruption, and minimize community reactions and annoyance, any effects on health will also be prevented.

# B.3

## NOISE/LAND USE COMPATIBILITY

### B.3.1 Introduction

Given the relationships between noise and the collective response of people to their environment, the cumulative exposure metrics DNL and CNEL have become accepted as standards for evaluating community noise exposure. In addition, they aid decision making regarding the compatibility of alternative land uses.

In their application to airport noise, in particular, DNL and CNEL projections have two principal functions:

- to provide a quantitative basis for assessing land use compatibility with aircraft noise exposure, and
- to provide a means for determining the significance of changes in noise exposure that might result from changes in airport layout, operations, or activity levels.

Both of these functions require the application of objective criteria. Government agencies dealing with environmental noise have devoted significant attention to this issue and, thus, have developed noise/land use compatibility guidelines to help federal, state, and local officials with this evaluation process.

While the federal government, through the FAA, has preempted control of aircraft noise at the source (i.e., certification of aircraft for operation in the United States), the federal government defers to local land use jurisdictions for determination of the level of noise exposure that is acceptable for given land uses. Despite that deference, most local land use control jurisdictions and airport proprietors, including California, Los Angeles, and LAWA, base aircraft noise/land use compatibility decisions on federal guidelines set forth in Federal Aviation Regulation (FAR) Part 150.<sup>5</sup>

---

<sup>5</sup> 14 C.F.R. Part 150, Airport Noise Compatibility Planning.

The following sections summarize the federal, state, city, and LAWA guidelines and regulations, in order.

## **B.3.2 FAA Guidelines**

Part 150 defines a two-step process for airport proprietors to follow in first identifying land uses that are incompatible with aircraft noise and then addressing through noise reduction (“abatement”) or noise mitigation. While the program is voluntary, there is a significant incentive for airport proprietors to participate, since federal funding is available to assist proprietors in implementing FAA-approved abatement or mitigation measures. In addition, the FAA is more likely to assist with implementation of airport operational noise abatement measures that involve FAA air traffic control actions if they are an FAA-approved element of a Part 150 “noise compatibility program.”

Part 150 sets forth FAA-recommended guidelines for noise/land use compatibility, based on DNL. The guidelines are designed to protect public health and welfare but also take into account the feasibility of controlling noise. For purposes of application of Part 150 and other federal environmental studies conducted in California, the FAA considers CNEL to be the functional equivalent of DNL and applies the Part 150 guidelines without adjustment.

The guidelines represent a compilation of extensive scientific research into noise-related activity interference and attitudinal response. However, the guidelines should be applied with a recognition of the subjective nature of response to noise and the special circumstances that can increase or decrease tolerance. For example, a high non-aircraft background or ambient noise level (such as from traffic) can reduce the significance of aircraft noise. Alternatively, residents of areas with unusually low background levels may find aircraft noise annoying at relatively low levels.

The table on the following page reproduces the FAA’s noise/land use compatibility guidelines from Part 150.

**Table B.3.1** FAA Noise/Land Use Compatibility Guidelines

Source: 14 C.F.R. Part 150, Airport Noise Compatibility Planning, Appendix A, Table 1.

| Land Use  | Yearly Day-Night Average Sound Level, Ldn,<br>in Decibels<br>(key and notes on following page) |       |       |       |       |      |
|---|--|-------|-------|-------|-------|------|
|   | < 65   | 65-70 | 70-75 | 75-80 | 80-85 | > 85 |
| <i>Residential Use</i>                                      |  |       |       |       |       |      |
| Residential other than mobile homes and transient lodgings  | Y  | N(1)  | N(1)  | N     | N     | N    |
| Mobile home park  | Y  | N     | N     | N     | N     | N    |
| Transient lodgings  | Y  | N(1)  | N(1)  | N(1)  | N     | N    |
| <i>Public Use</i>   |  |       |       |       |       |      |
| Schools   | Y  | N(1)  | N(1)  | N     | N     | N    |
| Hospitals and nursing homes                                 | Y  | 25    | 30    | N     | N     | N    |
| Churches, auditoriums, and concert halls                    | Y  | 25    | 30    | N     | N     | N    |
| Governmental services                                       | Y  | Y     | 25    | 30    | N     | N    |
| Transportation  | Y  | Y     | Y(2)  | Y(3)  | Y(4)  | Y(4) |
| Parking   | Y  | Y     | Y(2)  | Y(3)  | Y(4)  | N    |
| <i>Commercial Use</i>                                       |  |       |       |       |       |      |
| Offices, business and professional                          | Y  | Y     | 25    | 30    | N     | N    |
| Wholesale and retail, bldg. mtl., hardware, and farm equip. | Y  | Y     | Y(2)  | Y(3)  | Y(4)  | N    |
| Retail trade—general  | Y  | Y     | 25    | 30    | N     | N    |
| Utilities   | Y  | Y     | Y(2)  | Y(3)  | Y(4)  | N    |
| Communication   | Y  | Y     | 25    | 30    | N     | N    |
| <i>Manufacturing and Production</i>                         |  |       |       |       |       |      |
| Manufacturing—general                                       | Y  | Y     | Y(2)  | Y(3)  | Y(4)  | N    |
| Photographic and optical                                    | Y  | Y     | 25    | 30    | N     | N    |
| Agriculture (except livestock) and forestry                 | Y  | Y(6)  | Y(7)  | Y(8)  | Y(8)  | Y(8) |
| Livestock farming and breeding                              | Y  | Y(6)  | Y(7)  | N     | N     | N    |
| Mining and fishing, resource production and extraction      | Y  | Y     | Y     | Y     | Y     | Y    |
| <i>Recreational</i>   |  |       |       |       |       |      |
| Outdoor sports arenas and spectator sports                  | Y  | Y(5)  | Y(5)  | N     | N     | N    |
| Outdoor music shells, amphitheaters                         | Y  | N     | N     | N     | N     | N    |
| Nature exhibits and zoos                                    | Y  | Y     | N     | N     | N     | N    |
| Amusements, parks, resorts and camps                        | Y  | Y     | Y     | Y     | Y     | Y    |
| Golf courses, riding stables, water recreation              | Y  | Y     | 25    | 30    | N     | N    |

Key to Table B.3.1

|               |   |
|---------------|---|
| SLUCM         | Standard Land Use Coding Manual.  |
| Y(Yes)        | Land use and related structures compatible without restrictions.  |
| N(No)         | Land use and related structures are not compatible and should be prohibited.  |
| NLR           | Noise Level Reduction (outdoor to indoor) to be achieved through incorporation of noise attenuation into the design and construction of the structure.            |
| 25, 30, or 35 | Land use and related structures generally compatible; measures to achieve NLR of 25, 30, or 35 dB must be incorporated into design and construction of structure. |

Notes for Table B.3.1

The designations contained in this table do not constitute a federal determination that any use of land covered by the program is acceptable or unacceptable under federal, state, or local law. The responsibility for determining the acceptable and permissible land uses and the relationship between specific properties and specific noise contours rests with the local authorities. FAA determinations under Part 150 are not intended to substitute federally determined land uses for those determined to be appropriate by local authorities in response to locally determined needs and values in achieving noise compatible land uses.

- (1) Where the community determines that residential or school uses must be allowed, measures to achieve outdoor-to-indoor Noise Level Reduction (NLR) of at least 25 dB and 30 dB should be incorporated into building codes and be considered in individual approvals. Normal residential construction can be expected to provide a NLR of 20 dB; thus, the reduction requirements are often stated as 5, 10, or 15 dB over standard construction and normally assume mechanical ventilation and closed windows year-round. However, the use of NLR criteria will not eliminate outdoor noise problems.
- (2) Measures to achieve NLR of 25 dB must be incorporated into the design and construction of portions of these buildings where the public is received, in office areas, noise sensitive areas, or where the normal noise level is low.
- (3) Measures to achieve NLR of 30 dB must be incorporated into the design and construction of portions of these buildings where the public is received, in office areas, noise sensitive areas, or where the normal noise level is low.
- (4) Measures to achieve NLR of 35 dB must be incorporated into the design and construction of portions of these buildings where the public is received, in office areas, noise sensitive areas, or where the normal noise level is low.
- (5) Land use is compatible provided special sound reinforcement systems are installed.
- (6) Residential buildings require an NLR of 25.
- (7) Residential buildings require an NLR of 30.
- (8) Residential buildings not permitted.

### B.3.3 California Division of Aeronautics Standards

For noise assessment, CEQA requires the determination of exposure of persons to noise levels in excess of standards established in the local general plan or noise ordinance or applicable standards of other agencies. For airport noise studies, the California Division of Aeronautics has adopted noise standards that state, in part:

The following rules and regulations are promulgated in accordance with Article 3, Chapter 4, Part 1, Division 9, Public Utilities Code (Regulation of Airports) to provide noise standards governing the operation of aircraft and aircraft engines for all airports operating under a valid permit issued by the Department of Transportation. These standards are based upon two separate legal grounds: (1) the power of airport proprietors to impose noise ceilings and other limitations on the use of the airport, and (2) the power of the state to act to an extent not prohibited by federal law. The regulations are designed to cause the airport proprietor, aircraft operator, local governments, pilots, and the department to work cooperatively to diminish noise problems. The regulations accomplish these ends by controlling and reducing the noise impact area in communities in the vicinity of airports.<sup>6</sup>

The level of noise acceptable to a reasonable person residing in the vicinity of an airport is established as a CNEL value of 65 dB for purposes of these regulations. This criterion level has been chosen for reasonable persons residing in urban residential areas where houses are of typical California construction and may have windows partially open. It has been selected with reference to speech, sleep, and community reaction.<sup>7</sup>

The Division of Aeronautics noise standards further define land uses that are incompatible with aircraft noise as follows:<sup>8</sup>

- *Residences, including but not limited to, detached single-family dwellings, multi-family dwellings, high-rise apartments, condominiums and mobile homes, unless:*
  - *An aviation easement for aircraft noise, has been acquired by the airport proprietor;*
  - *A dwelling unit which was in existence at the same location prior to January 1, 1989, and has adequate acoustic insulation to ensure an interior CNEL of 45 dB or less due to aircraft noise in all habitable rooms;*
  - *A residence is a high rise apartment or condominium having an interior CNEL of 45 dB or less in all habitable rooms due to aircraft noise, and an air circulation or air conditioning system, as appropriate;*
  - *A residence exposed to an exterior CNEL less than 80 dB (75 dB if the residence has an exterior normally occupiable private habitable area) where the airport proprietor has*

<sup>6</sup> California Code of Regulations (CCR). 1990. Title 21, Subchapter 6, Noise Standards. Register 90. No. 10, 3/10/90. California Division of Aeronautics, Department of Transportation. Sacramento, CA. Article 1, General, Section 5001, p. 219.

<sup>7</sup> Ibid., Article 1, General, Section 5006, p. 224.

<sup>8</sup> Ibid., Article 1, General, Section 5014, pp. 225–226.

*made a genuine effort to acoustically treat the residence or acquire avigation easements for the residence involved, or both, but the property owner has refused to take part in the program; or*

*– A residence which is owned by the airport proprietor;*

- *Public and private schools of standard construction for which an avigation easement for noise has not been acquired by the airport proprietor, or that do not have adequate acoustic performance to ensure an interior CNEL of 45 dB or less in all classrooms due to aircraft noise;*
- *Hospitals and convalescent homes for which an avigation easement for noise has not been acquired by the airport proprietor, or that do not have adequate acoustic performance to provide an interior CNEL of 45 dB or less due to aircraft noise in all rooms used for patient care; and*
- *Churches and other places of worship for which an avigation easement for noise has not been acquired by the airport proprietor or that do not have adequate acoustic performance to ensure an interior CNEL of 45 dB or less due to aircraft noise.*

These standards are consistent with the Part 150 guidelines set forth in Section B.3.2.

## **B.3.4 Los Angeles CEQA Standards**

The City of Los Angeles has adopted guidelines for preparing CEQA analyses. The guidelines define standards for land uses that are incompatible with aircraft noise based directly on the Division of Aeronautics noise standards presented in Section B.3.3.<sup>9</sup> As noted previously, these standards are consistent with the FAA's Part 150 guidelines set forth in B.3.2.

## **B.3.5 LAWA Thresholds**

On behalf of the City of Los Angeles, LAWA has prepared and made a Part 150 submission for VNY to the FAA.<sup>10</sup> In that submission, LAWA and the City of Los Angeles officially adopted the FAA guidelines from Part 150 as the basis for determining the compatibility of surrounding land uses with noise exposure associated with operations at the airport.

---

<sup>9</sup> City of Los Angeles. 2006. *L.A. CEQA Thresholds Guide*. Environmental Affairs Department. Los Angeles, CA, p. I.4-3–I.4-4.

<sup>10</sup> City of Los Angeles, Los Angeles World Airports. 2003. *Van Nuys Airport Part 150 Study*. Los Angeles, CA. Prepared by Environmental Management Division.



# B.4

## DEVELOPMENT OF VNY NOISE CONTOURS

### B.4.1 Introduction

The L.A. CEQA Thresholds Guide (City of Los Angeles, 2006, p. I.4-5) requires the use of the FAA's Integrated Noise Model (INM) to prepare CNEL contours for civilian airports. Appendix A of FAR Part 150 provides standards to be followed in applying the INM. Those standards were followed in preparing contours for this EIR, using the most recent release of the INM available at the time (i.e., version 7.0).

The following sections will describe the required inputs to the INM, except for details on the aircraft fleet mix and operations, which are described in Chapter 4 of this report.

### B.4.2 INM Input Requirements

The INM contains the necessary algorithms to compute the necessary aircraft flight profiles and noise metrics; however, there are various airport-specific details that must be determined to make the model results specific to the desired airport. Therefore, various INM input parameters were researched, collected, and derived through close communications with the FAA and airport staffs. The following INM input requirements are discussed in greater detail in the sections noted:

- VNY Physical Parameters (B.4.3)
- VNY Runway Utilization (B.4.4)
- VNY Flight Track Geometry and Utilization (B.4.5)
- VNY Overflight Flight Track Geometry and Utilization (B.4.6)
- VNY Meteorological Data (B.4.7)
- Aircraft Noise and Performance Characteristics (B.4.8)

### **B.4.3 VNY Physical Parameters**

VNY is located in the San Fernando Valley of Los Angeles, California. The airport is surrounded by various communities, including Van Nuys, Sherman Oaks, North Hills, Reseda, Encino, and Lake Balboa. Figure B.4.1 presents the VNY airport layout.

VNY has two parallel operational runways: Runway 16R/34L and Runway 16L/34R. The primary runway, Runway 16R/34L, is 8,001 feet long and 150 feet wide. Runway 16L/34R is 4,011 feet long and 75 feet wide. Both runways have a negative gradient of 0.7% from north to south. The published airport elevation is 799 feet above mean sea level.


The INM includes an internal database on the airport layout, including runway locations, orientation, start of takeoff roll points, runway end elevations, landing thresholds, approach angles, etc. These data were verified with VNY sources and cross checked with the recent Part 150 submittal and quarterly LAWA noise contour INM studies.

Both Runways 16R and 16L have displaced arrival thresholds of 1,431 feet. Runway 16R has an approach angle of 3.9 degrees, while the other runways have standard approach angles of 3 degrees.

VNY helicopter operations operate primarily from the old National Guard ramp on the northwest portion of the airport and from Fixed Base Operators (FBOs) located on the southwestern portion of the airport between taxiways 20G and 22G. Modeling helipads were created in these two locations: HNW in the northwest and HSW in the southwest. These helipads are denoted with a small helicopter icon.

**Figure B.4.1** VNY Airport Layout

Source: LAWA

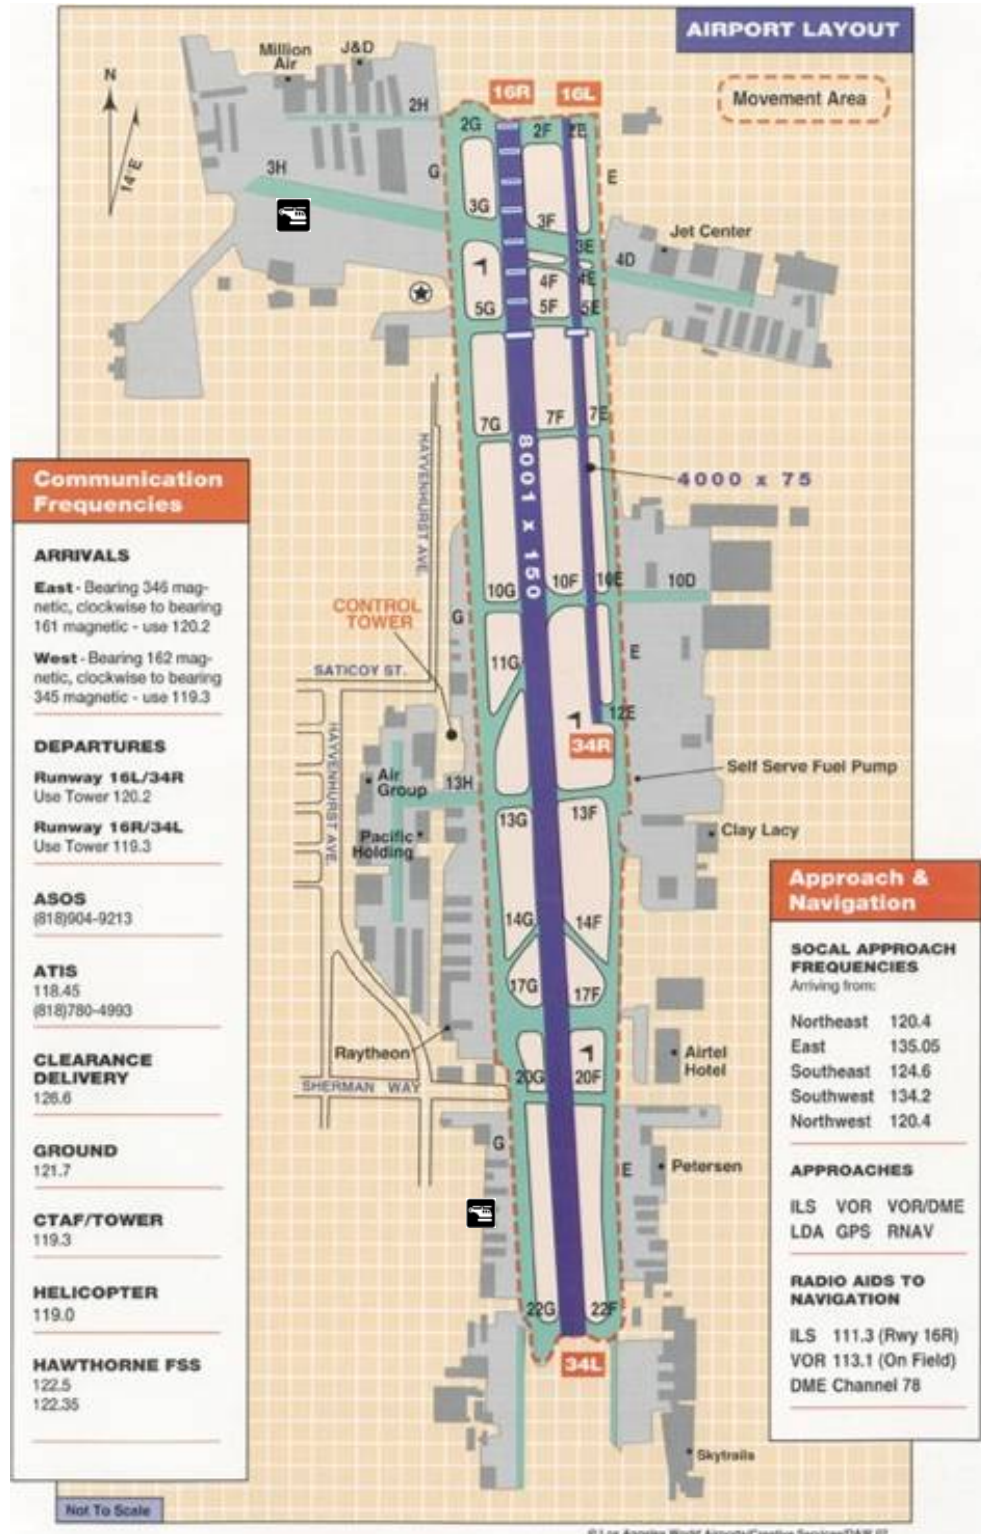

## B.4.4 VNY Runway Utilization

### B.4.4.1 Fixed-Wing Aircraft

The FAA Automated Radar Terminal System (ARTS) data for January 2004–June 2005 was used in conjunction with the Part 150 study, LAWA quarterly contour models, the LAWA Van Nuys Data System (VNDS), and LAWA annual runway utilization reports for 2004 and 2005 to determine representative runway utilizations for the fixed-wing aircraft. In addition, discussions with the FAA Air Traffic Control Tower (ATCT) manager provided information on local patterns and runway intersection departure use rates by propeller and turboprop aircraft.

After reviewing all the available information, the derived runway use was based primarily on the LAWA annual runway utilization statistics for years 2004 and 2005 and the VNDS listing of jet operations. The LAWA statistics listed average annual hourly use rates, which were then converted to average annual daily rates. The VNDS listing was used to determine the jet utilization rates for each runway end. After determining the jet usage, which was confined to Runway 16R/34L, HMMH made an assumption that 9% of the total operations were helicopter related and then determined the utilization rates for the propeller aircraft. Table B.4.1 presents the modeled runway use for arrival and departure operations for all modeled cases for the fixed-wing aircraft split into day (7:00 a.m.–7:00 p.m.), evening (7:00 p.m.–10:00 p.m.), and night (10:00 p.m.–7:00 a.m.).

**Table B.4.1** Runway Utilization for Fixed-Wing Aircraft Arrivals and Departures

Source: 2004–2005 ARTS Data, LAWA VNDS, LAWA Runway Statistics, HMMH

| Aircraft Group | Runway | Departures |         |        | Arrivals |         |        |
|----------------|--------|------------|---------|--------|----------|---------|--------|
|                |        | Day        | Evening | Night  | Day      | Evening | Night  |
| Jets           | 16L    | 0.0000     | 0.0000  | 0.0000 | 0.0000   | 0.0000  | 0.0000 |
|                | 16R    | 0.8384     | 0.8180  | 0.7887 | 0.8306   | 0.8049  | 0.8580 |
|                | 34L    | 0.1616     | 0.1820  | 0.2113 | 0.1394   | 0.1951  | 0.1420 |
|                | 34R    | 0.0000     | 0.0000  | 0.0000 | 0.0000   | 0.0000  | 0.0000 |
| Props          | 16L    | 0.2293     | 0.3100  | 0.2338 | 0.3729   | 0.2495  | 0.3116 |
|                | 16R    | 0.5900     | 0.5280  | 0.5687 | 0.4401   | 0.5508  | 0.4851 |
|                | 34L    | 0.1190     | 0.1328  | 0.1975 | 0.1038   | 0.1383  | 0.2033 |
|                | 34R    | 0.0617     | 0.0292  | 0.0000 | 0.0832   | 0.0614  | 0.0000 |

Local pattern operations are limited to propeller aircraft. Approximately 90% of local patterns are flown on the shorter runway, 16L/34R, with a pattern altitude of 1,000 feet above field elevation (AFE), with a left pattern for 16L and a right pattern for 34R. Local patterns flown on 16R/34L have a pattern altitude of 1,200 feet AFE, with a right pattern for Runway 16R and a left pattern for 34L. Repetitive operations are not permitted during nighttime hours. Using an approximate 80/20 split for south and north operations, respectively, HMMH developed the runway utilization rates for local patterns, which are summarized in Table B.4.2.

**Table B.4.2** Runway Utilization Rates for Local Pattern Operations

Source: LAWA Part 150, LAWA Runway Statistics, FAA ATCT, HMMH

| Runway | Time of Day |         |        |
|--------|-------------|---------|--------|
|        | Day         | Evening | Night  |
| 16L    | 0.7200      | 0.7200  | 0.0000 |
| 16R    | 0.0800      | 0.0800  | 0.0000 |
| 34L    | 0.0200      | 0.0200  | 0.0000 |
| 34R    | 0.1800      | 0.1800  | 0.0000 |

These runway utilization rates were then applied to the fixed-wing flight operations detailed in Section 4.2.5 and assumed to apply to all case years.

### B.4.4.2 Helicopters

Helicopter radar data showed operations to and from VNY centered primarily around two areas: the aircraft ramp area to the northwest in the vicinity of taxiway 3H and the aircraft ramp area southwest of the runways between taxiways 20G and 22 G. HMMH developed helipads at these locations (HNW and HSW), with accompanying helicopter flight tracks derived from the available radar data. These tracks closely follow the six established helicopter routes: Stagg, Flood Basin, Bull Creek, Saticoy, Tracks West, and Balboa. The general helicopter radar flight tracks were used to develop the individual helipad use, which is summarized in Table B.4.3.

**Table B.4.3** Helipad Utilization Rates for Helicopter Arrivals and Departures

Source: 2004–2005 ARTS Data, HMMH

| Helipad | Departures |         |        | Arrivals |         |        |
|---------|------------|---------|--------|----------|---------|--------|
|         | Day        | Evening | Night  | Day      | Evening | Night  |
| HNW     | 0.5278     | 0.7769  | 0.5603 | 0.3595   | 0.3710  | 0.2828 |
| HSW     | 0.4722     | 0.2231  | 0.4397 | 0.6405   | 0.6290  | 0.7172 |

These helipad utilization rates were then applied to the helicopter flight operations detailed in Section 5 and assumed to apply to all case years.

The FAA, working in cooperation with LAWA and operators, has established six helicopter ingress and egress routes at VNY and associated altitude minimums. These routes and altitudes are designed to maximize the safety and efficiency of traffic control and mitigate the noise impact on the adjacent communities. The VNY ATCT and individual operators enter into formal “letters of agreement” (LOAs) to implement this program. The following two pages present a sample copy of an LOA. The helicopter modeling flight tracks discussed and depicted in the next section are based on actual radar observations of helicopter operations that reflect a strong central tendency along these preferred routes.

## Sample Helicopter Letter of Agreement (page 1 of 2)

Source: VNT ATCT

LETTER OF AGREEMENT

EFFECTIVE: November 15, 2001

SUBJECT: Helicopter Operations and SVFR Separation Minima

1. PURPOSE. To establish procedures for the operation and control of helicopters. The goal is to ensure safe and efficient aircraft operations while minimizing noise impact on the surrounding community.
2. SCOPE. These procedures apply to VFR and SVFR operations in the Van Nuys Class Delta airspace. Use of these procedures are limited to signatories of this agreement.
3. RESPONSIBILITIES.
  - a. All signatories to this agreement shall ensure that their pilots are familiar with and adhere to the provisions herein...
  - b. Nothing in this letter shall be construed as approval or permission to violate any Federal Aviation Regulations (FAR) or other regulation. Each pilot shall be responsible for advising ATC if a deviation from any part of this agreement is necessary to comply with any regulation.
5. PROCEDURES.
  - a. General.
    - (1) VFR and SVFR operations shall be conducted using routes and altitudes specified in Attachment 1 of this Letter of Agreement unless otherwise authorized by ATC.
    - (2) Pilots shall climb to or descend from the specified altitude within the boundary of Van Nuys Airport unless otherwise authorized by ATC.
    - (3) Pilots shall contact Van Nuys Helicopter Control prior to entering the Van Nuys Class Delta airspace.
    - (4) Runway crossings shall be accomplished at midfield unless otherwise instructed by ATC.
    - (5) All arrivals to and departures from areas not visible from the tower will be at pilot's own risk.
    - (6) Unless otherwise directed by ATC, helicopters shall squawk 1204 prior to entering and while operating in Van Nuys Class Delta Airspace.
  - b. Special VFR. SVFR helicopters shall maintain visual reference to the surface and shall be provided the following aircraft separation minima:
    - (1) 1 mile between SVFR helicopters. This separation may be reduced to 200 feet if both helicopters are departing simultaneously on courses that diverge by at least 30 degrees and;
      - (a) The tower can determine this separation by reference to surface markings, or;
      - (b) One of the departing helicopters is instructed to remain at least 200 feet from the other.
    - (2) Between a SVFR helicopter and an arriving or departing IFR aircraft:
      - (a) 1/2 mile if the IFR aircraft is less than 1 mile from the landing airport.
      - (b) 1 mile if the IFR aircraft is 1 mile or more from the landing airport.

## Sample Helicopter Letter of Agreement (page 2 of 2)

Source: VNT ATCT

VAN NUYS TOWER AND  
Letter of Agreement  
Subject: Helicopter Operations and SVFR Separation Minima  
Effective: November 15, 2001

Attachment  
Page 1

VFR AND SVFR HELICOPTER ROUTES

STAGG (INDUSTRIAL) DEPARTURE - Proceed east via Stagg Street to the San Diego Freeway thence northbound or southbound via the freeway or eastbound over the industrial area. Altitude: 1300 feet MSL. (See Note 1)

STAGG (INDUSTRIAL) ARRIVAL - Proceed inbound via the San Diego Freeway or the industrial area east of the freeway to Stagg Street thence via Stagg Street to the airport. Altitude: 1300 feet MSL. (See Note 1)

FLOOD BASIN DEPARTURE (BASIN SOUTH) (RUNWAY 16 IN USE) - Proceed straight out via Runway 16R, continue over the golf course to the flood basin thence on course. Altitude: 1300 feet MSL. (See Note 2)

SATICOY DEPARTURE - Proceed westbound via Saticoy Street. Altitude: 1300 feet MSL. (Pilots may request higher altitude after passing Balboa Blvd.)

SATICOY ARRIVAL - Proceed eastbound via Saticoy Street. Altitude: 1300 feet MSL.

BALBOA DEPARTURE - Proceed westbound via Saticoy Street thence northbound via Balboa Blvd. Altitude: 1300 feet MSL. (Pilots may request higher altitude after passing Nordhoff Street.)

BALBOA ARRIVAL - Proceed southbound via Balboa Blvd. thence via Saticoy Street. Altitude: 1300 feet MSL.

TRACKS ARRIVAL/DEPARTURE - Proceed to and from Van Nuys Airport via the Southern Pacific Railroad tracks west of the airport. Altitude: 1300 feet MSL.

BULL CREEK ARRIVAL/DEPARTURE - Proceed to and from Van Nuys Airport via the Bull Creek. Altitude: 1300 feet MSL. (Least preferred - See Note 2)

NOTE 1 - THE STAGG ARRIVAL/DEPARTURE ROUTE FOLLOWS THE INDUSTRIAL AREA LOCATED BETWEEN THE TWO LARGE WORLD WAR II ERA HANGERS AND THE RAILROAD TRACKS. THE AIRPORT ROTATING BEACON ALIGNS IN AN EAST/WEST DIRECTION WITH THE STAGG (INDUSTRIAL) ROUTE.

NOTE 2 - FOR NOISE ABATEMENT, THE FLOOD BASIN DEPARTURE SHOULD BE REQUESTED TO THE EXTENT POSSIBLE.

GENERAL NOTE - ALTITUDES ABOVE 1300 FEET MSL FOR NOISE ABATEMENT MUST BE REQUESTED BY THE PILOT. TOWER WILL TRY TO APPROVE YOUR REQUEST. THE AIRPORT MANAGER ENCOURAGES HIGHER ALTITUDES WHEN TRAFFIC AND WEATHER PERMITS, ESPECIALLY AT NIGHT AND DURING EARLY MORNING HOURS.

## B.4.5 VNY Flight Track Geometry and Use

ARTS data from July 1, 2004, through June 30, 2005, were used to sample more than 166,000 tracks for use in developing INM model flight tracks. In addition, during the VNY noise measurement program, observations recorded various flight tracks flown for arriving and departing aircraft as well as the local patterns and incorporated this information into the modeling process. Flight tracks for local pattern activity were based solely on observations.

Displaying the radar tracks in the INM enabled the development of the central track or “backbone” track and the addition of “sub-tracks” on either side of the backbone to better represent the dispersal of actual tracks. Most modeled flight tracks consisted of the backbone track with four sub-tracks on either side. The overall width of the sub-track distribution was defined based on the area spanned by the actual radar tracks being modeled. The flight operations modeled on each central track group were allocated across a total of nine tracks using the INM standard distribution.

Aircraft were grouped into three major subgroups: jets, propeller aircraft, and helicopters. Each subgroup was treated independently and evaluated for the three time-of-day periods: day, evening, night. Figures B.4.2 through B.4.17 present the resulting modeled flight tracks for each of the aircraft groups for arrivals and departures and for touch-and-go pattern operations.

Based on information from the ATCT, it was assumed that propeller aircraft conducted takeoffs that started at the taxiway intersections listed below (i.e., rather than using the full runway length) 15% of the time. The intersections are labeled in Figure B.4.1 as follows:

- Intersection 5E/5F for Runway 16L,
- Intersection 10G/10L for Runway 16R,
- Intersection 13G/13F for Runway 34L, and
- Intersection 10E/10F for Runway 34.


The intersection takeoffs were modeled on the same flight tracks depicted in Figures B.4.10 through B.4.13; the initial straight segments of each of these tracks were shortened to account for the start of takeoff roll displacement.

Tables following the figures define flight track utilization rates.



**Figure B.4.2** Modeled Flight Tracks for Runway 16R Jet Arrivals

Source: HMMH

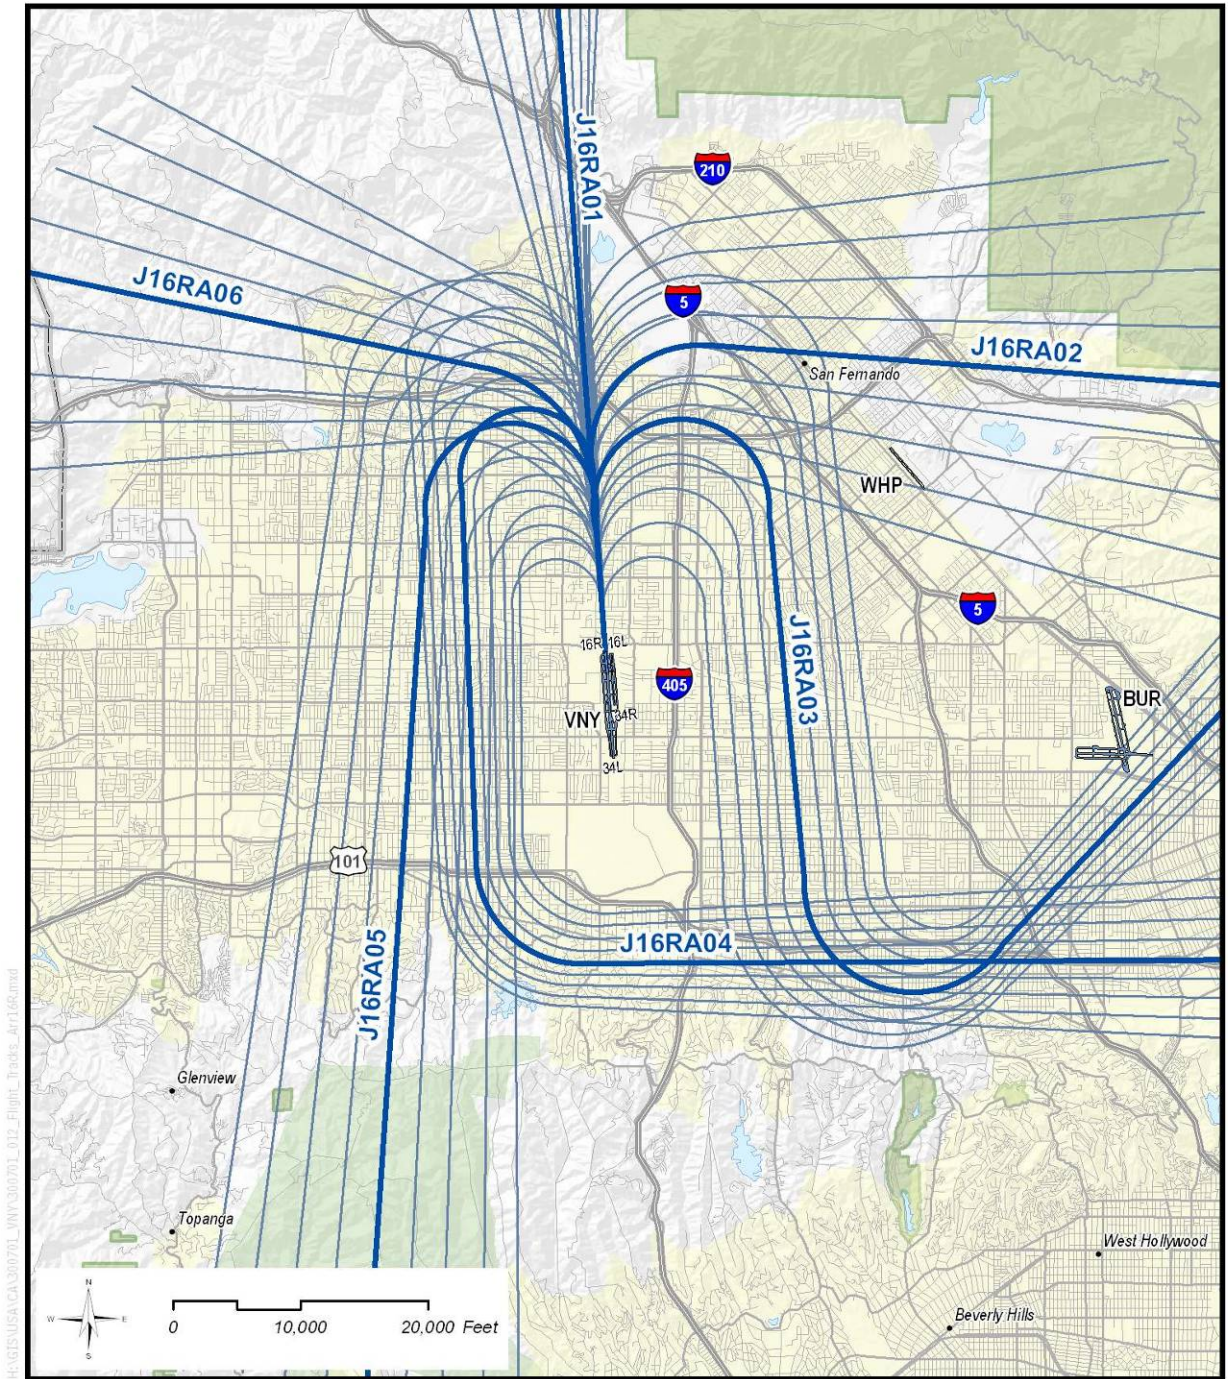


- Modeled Backbone Arrival Tracks
- Modeled Dispersed Arrival Tracks

**Van Nuys Airport Part 161 Study**  
Modeling Flight Tracks - Runway 16R Jet Arrivals



**Figure B.4.3** Modeled Flight Tracks for Runway 34L Jet Arrivals


Source: HMMH

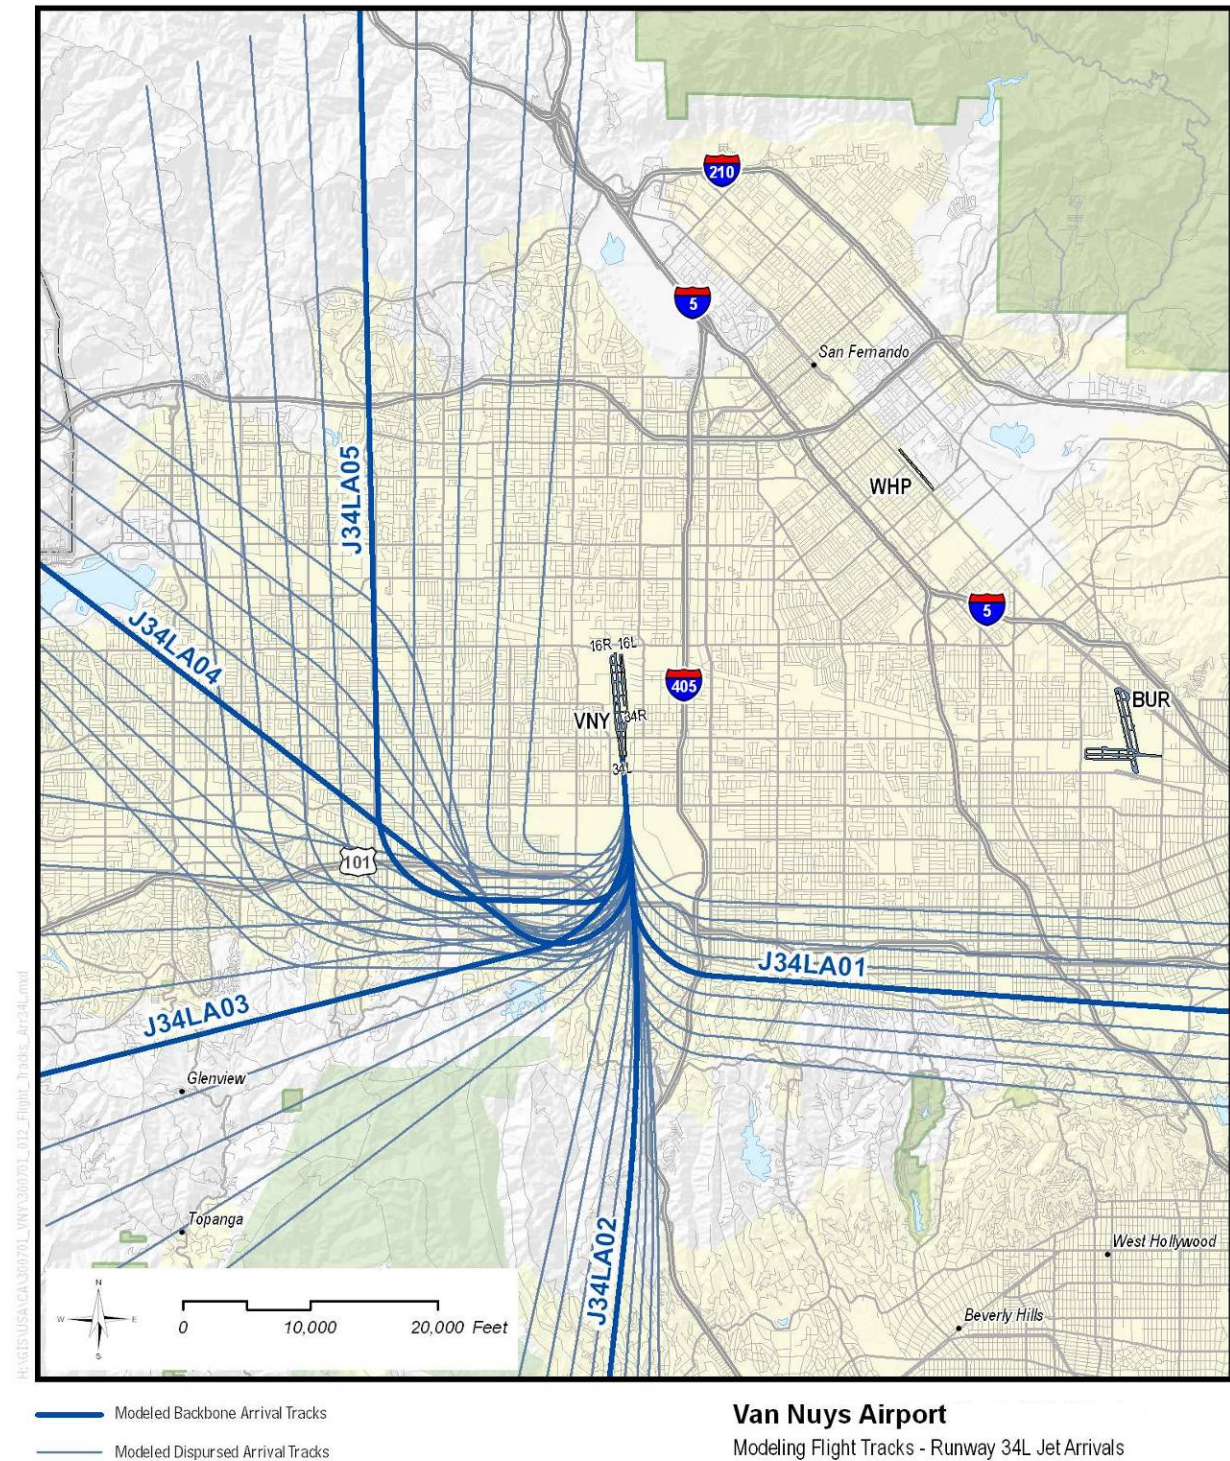



**Figure B.4.4** Modeled Flight Tracks for Runway 16R Jet Departures


Source: HMMH

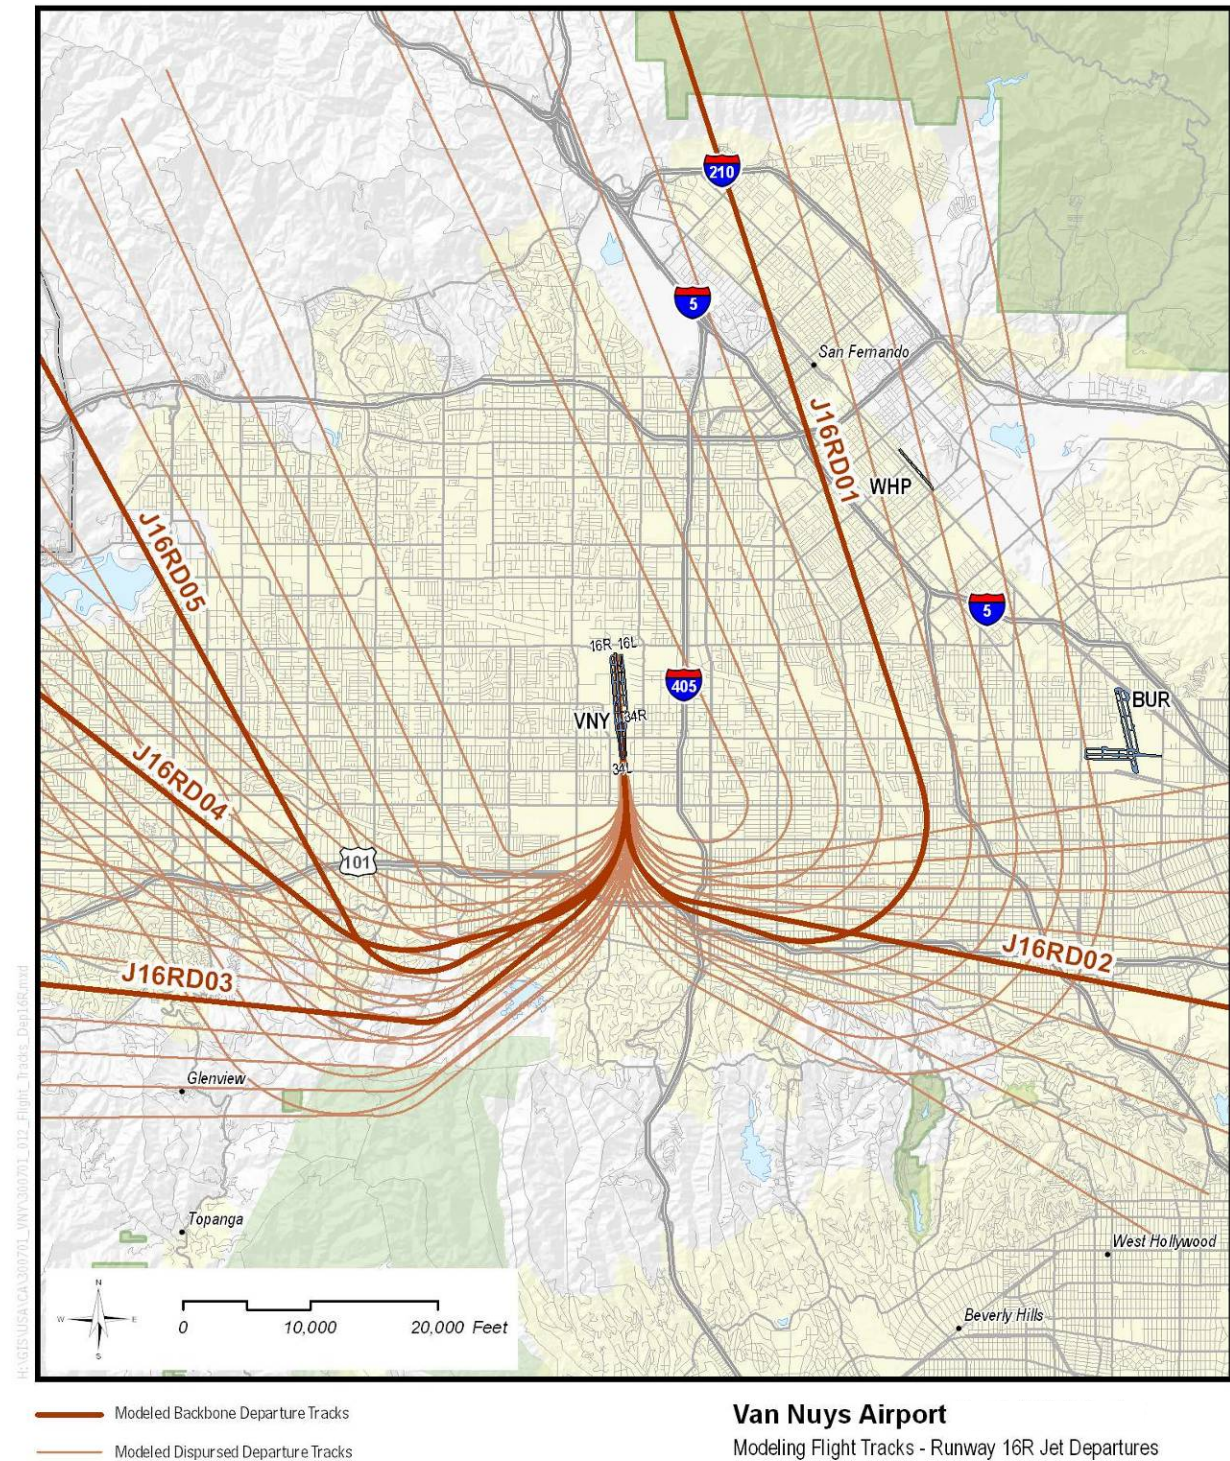



**Figure B.4.5** Modeled Flight Tracks for Runway 34L Jet Departures


Source: HMMH

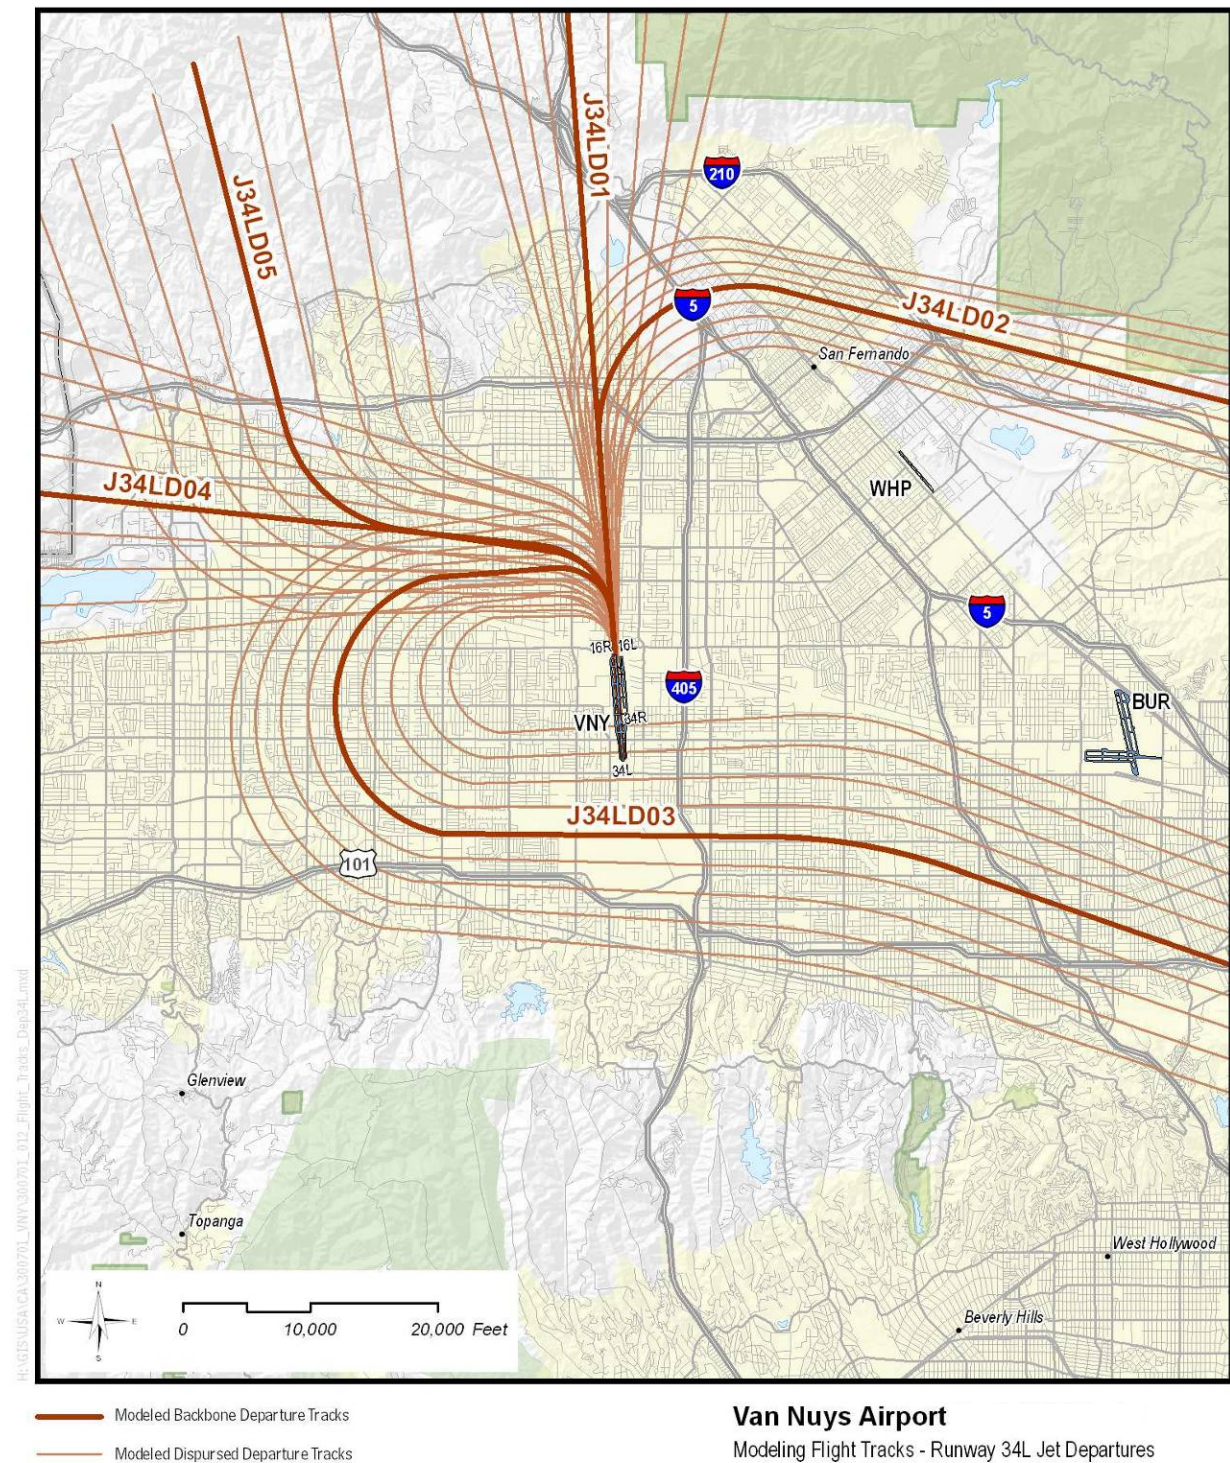




**Figure B.4.6** Modeled Flight Tracks for Runway 16L Propeller Arrivals

Source: HMMH

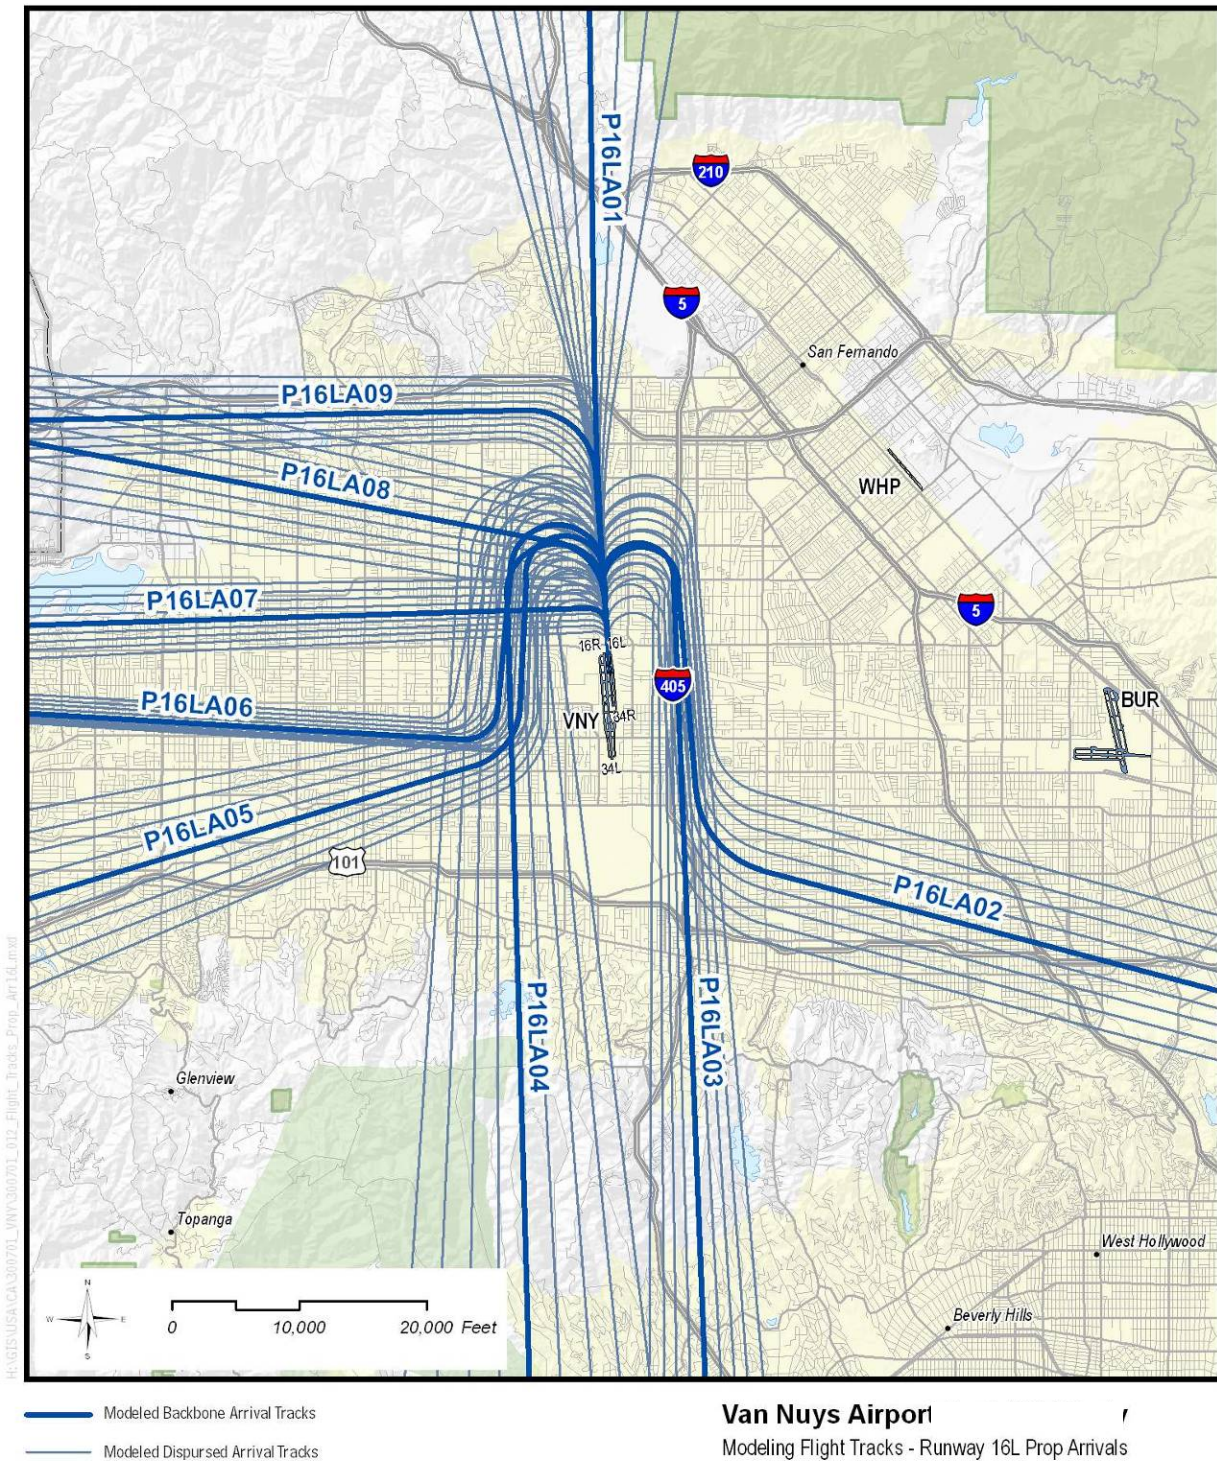



**Figure B.4.7** Modeled Flight Tracks for Runway 16R Propeller Arrivals

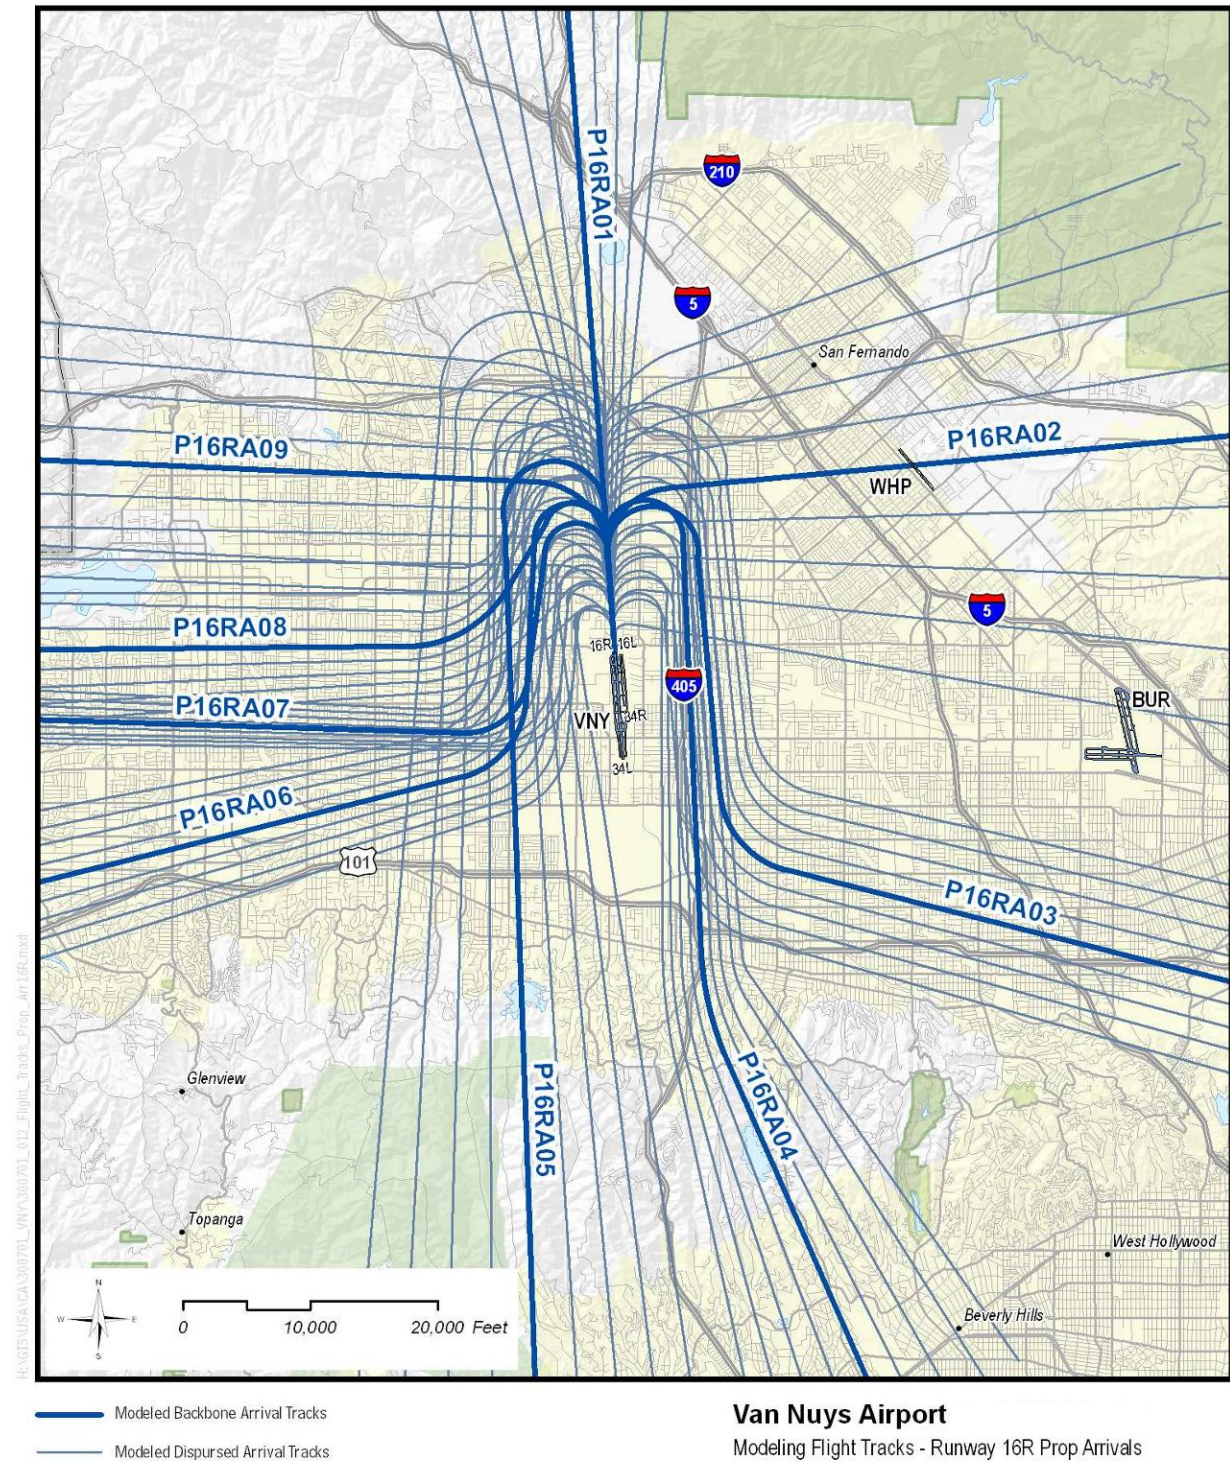



**Figure B.4.8** Modeled Flight Tracks for Runway 34L Propeller Arrivals

Source: HMMH


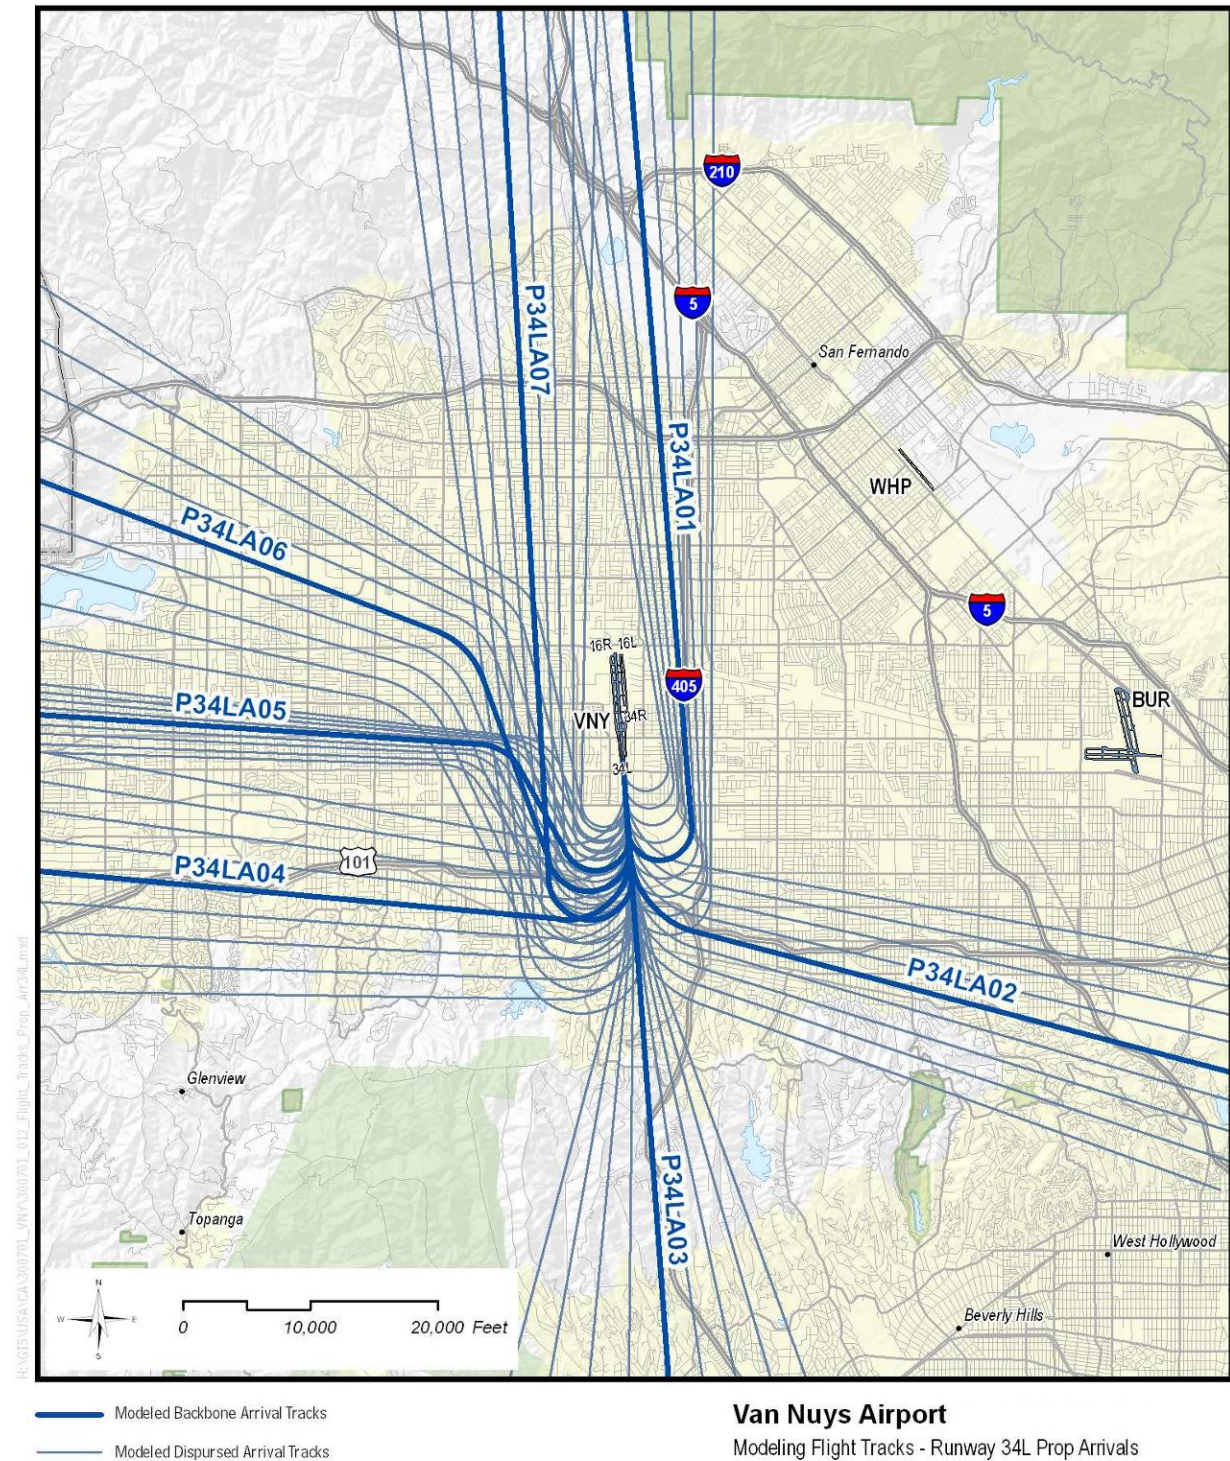




Figure B.4.9 Modeled Flight Tracks for Runway 34R Propeller Arrivals




Source: HMMH

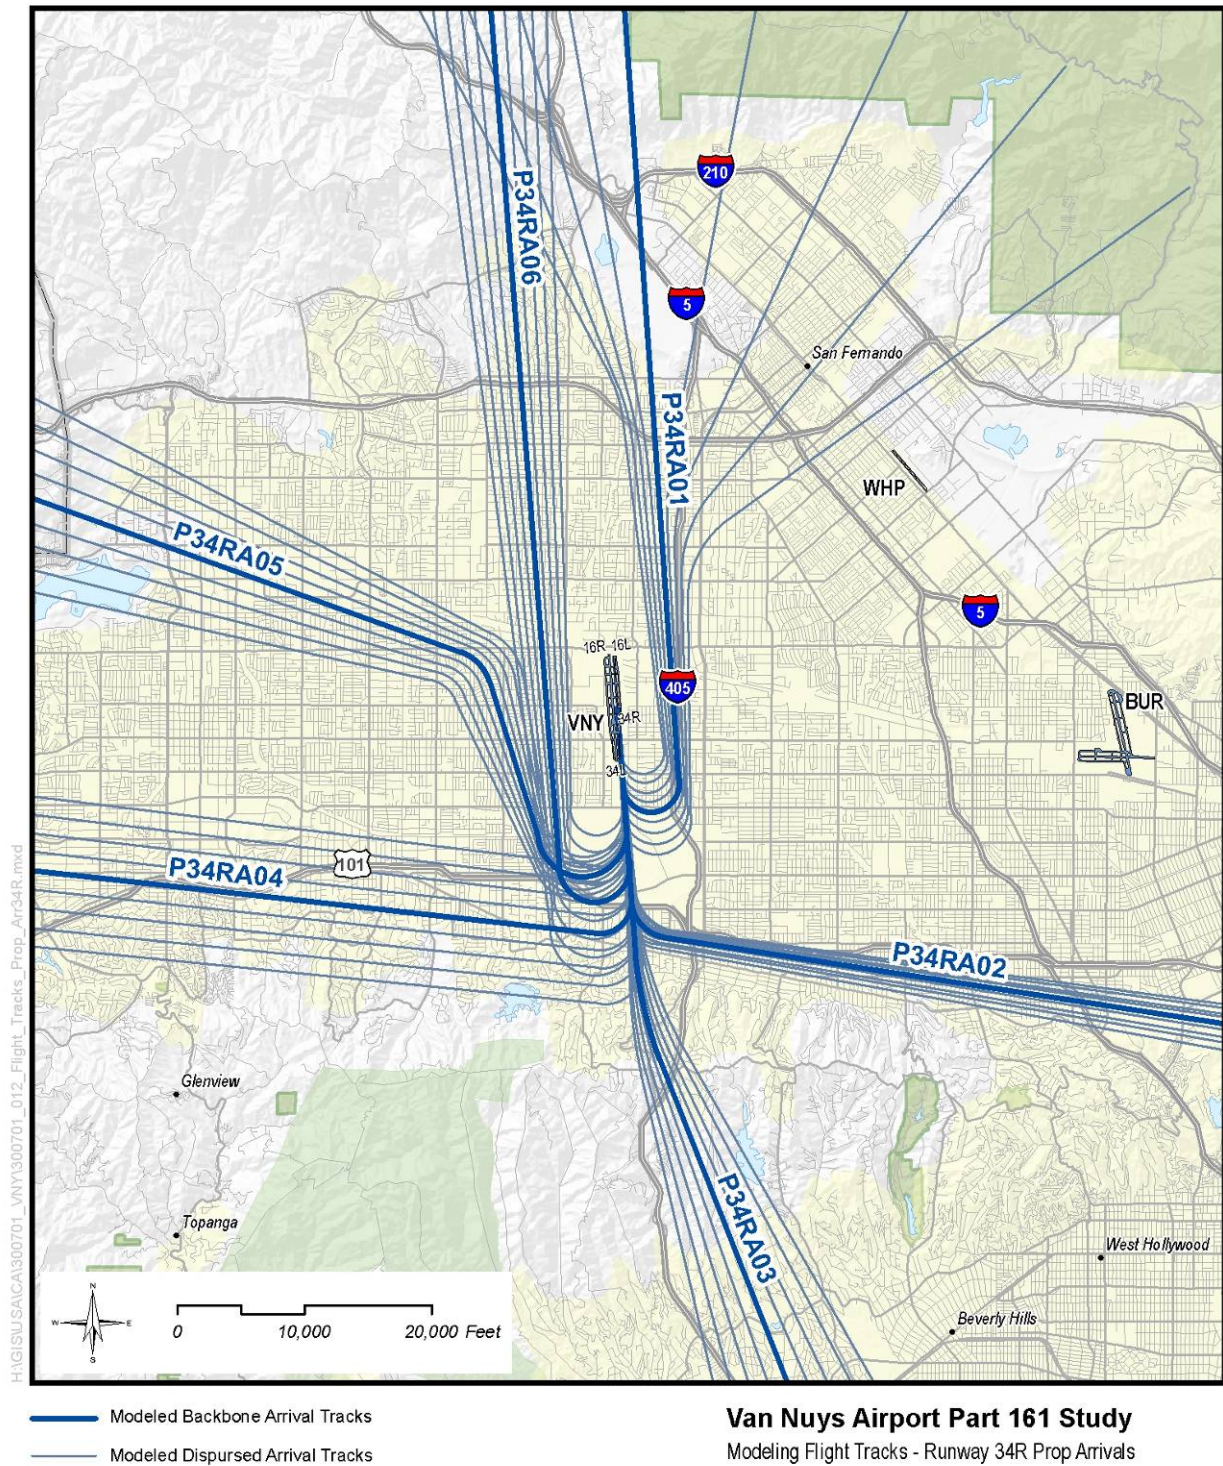

**Figure B.4.10** Modeled Flight Tracks for Runway 16L Propeller Departures

Source: HMMH

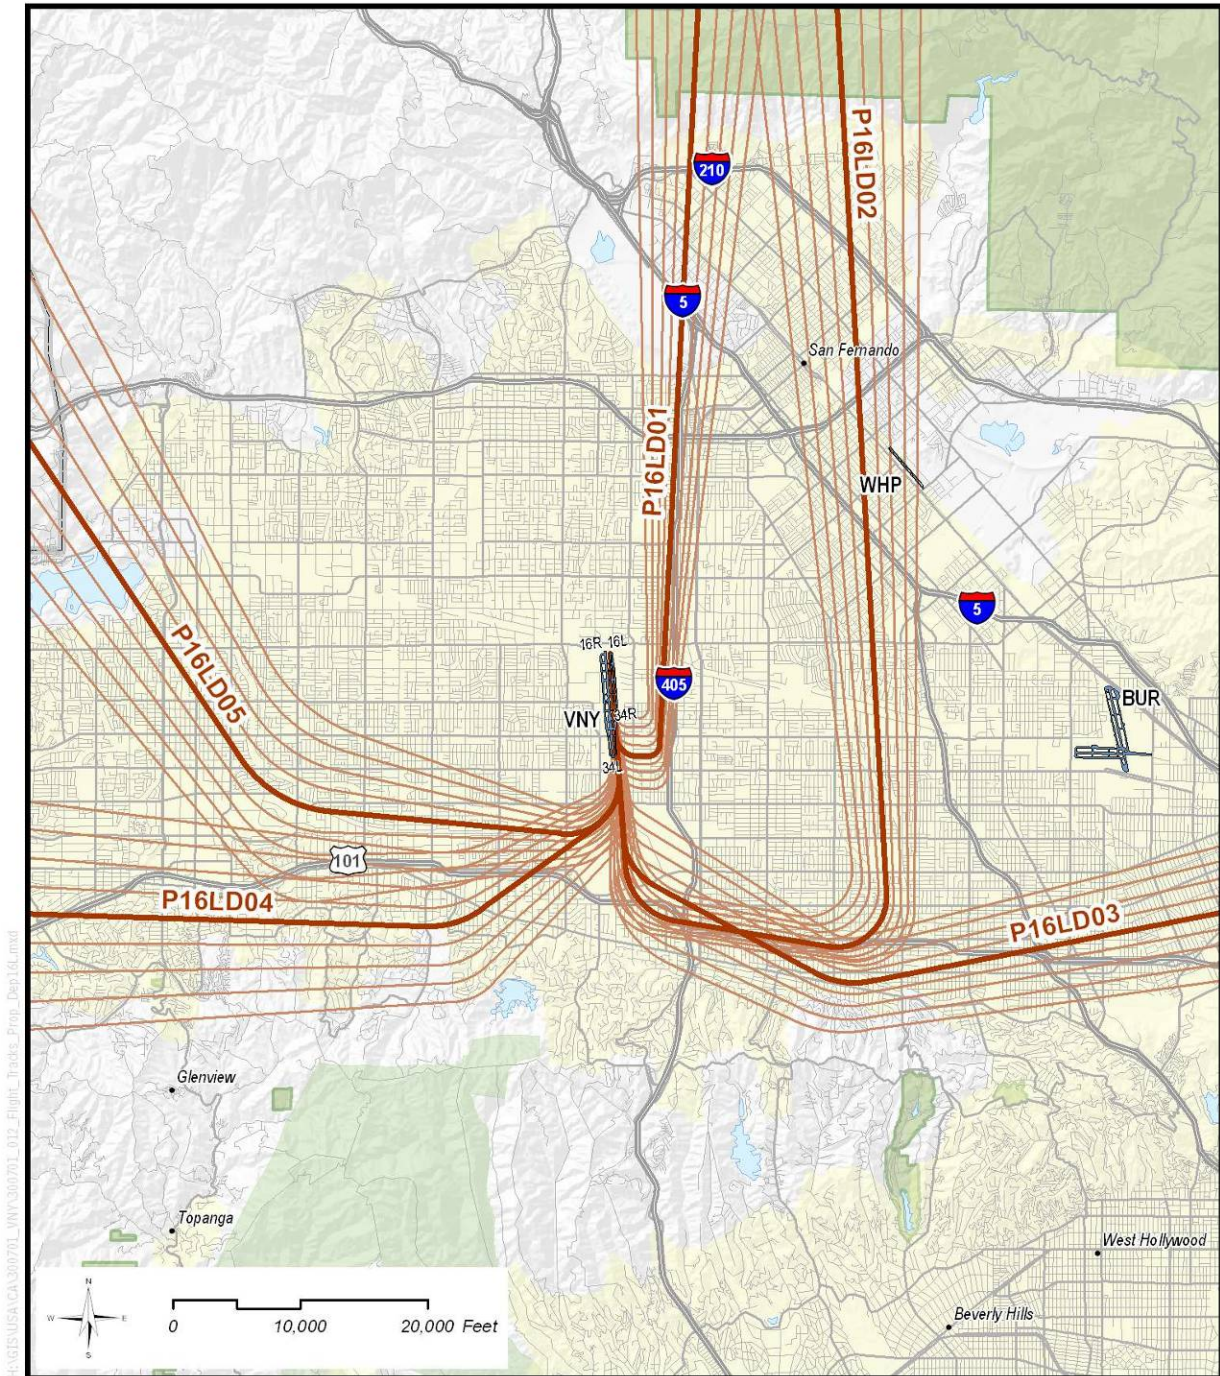


- Modeled Backbone Departure Tracks
- Modeled Dispersed Departure Tracks

**Van Nuys Airport**  
Modeling Flight Tracks - Runway 16L Prop Departures



**Figure B.4.11** Modeled Flight Tracks for Runway 16R Propeller Departures


Source: HMMH

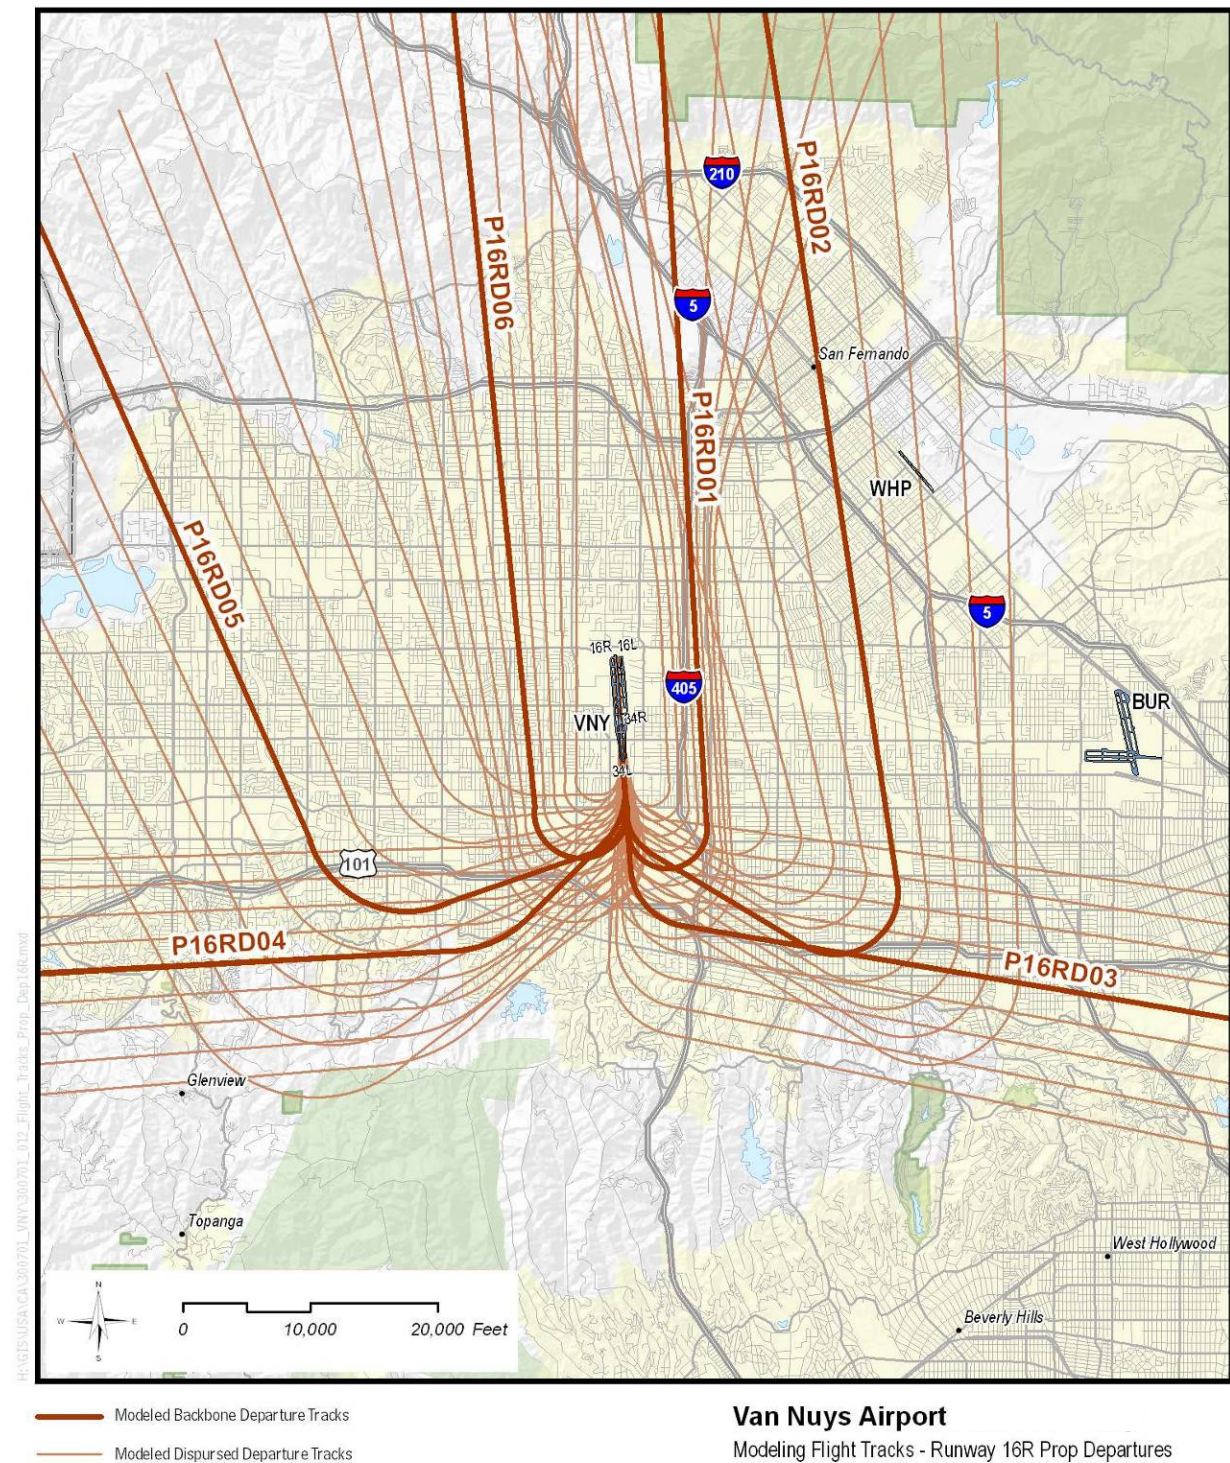



**Figure B.4.12** Modeled Flight Tracks for Runway 34L Propeller Departures


Source: HMMH

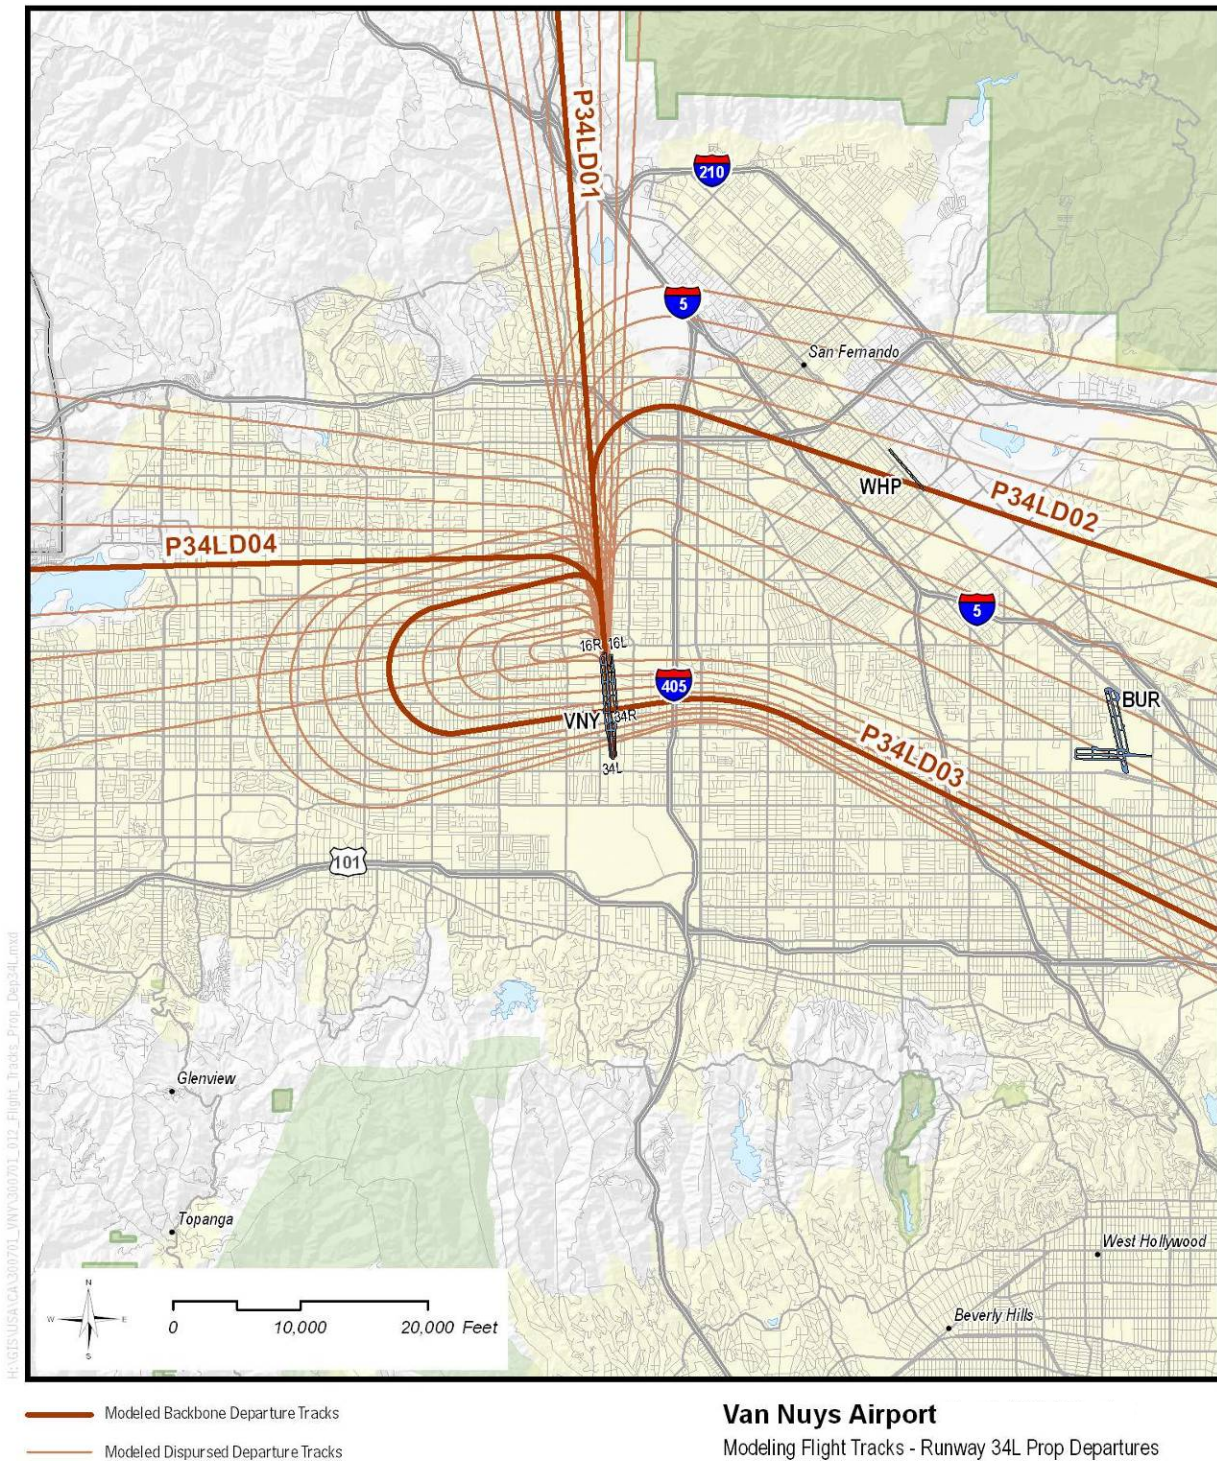



**Figure B.4.13** Modeled Flight Tracks for Runway 34R Propeller Departures


Source: HMMH

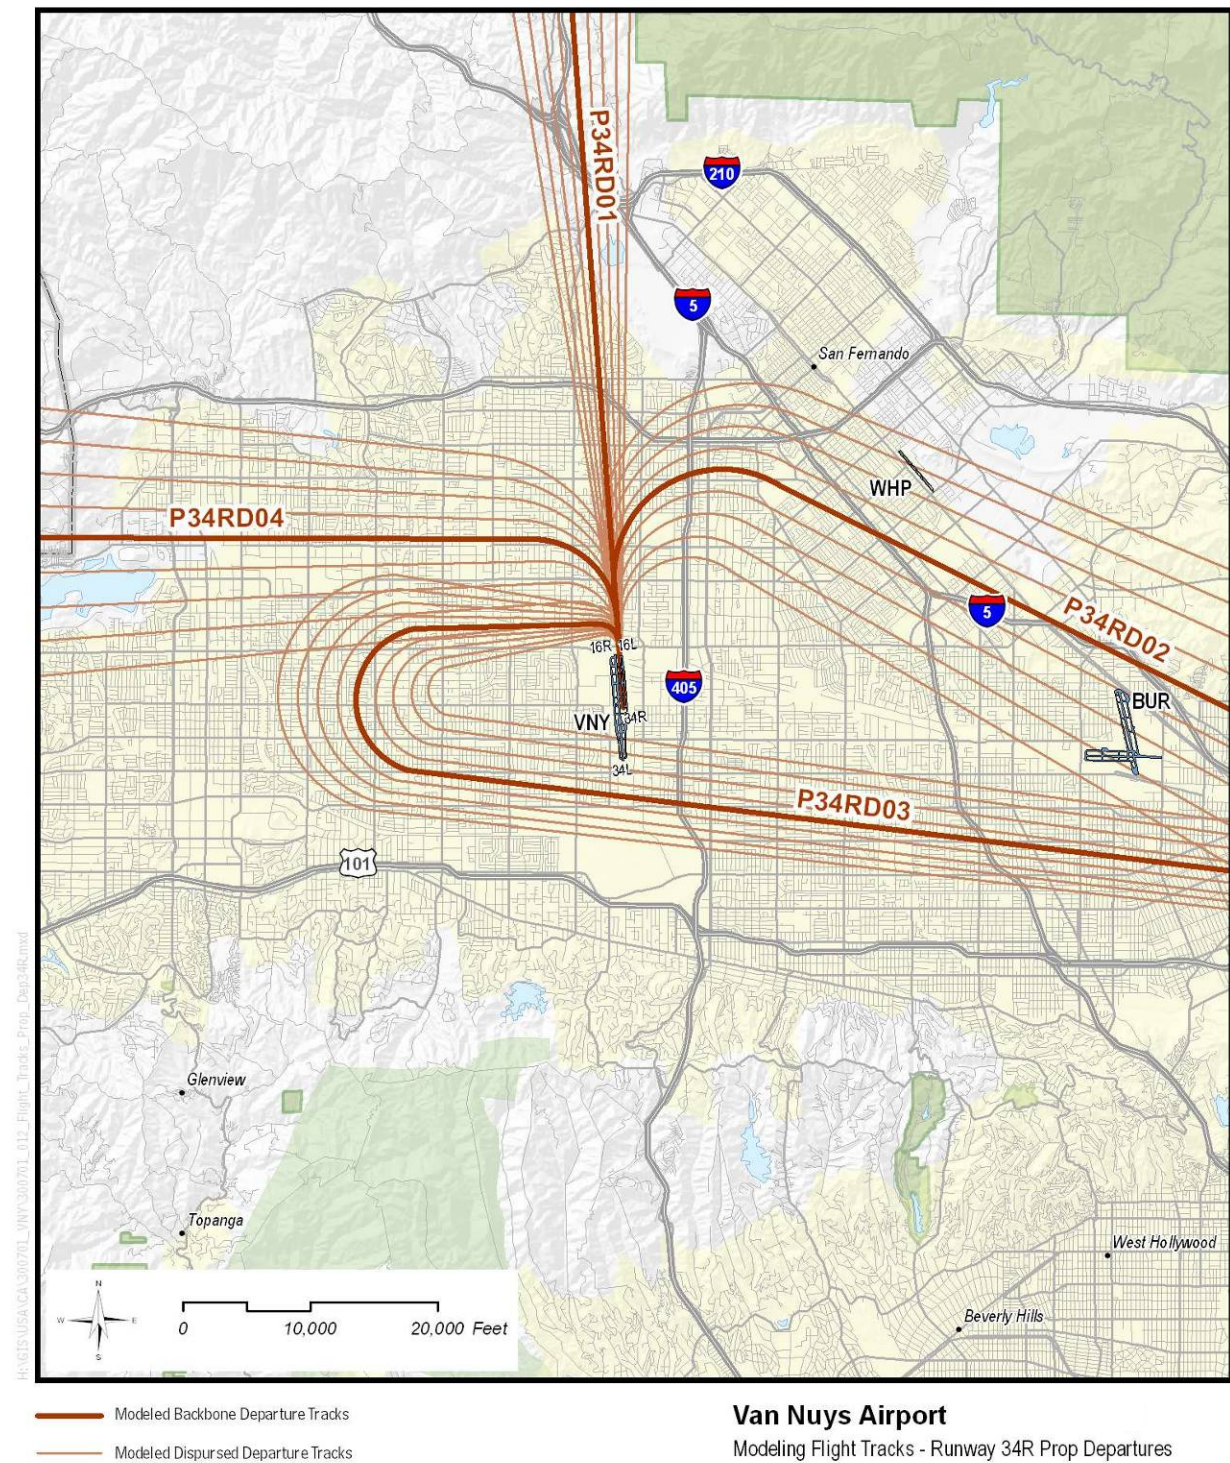



**Figure B.4.14** Modeled Flight Tracks for Helicopter Arrivals


Source: HMMH

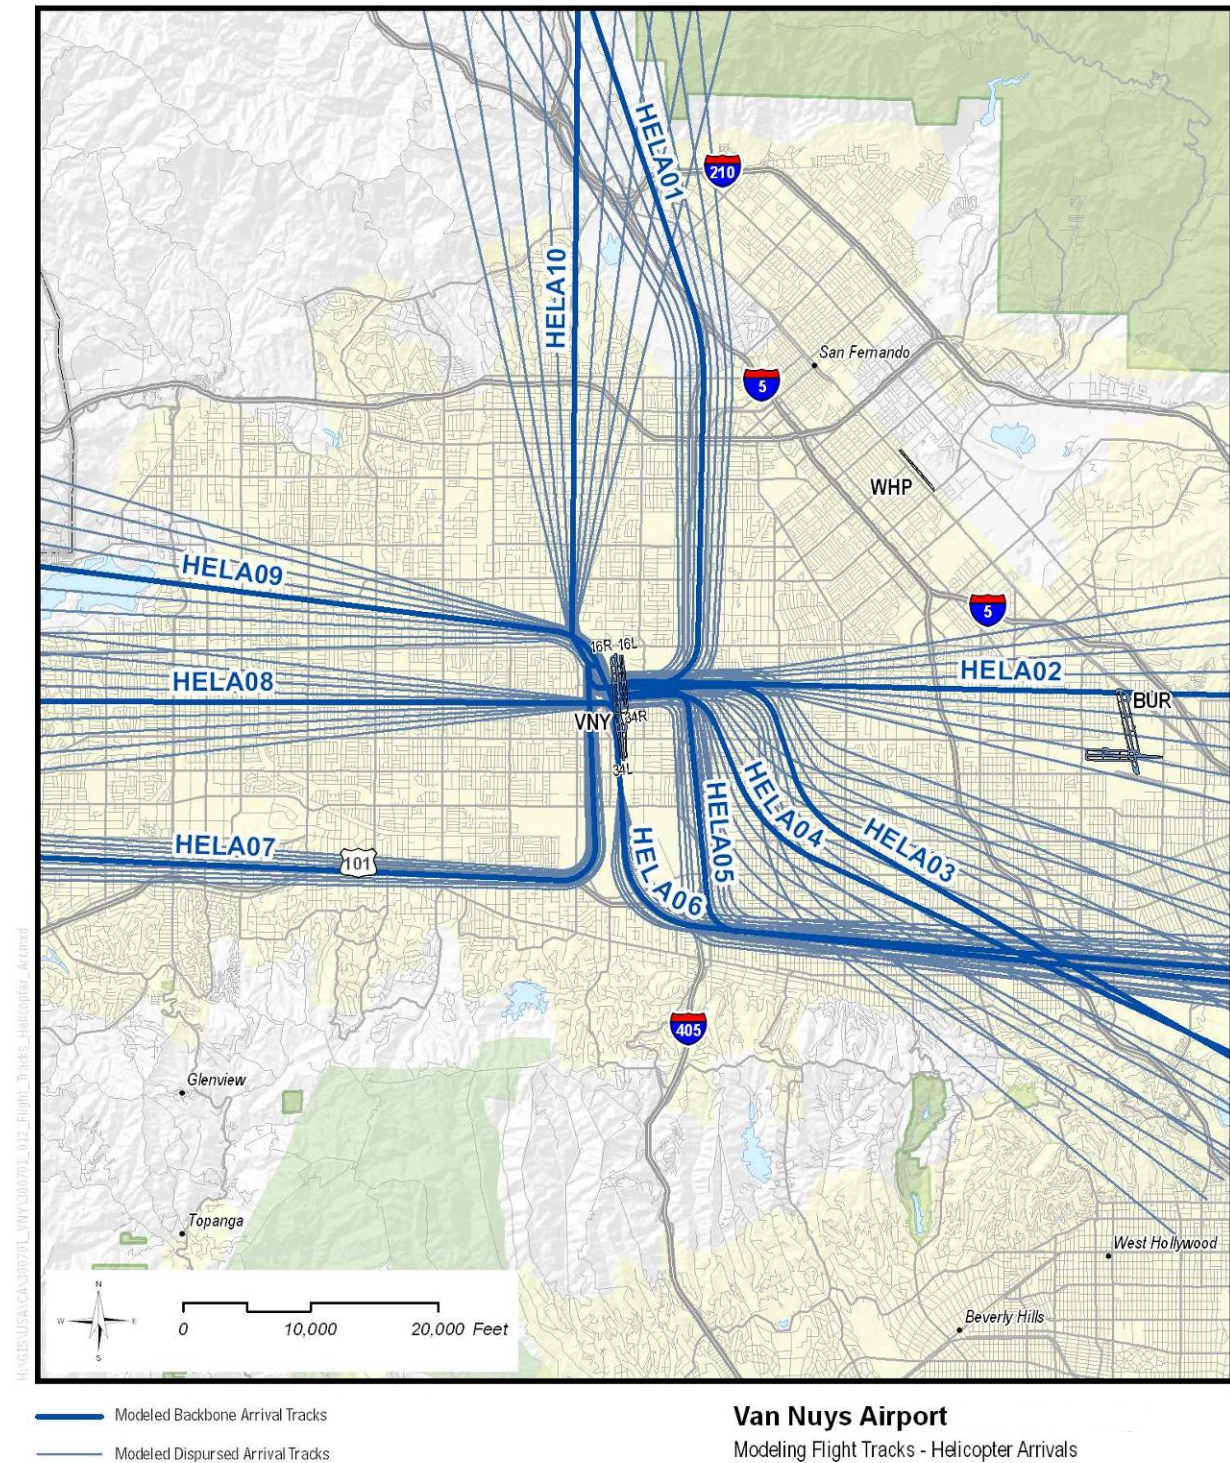



**Figure B.4.15** Modeled Flight Tracks for Helicopter Departures


Source: HMMH

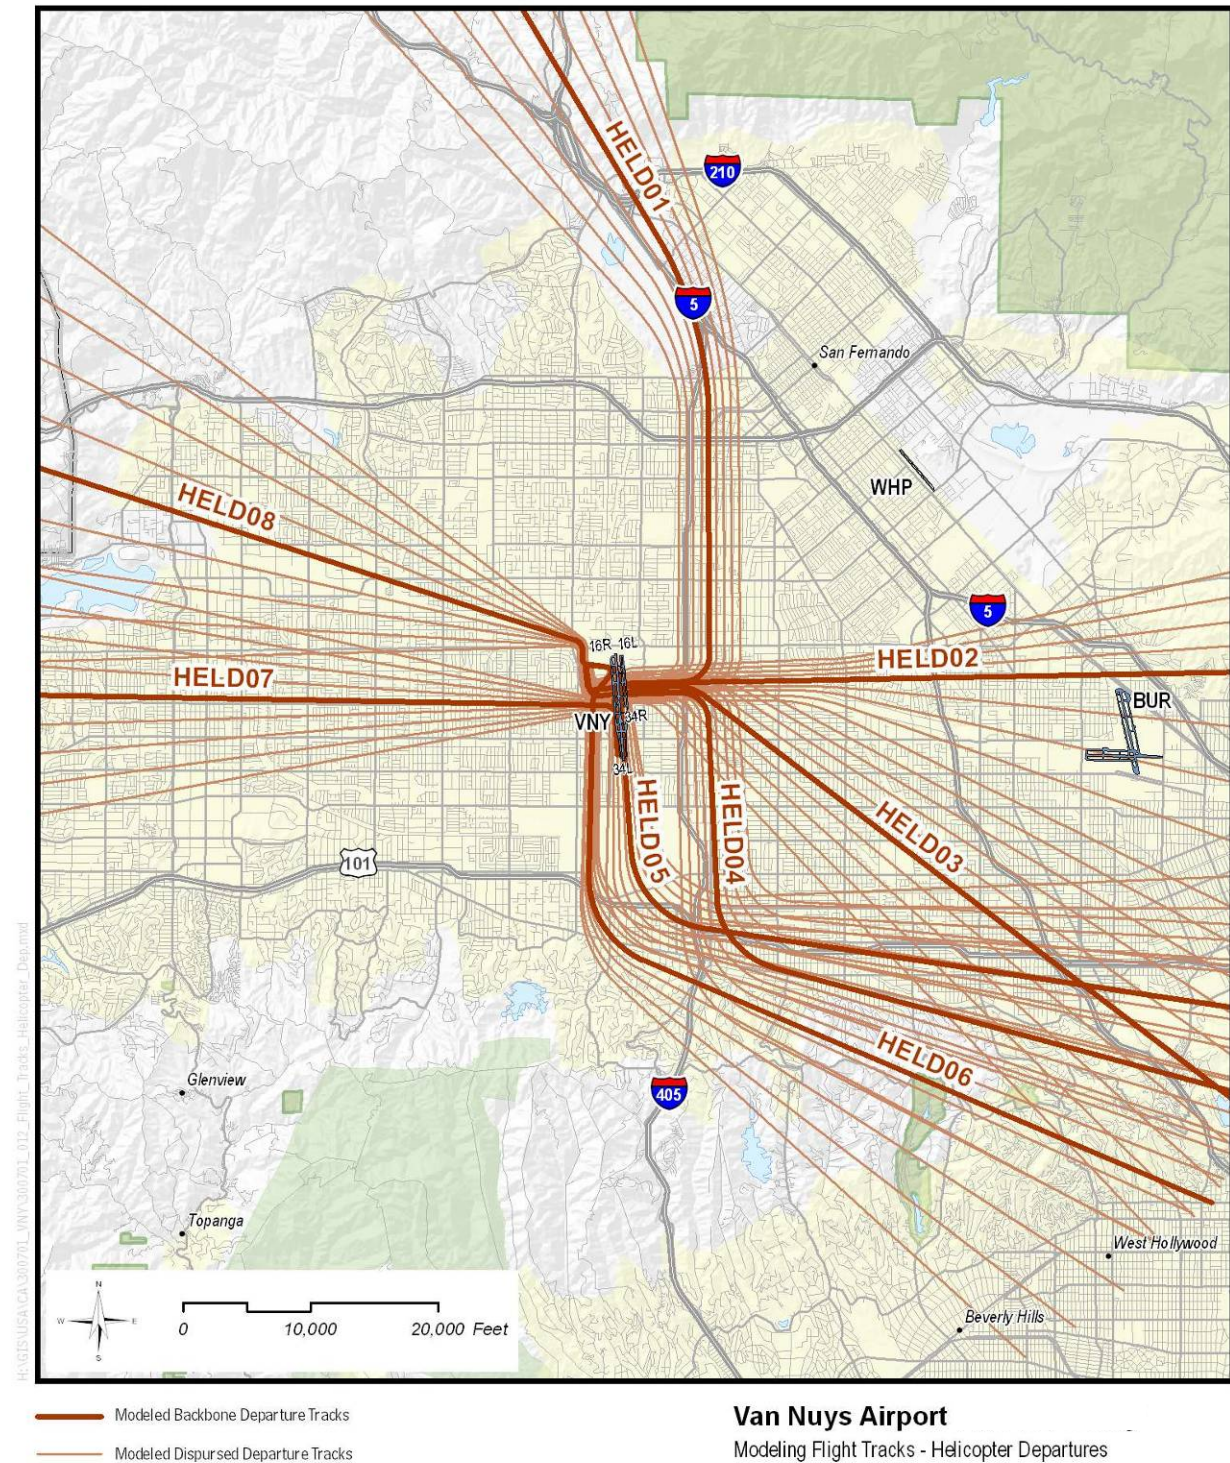



**Figure B.4.16** Modeled Flight Tracks for Runways 16L/16R, Local Pattern


Source: HMMH

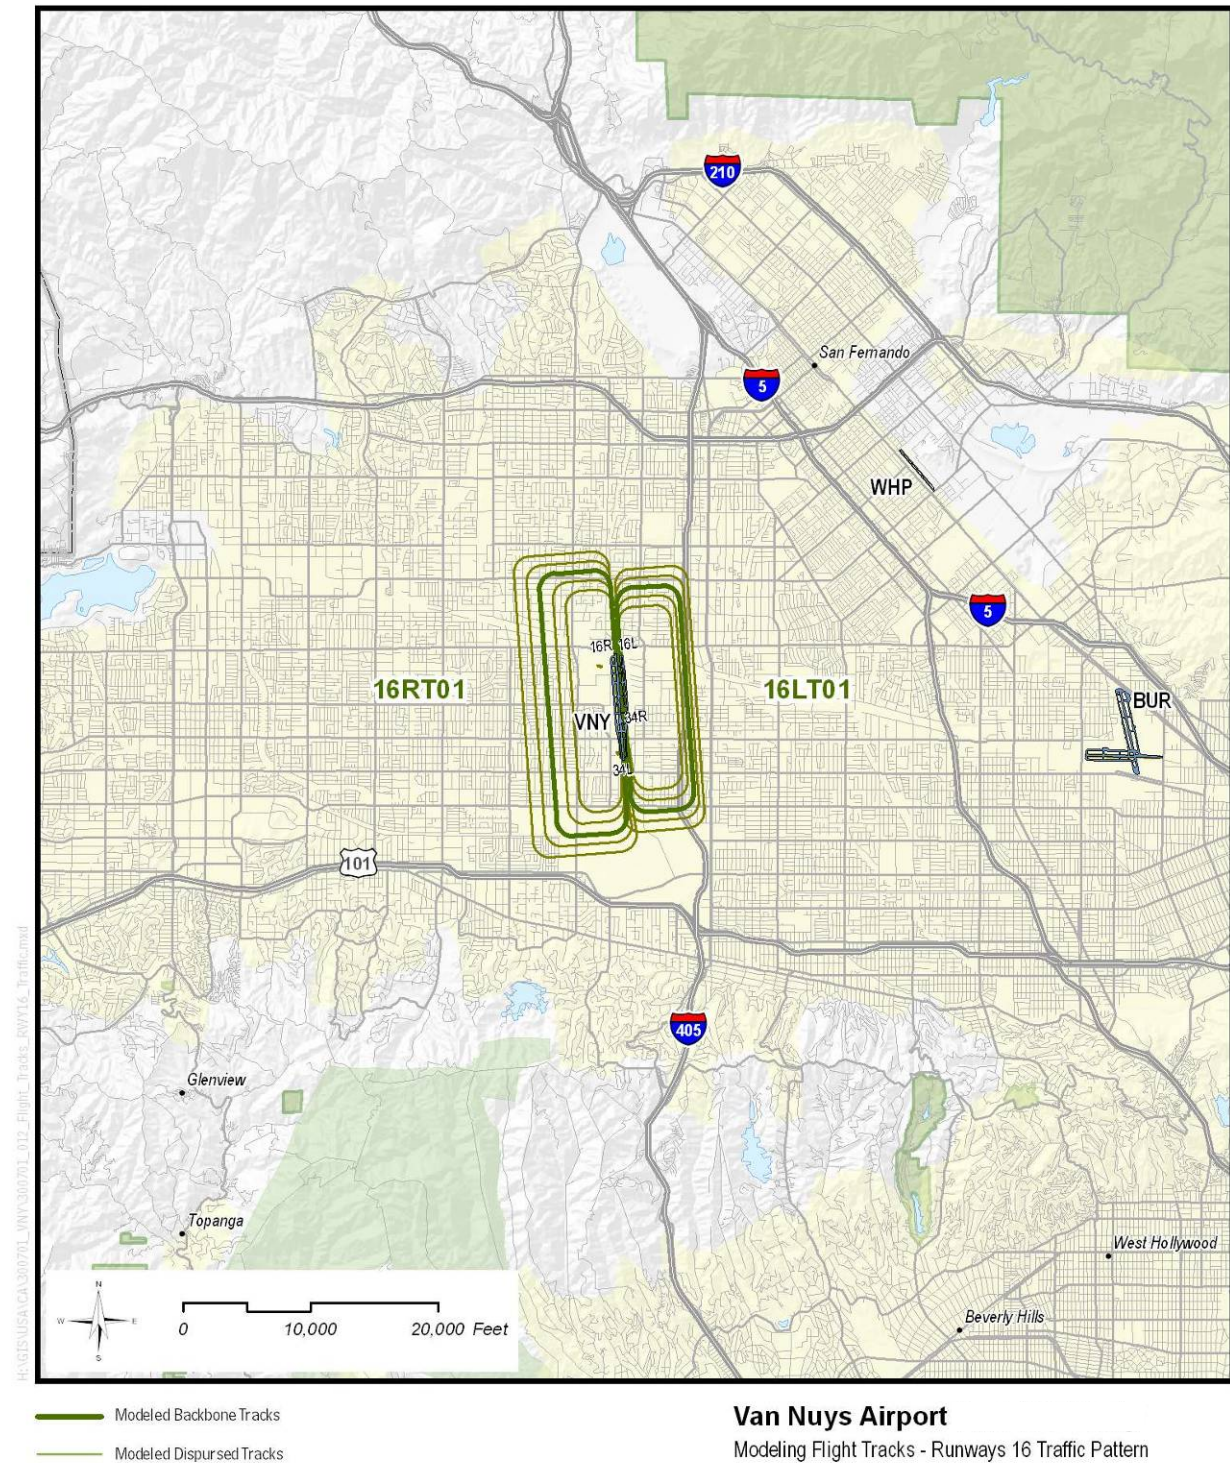



**Figure B.4.17** Modeled Flight Tracks for Runways 34L/34R, Local Pattern

Source: HMMH

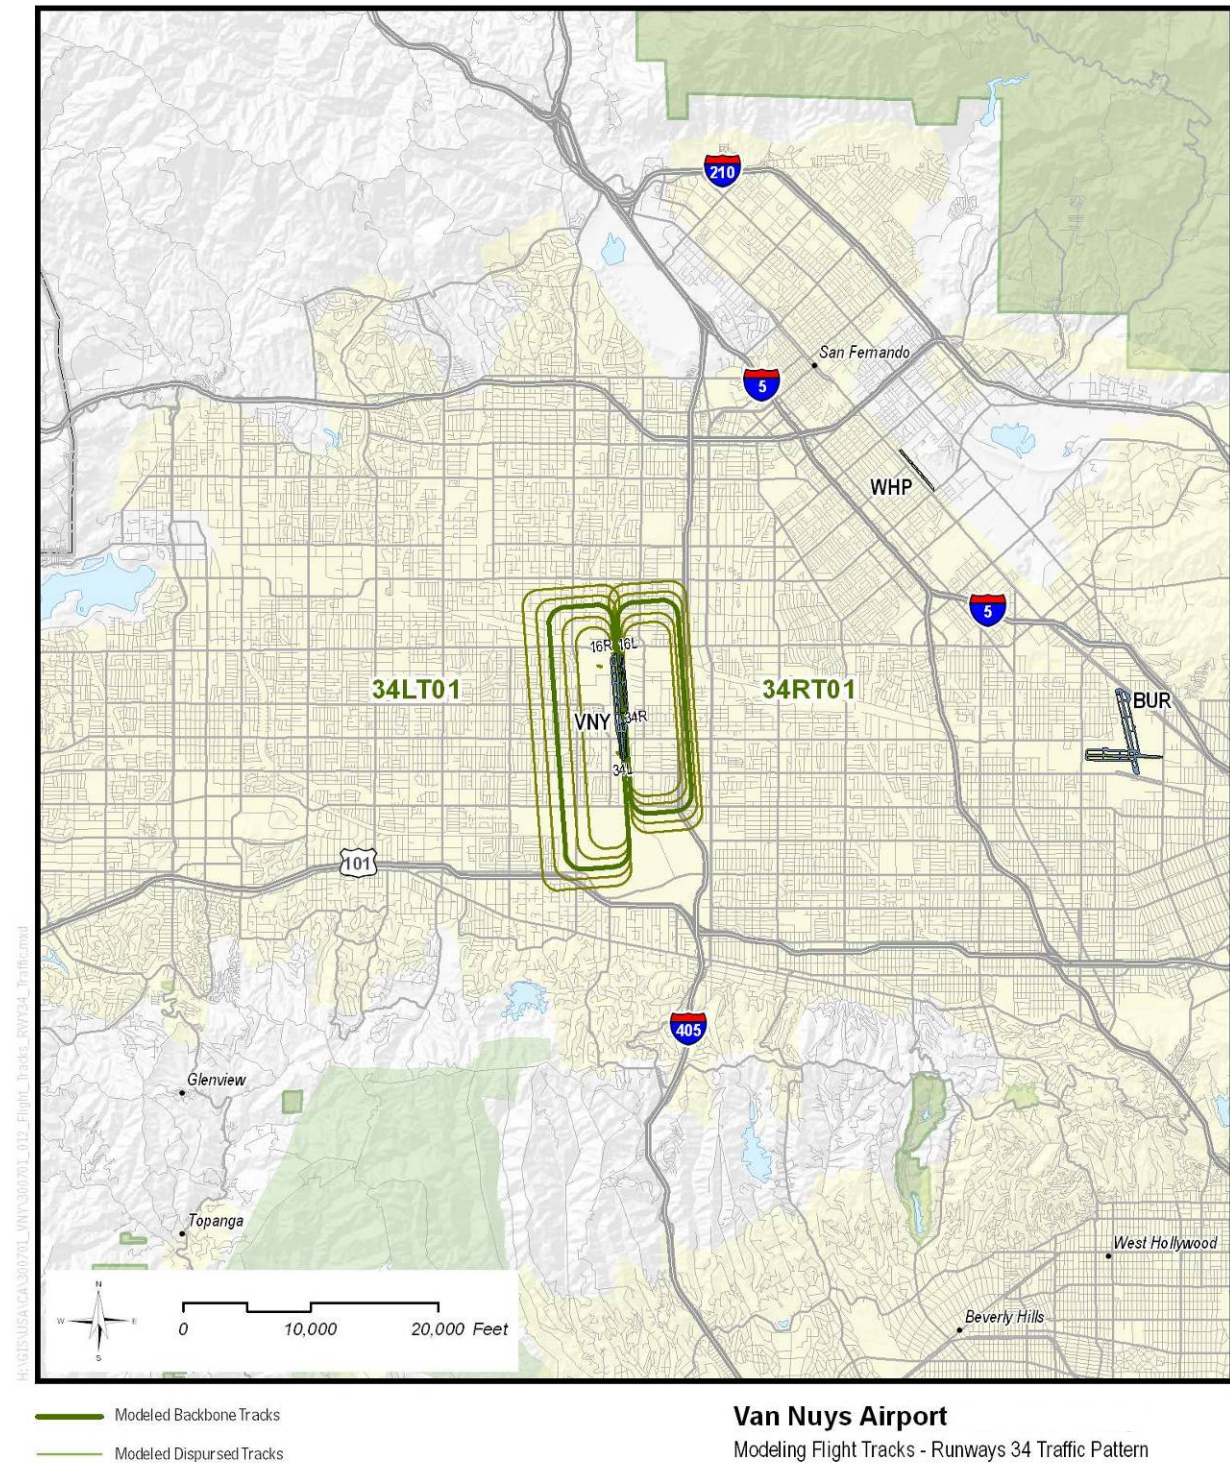

Tables B.4.4 and B.4.5 list the flight track utilization rates for departures and arrivals. The flight track nomenclature for fixed-wing aircraft consists of seven or eight characters: first digit = aircraft group (J or P); second through fourth digits = runway (16L, 16R, 34L, 34R); fifth digit = operation (Arrival or Departure); sixth and seventh digits = track number (01, 02, etc.); and eighth digit = intersection departure (I), if appropriate. For example, track P16LD01I is an intersection departure for a propeller aircraft on runway 16L flying track 01. Helicopter track nomenclature consists of three digits (HEL), one digit = operation (Arrival or Departure), and two digits = track number (01, 02, etc.). Local pattern flight tracks were modeled using one track for each runway.

As noted for the runway use, the flight track utilization rates are assumed to apply to the 2007 and future cases.

**Table B.4.4** Departure Flight Track Utilization Rates

Source: ARTS 2004–2005 data, FAA ATCT, HMMH

| Aircraft Group | Runway/<br>Helipad | Track Name | Day      | Evening | Night  |        |
|----------------|--------------------|------------|----------|---------|--------|--------|
| Jet            | 16R                | J16RD01    | 0.5469   | 0.5043  | 0.5673 |        |
|                |                    | J16RD02    | 0.1331   | 0.2155  | 0.1714 |        |
|                |                    | J16RD03    | 0.0939   | 0.0560  | 0.0082 |        |
|                |                    | J16RD04    | 0.0185   | 0.0216  | 0.0327 |        |
|                |                    | J16RD05    | 0.2076   | 0.2026  | 0.2204 |        |
|                | 34L                | J34LD01    | 0.1053   | 0.1154  | 0.3334 |        |
|                |                    | J34LD02    | 0.0351   | 0.0000  | 0.0000 |        |
|                |                    | J34LD03    | 0.0947   | 0.0769  | 0.0588 |        |
|                |                    | J34LD04    | 0.2912   | 0.3846  | 0.2745 |        |
|                |                    | J34LD05    | 0.4737   | 0.4231  | 0.3333 |        |
|                | Propeller          | 16L        | P16LD01  | 0.1545  | 0.0000 | 0.0000 |
|                |                    |            | P16LD01I | 0.0273  | 0.0000 | 0.0000 |
|                |                    |            | P16LD02  | 0.0773  | 0.0000 | 0.0000 |
| P16LD02I       |                    |            | 0.0136   | 0.0000  | 0.0000 |        |
| P16LD03        |                    |            | 0.2575   | 0.8500  | 0.8500 |        |
| P16LD03I       |                    |            | 0.0455   | 0.1500  | 0.1500 |        |
| P16LD04        |                    |            | 0.2318   | 0.0000  | 0.0000 |        |
| P16LD04I       |                    |            | 0.0409   | 0.0000  | 0.0000 |        |
| P16LD05        |                    |            | 0.1288   | 0.0000  | 0.0000 |        |
| P16LD05I       |                    |            | 0.0228   | 0.0000  | 0.0000 |        |

**Table B.4.4 (cont'd.)** Departure Flight Track Utilization Rates

Source: ARTS 2004–/2005 data, FAA ATCT, HMMH

| Aircraft Group | Runway/<br>Helipad | Track Name | Day    | Evening | Night  |
|----------------|--------------------|------------|--------|---------|--------|
| Propeller      | 16R                | P16RD01    | 0.0139 | 0.0065  | 0.0177 |
|                |                    | P16RD01I   | 0.0025 | 0.0011  | 0.0031 |
|                |                    | P16RD02    | 0.0887 | 0.0392  | 0.1240 |
|                |                    | P16RD02I   | 0.0157 | 0.0069  | 0.0219 |
|                |                    | P16RD03    | 0.2996 | 0.3794  | 0.3010 |
|                |                    | P16RD03I   | 0.0529 | 0.0670  | 0.0531 |
|                |                    | P16RD04    | 0.2494 | 0.1373  | 0.0531 |
|                |                    | P16RD04I   | 0.0440 | 0.0242  | 0.0094 |
|                |                    | P16RD05    | 0.1300 | 0.2354  | 0.3365 |
|                |                    | P16RD05I   | 0.0229 | 0.0415  | 0.0594 |
|                |                    | P16RD06    | 0.0683 | 0.0523  | 0.0177 |
|                | P16RD06I           | 0.0121     | 0.0092 | 0.0031  |        |
|                | 34L                | P34LD01    | 0.1337 | 0.1417  | 0.1889 |
|                |                    | P34LD01I   | 0.0236 | 0.0250  | 0.0333 |
|                |                    | P34LD02    | 0.2340 | 0.2361  | 0.0000 |
|                |                    | P34LD02I   | 0.0413 | 0.0417  | 0.0000 |
|                |                    | P34LD03    | 0.1003 | 0.1889  | 0.0000 |
|                |                    | P34LD03I   | 0.0177 | 0.0333  | 0.0000 |
|                |                    | P34LD04    | 0.3820 | 0.2833  | 0.6611 |
|                | P34LD04I           | 0.0674     | 0.0500 | 0.1167  |        |
|                | 34R                | P34RD01    | 0.0507 | 0.0000  | 0.0000 |
|                |                    | P34RD01I   | 0.0089 | 0.0000  | 0.0000 |
|                |                    | P34RD02    | 0.1142 | 0.2125  | 0.0000 |
|                |                    | P34RD02I   | 0.0202 | 0.0375  | 0.0000 |
|                |                    | P34RD03    | 0.1015 | 0.1063  | 0.1308 |
|                |                    | P34RD03I   | 0.0179 | 0.0188  | 0.0231 |
|                |                    | P34RD04    | 0.5836 | 0.5312  | 0.7192 |
| P34RD04I       | 0.1030             | 0.0937     | 0.1269 |         |        |
| Helicopter     | HNW                | HELD01     | 0.1272 | 0.2673  | 0.1231 |
|                |                    | HELD03     | 0.3991 | 0.4850  | 0.5076 |
|                |                    | HELD05     | 0.3158 | 0.1090  | 0.1077 |
|                |                    | HELD06     | 0.0702 | 0.0793  | 0.0308 |
|                |                    | HELD08     | 0.0877 | 0.0594  | 0.2308 |
|                | HSW                | HELD02     | 0.1176 | 0.2760  | 0.2941 |
|                |                    | HELD04     | 0.5197 | 0.3102  | 0.2549 |
|                |                    | HELD07     | 0.3627 | 0.4138  | 0.4510 |

**Table B.4.5** Arrival Flight Track Utilization Rates

Source: ARTS 2004–2005 data, FAA ATCT, HMMH

| Aircraft Group | Runway/<br>Helipad | Track Name | Day    | Evening | Night  |
|----------------|--------------------|------------|--------|---------|--------|
| Jet            | 16R                | J16RA01    | 0.6910 | 0.6643  | 0.6854 |
|                |                    | J16RA02    | 0.0592 | 0.0474  | 0.0955 |
|                |                    | J16RA03    | 0.0219 | 0.0146  | 0.0169 |
|                |                    | J16RA04    | 0.0116 | 0.0000  | 0.0112 |
|                |                    | J16RA05    | 0.1622 | 0.1898  | 0.1180 |
|                |                    | J16RA06    | 0.0541 | 0.0839  | 0.0730 |
|                | 34L                | J34LA01    | 0.1039 | 0.1096  | 0.2791 |
|                |                    | J34LA02    | 0.0794 | 0.1781  | 0.1628 |
|                |                    | J34LA03    | 0.2627 | 0.2192  | 0.1395 |
|                |                    | J34LA04    | 0.1222 | 0.1918  | 0.0698 |
| J34LA05        |                    | 0.4318     | 0.3013 | 0.3488  |        |
| Propeller      | 16L                | P16LA01    | 0.3124 | 0.2000  | 0.2500 |
|                |                    | P16LA02    | 0.0707 | 0.0800  | 0.0000 |
|                |                    | P16LA03    | 0.0629 | 0.2800  | 0.0000 |
|                |                    | P16LA04    | 0.1257 | 0.1600  | 0.2500 |
|                |                    | P16LA05    | 0.0864 | 0.0667  | 0.0000 |
|                |                    | P16LA06    | 0.0334 | 0.0000  | 0.0000 |
|                |                    | P16LA07    | 0.0609 | 0.0267  | 0.5000 |
|                |                    | P16LA08    | 0.2181 | 0.1333  | 0.0000 |
|                |                    | P16LA09    | 0.0295 | 0.0533  | 0.0000 |
|                | 16R                | P16RA01    | 0.3949 | 0.2536  | 0.4685 |
|                |                    | P16RA02    | 0.0303 | 0.0700  | 0.0759 |
|                |                    | P16RA03    | 0.0618 | 0.0773  | 0.0506 |
|                |                    | P16RA04    | 0.0194 | 0.2464  | 0.0633 |
|                |                    | P16RA05    | 0.0947 | 0.0894  | 0.1139 |
|                |                    | P16RA06    | 0.0750 | 0.0556  | 0.0253 |
|                |                    | P16RA07    | 0.0336 | 0.0290  | 0.0000 |
|                |                    | P16RA08    | 0.0472 | 0.0169  | 0.0759 |
|                |                    | P16RA09    | 0.2431 | 0.1618  | 0.1266 |
|                | 34L                | P34LA01    | 0.0851 | 0.0556  | 0.0217 |
|                |                    | P34LA02    | 0.1234 | 0.2083  | 0.6957 |
|                |                    | P34LA03    | 0.1929 | 0.4028  | 0.1304 |
|                |                    | P34LA04    | 0.2199 | 0.1250  | 0.1087 |
|                |                    | P34LA05    | 0.0227 | 0.0278  | 0.0000 |
|                |                    | P34LA06    | 0.1560 | 0.0694  | 0.0000 |
|                |                    | P34LA07    | 0.2000 | 0.1111  | 0.0435 |
|                | 34R                | P34RA01    | 0.3748 | 0.0000  | 0.0000 |
|                |                    | P34RA02    | 0.0313 | 0.2000  | 0.2000 |
|                |                    | P34RA03    | 0.2188 | 0.6000  | 0.6000 |
|                |                    | P34RA04    | 0.2188 | 0.0000  | 0.0000 |
|                |                    | P34RA05    | 0.0625 | 0.2000  | 0.2000 |
| P34RA06        |                    | 0.0938     | 0.0000 | 0.0000  |        |

**Table B.4.5 (cont'd.)** Arrival Flight Track Utilization Rates

Source: ARTS 2004–2005 data, FAA ATCT, HMMH

| Aircraft Group | Runway/ Helipad | Track Name | Day    | Evening | Night  |
|----------------|-----------------|------------|--------|---------|--------|
| Helicopter     | HNW             | HELA01     | 0.3179 | 0.4494  | 0.3171 |
|                |                 | HELA03     | 0.4271 | 0.3188  | 0.4146 |
|                |                 | HELA07     | 0.1722 | 0.1159  | 0.1463 |
|                |                 | HELA10     | 0.0828 | 0.1159  | 0.1220 |
|                |                 | HELA02     | 0.1190 | 0.2137  | 0.2115 |
|                | HSW             | HELA04     | 0.2881 | 0.1966  | 0.2982 |
|                |                 | HELA05     | 0.1840 | 0.2649  | 0.1346 |
|                |                 | HELA06     | 0.1710 | 0.1880  | 0.2597 |
|                |                 | HELA08     | 0.1022 | 0.0769  | 0.0384 |
|                |                 | HELA09     | 0.1357 | 0.0599  | 0.0576 |

## B.4.6 Overflight Track Geometry and Utilization

The operations and fleet mixes used for the aircraft overflights of VNY are detailed in Section 6. These include arrivals to Runway 8 at BUR and other overflights of VNY by aircraft and helicopters. The procedure that was used for VNY arrivals and departures was incorporated here to develop typical overflight routes and utilization. The flight track for all modeled arriving flights at BUR consisted of a straight track corresponding to the ILS and normal VFR arrival to Runway 8. This flight track crosses VNY in the vicinity of Sherman Way. Most modeled flight tracks consisted of the backbone track with two sub-tracks on either side. The overall width of the sub-track distribution was defined based on the area spanned by the actual radar tracks being modeled. The flight operations modeled on each central track group were allocated across a total of five tracks using the INM standard distribution. Figure B.4.18 presents the overflight radar tracks and resulting modeled flight tracks for the aircraft overflights.

To determine the flight track utilization rates of the non-BUR overflight tracks, the radar flight track density was used for each track. The resulting rate was used for all times of day for each identified aircraft. Table B.4.6 lists the overflight flight tracks and their utilization.


**Table B.4.6** Overflight Flight Track Utilization Rates

Source: ARTS 2004–2005 data, HMMH

| Track Name | Utilization Rate All Times of Day |
|------------|-----------------------------------|
| OVFT01     | 0.2530                            |
| OVFT02     | 0.2530                            |
| OVFT03     | 0.1807                            |
| OVFT04     | 0.1807                            |
| OVFT05     | 0.1326                            |



Figure B.4.18 Modeled Flight Tracks for Helicopter and Fixed-Wing Aircraft Overflights

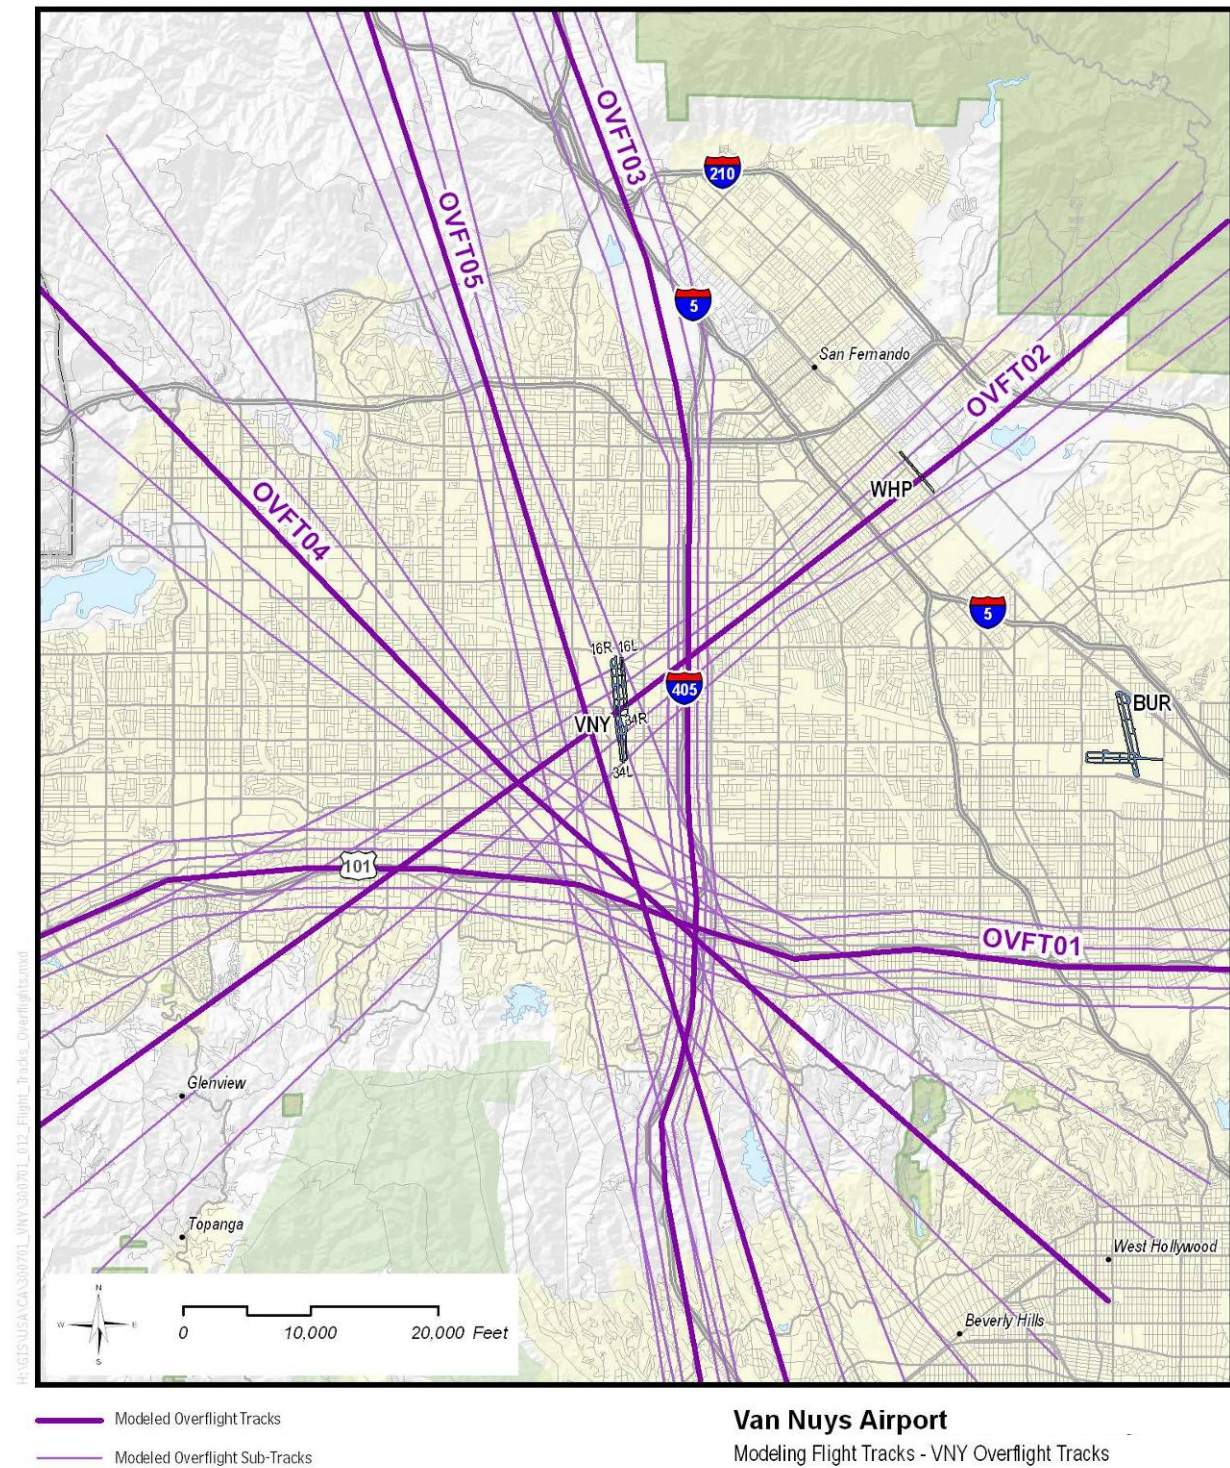

## **B.4.7 Meteorological Data**

The INM requires average values of temperature in degrees Fahrenheit, sea level pressure in inches of mercury (Hg), relative humidity in percent, and headwind in knots (kts). Average daily values of temperature, wet bulb temperature, and sea level barometric pressure for VNY were acquired from the National Climatic Data Center for 2004. HMMH then developed annual average values for temperature (66.1°F), relative humidity (54.2%), and sea level barometric pressure (29.96 in. Hg) and used the default value, 8 kts, for the prevailing headwind. These values were then input into the INM as the meteorological annual averages.

## **B.4.8 Aircraft Noise and Performance**

Specific noise and performance data must be entered for each aircraft type operating at the airport. Noise data are included in the form of sound exposure level (SEL) at a range of distances (from 200 feet to 25,000 feet) from a particular aircraft with engines at a specific thrust level. Performance data include thrust, speed, and altitude profiles for takeoff and landing operations. The INM database contains standard noise and performance data for more than 100 types of fixed-wing aircraft and helicopters. The program automatically accesses the applicable noise and performance data for departure and arrival operations by those aircraft.

To model operations at VNY as accurately as feasible, it was necessary to obtain FAA approval for two refinements to the INM database:

- Use of “substitute” aircraft types for aircraft not included in the INM database, and
- Use of “user-defined” modeling inputs reflecting the benefits of the most commonly used “noise abatement departure profile” (NADP) procedures that differ from the standard INM departure profiles.

The following subsections summarize these revisions.

### **B.4.8.1 Substitute Aircraft**

Some aircraft types included in the operations modeled at VNY are not included in the INM’s standard database. For these aircraft types, recommendations for INM substitute aircraft were forwarded to the FAA for approval or identification of an alternate approved substitution. These aircraft types and their FAA-approved INM substitutions follow.

**Table B.4.7** FAA Approved and Recommended INM Aircraft Substitutions

Source: FAA/AEE, HMMH

| <b>Aircraft Type</b>                    | <b>FAA Approved Aircraft Substitution</b> |
|---|---|
| Very Light Jets (VLJ)                   | CNA55B or CNA500                          |
| L-39 Albatross                          | T-38A                                     |
| Bombardier CRJ-700                      | GV  |
| Raytheon Beechcraft Premier 1           | CNA 500                                   |
| Bombardier Global Express               | GV  |
| Twin Piston Radial Engines (B-25, B-26) | DC3                                       |
| C10T                                    | CNA210                                    |
| P46T, PC12                              | SD330                                     |
| TBM7                                    | GASEPF                                    |

A copy of related FAA correspondence is presented on the following page.





U.S. Department  
of Transportation  
**Federal Aviation  
Administration**

Office of Environment and Energy

800 Independence Ave., S.W.  
Washington, D.C. 20591

November 21, 2006

Mr. Robert D Behr Jr.  
Harris Miller Miller & Hanson Inc.  
945 University Avenue, Suite 201  
Sacramento, CA 95825

Dear Mr. Behr:

The Office of Environment and Energy has reviewed the proposed substitutions submitted for aircraft modeling for Van Nuys Airport (VNY) in support of the Los Angeles World Airports (LAWA) FAA Part 161 Study.

Our office approves the following use of the INM standard types, and concurs with your proposals:

1. Use INM substitution aircraft CNA55B or CNA500 for modeling VLJ.
2. Use INM standard aircraft GV for modeling Bombardier CRJ-700 (CRJ7).
3. Use INM substitution aircraft CNA500B for modeling Raytheon/Beechcraft 390 Premier I (PRM1).
4. Use INM standard aircraft GV for modeling Bombardier BD-700 Global Express (GLEX).
5. Use INM standard aircraft DC3 for modeling Twin Piston Radial Engine Aircraft (B-25, B-26).

Our office recommends the following use of INM types for the noise modeling, which differ from your proposals

1. Use INM standard aircraft T-38A for modeling L-39 Albatross
2. Use INM standard aircraft CNA210 for modeling Single-Engine Turboprop C10T.
3. Use INM substitution aircraft SD330 for modeling Single-Engine Turboprop P46T.
4. Use INM substitution aircraft SD330 for modeling Single-Engine Turboprop PC12.
5. Use INM standard aircraft GASEPF for modeling Single-Engine Turboprop TBM7.

Please understand that approvals listed above are limited to this particular Part 161 Study. Any additional projects or non-standard INM input will require separate approval.

Sincerely,



Dr. Mehmet Marsan  
Acting Manager  
AEE/Noise Division

## B.4.8.2 User-Defined Profiles

The 2003 Part 150 study for VNY included FAA-approved user-defined departure profiles flown for the Lear 25 Gulfstream II, Gulfstream IIB, and Gulfstream III aircraft operating at VNY.

Appendix B in the INM User's Guide provides the FAA guidance and checklist for processing user changes to INM standard profiles to expedite the approval process. Users must provide:

- Background of project,
- Statement of benefit,
- Analysis demonstrating benefit,
- Concurrence on aircraft performance,
- Certification of new parameters, and
- Graphical and tabular comparison.

An effort was undertaken to expand the previous effort to more of the corporate jets flying in and out of VNY by gathering more data from the FBO data were received from two operators, and face-to-face meetings were conducted with two more. The data gathered from the operators were used to build user-defined profiles in INM input format. In contrast to the Part 150 study, the more recent INM had incorporated the departure profiles flown by the Gulfstream II and III aircraft; therefore, no adjustments were needed or sought for these aircraft. The aircraft for which new information on departure profiles were sought included the Lear 25, Gulfstream IV, Boeing 727, and Douglas A-3. After developing the INM profiles based on operator input and obtaining the concurrence of the operators, new profile packages for these aircraft types were submitted, as outlined above, to the FAA for approval.

These profiles and accompanying concurrence packages follow, in order, for the following aircraft:

- Gulfstream IV,
- Douglas A-3,

- Boeing 727,
- Lear 25/25
- , and
- Gulfstream III with hushkit for recertification to Part 36 Stage 3.

**HARRIS MILLER MILLER & HANSON INC.**

945 University Avenue, Suite 201  
Sacramento, California 95825  
T 916.568.1116  
F 916.568.1201  
W www.hmmh.com

June 9, 2006

Mr. Sandy Liu  
Federal Aviation Administration  
Office of Environment and Energy  
800 Independence Ave., SW  
Washington, DC 20591

Subject: Request for Approval of User Changes to the Integrated Noise Model, GIV  
Reference: HMMH Project Number 300701

Dear Mr. Liu:

This letter is a request for approval of user changes to the Integrated Noise Model (INM) version 6.2 for use at Van Nuys (VNY) airport. These changes involve augmenting the standard departure profiles in the INM with actual procedures as flown by pilots operating at VNY.

**Section 1 – Background**

We are submitting this request for written approval for changes to the Integrated Noise Model standard profiles in support of a Van Nuys Airport FAR Part 161 study. Los Angeles World Airports (LAWA), the proprietor of VNY, is the sponsor of the study.

This letter contains data on the Gulfstream GIV operating procedures as provided by The Air Group. We will send similar letters containing data for other aircraft operating at VNY which also are flown differently than modeled in the INM. In support of the Part 161 process, we held a meeting on January 25, 2006 with personnel from The Air Group, a Fixed Base Operator (FBO) at VNY, to determine how they operate their GIV aircraft. The Air Group's approval of our modeling of this procedure is documented in Appendix A. We refer to this procedure as the Air Group procedure in this document.

**Section 2 – Statement of Benefit**

The Air Group procedure provides a benefit (maximum of -0.2 dBA, SEL) from 0.5 to 10 nautical miles (nm) from the brake release point.

**Section 3 – Analysis Demonstrating Benefit**

The differences between the standard INM departure and the Air Group procedure are primarily due to the different flaps schedule used in the Air Group procedure. The Air Group procedure reduces from 20 degrees of flaps at takeoff to 0 degrees of flaps at 400 feet Above Field Elevation (AFE). The standard INM GIV departure uses 20 degrees of flaps from takeoff up to 1,850 feet AFE. The intention of the Air Group procedure is to climb out from VNY at the maximum rate possible; the primary reason for this procedure is to quickly gain altitude to avoid conflicts with arrival traffic at neighboring Burbank airport.

The analysis shows the Air Group procedure provides noise benefits from 0.5 to 10 nautical miles from the brake release point. The benefit is a maximum (-1.7 dB, SEL, relative to the INM standard procedure) at 0.5 nm from the departure end, with the benefit decreasing as the aircraft continues down the flight track.

**HARRIS MILLER MILLER & HANSON INC.**

AG - GIV Request for Approval of User Changes to INM  
June 9, 2006  
Page 2

Table 1 shows the SEL results under the flight path from the Air Group procedure; the standard INM departure profile is presented for comparison.

**Section 4 – Concurrence on Aircraft Performance**

A letter from Air Group stating agreement with these procedures is found in Appendix A.

**Section 5 – Certification of New Parameters**

The aircraft performance characteristics provided by the Air Group have been translated into INM procedure steps using standard engineering practice. We developed no new aircraft performance coefficients for this study. The procedure steps data in this study conform to the rules given in the INM User's Guide and SAE-1845. We used net corrected thrust in units of pounds for all thrust settings.

**Section 6 – Graphical and Tabular Comparison**

Tables 2-5 and Figures 1-3 present the results of the modeling analysis by showing the altitude, airspeed, and net corrected thrust per engine of the modeled procedures as a function of distance from the brake release point.

If you have any questions or comments regarding the content of this letter, you can reach me via telephone at 916.568.1116 or via e-mail at [rbehr@hmmh.com](mailto:rbehr@hmmh.com). Thank you for your consideration. I look forward to hearing back from you at your earliest convenience.

Sincerely yours,

**HARRIS MILLER MILLER & HANSON INC.**

Robert D. Behr  
Senior Consultant

enclosures:

**HARRIS MILLER MILLER & HANSON INC.**

AG - GIV Request for Approval of User Changes to INM

June 9, 2006

Page 3

**Table 1. Comparison of Noise Impacts from Brake Release for INM Standard and Air Group Departure Procedures**

INM Aircraft Model: GIV Profile Weight: 63,410 lb

| Distance from Brake Release (nm) | INM Standard, SEL (dBA) | Air Group, SEL (dBA) | Difference SEL (dBA) |
|----------------------------------|-------------------------|----------------------|----------------------|
| 0.00                             | 134.2                   | 134.2                | 0.0                  |
| 0.50                             | 107.8                   | 106.1                | -1.7                 |
| 1.00                             | 91.6                    | 90.7                 | -0.9                 |
| 1.50                             | 86.6                    | 86.2                 | -0.4                 |
| 2.00                             | 83.4                    | 83.1                 | -0.3                 |
| 2.50                             | 81.0                    | 80.6                 | -0.4                 |
| 3.00                             | 79.7                    | 79.5                 | -0.2                 |
| 3.50                             | 77.7                    | 77.4                 | -0.3                 |
| 4.00                             | 76.4                    | 76.2                 | -0.2                 |
| 4.50                             | 75.3                    | 75.0                 | -0.3                 |
| 5.00                             | 74.1                    | 73.4                 | -0.7                 |
| 5.50                             | 73.0                    | 72.9                 | -0.1                 |
| 6.00                             | 71.7                    | 71.9                 | 0.2                  |
| 6.50                             | 71.0                    | 71.0                 | 0.0                  |
| 7.00                             | 70.2                    | 70.1                 | -0.1                 |
| 7.50                             | 69.5                    | 69.4                 | -0.1                 |
| 8.00                             | 68.8                    | 68.7                 | -0.1                 |
| 8.50                             | 68.1                    | 68.1                 | 0.0                  |
| 9.00                             | 67.6                    | 67.5                 | -0.1                 |
| 9.50                             | 67.0                    | 66.9                 | -0.1                 |
| 10.0                             | 66.5                    | 66.4                 | -0.1                 |

**HARRIS MILLER MILLER & HANSON INC.**

AG - GIV Request for Approval of User Changes to INM

June 9, 2006

Page 4

**Table 2. INM Standard GIV Departure Procedures**

Profile Weight: 63,410 lb

| Step Number | Altitude Above Field Elevation (AFE), feet | Calibrated Airspeed, knots | Flaps | Thrust Setting |
|-------------|--|----------------------------|-------|----------------|
| 1           | 0.0  | -                          | 20    | Max takeoff    |
| 2           | 35.0                                       | -                          | 20    | Max takeoff    |
| 3           | -  | 159.2                      | 20    | Max takeoff    |
| 4           | 400  | -                          | 20    | Max takeoff    |
| 5           | 600  | -                          | 20    | Max Climb      |
| 6           | 750  | -                          | 20    | Max Climb      |
| 7           | 1850                                       | -                          | 10    | Max Climb      |
| 8           | 3000                                       | -                          | 10    | Max Climb      |
| 9           | -  | 250                        | zero  | Max Climb      |
| 10          | 5000                                       | -                          | zero  | Max Climb      |
| 11          | 6000                                       | -                          | zero  | Max Climb      |
| 12          | 7000                                       | -                          | zero  | Max Climb      |
| 13          | 8000                                       | -                          | zero  | Max Climb      |
| 14          | 9000                                       | -                          | zero  | Max Climb      |
| 15          | 10000                                      | -                          | zero  | Max Climb      |

**Table 3. Air Group GIV Departure Procedures**

Profile Weight: 63,410 lb

| Step Number | Altitude Above Field Elevation (AFE), feet | Calibrated Airspeed, knots | Flaps | Thrust Setting |
|-------------|--|----------------------------|-------|----------------|
| 1           | 0  | -                          | 20    | Max takeoff    |
| 2           | 35   | -                          | 20    | Max takeoff    |
| 3           | 400  | -                          | 20    | Max takeoff    |
| 4           | -  | 160                        | zero  | Max takeoff    |
| 5           | 2000                                       | -                          | zero  | Max Climb      |
| 6           | 3000                                       | -                          | zero  | Max Climb      |
| 7           | -  | 250                        | zero  | Max Climb      |
| 8           | 5000                                       | -                          | zero  | Max Climb      |
| 9           | 6000                                       | -                          | zero  | Max Climb      |
| 10          | 7000                                       | -                          | zero  | Max Climb      |
| 11          | 8000                                       | -                          | zero  | Max Climb      |
| 12          | 9000                                       | -                          | zero  | Max Climb      |
| 13          | 10000                                      | -                          | zero  | Max Climb      |

**HARRIS MILLER MILLER & HANSON INC.**

AG - GIV Request for Approval of User Changes to INM

June 9, 2006

Page 5

**Table 4. INM Standard GIV Departure Parameters**

Profile Weight: 63,410 lb

| Distance from Brake Release, nm | Altitude Above Field Elevation (AFE), feet | True Airspeed, knots | Net Corrected Thrust per Engine, lb |
|---------------------------------|--|----------------------|-------------------------------------|
| 0.00                            | 0.0  | 35.0                 | 13181.0                             |
| 0.45                            | 0.0  | 147.0                | 11009.1                             |
| 0.47                            | 35.0                                       | 147.1                | 11011.1                             |
| 0.70                            | 209.3                                      | 160.8                | 10824.9                             |
| 0.82                            | 400.0                                      | 161.3                | 10835.9                             |
| 0.90                            | 500.0                                      | 161.5                | 8667.5                              |
| 0.99                            | 600.0                                      | 161.7                | 8690.3                              |
| 1.12                            | 750.0                                      | 162.1                | 8707.3                              |
| 2.01                            | 1850.0                                     | 164.8                | 8832.7                              |
| 2.97                            | 3000.0                                     | 167.6                | 8963.7                              |
| 6.09                            | 4573.4                                     | 269.5                | 8289.4                              |
| 6.54                            | 5000.0                                     | 271.3                | 8338.0                              |
| 7.63                            | 6000.0                                     | 275.4                | 8451.9                              |
| 8.75                            | 7000.0                                     | 279.7                | 8565.8                              |
| 9.92                            | 8000.0                                     | 284.1                | 8679.7                              |
| 11.12                           | 9000.0                                     | 288.5                | 8784.3                              |
| 12.39                           | 10000.0                                    | 293.1                | 8835.2                              |

**Table 5. Air Group GIV Departure Parameters**

Profile Weight: 63,410 lb

| Distance from Brake Release, nm | Altitude Above Field Elevation (AFE), feet | True Airspeed, knots | Net Corrected Thrust per Engine, lb |
|---------------------------------|--|----------------------|-------------------------------------|
| 0.00                            | 0.0  | 35.0                 | 13181.0                             |
| 0.45                            | 0.0  | 147.0                | 11009.1                             |
| 0.47                            | 35.0                                       | 147.1                | 11011.1                             |
| 0.68                            | 400.0                                      | 147.9                | 11032.2                             |
| 0.85                            | 566.8                                      | 151.9                | 8791.5                              |
| 1.34                            | 1062.8                                     | 163.7                | 8735.4                              |
| 2.07                            | 2000.0                                     | 166.0                | 8842.2                              |
| 2.88                            | 3000.0                                     | 168.4                | 8956.1                              |
| 5.04                            | 3628.7                                     | 265.7                | 8181.7                              |
| 6.47                            | 5000.0                                     | 271.3                | 8338.0                              |
| 7.56                            | 6000.0                                     | 275.4                | 8451.9                              |
| 8.69                            | 7000.0                                     | 279.7                | 8565.8                              |
| 9.85                            | 8000.0                                     | 284.1                | 8679.7                              |
| 11.06                           | 9000.0                                     | 288.5                | 8784.3                              |
| 12.32                           | 10000.0                                    | 293.1                | 8835.2                              |



**HARRIS MILLER MILLER & HANSON INC.**

AG - GIV Request for Approval of User Changes to INM  
June 9, 2006  
Page 6

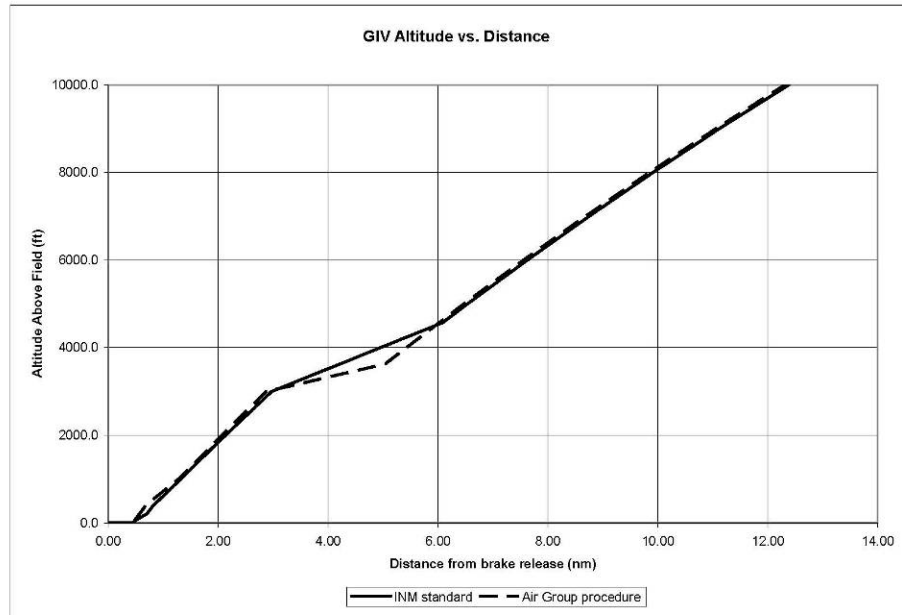


Figure 1. Altitude Profiles for Standard and Air Group Procedures

**HARRIS MILLER MILLER & HANSON INC.**

AG - GIV Request for Approval of User Changes to INM  
June 9, 2006  
Page 7

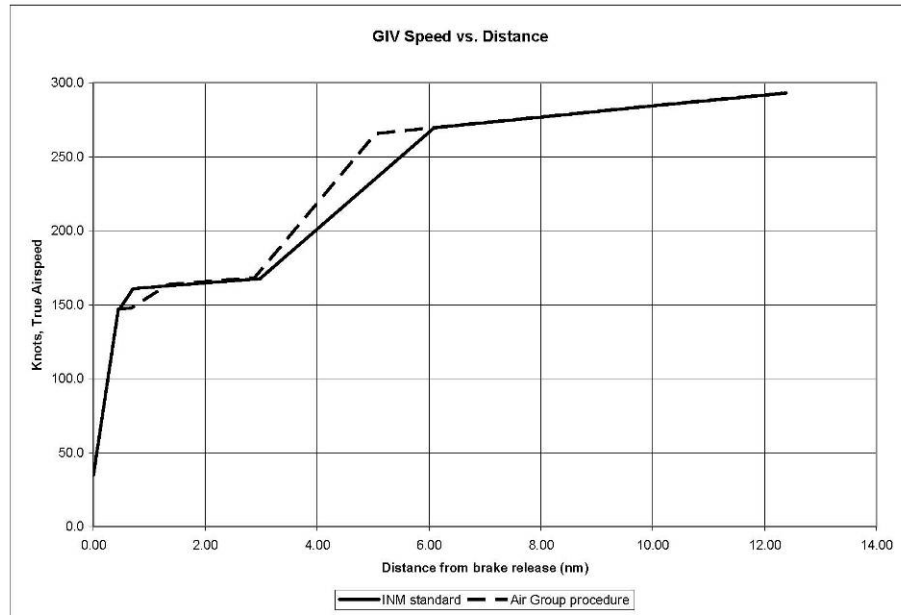


Figure 2. Airspeed Profiles for Standard and Air Group Procedures

**HARRIS MILLER MILLER & HANSON INC.**

AG - GIV Request for Approval of User Changes to INM  
June 9, 2006  
Page 8

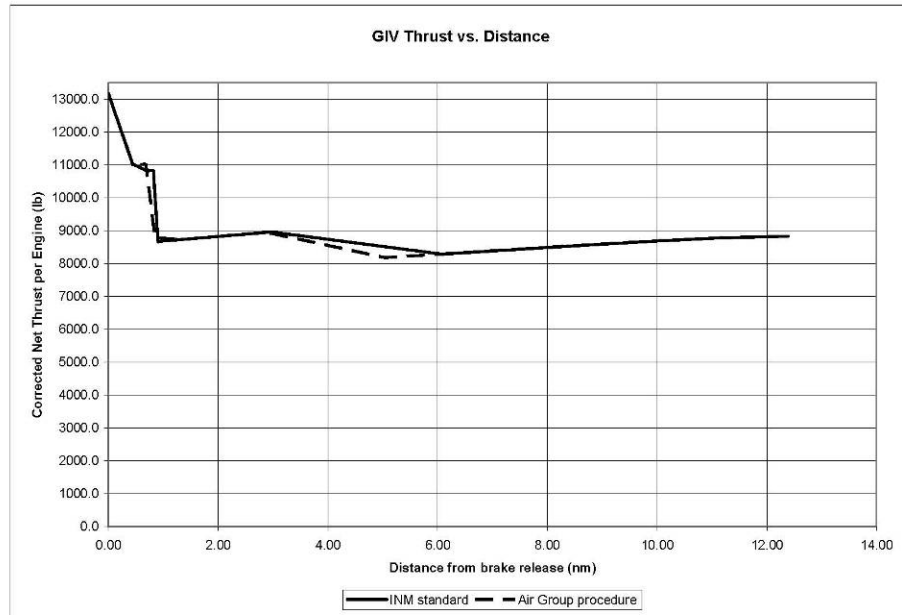


Figure 3. Thrust Profiles for Standard and Air Group Procedures

**HARRIS MILLER MILLER & HANSON INC.**

AG - GIV Request for Approval of User Changes to INM  
June 9, 2006  
Page 9

**APPENDIX A**


8- 8-08:14:45 :AGI Fit ops 11 818 809 7211 # 1


**HARRIS MILLER MILLER & HANSON INC.**  
Review and Concurrence of VNY Aircraft Performance Data – Air Group  
March 29, 2006  
Page 4

The Air Group concurrence with modeled procedures:

The Air Group certifies that the proposed profile for Gulfstream IV aircraft departing from Van Nuys Airport falls within reasonable bounds of the aircraft's performance.

DAVID BAKER  
Name

 CHIEF PILOT  
Position/Title





U.S. Department  
of Transportation  
**Federal Aviation  
Administration**

Office of Environment and Energy

800 Independence Ave., S.W.  
Washington, D.C. 20591

JUN 21 2006

Mr. Bob Behr  
Harris Miller Miller & Hanson Inc.  
945 University Ave., Suite 201  
Sacramento, CA 95825

Dear Sirs:

The Office of Environment and Energy has reviewed the data submitted for the user defined departure profile data for the GIV and approves its use in the Van Nuys Airport FAR Part 161 study.

Please understand that this approval for use of the profile is limited to this particular Van Nuys Airport FAR Part 161 study. Any additional projects or non-standard INM input for VNY will require separate approval as will use of this profile for another site.

Sincerely,

A handwritten signature in cursive script that reads "Sandy P. Liu".

Sandy Liu  
AEE/Noise Division

**HARRIS MILLER MILLER & HANSON INC.**

945 University Avenue, Suite 201  
Sacramento, California 95825  
T 916.568.1116  
F 916.568.1201  
W www.hmmh.com

June 20, 2006

Sandy Liu  
Federal Aviation Administration  
Office of Environment and Energy  
800 Independence Ave., SW  
Washington, DC 20591

Subject: Request for Approval of User Changes to the Integrated Noise Model, A-3  
Reference: HMMH Project Number 300701

Dear Mr. Liu:

This letter is a request for approval of user changes to the Integrated Noise Model (INM) version 6.2 for use at Van Nuys Airport (VNY). These changes involve augmenting the standard departure profiles in the INM with actual procedures as flown by pilots operating at VNY.

**Section 1 – Background**

We are submitting this request for written approval for changes to the Integrated Noise Model standard profiles in support of a Van Nuys Airport FAR Part 161 study. Los Angeles World Airports (LAWA), the proprietor of VNY, is the sponsor of the study.

This letter contains data on the Douglas A-3 (INM type A3) operating procedures as provided by Raytheon Flight Test Operations (Raytheon). We will send similar letters containing data for other aircraft operating at VNY which also are flown differently than modeled in the INM. In support of the Part 161 process, we received information from January-June 2006 from personnel at Raytheon, a Fixed Base Operator (FBO) at VNY, stating how they operate their A-3 aircraft. Raytheon's approval of our modeling of this procedure is documented in Appendix A. We refer to this procedure as the Raytheon procedure in this document.

**Section 2 – Statement of Benefit**

The Raytheon procedure provides a benefit (maximum of -6.4 dBA, SEL) from 0.0 to 1.5 nautical miles (nm) from the brake release point.

**Section 3 – Analysis Demonstrating Benefit**

The differences between the standard INM departure and the Raytheon procedure are primarily due to slightly different initial power settings during the takeoff roll and significant differences during the climb-out phase. The Raytheon procedure begins with a thrust setting of 96% RPM. Upon reaching 400 feet Above Field Elevation (AFE), the power is decreased to a power setting of 93%; this power setting is retained up to 10000 feet AFE. The standard INM A-3 departure uses 97% RPM during the ground roll, with an increase to 98% at rotation and up to 400 feet AFE. At 400 feet, the power is decreased to 93%.

The analysis shows the Raytheon procedure provides noise benefits from 0.0 to 1.5 nautical miles from the brake release point. After about 1.5 nm from brake release, the INM standard aircraft begins a power reduction to 93%, resulting in less noise under the flight path (maximum of 2.9 dBA, SEL, at 2.0 nm from brake release) than the Raytheon procedure due to the higher climb gradient and faster airspeeds of the standard procedure. Raytheon's chief test pilot has stated that the high speed (250

**HARRIS MILLER MILLER & HANSON INC.**

A-3 Request for Approval of User Changes to INM  
June 20, 2006  
Page 2

knots at 700 feet AGL) and small climb gradient (5000 feet in 33 nm) of the INM standard procedure is impossible to accept in the high volume air traffic environment around VNY.

Table 1 shows the SEL results under the flight path from the Raytheon procedure; the standard INM departure profile is presented for comparison.

**Section 4 – Concurrence on Aircraft Performance**

A letter from Raytheon stating agreement with these procedures is found in Appendix A.

**Section 5 – Certification of New Parameters**

The aircraft performance characteristics provided by Raytheon have been translated into INM procedure steps using standard engineering practice. We developed no new aircraft performance coefficients for this study. The procedure steps data in this study conform to the rules given in the INM User's Guide and SAE-1845. We used % RPM for all thrust settings.

**Section 6 – Graphical and Tabular Comparison**

Tables 2-3 and Figures 1-3 present the results of the modeling analysis by showing the altitude, airspeed, and engine % RPM of the modeled procedures as a function of distance from the brake release point.

If you have any questions or comments regarding the content of this letter, you can reach me via telephone at 916.568.1116 or via e-mail at [rbehr@hmmh.com](mailto:rbehr@hmmh.com). Thank you for your consideration. I look forward to hearing back from you at your earliest convenience.

Sincerely yours,

**HARRIS MILLER MILLER & HANSON INC.**

Robert D. Behr  
Senior Consultant

enclosures:

**HARRIS MILLER MILLER & HANSON INC.**

A-3 Request for Approval of User Changes to INM

June 20, 2006

Page 3

**Table 1. Comparison of Noise Impacts from Brake Release for INM Standard and Raytheon A-3 Departure Procedures****INM Aircraft Model: A3 Profile Weight: Standard 68,000 lb; Raytheon 69,400 lb**

| Distance from Brake Release (nm) | INM Standard, SEL (dBA) | Raytheon, SEL (dBA) | Difference SEL (dBA) |
|----------------------------------|-------------------------|---------------------|----------------------|
| 0.00                             | 154.6                   | 152.8               | -1.8                 |
| 0.50                             | 134.1                   | 130.6               | -3.5                 |
| 1.00                             | 128.3                   | 125.9               | -2.4                 |
| 1.50                             | 123.6                   | 122.3               | -1.3                 |
| 2.00                             | 109.4                   | 112.3               | 2.9                  |
| 2.50                             | 106.7                   | 109.4               | 2.7                  |
| 3.00                             | 104.8                   | 107.2               | 2.4                  |
| 3.50                             | 103.4                   | 105.4               | 2.0                  |
| 4.00                             | 102.3                   | 103.8               | 1.5                  |
| 4.50                             | 101.3                   | 102.5               | 1.2                  |
| 5.00                             | 100.0                   | 101.1               | 1.1                  |
| 5.50                             | 98.6                    | 99.9                | 1.3                  |
| 6.00                             | 97.5                    | 98.8                | 1.3                  |
| 6.50                             | 97.0                    | 97.8                | 0.8                  |
| 7.00                             | 96.8                    | 97.0                | 0.2                  |
| 7.50                             | 96.7                    | 96.2                | -0.5                 |
| 8.00                             | 96.5                    | 95.5                | -1.0                 |
| 8.50                             | 96.4                    | 94.8                | -1.6                 |
| 9.00                             | 96.3                    | 94.0                | -2.3                 |
| 9.50                             | 96.2                    | 93.3                | -2.9                 |
| 10.0                             | 96.1                    | 92.6                | -3.5                 |



**HARRIS MILLER MILLER & HANSON INC.**

A-3 Request for Approval of User Changes to INM

June 20, 2006

Page 4

**Table 2. INM Standard A-3 Departure Procedures**

Profile Weight: 68,000 lb

| Distance from Brake Release (nm) | Altitude Above Field Elevation (AFE), feet | True Airspeed, knots | Power Parameter % RPM |
|----------------------------------|--|----------------------|-----------------------|
| 0.00                             | 0.0  | 35.0                 | 97.0                  |
| 0.20                             | 0.0  | 105.0                | 98.0                  |
| 1.48                             | 400.0                                      | 190.0                | 98.0                  |
| 1.81                             | 700.0                                      | 250.0                | 93.0                  |
| 3.13                             | 1400.0                                     | 250.0                | 93.0                  |
| 4.77                             | 2100.0                                     | 250.0                | 93.0                  |
| 6.09                             | 3000.0                                     | 250.0                | 93.0                  |
| 32.92                            | 5000.0                                     | 250.0                | 93.0                  |

**Table 3. Raytheon A-3 Departure Procedures**

Profile Weight: 69,400 lb

| Distance from Brake Release (nm) | Altitude Above Field Elevation (AFE), feet | True Airspeed, knots | Power Parameter % RPM |
|----------------------------------|--|----------------------|-----------------------|
| 0.00                             | 0.0  | 35.0                 | 96.0                  |
| 0.20                             | 0.0  | 133.6                | 96.0                  |
| 1.64                             | 400.0                                      | 157.7                | 96.0                  |
| 1.70                             | 420.0                                      | 157.8                | 93.0                  |
| 2.00                             | 700.0                                      | 158.4                | 93.0                  |
| 4.91                             | 3000.0                                     | 190.4                | 93.0                  |
| 19.11                            | 10000.0                                    | 235.7                | 93.0                  |

**HARRIS MILLER MILLER & HANSON INC.**

A-3 Request for Approval of User Changes to INM  
June 20, 2006  
Page 5

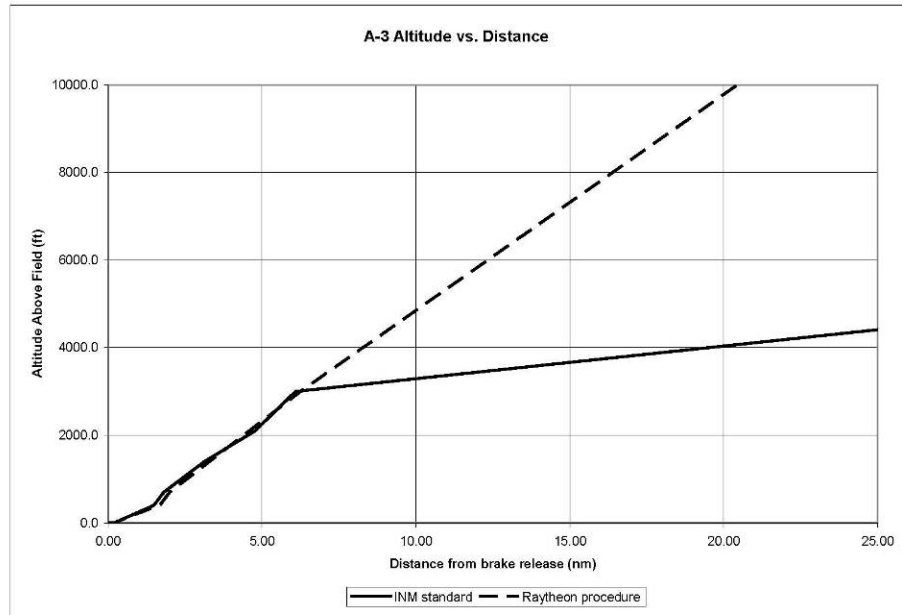


Figure 1. Altitude Profiles for Standard and Raytheon Procedures

**HARRIS MILLER MILLER & HANSON INC.**

A-3 Request for Approval of User Changes to INM  
June 20, 2006  
Page 6

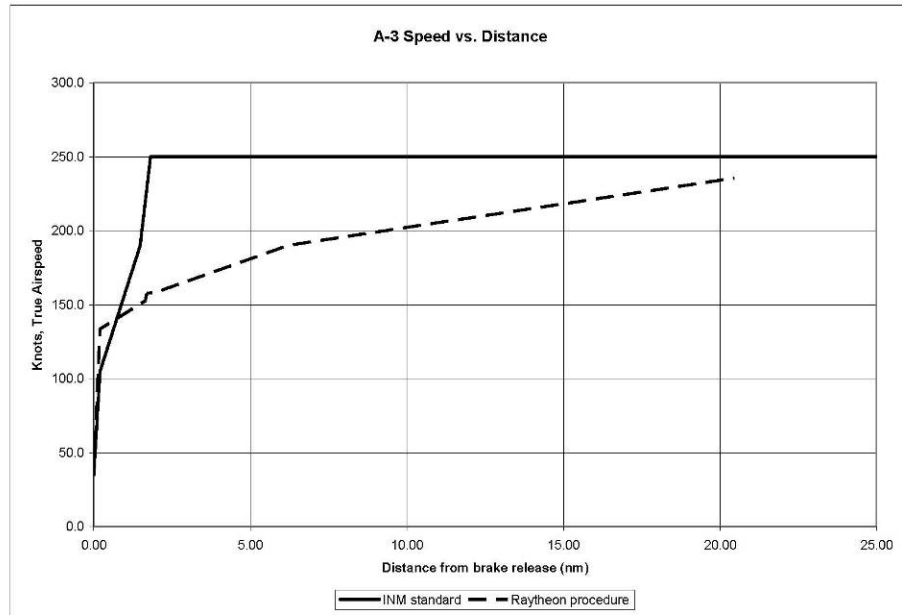


Figure 2. Airspeed Profiles for Standard and Raytheon Procedures

**HARRIS MILLER MILLER & HANSON INC.**

A-3 Request for Approval of User Changes to INM  
June 20, 2006  
Page 7



Figure 3. Thrust Profiles for Standard and Raytheon Procedures

**HARRIS MILLER MILLER & HANSON INC.**

A-3 Request for Approval of User Changes to INM  
June 20, 2006  
Page 8

**APPENDIX A**

Review and Concurrence of VNY Aircraft Performance Data - Raytheon  
June 7, 2006  
Page 4

Raytheon Flight Test Operations concurrence with modeled procedures:

Raytheon Flight Test Operations certifies that the proposed profile for A-3 aircraft departing from Van Nuys Airport falls within reasonable bounds of the aircraft's performance.

  
Name

  
Position/Title



JUN-19-2006 15:24 FROM: TQ 8183754587 TO: 916 568 1201 P.47

**HARRIS MILLER MILLER & HANSON INC.**

945 University Avenue, Suite 201  
Sacramento, California 95825  
T 916.568.1116  
F 916.568.1201  
W www.hmmh.com

March 13, 2007

Dr. "Bill" Hua He  
Federal Aviation Administration  
Office of Environment and Energy  
800 Independence Ave., SW  
Washington, DC 20591

Subject: Supplemental Information for A-3 Non-Standard Departure Profiles at Van Nuys Airport

Reference: HMMH Project Number 300701

Dear Dr. He:

This letter is in response to questions raised regarding our request (previously submitted in June 2006) to use actual operator profiles for the A-3 aircraft when modeling in the Integrated Noise Model (INM) at Van Nuys Airport (VNY). The INM modeling is in support of the VNY FAR Part 161 study. Los Angeles World Airports (LAWA), the proprietor of VNY, is the sponsor of the study.

**Section 1 – Background**

In recent communications from the FAA, questions were raised concerning how certain values were calculated using standard engineering procedures. This document and attachments attempt to describe in detail the methodology employed using information from the INM Version 6.0 User's Guide and Technical Manual and SAE-AIR-1845 equations.

In support of the Part 161 process, we received flight profile information from January-June 2006 from personnel at Raytheon, a Fixed Base Operator (FBO) at VNY, stating how they operate their A-3 aircraft. We worked directly with the Raytheon Chief Pilot to gather and record data during actual A-3 departure flights from VNY. The data were then converted into the required format for the Integrated Noise Model.

As stated in our original letter of request, the differences between the standard INM departure and the Raytheon procedure are primarily due to slightly different initial power settings during the takeoff roll and significant differences during the climb-out phase. The Raytheon procedure begins with a thrust setting of 96% RPM. Upon reaching 400 feet Above Field Elevation (AFE), the power is decreased to a power setting of 93%; this power setting is retained up to 10000 feet AFE. The standard INM A-3 departure uses 97% RPM during the ground roll, with an increase to 98% at rotation and up to 400 feet AFE. At 400 feet, the power is decreased to 93%.

Raytheon's chief test pilot has stated that the high speed (250 knots at 700 feet AFE and small climb gradient (5000 feet in 33 nm) of the INM standard procedure is impossible to accept in the high volume air traffic environment around VNY.

**Section 2 – Derivation of New Parameters**

Data provided by Raytheon included the aircraft power setting, altitude, rate of climb, and calibrated/indicated airspeed at various points in the profile. These aircraft performance characteristics were then translated into INM procedure steps using standard engineering practice which is detailed below and in the attached spreadsheet. The procedure steps data conform to the

**HARRIS MILLER MILLER & HANSON INC.**

Supplemental Data for A-3 Request for Approval of User Changes to INM

March 13, 2007

Page 2

rules given in the INM User's Guide / Technical Manual and SAE-AIR-1845. We used % RPM for all thrust settings. We developed no new aircraft performance coefficients for this study.

The attached spreadsheet details the calculations of true airspeed from calibrated airspeed using INM Version 6.0 Technical Manual equations in Section 2.3.3 and SAE-AIR-1845 equation A5,

$$v_T = v \sigma^{-1/2}$$

where

$v_T$  is true airspeed in knots

$v$  is calibrated airspeed in knots

$\sigma$  is air density ratio at aircraft altitude

In addition, the attached spreadsheet shows the calculation of the distance traveled for each segment based on time and true airspeed (except for the provided Raytheon data at the 2 nm point) and then incorporated into the INM profile points file detailed in the table below.

**Raytheon A-3 Departure Procedures****Profile Weight: 69,400 lb**

| Distance from Brake Release (nm) | Altitude Above Field Elevation (AFE), feet | True Airspeed, knots | Power Parameter % RPM |
|----------------------------------|--|----------------------|-----------------------|
| 0.00                             | 0.0  | 35.0                 | 96.0                  |
| 0.20                             | 0.0  | 133.6                | 96.0                  |
| 1.64                             | 400.0                                      | 157.7                | 96.0                  |
| 1.70                             | 420.0                                      | 157.8                | 93.0                  |
| 2.00                             | 700.0                                      | 158.4                | 93.0                  |
| 5.34                             | 3000.0                                     | 190.4                | 93.0                  |
| 17.77                            | 10000.0                                    | 235.7                | 93.0                  |

**Section 3 – Comparison with Measured Data**

As previously stated, specific cockpit procedure data were collected on several A-3 flights by Raytheon pilots. The chief pilot was well aware that the cockpit procedure variations would be compared for overall effects on noise monitor measurements. Noise monitor readings at permanent noise monitor V-7, located approximately two nautical miles from brake release for Runway 16R departures and near runway centerline, were gathered for the A-3 departures and compared to the INM results at the same point. The range of measured SEL values for the A-3 departures was 110.3 – 114.3 dBA. The modeled SEL for the Raytheon procedure was 112.2 dBA, nearly the center of the measured range of values. The modeled SEL for the A-3 Standard or Noisemap profile at V-7 was 109.4 dBA.

**Section 4 – Other Observations**

We noted that the INM standard points profile for the A-3 uses a constant "True Airspeed" of 250 knots from 700 feet through 5,000 feet AFE which is probably inconsistent with normal cockpit procedures to fly calibrated/indicated airspeed.

If you have any questions or comments regarding the content of this letter, you can reach me via telephone at 916.568.1116 or via e-mail at [rbehr@hmmh.com](mailto:rbehr@hmmh.com). I hope this clarifies questions you had


**HARRIS MILLER MILLER & HANSON INC.**

Supplemental Data for A-3 Request for Approval of User Changes to INM  
March 13, 2007  
Page 3

on our previous request. Thank you for your consideration. I look forward to hearing back from you at your earliest convenience.

Sincerely yours,

**HARRIS MILLER MILLER & HANSON INC.**



Robert D. Behr  
Senior Consultant

Attachment: A3 Data Sheet



A-3 Data Sheet  
 Computation of data for profile points INM input

A-3  
 Ground roll 1200 Nmap

First Seg  
 altitude 400  
 Distance 10000 1.645788  
 KIAS 155  
 KTAS 157.7548  
 Power 96

Second Seg  
 altitude 420  
 ROC 1000  
 ROC (ft/s) 16.66667  
 KIAS 155  
 KTAS 157.8014  
 True (ft/s) 266.3372  
 climb (rad) 0.062618  
 Distance 10318.98 1.698285  
 Power 93

Third Seg  
 altitude 700  
 ROC 1000  
 ROC (ft/s) 16.66667  
 time (sec) 16.8  
 KIAS 155  
 KTAS 158.4554  
 True (ft/s) 267.441  
 accel 0.065701  
 Distance 12152.23 2  
 Power 93

Fourth Seg  
 altitude 3000  
 ROC 2000  
 ROC (ft/s) 33.33333  
 time (sec) 69  
 KIAS 180  
 KTAS 190.43  
 True (ft/s) 321.4078  
 accel 0.782127  
 Distance 32467.51 5.343465  
 Power 93

Fifth Seg  
 altitude 10000  
 ROC 2000  
 ROC (ft/s) 33.33333  
 time (sec) 210  
 KIAS 200  
 KTAS 235.6877  
 True (ft/s) 397.7937  
 accel 0.363743  
 Distance 107983.7 17.77183  
 Power 93

ISA Day  
 Altitude, ROC, Power, KIAS from Raytheon

INM 6.0 Technical Manual 2.3.3  
 theta delta sigma  
 0.991757 0.957421 0.965379

theta delta sigma  
 0.991619 0.956724 0.96481

SAE-AIR-1845 Equation A9

theta delta sigma  
 0.989694 0.947001 0.956862

Based on Raytheon flight data (700 feet at 2 miles)

theta delta sigma  
 0.973881 0.870122 0.893458

Equation based on velocity and acceleration equations.

theta delta sigma  
 0.925754 0.666625 0.720089

fts2fps 1.6878  
 T 56.15077  
 P 29.92  
 E 799  
 R 459.67  
 L 0.003566  
 EXP 5.258562  
 gamma 1.4  
 gas\_const 1716.2  
 nm2ft 6076.116

**HARRIS MILLER MILLER & HANSON INC.**

945 University Avenue, Suite 201  
Sacramento, California 95825  
T 916.568.1116  
F 916.568.1201  
W www.hmmh.com

July 7, 2006

Mr. Sandy Liu  
Federal Aviation Administration  
Office of Environment and Energy  
800 Independence Ave., SW  
Washington, DC 20591

Subject: Request for Approval of User Changes to the Integrated Noise Model, 727  
Reference: HMMH Project Number 300701

Dear Mr. Liu:

This letter is a request for approval of user changes to the Integrated Noise Model (INM) version 6.2 for use at Van Nuys (VNY) airport. These changes involve augmenting the standard departure profiles in the INM with actual procedures as flown by pilots operating at VNY.

**Section 1 – Background**

We are submitting this request for written approval for changes to the Integrated Noise Model standard profiles in support of a Van Nuys Airport FAR Part 161 study. Los Angeles World Airports (LAWA), the proprietor of VNY, is the sponsor of the study.

This letter contains data on the Boeing 727 operating procedures. The data are based on using the Stage 3 certificated 727EM2 (stage length 1; 156,000 lb) as the base aircraft. We will send similar letters containing data for other aircraft operating at VNY which also are flown differently than modeled in the INM. In support of the Part 161 process, we held a meeting on January 24, 2006 with personnel from Clay Lacy Aviation, a Fixed Base Operator (FBO) at VNY, to determine how they operate their Boeing 727 aircraft. Clay Lacy Aviation's approval of our modeling of this procedure is documented in appendix YY. We refer to this procedure as the Clay Lacy procedure in this document.

**Section 2 – Statement of Benefit**

The differences between the standard INM departure and the Clay Lacy procedure are primarily due to the lower thrust levels used in the Clay Lacy procedure from 500 to 3,000 feet Above Field Elevation (AFE). The standard INM procedure uses Maximum Takeoff power up until 200 knots are reached during departure; the takeoff flaps are set to 5 degrees and retracted during the acceleration portion of the departure. The Clay Lacy procedure uses Maximum Takeoff power up to 400 feet AFE, and then reduces to an Engine Pressure Ratio (EPR) of 1.8. This EPR setting is held to 3,000 AFE when the power is increased to Maximum Climb, which corresponds with the standard INM procedure. The Clay Lacy procedure also uses 15 degrees of flaps (due to the relatively short runway at VNY), which are maintained until 3,000 feet AFE is reached.

The lower thrust settings of the Clay Lacy procedure provide a noise benefit for the area within about three nautical miles (nm) from the brake release point. Beyond this distance, the Clay Lacy procedure is slightly louder than the INM standard due to the lower climb gradient, and hence lower altitude, until climb thrust is applied.

**HARRIS MILLER MILLER & HANSON INC.**

B727 Request for Approval of User Changes to INM  
July 7, 2006  
Page 2

**Section 3 – Analysis Demonstrating Benefit**

The analysis shows the Clay Lacy procedure provides noise benefits from one to three nautical miles from the brake release point. The benefit is highest (4.4 dB, SEL) at 1.5 nm from the brake release point. Beyond 3.5 nm, the Clay Lacy procedure gives a slight noise increase, with a maximum penalty of about 2.5 dB (SEL) at 6 nm from the brake release point.

**Table 1** shows the SEL results under the flight path from the Clay Lacy procedure; the standard INM departure profile is presented for comparison.

**Section 4 – Concurrence on Aircraft Performance**

A letter from Clay Lacy Aviation stating agreement with these procedures is found in Appendix A.

**Section 5 – Certification of New Parameters**

The aircraft performance characteristics provided by Clay Lacy Aviation have been translated into INM procedure steps using standard engineering practice. We developed no new aircraft performance coefficients for this study. The procedure steps data in this study conform to the rules given in the INM User's Guide and SAE-1845. We used net corrected thrust in units of pounds for all thrust settings.

**Section 6 – Graphical and Tabular Comparison**

Tables 2-5 and Figures 1-3 present the results of the modeling analysis by showing the altitude, airspeed, and net corrected thrust per engine of the modeled procedures as a function of distance from the brake release point.

If you have any questions or comments regarding the content of this letter, you can reach me via telephone at 916.568.1116 or via e-mail at [rbehr@hmmh.com](mailto:rbehr@hmmh.com). Thank you for your consideration. I look forward to hearing back from you at your earliest convenience.

Sincerely yours,

**HARRIS MILLER MILLER & HANSON INC.**

Robert D. Behr  
Senior Consultant

enclosures:

**HARRIS MILLER MILLER & HANSON INC.**

B727 Request for Approval of User Changes to INM

July 7, 2006

Page 3

**Table 1. Comparison of Noise Impacts from Brake Release for INM Standard and Clay Lacy Departure Procedures****INM Aircraft Model: 727EM2 Profile Weight: 156,000 lb**

| Distance from Brake Release (nm) | INM Standard, SEL (dBA) | Clay Lacy, SEL (dBA) | Difference SEL (dBA) |
|----------------------------------|-------------------------|----------------------|----------------------|
| 0.00                             | 145.1                   | 145.1                | 0.0                  |
| 0.50                             | 142.3                   | 142.1                | -0.2                 |
| 1.00                             | 120.8                   | 120.0                | -0.8                 |
| 1.50                             | 109.5                   | 105.1                | -4.4                 |
| 2.00                             | 105.5                   | 101.7                | -3.8                 |
| 2.50                             | 103.3                   | 99.3                 | -4.0                 |
| 3.00                             | 101.2                   | 97.4                 | -3.8                 |
| 3.50                             | 95.0                    | 95.8                 | 0.8                  |
| 4.00                             | 93.4                    | 94.4                 | 1.0                  |
| 4.50                             | 92.0                    | 93.1                 | 1.1                  |
| 5.00                             | 90.9                    | 92.0                 | 1.1                  |
| 5.50                             | 90.0                    | 91.2                 | 1.2                  |
| 6.00                             | 89.1                    | 91.6                 | 2.5                  |
| 6.50                             | 88.4                    | 90.7                 | 2.3                  |
| 7.00                             | 87.4                    | 89.8                 | 2.4                  |
| 7.50                             | 86.9                    | 88.9                 | 2.0                  |
| 8.00                             | 86.2                    | 88.1                 | 1.9                  |
| 8.50                             | 85.5                    | 87.5                 | 2.0                  |
| 9.00                             | 84.8                    | 86.9                 | 2.1                  |
| 9.50                             | 84.3                    | 86.0                 | 1.7                  |
| 10.0                             | 83.7                    | 85.5                 | 1.8                  |

**HARRIS MILLER MILLER & HANSON INC.**

B727 Request for Approval of User Changes to INM  
 July 7, 2006  
 Page 4

**Table 2. INM Standard B727 Departure Procedures**  
 Profile Weight: 156,000 lb

| Step Number | Altitude Above Field Elevation (AFE), feet | Calibrated Airspeed, knots | Flaps | Thrust Setting |
|-------------|--|----------------------------|-------|----------------|
| 1           | 0.0  | -                          | 5     | Max takeoff    |
| 2           | 1000                                       | -                          | 5     | Max takeoff    |
| 3           | -  | 170                        | 5     | Max takeoff    |
| 4           | -  | 200                        | 2     | Max takeoff    |
| 5           | -  | 210                        | zero  | Max Climb      |
| 6           | 3000                                       | -                          | zero  | Max Climb      |
| 7           | -  | 250                        | zero  | Max Climb      |
| 8           | 5500                                       | -                          | zero  | Max Climb      |
| 9           | 7500                                       | -                          | zero  | Max Climb      |
| 10          | 10000                                      | -                          | zero  | Max Climb      |

**Table 3. Clay Lacy B727 Departure Procedures**  
 Profile Weight: 156,000 lb

| Step Number | Altitude Above Field Elevation (AFE), feet | Calibrated Airspeed, knots | Flaps | Thrust Setting |
|-------------|--|----------------------------|-------|----------------|
| 1           | 0.0  | -                          | 15    | Max takeoff    |
| 2           | -  | 160                        | 15    | Max takeoff    |
| 3           | 400  | -                          | 15    | Max takeoff    |
| 4           | 500  | -                          | 15    | 1.8 EPR        |
| 5           | 3000                                       | -                          | 15    | 1.8 EPR        |
| 6           | -  | 210                        | zero  | Max Climb      |
| 7           | -  | 250                        | zero  | Max Climb      |
| 8           | 5500                                       | -                          | zero  | Max Climb      |
| 9           | 7500                                       | -                          | zero  | Max Climb      |
| 10          | 10000                                      | -                          | zero  | Max Climb      |

**HARRIS MILLER MILLER & HANSON INC.**

B727 Request for Approval of User Changes to INM

July 7, 2006

Page 5

**Table 4. INM Standard B727 Departure Parameters**  
Profile Weight: 156,000 lb

| Distance from Brake Release, nm | Altitude Above Field Elevation (AFE), feet | True Airspeed, knots | Net Corrected Thrust per Engine, lb |
|---------------------------------|--|----------------------|-------------------------------------|
| 0.00                            | 0.0  | 35.0                 | 14658.3                             |
| 0.93                            | 0.0  | 162.7                | 13453.4                             |
| 1.87                            | 1000.0                                     | 165.1                | 13816.3                             |
| 2.11                            | 1119.9                                     | 174.0                | 13781.5                             |
| 3.00                            | 1523.6                                     | 206.0                | 13595.4                             |
| 3.16                            | 1572.8                                     | 210.9                | 10682.0                             |
| 3.36                            | 1630.3                                     | 216.6                | 10618.2                             |
| 5.16                            | 3000.0                                     | 221.1                | 10838.5                             |
| 6.95                            | 3463.0                                     | 265.0                | 10588.8                             |
| 9.97                            | 5500.0                                     | 273.3                | 10916.7                             |
| 13.16                           | 7500.0                                     | 281.9                | 11238.5                             |
| 17.50                           | 10000.0                                    | 293.1                | 11640.7                             |

**Table 5. Clay Lacy B727 Departure Parameters**  
Profile Weight: 156,000 lb

| Distance from Brake Release, nm | Altitude Above Field Elevation (AFE), feet | True Airspeed, knots | Net Corrected Thrust per Engine, lb |
|---------------------------------|--|----------------------|-------------------------------------|
| 0.00                            | 0.0  | 35.0                 | 14658.3                             |
| 0.83                            | 0.0  | 154.3                | 13515.2                             |
| 0.97                            | 56.8                                       | 161.3                | 13485.5                             |
| 1.30                            | 400.0                                      | 162.1                | 13610.1                             |
| 1.45                            | 500.0                                      | 162.3                | 10330.0                             |
| 5.63                            | 3000.0                                     | 168.4                | 10360.0                             |
| 5.80                            | 3053.1                                     | 173.3                | 11243.7                             |
| 7.51                            | 3604.0                                     | 223.1                | 10935.6                             |
| 9.37                            | 4084.1                                     | 267.5                | 10688.8                             |
| 11.50                           | 5500.0                                     | 273.3                | 10916.7                             |
| 14.68                           | 7500.0                                     | 281.9                | 11238.5                             |
| 19.03                           | 10000.0                                    | 293.1                | 11640.7                             |

**HARRIS MILLER MILLER & HANSON INC.**

B727 Request for Approval of User Changes to INM  
July 7, 2006  
Page 6

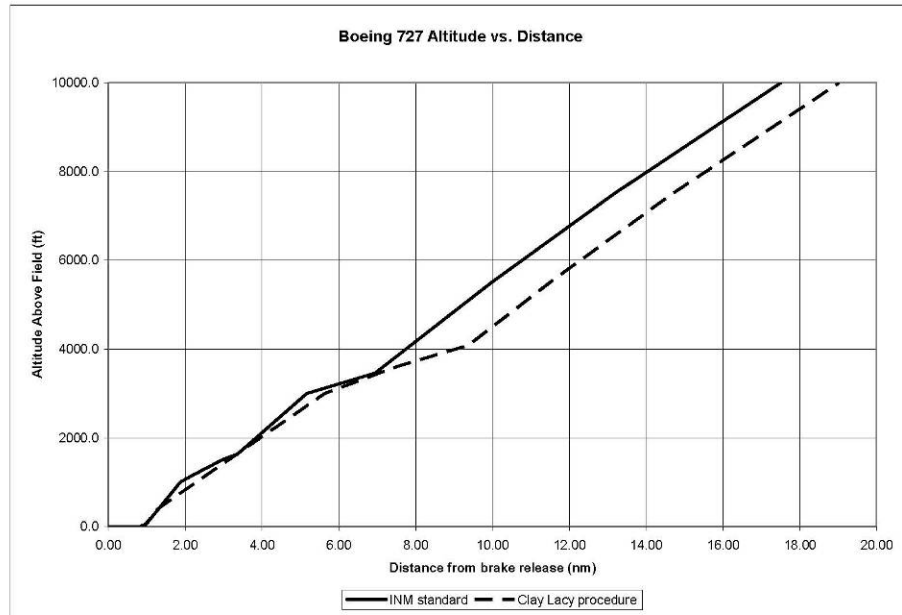


Figure 1. Altitude Profiles for Standard and Clay Lacy Procedures

**HARRIS MILLER MILLER & HANSON INC.**

B727 Request for Approval of User Changes to INM  
July 7, 2006  
Page 7

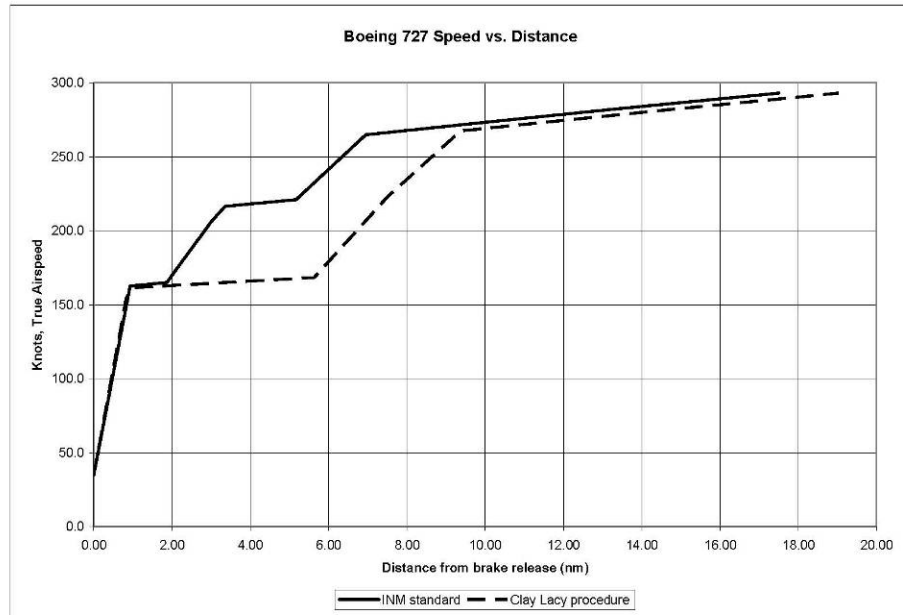


Figure 2. Airspeed Profiles for Standard and Clay Lacy Procedures



**HARRIS MILLER MILLER & HANSON INC.**

B727 Request for Approval of User Changes to INM  
July 7, 2006  
Page 8

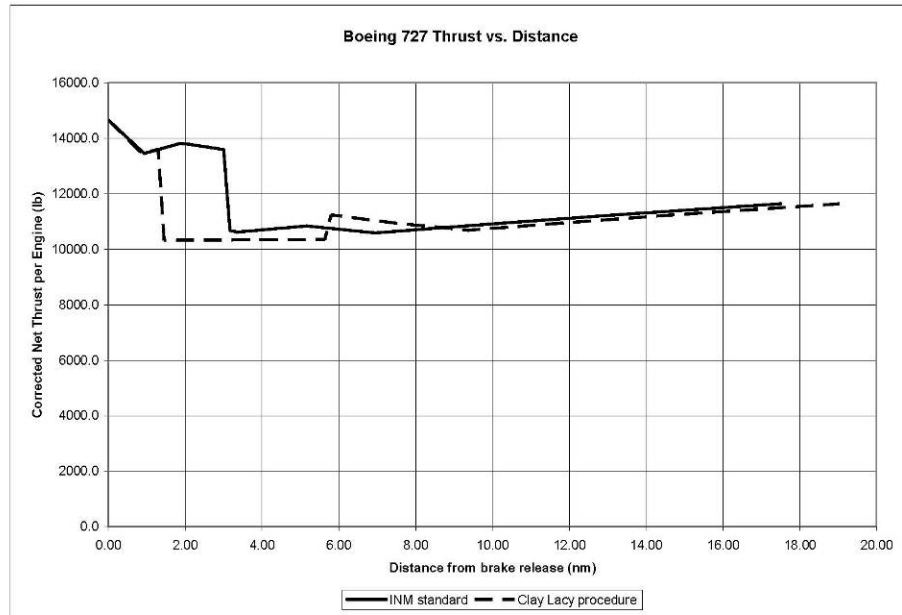


Figure 3. Thrust Profiles for Standard and Clay Lacy Procedures

**HARRIS MILLER MILLER & HANSON INC.**

B727 Request for Approval of User Changes to INM  
July 7, 2006  
Page 9


**Appendix A**


07/06/2006 21:30 FAX 004

**HARRIS MILLER MILLER & HANSON INC.**  
Review and Concurrence of VNY Aircraft Performance Data - Clay Lacy  
March 29, 2006  
Page 25

Clay Lacy Aviation concurrence with modeled procedures:

Clay Lacy Aviation certifies that the proposed profile for Boeing 727 aircraft departing from Van Nuys Airport falls within reasonable bounds of the aircraft's performance.

  
Name

 PRESIDENT/CLAY LACY AVIATION  
Position/ Title

**HARRIS MILLER MILLER & HANSON INC.**

945 University Avenue, Suite 201  
Sacramento, California 95825  
T 916.568.1116  
F 916.568.1201  
W www.hmmh.com

March 13, 2007

Dr. "Bill" Hua He  
Federal Aviation Administration  
Office of Environment and Energy  
800 Independence Ave., SW  
Washington, DC 20591

Subject: Supplemental Information for Boeing 727 Non-Standard Departure Profiles at Van Nuys Airport

Reference: HMMH Project Number 300701

Dear Dr. He:

This letter is in response to questions raised regarding our request (previously submitted in June 2006) to use actual operator profiles for the Boeing 727 aircraft when modeling in the Integrated Noise Model (INM) at Van Nuys Airport (VNY). The INM modeling is in support of the VNY FAR Part 161 study. Los Angeles World Airports (LAWA), the proprietor of VNY, is the sponsor of the study.

**Section 1 – Background**

In recent communications from the FAA, questions were raised concerning how certain values were calculated using standard engineering procedures. This document and attachments attempt to describe in detail the methodology employed using information from the INM Version 6.0 User's Guide and Technical Manual and SAE-AIR-1845 equations.

In support of the Part 161 process, we held a meeting on January 24, 2006 with personnel from Clay Lacy Aviation, a Fixed Base Operator (FBO) at VNY, to determine how they operate their Boeing 727 aircraft. We received data directly from Clay Lacy which were then converted into the required format for the Integrated Noise Model.

As stated in our original letter of request, the differences between the standard INM departure for the 727EM2 Standard (Stage Length 1) and the Clay Lacy procedure are primarily due to the lower thrust levels used in the Clay Lacy procedure from 500 to 3,000 feet Above Field Elevation (AFE). The standard INM procedure uses Maximum Takeoff power up until 200 knots are reached during departure; the takeoff flaps are set to 5 degrees and retracted during the acceleration portion of the departure. The Clay Lacy procedure uses Maximum Takeoff power up to 400 feet AFE, and then reduces to an Engine Pressure Ratio (EPR) of 1.8. This EPR setting is held to 3,000 AFE when the power is increased to Maximum Climb, which corresponds with the standard INM procedure. The Clay Lacy procedure also uses 15 degrees of flaps (due to the relatively short runway at VNY), which are maintained until 3,000 feet AFE is reached.

**Section 2 – Derivation of New Parameters**

Data provided by Clay Lacy included the aircraft power setting, altitude, and calibrated/indicated airspeed at various points in the profile. These aircraft performance characteristics were then translated into INM procedure steps using standard engineering practice which is detailed below and in the attached spreadsheet. The procedure steps data conform to the rules given in the INM User's

**HARRIS MILLER MILLER & HANSON INC.**

Supplemental Data for Boeing 727 Request for Approval of User Changes to INM  
 March 13, 2007  
 Page 2

Guide / Technical Manual and SAE-AIR-1845. We developed no new aircraft performance coefficients for this study.

To develop the “cut-back” thrust levels in corrected net thrust per engine (pounds), we determined the true airspeeds at the corresponding altitudes. Based on a standard day and standard lapse rate, we used the INM thrust calculator to convert the 1.8 EPR to pounds thrust per engine.

The attached spreadsheet details the calculations of true airspeed from calibrated airspeed using INM Version 6.0 Technical Manual equations in Section 2.3.3 and SAE-AIR-1845 equation A5,

$$v_T = v \sigma^{-1/2}$$

where

$v_T$  is true airspeed in knots

$v$  is calibrated airspeed in knots

$\sigma$  is air density ratio at aircraft altitude

**Clay Lacy B727 Departure Procedures**

Profile Weight: 156,000 lb

| Step Number | Altitude Above Field Elevation (AFE), feet | Calibrated Airspeed, knots | Flaps | Thrust Setting |
|-------------|--|----------------------------|-------|----------------|
| 1           | 0.0  | -                          | 15    | Max takeoff    |
| 2           | -  | 160                        | 15    | Max takeoff    |
| 3           | 400  | -                          | 15    | Max takeoff    |
| 4           | 500  | -                          | 15    | 1.8 EPR        |
| 5           | 3000                                       | -                          | 15    | 1.8 EPR        |
| 6           | -  | 210                        | zero  | Max Climb      |
| 7           | -  | 250                        | zero  | Max Climb      |
| 8           | 5500                                       | -                          | zero  | Max Climb      |
| 9           | 7500                                       | -                          | zero  | Max Climb      |
| 10          | 10000                                      | -                          | zero  | Max Climb      |

**Translated into INM Procedure**

| ACFT_ID | OP | PROF_ID1 | PROF_ID2 | STEP # | STEP_TYPE | FLAP | THR | PRM1    | PRM2  | PRM3    |
|---------|----|----------|----------|--------|-----------|------|-----|---------|-------|---------|
| 727LAC  | D  | LACY     | 1        | 1      | T         | 15   | T   | 0.0     | 0.0   | 0.0     |
| 727LAC  | D  | LACY     | 1        | 2      | A         | U-15 | T   | 1000.0  | 160.0 | 0.0     |
| 727LAC  | D  | LACY     | 1        | 3      | C         | U-15 | T   | 400.0   | 0.0   | 0.0     |
| 727LAC  | D  | LACY     | 1        | 4      | C         | U-15 | U   | 500.0   | 0.0   | 10330.0 |
| 727LAC  | D  | LACY     | 1        | 5      | C         | U-15 | U   | 3000.0  | 0.0   | 10330.0 |
| 727LAC  | D  | LACY     | 1        | 6      | A         | ZERO | C   | 1000.0  | 210.0 | 0.0     |
| 727LAC  | D  | LACY     | 1        | 7      | A         | ZERO | C   | 1000.0  | 250.0 | 0.0     |
| 727LAC  | D  | LACY     | 1        | 8      | C         | ZERO | C   | 5500.0  | 0.0   | 0.0     |
| 727LAC  | D  | LACY     | 1        | 9      | C         | ZERO | C   | 7500.0  | 0.0   | 0.0     |
| 727LAC  | D  | LACY     | 1        | 10     | C         | ZERO | C   | 10000.0 | 0.0   | 0.0     |

**HARRIS MILLER MILLER & HANSON INC.**

Supplemental Data for Boeing 727 Request for Approval of User Changes to INM  
 March 13, 2007  
 Page 3

**Clay Lacy B727 Profile Points**  
**Profile Weight: 156,000 lb**

| Distance from Brake Release, nm | Altitude Above Field Elevation (AFE), feet | True Airspeed, knots | Net Corrected Thrust per Engine, lb |
|---------------------------------|--|----------------------|-------------------------------------|
| 0.00                            | 0.0  | 35.0                 | 14979.4                             |
| 0.77                            | 0.0  | 155.5                | 13836.3                             |
| 0.92                            | 57.7                                       | 162.5                | 13807.0                             |
| 1.25                            | 400.0                                      | 163.3                | 13931.2                             |
| 1.41                            | 500.0                                      | 163.6                | 10330.0                             |
| 5.86                            | 3000.0                                     | 169.8                | 10330.0                             |
| 6.03                            | 3052.7                                     | 174.5                | 11559.5                             |
| 7.76                            | 3607.8                                     | 224.9                | 11252.0                             |
| 9.65                            | 4090.8                                     | 269.7                | 11005.7                             |
| 11.77                           | 5500.0                                     | 275.5                | 11232.5                             |
| 14.97                           | 7500.0                                     | 284.1                | 11554.3                             |
| 19.33                           | 10000.0                                    | 295.5                | 11956.5                             |

**Section 3 – Comparison with Measured Data**

The number of Boeing 727 operations in a year was very small limiting the number of noise monitor measurements available for comparison. Fifteen noise monitor readings at permanent noise monitor V-7, located approximately two nautical miles from brake release for Runway 16R departures and near runway centerline, were gathered for the Boeing 727 departures and compared to the INM results at the same point. The range of measured SEL values for the Boeing 727 departures was 101 – 112 dBA. The modeled SEL for the Clay Lacy procedure was 102 dBA. The modeled SEL for the 727EM2 Standard (Stage Length 1) profile at V-7 was 105 dBA.

If you have any questions or comments regarding the content of this letter, you can reach me via telephone at 916.568.1116 or via e-mail at [rbehr@hmmh.com](mailto:rbehr@hmmh.com). I hope this clarifies questions you had on our previous request. Thank you for your consideration. I look forward to hearing back from you at your earliest convenience.

Sincerely yours,

**HARRIS MILLER MILLER & HANSON INC.**



Robert D. Behr  
 Senior Consultant

Attachment: Boeing 727 Data Sheet



**HARRIS MILLER MILLER & HANSON INC.**

945 University Avenue, Suite 201  
Sacramento, California 95825  
T 916.568.1116  
F 916.568.1201  
W www.hmmh.com

July 7, 2006

Mr. Sandy Liu  
Federal Aviation Administration  
Office of Environment and Energy  
800 Independence Ave., SW  
Washington, DC 20591

Subject: Request for Approval of User Changes to the Integrated Noise Model, Lear 24/25  
Reference: HMMH Project Number 300701

Dear Mr. Liu:

This letter is a request for approval of user changes to the Integrated Noise Model (INM) version 6.2 for use at Van Nuys (VNY) airport. These changes involve augmenting the standard departure profiles in the INM with actual procedures as flown by pilots operating at VNY.

**Section 1 – Background**

We are submitting this request for written approval for changes to the Integrated Noise Model standard profiles in support of a Van Nuys Airport FAR Part 161 study. Los Angeles World Airports (LAWA), the proprietor of VNY, is the sponsor of the study.

This letter contains data on the Lear 24/25 operating procedures as provided by Clay Lacy Aviation. We will send similar letters containing data for other aircraft operating at VNY which also are flown differently than modeled in the INM. In support of the Part 161 process, we held a meeting on January 24, 2006 with personnel from Clay Lacy Aviation, a Fixed Base Operator (FBO) at VNY, to determine how they operate their Lear 2X series aircraft. Clay Lacy Aviation's approval of our modeling of this procedure is documented in Appendix A. We refer to this procedure as the Clay Lacy procedure in this document.

**Section 2 – Statement of Benefit**

The differences between the standard INM departure and the Clay Lacy procedure are primarily due to the lower thrust levels used in the Clay Lacy procedure. The standard INM procedure uses 100% power up to 1,500 feet Above Field Elevation (AFE) during departure; the Clay Lacy procedure uses 100% power up to 400 feet AFE, then reduces to 94%, with a reduction to 91% at 1,000 feet AFE. This power setting is held to 3,000 feet AFE when the power is increased to 97%, which corresponds with the maximum climb power of the standard INM procedure. The Lear 24/25 has enough excess power to maintain the required climb gradient in the event of an engine failure at any point in the Clay Lacy procedure.

The lower thrust setting of the Clay Lacy procedure provides a noise benefit for the area within about 3.5 nautical miles (nm) from the brake release point. Beyond this distance, the Clay Lacy procedure is slightly louder than the INM standard due to the lower climb gradient, and hence lower altitude, until climb thrust is applied.

## HARRIS MILLER MILLER & HANSON INC.

Lear 25 Request for Approval of User Changes to INM  
July 7, 2006  
Page 2

In addition to the procedure described above, Clay Lacy Aviation also indicated that they use a departure weight between 12,000 and 13,000 pounds (lbs), rather than the INM standard weight of 15,000 lbs. We modeled both the standard INM procedure and the Clay Lacy procedure using an aircraft weight of 12,500 lbs to determine the impact of the lower weights on noise at the ground. The Clay Lacy procedure provides a similar benefit compared to the INM standard procedure when the lighter weight is used.

### Section 3 – Analysis Demonstrating Benefit

The analysis shows the Clay Lacy procedure provides noise benefits from 1 to 3 nautical miles from the brake release point. The benefit is highest (5.3 dB, SEL) at 1 nm from the brake release point, with the benefit decreasing as the aircraft continues down the flight track. At 3.5 nm, the procedure provides little benefit, and beyond that point, the Clay Lacy procedure gives a slight noise increase, with a consistent maximum penalty of about 1.0 dB (SEL) between 4 and 8 nm from brake release.

Table 1 shows the SEL results under the flight path from the Clay Lacy procedure; the standard INM departure profile is presented for comparison.

**Error! Reference source not found.** shows the SEL results under the flight path for the Clay Lacy procedure for the lower weight of 12,500 lbs; the standard INM procedure, which was also run with this lighter weight, is given for comparison. At the lower weight, the benefit of the Clay Lacy procedure drops from a maximum of 5.3 dB, SEL to 4.0 dB, SEL. The distance from brake release to where the procedure changes from a benefit to an increase in impact is also smaller, but we believe the benefits of the Clay Lacy procedure near the airport are still significant and that the procedure should be used.

### Section 4 – Concurrence on Aircraft Performance

A letter from Clay Lacy Aviation stating agreement with these procedures is found in Appendix A.

### Section 5 – Certification of New Parameters

The aircraft performance characteristics provided by Clay Lacy Aviation have been translated into INM procedure steps using standard engineering practice. We developed no new aircraft performance coefficients for this study. The procedure steps data in this study conform to the rules given in the INM User's Guide and SAE-1845. We used net corrected thrust in units of pounds for all thrust settings.

### Section 6 – Graphical and Tabular Comparison

Tables 3-8 and Figures 1-6 present the results of the modeling analysis by showing the altitude, airspeed, and net corrected thrust per engine of the modeled procedures as a function of distance from the brake release point.

If you have any questions or comments regarding the content of this letter, you can reach me via telephone at 916.568.1116 or via e-mail at [rbehr@hmmh.com](mailto:rbehr@hmmh.com). Thank you for your consideration. I look forward to hearing back from you at your earliest convenience.



**HARRIS MILLER MILLER & HANSON INC.**

Lear 25 Request for Approval of User Changes to INM  
July 7, 2006  
Page 3

Sincerely yours,

**HARRIS MILLER MILLER & HANSON INC.**

Robert D. Behr  
Senior Consultant

enclosures:

**HARRIS MILLER MILLER & HANSON INC.**

Lear 25 Request for Approval of User Changes to INM

July 7, 2006

Page 4

**Table 1. Comparison of Noise Impacts from Brake Release for INM Standard and Clay Lacy Departure Procedures****INM Aircraft Model: LEAR25      Profile Weight: 15,000 lb**

| <b>Distance from<br/>Brake Release<br/>(nm)</b> | <b>INM Standard,<br/>SEL (dBA)</b> | <b>Clay Lacy,<br/>SEL (dBA)</b> | <b>Difference<br/>SEL (dBA)</b> |
|---|------------------------------------|---------------------------------|---------------------------------|
| 0.00  | 153.1                              | 153.1                           | 0.0                             |
| 0.50  | 148.5                              | 148.5                           | 0.0                             |
| 1.00  | 121.4                              | 116.1                           | -5.3                            |
| 1.50  | 112.4                              | 109.4                           | -3.0                            |
| 2.00  | 107.8                              | 105.0                           | -2.8                            |
| 2.50  | 104.8                              | 102.5                           | -2.3                            |
| 3.00  | 101.2                              | 100.1                           | -1.1                            |
| 3.50  | 99.0                               | 98.9                            | -0.1                            |
| 4.00  | 97.2                               | 98.1                            | 0.9                             |
| 4.50  | 96.0                               | 96.9                            | 0.9                             |
| 5.00  | 94.8                               | 95.8                            | 1.0                             |
| 5.50  | 93.7                               | 94.6                            | 0.9                             |
| 6.00  | 92.4                               | 93.3                            | 0.9                             |
| 6.50  | 91.2                               | 92.2                            | 1.0                             |
| 7.00  | 90.1                               | 91.0                            | 0.9                             |
| 7.50  | 89.0                               | 89.9                            | 0.9                             |
| 8.00  | 88.0                               | 88.9                            | 0.9                             |
| 8.50  | 87.1                               | 87.9                            | 0.8                             |
| 9.00  | 86.1                               | 86.9                            | 0.8                             |
| 9.50  | 85.3                               | 86.0                            | 0.7                             |
| 10.00   | 84.5                               | 85.1                            | 0.6                             |

**HARRIS MILLER MILLER & HANSON INC.**

Lear 25 Request for Approval of User Changes to INM

July 7, 2006

Page 5

**Table 2. Comparison of Noise Impacts from Brake Release for INM Standard and Clay Lacy Departure Procedures at Lower Weight**  
**INM Aircraft Model: LEAR25      Profile Weight: 12,500 lb**

| Distance from Brake Release (nm) | INM Standard, SEL (dBA) | Clay Lacy, SEL (dBA) | Difference SEL (dBA) |
|----------------------------------|-------------------------|----------------------|----------------------|
| 0.00                             | 153.1                   | 153.1                | 0.0                  |
| 0.50                             | 130.6                   | 130.4                | -0.2                 |
| 1.00                             | 115.9                   | 111.9                | -4.0                 |
| 1.50                             | 108.5                   | 105.6                | -2.9                 |
| 2.00                             | 104.3                   | 102.3                | -2.0                 |
| 2.50                             | 100.2                   | 99.6                 | -0.6                 |
| 3.00                             | 98.0                    | 98.6                 | 0.6                  |
| 3.50                             | 96.2                    | 97.1                 | 0.9                  |
| 4.00                             | 94.7                    | 95.7                 | 1.0                  |
| 4.50                             | 93.1                    | 94.0                 | 0.9                  |
| 5.00                             | 91.5                    | 92.6                 | 1.1                  |
| 5.50                             | 90.0                    | 91.0                 | 1.0                  |
| 6.00                             | 88.7                    | 89.6                 | 0.9                  |
| 6.50                             | 87.4                    | 88.2                 | 0.8                  |
| 7.00                             | 86.2                    | 87.0                 | 0.8                  |
| 7.50                             | 85.1                    | 85.8                 | 0.7                  |
| 8.00                             | 84.1                    | 84.8                 | 0.7                  |
| 8.50                             | 83.1                    | 83.7                 | 0.6                  |
| 9.00                             | 82.1                    | 82.8                 | 0.7                  |
| 9.50                             | 80.6                    | 81.6                 | 1.0                  |
| 10.00                            | 77.7                    | 79.8                 | 2.1                  |

**HARRIS MILLER MILLER & HANSON INC.**

Lear 25 Request for Approval of User Changes to INM  
 July 7, 2006  
 Page 6

**Table 3. INM Standard Lear 25 Departure Procedures**

| Step Number | Altitude Above Field Elevation (AFE), feet | Calibrated Airspeed, knots | Flaps | Thrust Setting |
|-------------|--|----------------------------|-------|----------------|
| 1           | 0.0  | -                          | 20    | Max Takeoff    |
| 2           | -  | 171                        | 20    | Max Takeoff    |
| 3           | 1500                                       | -                          | 20    | Max Takeoff    |
| 4           | -  | 196                        | 10    | Max Takeoff    |
| 5           | 3000                                       | -                          | zero  | Max Climb      |
| 6           | -  | 250                        | zero  | Max Climb      |
| 7           | 5500                                       | -                          | zero  | Max Climb      |
| 8           | 7500                                       | -                          | zero  | Max Climb      |
| 9           | 10000                                      | -                          | zero  | Max Climb      |

**Table 4. Clay Lacy Lear 25 Departure Procedures**

| Step Number | Altitude Above Field Elevation (AFE), feet | Calibrated Airspeed, knots | Flaps | Thrust Setting |
|-------------|--|----------------------------|-------|----------------|
| 1           | 0.0  | -                          | 10    | Max Takeoff    |
| 2           | -  | 160                        | 10    | Max Takeoff    |
| 3           | 400  | -                          | 10    | 94% RPM        |
| 4           | 1000                                       | -                          | 10    | 94% RPM        |
| 5           | 1100                                       | -                          | 10    | 90% RPM        |
| 6           | 3000                                       | -                          | zero  | 90% RPM        |
| 7           | -  | 250                        | zero  | Max Climb      |
| 8           | 5500                                       | -                          | zero  | Max Climb      |
| 9           | 7500                                       | -                          | zero  | Max Climb      |
| 10          | 10000                                      | -                          | zero  | Max Climb      |

**HARRIS MILLER MILLER & HANSON INC.**

Lear 25 Request for Approval of User Changes to INM

July 7, 2006

Page 7

**Table 5. INM Standard Lear 25 Departure Parameters**

Profile Weight: 15,000 lb

| Distance from Brake Release, nm | Altitude Above Field Elevation (AFE), feet | True Airspeed, knots | Net Corrected Thrust per Engine, lb |
|---------------------------------|--|----------------------|-------------------------------------|
| 0.00                            | 0.0  | 35.0                 | 2845.3                              |
| 0.62                            | 0.0  | 157.1                | 2527.2                              |
| 0.95                            | 214.6                                      | 172.7                | 2493.1                              |
| 1.98                            | 1500.0                                     | 176.0                | 2476.4                              |
| 2.56                            | 1824.7                                     | 202.8                | 2422.3                              |
| 2.72                            | 2026.3                                     | 203.4                | 2180.1                              |
| 3.52                            | 3000.0                                     | 206.3                | 2173.5                              |
| 5.73                            | 4222.7                                     | 268.1                | 2073.3                              |
| 7.09                            | 5500.0                                     | 273.3                | 2078.4                              |
| 9.39                            | 7500.0                                     | 281.9                | 2099.3                              |
| 12.60                           | 10000.0                                    | 293.1                | 2147.3                              |

**Table 6. Clay Lacy Lear 25 Departure Parameters**

Profile Weight: 15,000 lb

| Distance from Brake Release, nm | Altitude Above Field Elevation (AFE), feet | True Airspeed, knots | Net Corrected Thrust per Engine, lb |
|---------------------------------|--|----------------------|-------------------------------------|
| 0.00                            | 0.0  | 35.0                 | 2845.3                              |
| 0.62                            | 0.0  | 157.1                | 2527.2                              |
| 0.70                            | 57.7                                       | 161.3                | 2518.0                              |
| 1.06                            | 400.0                                      | 162.1                | 2092.0                              |
| 1.61                            | 1000.0                                     | 163.5                | 2092.0                              |
| 1.74                            | 1100.0                                     | 163.8                | 1898.0                              |
| 3.60                            | 3000.0                                     | 168.4                | 1898.0                              |
| 3.76                            | 3071.5                                     | 174.7                | 2239.6                              |
| 6.22                            | 4139.3                                     | 267.8                | 2073.2                              |
| 7.66                            | 5500.0                                     | 273.3                | 2078.4                              |
| 9.97                            | 7500.0                                     | 281.9                | 2099.3                              |
| 13.17                           | 10000.0                                    | 293.1                | 2147.3                              |

**HARRIS MILLER MILLER & HANSON INC.**

Lear 25 Request for Approval of User Changes to INM  
 July 7, 2006  
 Page 8

**Table 7. INM Standard Lear 25 Departure Parameters**  
 Profile Weight: 12,500 lb

| Distance from Brake Release, nm | Altitude Above Field Elevation (AFE), feet | True Airspeed, knots | Net Corrected Thrust per Engine, lb |
|---------------------------------|--|----------------------|-------------------------------------|
| 0.00                            | 0.0  | 35.0                 | 2845.3                              |
| 0.42                            | 0.0  | 143.4                | 2554.9                              |
| 0.80                            | 253.5                                      | 172.8                | 2492.5                              |
| 1.55                            | 1500.0                                     | 176.0                | 2476.4                              |
| 1.92                            | 1712.4                                     | 202.4                | 2423.3                              |
| 2.09                            | 1972.8                                     | 203.2                | 2181.0                              |
| 2.73                            | 3000.0                                     | 206.3                | 2173.5                              |
| 4.10                            | 3757.3                                     | 266.2                | 2073.1                              |
| 5.51                            | 5500.0                                     | 273.3                | 2078.4                              |
| 7.28                            | 7500.0                                     | 281.9                | 2099.3                              |
| 9.72                            | 10000.0                                    | 293.1                | 2147.3                              |

**Table 8. Clay Lacy Lear 25 Departure Parameters**  
 Profile Weight: 12,500 lb

| Distance from Brake Release, nm | Altitude Above Field Elevation (AFE), feet | True Airspeed, knots | Net Corrected Thrust per Engine, lb |
|---------------------------------|--|----------------------|-------------------------------------|
| 0.00                            | 0.0  | 35.0                 | 2845.3                              |
| 0.42                            | 0.0  | 143.4                | 2554.9                              |
| 0.62                            | 135.3                                      | 161.4                | 2516.8                              |
| 0.75                            | 400.0                                      | 162.1                | 2512.6                              |
| 0.82                            | 500.0                                      | 162.3                | 2092.0                              |
| 1.17                            | 1000.0                                     | 163.5                | 2092.0                              |
| 1.25                            | 1100.0                                     | 163.8                | 1898.0                              |
| 2.68                            | 3000.0                                     | 168.4                | 1898.0                              |
| 2.84                            | 3071.7                                     | 177.6                | 2239.6                              |
| 4.44                            | 3770.1                                     | 266.3                | 2073.1                              |
| 5.84                            | 5500.0                                     | 273.3                | 2078.4                              |
| 7.61                            | 7500.0                                     | 281.9                | 2099.3                              |

**HARRIS MILLER MILLER & HANSON INC.**

Lear 25 Request for Approval of User Changes to INM  
July 7, 2006  
Page 9

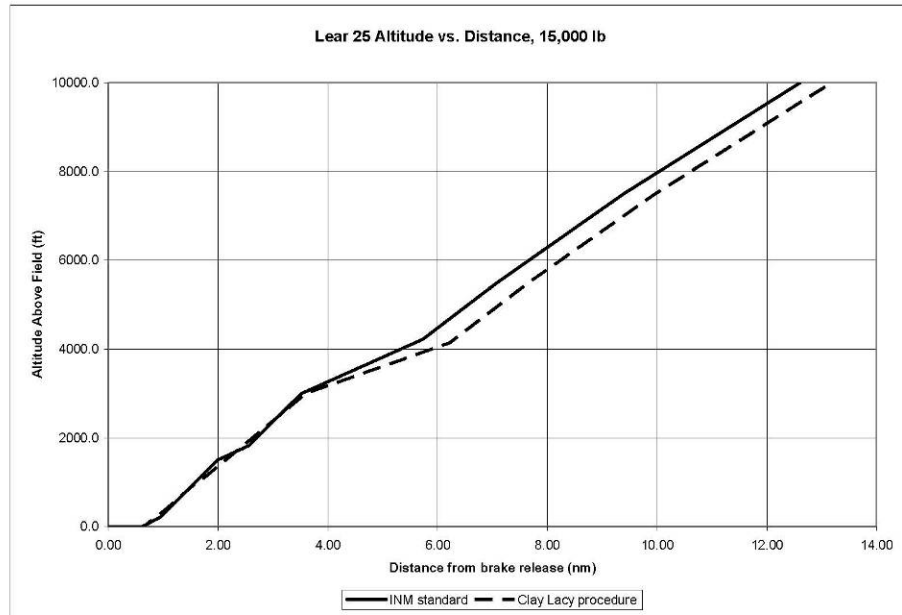


Figure 1. Altitude Profiles for Standard and Clay Lacy Procedures at Weight 15,000 Pounds

**HARRIS MILLER MILLER & HANSON INC.**

Lear 25 Request for Approval of User Changes to INM  
July 7, 2006  
Page 10

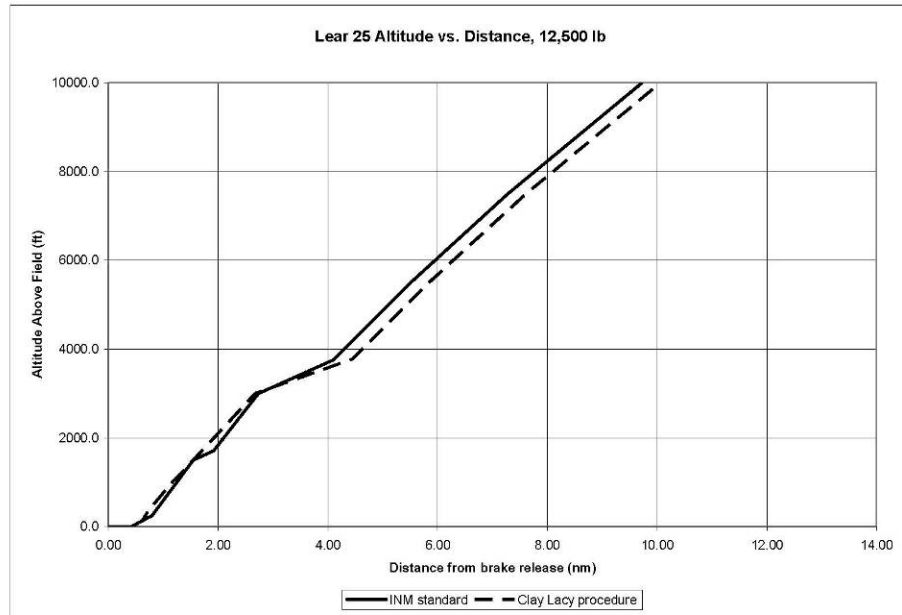


Figure 2. Altitude Profiles for Standard and Clay Lacy Procedures at Weight 12,500 Pounds



**HARRIS MILLER MILLER & HANSON INC.**

Lear 25 Request for Approval of User Changes to INM  
July 7, 2006  
Page 11

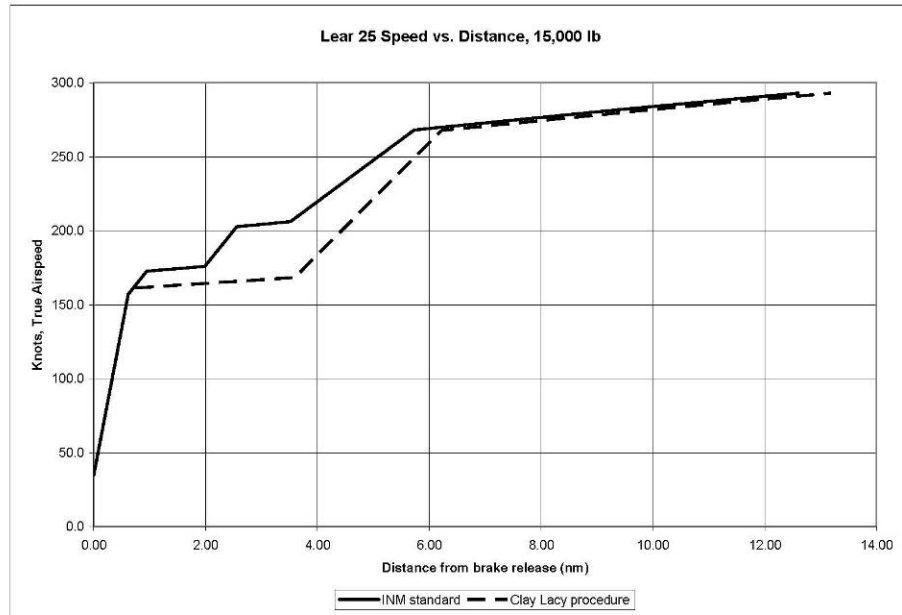


Figure 3. Airspeed Profiles for Standard and Clay Lacy Procedures at Weight 15,000 Pounds

**HARRIS MILLER MILLER & HANSON INC.**

Lear 25 Request for Approval of User Changes to INM  
July 7, 2006  
Page 12

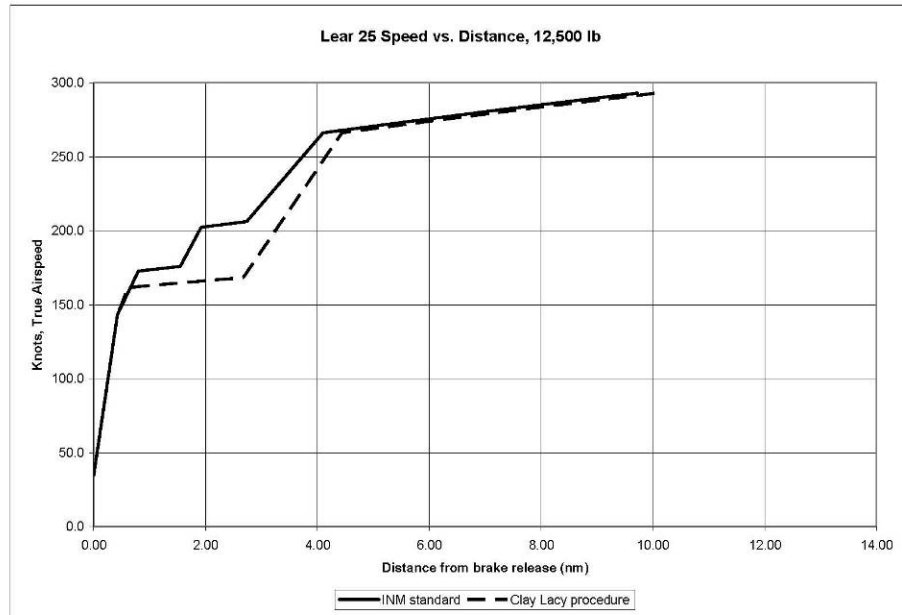


Figure 4. Airspeed Profiles for Standard and Clay Lacy Procedures at Weight 12,500 Pounds

**HARRIS MILLER MILLER & HANSON INC.**

Lear 25 Request for Approval of User Changes to INM  
July 7, 2006  
Page 13

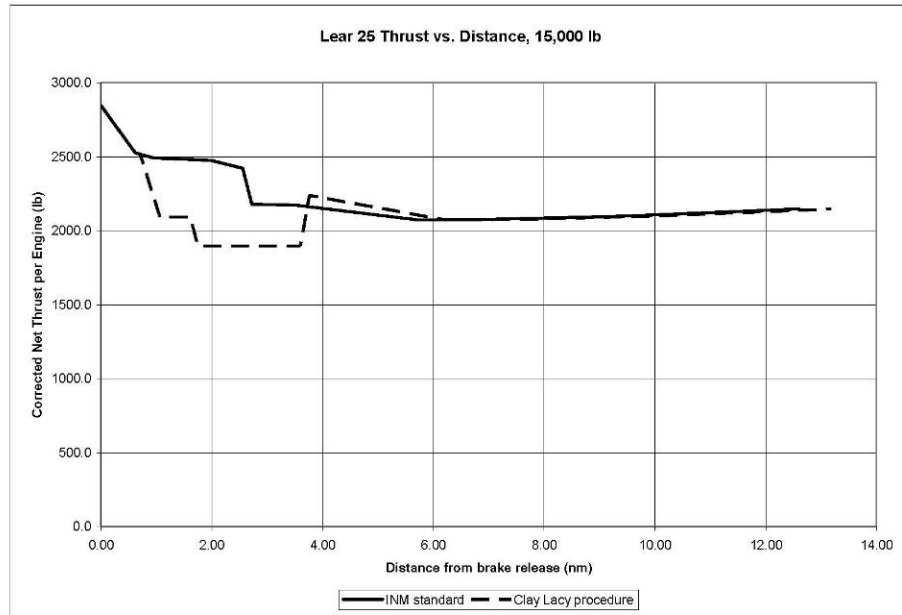


Figure 5. Thrust Profiles for Standard and Clay Lacy Procedures at Weight 15,000 Pounds

**HARRIS MILLER MILLER & HANSON INC.**

Lear 25 Request for Approval of User Changes to INM  
July 7, 2006  
Page 14

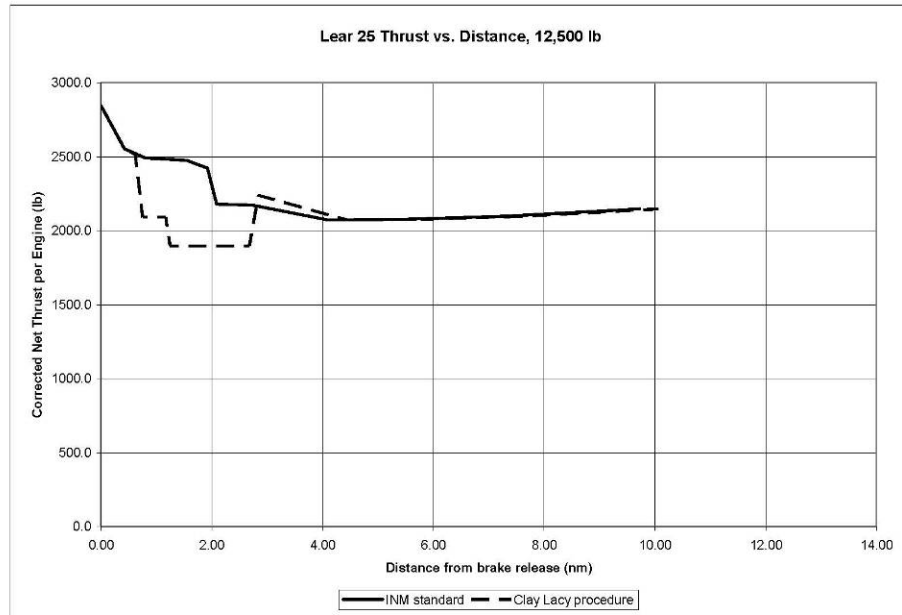


Figure 6. Thrust Profiles for Standard and Clay Lacy Procedures at Weight 12,500 Pounds

**HARRIS MILLER MILLER & HANSON INC.**

Lear 25 Request for Approval of User Changes to INM  
July 7, 2006  
Page 15


**Appendix A**


07/06/2006 21:29 FAX 002

Review and Concurrence of VNY Aircraft Performance Data – Clay Lacy  
March 29, 2006  
Page 7

Clay Lacy Aviation concurrence with modeled procedures:

Clay Lacy Aviation certifies that the proposed profile for Lear 24/25 aircraft departing from Van Nuys Airport falls within reasonable bounds of the aircraft's performance.

  
Name

 PRESIDENT / CLAY LACY AVIATION  
Position/ Title

**HARRIS MILLER MILLER & HANSON INC.**

945 University Avenue, Suite 201  
Sacramento, California 95825  
T 916.568.1116  
F 916.568.1201  
W www.hmmh.com

March 13, 2007

Dr. "Bill" Hua He  
Federal Aviation Administration  
Office of Environment and Energy  
800 Independence Ave., SW  
Washington, DC 20591

Subject: Supplemental Information for Lear 25 Non-Standard Departure Profiles at Van Nuys Airport

Reference: HMMH Project Number 300701

Dear Dr. He:

This letter is in response to questions raised regarding our request (previously submitted in July 2006) to use actual operator profiles for the Lear 25 aircraft when modeling in the Integrated Noise Model (INM) at Van Nuys Airport (VNY). The INM modeling is in support of the VNY FAR Part 161 study. Los Angeles World Airports (LAWA), the proprietor of VNY, is the sponsor of the study.

**Section 1 – Background**

In recent communications from the FAA, questions were raised concerning how certain values were calculated using standard engineering procedures. This document and attachments attempt to describe in detail the methodology employed using information from the INM Version 6.0 User's Guide and Technical Manual and SAE-AIR-1845 equations. We have also discussed the differences in this profile and the profile submitted under the VNY Part 150 study with LAWA representatives. They recommended/approved our submittal of this profile as it represents the current procedure flown at VNY by the major Lear 25 operator.

In support of the Part 161 process, we held a meeting on January 24, 2006 with personnel from Clay Lacy Aviation, a Fixed Base Operator (FBO) at VNY, to determine how they operate their Lear 2X series aircraft. After we gathered the data, we converted the data into the required format for the Integrated Noise Model.

As stated in our original letter of request, the differences between the standard INM departure and the proposed procedure are primarily due to the lower thrust levels used in the Clay Lacy procedure. The standard INM procedure uses maximum takeoff power up to 1,500 feet Above Field Elevation (AFE) during departure; the Clay Lacy procedure uses maximum takeoff power up to 400 feet AFE, then reduces to 94% RPM, with a reduction to 91% RPM at 1,000 feet AFE. The 91% RPM power setting is held to 3,000 feet AFE when the power is increased to 97% RPM, which corresponds with the maximum climb power of the standard INM procedure. The Lear 24/25 has enough excess power to maintain the required climb gradient in the event of an engine failure at any point in the Clay Lacy procedure.

**Section 2 – Derivation of New Parameters**

Data provided by Clay Lacy included the aircraft power setting, flap setting, altitude, and calibrated/indicated airspeed at various points in the profile as shown in the following table.

**HARRIS MILLER MILLER & HANSON INC.**

Supplemental Data for Lear 25 Request for Approval of User Changes to INM

March 13, 2007

Page 2

**Clay Lacy Lear 25 Departure Procedures**

| Step Number | Altitude Above Field Elevation (AFE), feet | Calibrated Airspeed, knots | Flaps | Thrust Setting |
|-------------|--|----------------------------|-------|----------------|
| 1           | 0.0  | -                          | 10    | Max Takeoff    |
| 2           | -  | 160                        | 10    | Max Takeoff    |
| 3           | 400  | -                          | 10    | 94% RPM        |
| 4           | 1000                                       | -                          | 10    | 94% RPM        |
| 5           | 1100                                       | -                          | 10    | 91% RPM        |
| 6           | 3000                                       | -                          | zero  | 91% RPM        |
| 7           |  | 250                        | zero  | Max Climb      |
| 8           | 5500                                       | -                          | zero  | Max Climb      |
| 9           | 7500                                       | -                          | zero  | Max Climb      |
| 10          | 10000                                      | -                          | zero  | Max Climb      |

These aircraft performance characteristics were then translated into INM procedure steps by using standard engineering practice to determine the reduced thrust settings. The procedure steps data conform to the rules given in the INM User's Guide / Technical Manual and SAE-AIR-1845. We developed no new aircraft performance coefficients for this study. The procedure for the calculation of the thrust levels in corrected net thrust per engine in pounds follows with actual calculations in the attached spreadsheet.

The Lear aircraft do not have data coefficients in the thr\_gnrl.dbf file to assist in converting N1 to pounds thrust. Data are included for three Cessna-types; therefore, it was decided to use a comparative method to determine the approximate Lear thrust levels. From the thr\_gnrl.dbf file, we obtained the regression coefficients (E, F, G<sub>A</sub>, G<sub>B</sub>, H, K<sub>1</sub>, K<sub>2</sub>) for the Cessna INM types (CNA500, CNA55B, and CNA750) and used the SAE-AIR-1845 thrust equation:

$$F_n / \delta = E + F v + G_A h + G_B h^2 + H T_C + K_1 N_1 + K_2 N_1^2$$

where

$F_n / \delta$  corrected net thrust per engine (pounds)  
 $v$  equivalent/calibrated airspeed (knots)  
 $h$  pressure altitude (feet) MSL  
 $T_C$  temperature (°C) at the aircraft  
 $E, F, G_A, G_B, H, K_1, K_2$  regression coefficients  
 $N_1$  power setting

From the thr\_jet.dbf file we obtained the regression coefficients for the Lear aircraft as before, except for  $K_1$  and  $K_2$ . We computed the corrected net thrust for the Cessna aircraft at a representative pressure altitude of 1,800 feet MSL and 160 knots calibrated airspeed for various  $N_1$  levels (50 – 100). We then determined the percent of total thrust for each  $N_1$  level and derived an average percent of total thrust for 91% and 94%  $N_1$ . These average percentages were then applied to the maximum thrust determined for the Lear aircraft through use of the equation above (without the  $K_1$  and  $K_2$  terms). The resulting corrected net thrust levels were then input into the INM procedure profile for the Lear aircraft (91% - 1898 pounds, 94% - 2086 pounds).

**HARRIS MILLER MILLER & HANSON INC.**

Supplemental Data for Lear 25 Request for Approval of User Changes to INM

March 13, 2007

Page 3

**Translated into INM Procedure**

| ACFT_ID | OP | PROF_ID1 | PROF_ID2 | STEP # | STEP_TYPE | FLAP | THR | PRM1    | PRM2  | PRM3   |
|---------|----|----------|----------|--------|-----------|------|-----|---------|-------|--------|
| L25LAC  | D  | LACY     | 1        | 1      | T         | 20   | T   | 0.0     | 0.0   | 0.0    |
| L25LAC  | D  | LACY     | 1        | 2      | A         | 10   | T   | 1698.0  | 160.0 | 0.0    |
| L25LAC  | D  | LACY     | 1        | 3      | C         | 10   | T   | 400.0   | 0.0   | 0.0    |
| L25LAC  | D  | LACY     | 1        | 4      | C         | 10   | U   | 500.0   | 0.0   | 2086.0 |
| L25LAC  | D  | LACY     | 1        | 5      | C         | 10   | U   | 1000.0  | 0.0   | 2086.0 |
| L25LAC  | D  | LACY     | 1        | 6      | C         | 10   | U   | 1100.0  | 0.0   | 1898.0 |
| L25LAC  | D  | LACY     | 1        | 7      | C         | ZERO | U   | 3000.0  | 0.0   | 1898.0 |
| L25LAC  | D  | LACY     | 1        | 8      | A         | ZERO | C   | 1500.0  | 250.0 | 0.0    |
| L25LAC  | D  | LACY     | 1        | 9      | C         | ZERO | C   | 5500.0  | 0.0   | 0.0    |
| L25LAC  | D  | LACY     | 1        | 10     | C         | ZERO | C   | 7500.0  | 0.0   | 0.0    |
| L25LAC  | D  | LACY     | 1        | 11     | C         | ZERO | C   | 10000.0 | 0.0   | 0.0    |

**Clay Lacy Lear 25 Profile Points**

Profile Weight: 12,500 lb

| Distance from Brake Release, nm | Altitude Above Field Elevation (AFE), feet | True Airspeed, knots | Net Corrected Thrust per Engine, lb |
|---------------------------------|--|----------------------|-------------------------------------|
| 0.00                            | 0.0  | 35.0                 | 2833.39                             |
| 0.42                            | 0.0  | 144.5                | 2543.01                             |
| 0.63                            | 145.7                                      | 162.7                | 2505.24                             |
| 0.77                            | 400.0                                      | 163.3                | 2502.17                             |
| 0.84                            | 500.0                                      | 163.6                | 2086.00                             |
| 1.20                            | 1000.0                                     | 164.8                | 2086.00                             |
| 1.29                            | 1100.0                                     | 165.0                | 1898.00                             |
| 2.77                            | 3000.0                                     | 169.8                | 1898.00                             |
| 2.94                            | 3071.1                                     | 178.3                | 2238.21                             |
| 4.67                            | 3819.8                                     | 268.6                | 2074.19                             |
| 6.08                            | 5500.0                                     | 275.5                | 2084.77                             |
| 7.92                            | 7500.0                                     | 284.1                | 2111.79                             |
| 10.44                           | 10000.0                                    | 295.5                | 2167.60                             |

**Section 3 – Comparison with Measured Data**

Noise monitor readings at permanent noise monitor V-7, located approximately two nautical miles from brake release for Runway 16R departures and near runway centerline, were gathered for the Lear 25 departures and compared to the INM results at the same point. The range of measured SEL values for the Lear 25 departures was 96 – 105 dBA. The modeled SEL for the Clay Lacy procedure was 102.2 dBA, near the center of the measured range of values. The modeled SEL for the Lear 25 Standard profile at V-7 was 104.2 dBA.



**HARRIS MILLER MILLER & HANSON INC.**

Supplemental Data for Lear 25 Request for Approval of User Changes to INM  
March 13, 2007  
Page 4

If you have any questions or comments regarding the content of this letter, you can reach me via telephone at 916.568.1116 or via e-mail at [rbehr@hmmh.com](mailto:rbehr@hmmh.com). I hope this clarifies questions you had on our previous request. Thank you for your consideration. I look forward to hearing back from you at your earliest convenience.

Sincerely yours,

**HARRIS MILLER MILLER & HANSON INC.**



Robert D. Behr  
Senior Consultant

Attachment: Lear 25 Data Sheet

Lear 25/35 Data Sheet  
 Computation of outback thrust levels in pounds, given N1 Levels

|                 | E        | F        | G1        | G2        | H       | K2        | K3       |          |          |          |
|-----------------|----------|----------|-----------|-----------|---------|-----------|----------|----------|----------|----------|
| CNA500          | 1743.1   | -1.64678 | -2.01E-03 | -1.56E-07 | 0       | -4.97E+01 | 5.45E-01 |          |          |          |
| CNA55B          | 1373.8   | -2.2903  | -8.88E-05 | 3.23E-08  | 0       | -4.49E+01 | 6.63E-01 |          |          |          |
| CNA750          | 4778.6   | -6.56571 | 6.71E-04  | -4.11E-07 | 0       | -1.47E+02 | 1.97E+00 |          |          |          |
| LR25 (max)      | 2845.4   | -2.03911 | -1.68E-02 | 2.18E-06  | 0       |           |          |          |          |          |
| LR35 (max)      | 3412.2   | -3.888   | -4.41E-03 | 1.54E-06  | 0       |           |          |          |          |          |
| Speed           | 160      |          |           |           |         |           |          |          |          |          |
| Alt             | 1800     |          |           |           |         |           |          |          |          |          |
| Fn/(delta)      | N1 Level |          | CNA500    | CNA55B    | CNA750  |           |          | LEAR25   | LEAR35   |          |
| Absolute        | 50       |          | 354.02    | 422.42    | 1329.36 |           |          |          |          |          |
|                 | 60       |          | 456.73    | 703.41    | 2034.52 |           |          |          |          |          |
|                 | 70       |          | 688.43    | 1117.05   | 3134.64 |           |          |          |          |          |
|                 | 80       |          | 989.14    | 1663.34   | 4629.72 |           |          |          |          |          |
|                 | 90       |          | 1418.85   | 2342.29   | 6519.76 |           |          |          |          |          |
|                 | 91       |          | 1467.81   | 2417.48   | 6730.49 |           |          |          |          |          |
|                 | 94       |          | 1621.25   | 2651.02   | 7386.37 |           |          |          |          |          |
|                 | 96       |          | 1728.99   | 2813.34   | 7843.37 |           |          |          |          |          |
|                 | 100      |          | 1957.55   | 3153.90   | 8804.76 |           |          | 2496.0   | 2787.2   |          |
| % of max thrust | 50       |          | 18.1%     | 13.4%     | 15.1%   |           |          |          |          |          |
|                 | 60       |          | 23.3%     | 22.3%     | 23.1%   |           |          |          |          |          |
|                 | 70       |          | 34.1%     | 35.4%     | 35.6%   |           |          |          |          |          |
|                 | 80       |          | 50.5%     | 52.7%     | 52.6%   | AVG       | CNAX     |          |          |          |
|                 | 90       |          | 72.5%     | 74.3%     | 74.0%   | 73.6%     | STD_DEV  | 1.0%     | 1837.027 | 2051.324 |
|                 | 91       |          | 75.0%     | 76.7%     | 76.4%   | 76.0%     | 0.9%     | 1897.587 | 2118.948 |          |
|                 | 94       |          | 82.8%     | 84.1%     | 83.9%   | 83.6%     | 0.7%     | 2086.384 | 2329.77  |          |
|                 | 96       |          | 88.3%     | 89.2%     | 89.1%   | 88.9%     | 0.5%     | 2218.181 | 2476.941 |          |
|                 | 100      |          | 100.0%    | 100.0%    | 100.0%  |           |          |          |          |          |



U.S. Department  
of Transportation  
**Federal Aviation  
Administration**

Office of Environment and Energy

800 Independence Ave., S.W.  
Washington, D.C. 20591

April 4, 2007

Mr. Robert D Behr Jr.  
Harris Miller Miller & Hanson Inc.  
945 University Avenue, Suite 201  
Sacramento, CA 95825

Dear Mr. Behr:

The Office of Environment and Energy has reviewed the proposed non-standard INM departure profiles for three aircraft (Lear 25, Boeing 727 and A3) submitted for aircraft modeling for Van Nuys Airport (VNY) in support of the Los Angeles World Airports (LAWA) FAA Part 161 Study. Our office has also reviewed the supplemental steps used in deriving the non-standard profiles.

Our office approves the proposed revision of the profiles, with the understanding that

(1) The Clay Lacy Aviation has reviewed and verified that the proposed profiles for Lear25 and Boeing 727 are within the bounds of performance for the aircraft, and that the operators do in fact fly the procedure being modeled.

(1) The Raytheon Flight Test Operations has reviewed and verified that the proposed profiles for A-3 are within the bounds of performance for the aircraft, and that the operators do in fact fly the procedure being modeled.

Please understand that approvals listed above are limited to this particular Part 161 Study. Any additional projects or non-standard INM input will require separate approval.

Sincerely,

A handwritten signature in cursive script, appearing to read "M. Marsan".

Dr. Mehmet Marsan  
Acting Manager  
AEE/Noise Division

**HARRIS MILLER MILLER & HANSON INC.**

945 University Avenue, Suite 201  
Sacramento, California 95825  
T 916.568.1116  
F 916.568.1201  
W www.hmmh.com

April 23, 2007

Dr. "Bill" Hua He  
Federal Aviation Administration  
Office of Environment and Energy  
800 Independence Ave., SW  
Washington, DC 20591

Subject: Request for Approval of User Changes to the Integrated Noise Model, Lear35

Reference: HMMH Project Number 300701

Dear Dr. He:

This letter is a request for approval of user changes to the Integrated Noise Model (INM) version 6.2a for use at Van Nuys (VNY) airport. These changes involve augmenting the standard departure profiles in the INM with actual procedures as flown by pilots operating at VNY.

**Section 1 – Background**

We are submitting this request for written approval for changes to the Integrated Noise Model standard profiles in support of a Van Nuys Airport FAR Part 161 study. Los Angeles World Airports (LAWA), the proprietor of VNY, is the sponsor of the study.

This letter contains data on the Lear 35 operating procedures. In support of the Part 161 process, we held a meeting on January 24, 2006 with personnel from Clay Lacy Aviation, a Fixed Base Operator (FBO) at VNY, to determine how they operate their Lear 35 aircraft. Clay Lacy Aviation's approval of our modeling of this procedure is documented in appendix A. We refer to this procedure as the Clay Lacy procedure in this document.

**Section 2 – Statement of Benefit**

The differences for the Lear 35 between the standard INM departure and the Clay Lacy departure procedures are primarily due to the lower thrust levels used at the start of the Clay Lacy procedure. The standard INM procedure uses maximum takeoff power up to 1,500 feet Above Field Elevation (AFE) during departure; the Clay Lacy procedure uses maximum takeoff power up to 400 feet AFE, then reduces to 94%, with a further reduction to 91% at 1,000 feet AFE. This power setting is held to 3,000 feet AFE, where the power is increased to 97%, which corresponds with the maximum climb power of the standard INM procedure. At the same track distance, the INM standard aircraft is at a higher altitude due to the greater thrust used, and so is farther from the ground at the point where the same thrust levels are used. This greater distance from the ground for the modeled INM aircraft gives a slightly lower noise level on the ground compared to the modeled Clay Lacy aircraft.

The power settings and procedure steps used in this analysis can be seen in the attached tables. The Lear 35 has enough excess power to maintain the required climb gradient in the event of an engine failure at any point in the Clay Lacy procedure.

**HARRIS MILLER MILLER & HANSON INC.**

Lear 35 Request for Approval of User Changes to INM  
 April 23, 2007  
 Page 2

**Section 3 – Analysis Demonstrating Benefit**

The analysis shows the Clay Lacy procedure provides noise benefits from one to three and a half nautical miles from brake release. The benefit is highest (4.4 dB, SEL) at two nautical miles from brake release, with the benefit decreasing as the aircraft continues down the flight track. At four nautical miles and beyond, the Clay Lacy procedure gives a slight noise increase, with a consistent maximum penalty of about 1.4 dB (SEL) between four and six nautical miles from brake release.

Table 1 shows the SEL results under the flight path from the Clay Lacy procedure; the standard INM departure profile is presented for comparison.

**Table 1 Comparison of Noise Impacts from Brake Release for INM Standard and Clay Lacy Departure Procedures**

INM Aircraft Model: LEAR35 Profile Weight: 18,300 lb

| Distance from Brake Release (nm) | INM Standard, SEL (dBA) | Clay Lacy, SEL (dBA) | Difference SEL (dBA) |
|----------------------------------|-------------------------|----------------------|----------------------|
| 0.00                             | 144.6                   | 144.6                | 0.0                  |
| 0.50                             | 119.3                   | 119.3                | 0.0                  |
| 1.00                             | 104.6                   | 100.7                | -3.9                 |
| 1.50                             | 97.9                    | 94.6                 | -3.3                 |
| 2.00                             | 94.1                    | 89.7                 | -4.4                 |
| 2.50                             | 90.7                    | 87.3                 | -3.4                 |
| 3.00                             | 86.6                    | 85.2                 | -1.4                 |
| 3.50                             | 84.7                    | 83.7                 | -1.0                 |
| 4.00                             | 83.0                    | 84.4                 | 1.4                  |
| 4.50                             | 81.8                    | 83.3                 | 1.5                  |
| 5.00                             | 80.6                    | 82.0                 | 1.4                  |
| 5.50                             | 79.5                    | 80.9                 | 1.4                  |
| 6.00                             | 78.4                    | 79.6                 | 1.2                  |
| 6.50                             | 77.1                    | 78.4                 | 1.3                  |
| 7.00                             | 76.2                    | 77.2                 | 1.0                  |
| 7.50                             | 75.3                    | 76.1                 | 0.8                  |
| 8.00                             | 74.5                    | 75.3                 | 0.8                  |
| 8.50                             | 73.7                    | 74.5                 | 0.8                  |
| 9.00                             | 73.0                    | 73.7                 | 0.7                  |
| 9.50                             | 72.3                    | 73.0                 | 0.7                  |
| 10.00                            | 71.6                    | 72.3                 | 0.7                  |

Table 2 shows the INM Standard profile data and Table 3 shows the data provided by Clay Lacy including the aircraft power setting, flap setting, altitude, and calibrated/indicated airspeed at various points in the profile.

**HARRIS MILLER MILLER & HANSON INC.**

Lear 35 Request for Approval of User Changes to INM  
 April 23, 2007  
 Page 3

**Table 2. INM Standard Lear 35 Departure Procedures**  
**Profile Weight: 18,300 lb**

| Step Number | Altitude Above Field Elevation (AFE), feet | Calibrated Airspeed, knots | Flaps | Thrust Setting |
|-------------|--|----------------------------|-------|----------------|
| 1           | 0.0  | -                          | 20    | Max Takeoff    |
| 2           | -  | 158                        | 20    | Max Takeoff    |
| 3           | 1500                                       | -                          | 20    | Max Takeoff    |
| 4           | -  | 183                        | 10    | Max Takeoff    |
| 5           | 3000                                       | -                          | zero  | Max Climb      |
| 6           | -  | 250                        | zero  | Max Climb      |
| 7           | 5500                                       | -                          | zero  | Max Climb      |
| 8           | 7500                                       | -                          | zero  | Max Climb      |
| 9           | 10000                                      | -                          | zero  | Max Climb      |

**Table 3. Clay Lacy Lear 35 Departure Procedures**  
**Profile Weight: 18,300 lb**

| Step Number | Altitude Above Field Elevation (AFE), feet | Calibrated Airspeed, knots | Flaps | Thrust Setting |
|-------------|--|----------------------------|-------|----------------|
| 1           | 0.0  | -                          | 10    | Max Takeoff    |
| 2           | -  | 160                        | 10    | Max Takeoff    |
| 3           | 400  | -                          | 10    | 94% RPM        |
| 4           | 1000                                       | -                          | 10    | 94% RPM        |
| 5           | 1100                                       | -                          | 10    | 91% RPM        |
| 6           | 3000                                       | -                          | zero  | 91% RPM        |
| 7           | -  | 250                        | zero  | Max Climb      |
| 8           | 5500                                       | -                          | zero  | Max Climb      |
| 9           | 7500                                       | -                          | zero  | Max Climb      |
| 10          | 10000                                      | -                          | zero  | Max Climb      |

## HARRIS MILLER MILLER & HANSON INC.

Lear 35 Request for Approval of User Changes to INM  
April 23, 2007  
Page 4

### Section 3.1 – Derivation of New Parameters

The Clay Lacy aircraft performance characteristics were then translated into INM procedure steps by using standard engineering practice to determine the reduced thrust settings. The procedure steps data conform to the rules given in the INM User's Guide / Technical Manual and SAE-AIR-1845. We developed no new aircraft performance coefficients for this study. The procedure for the calculation of the thrust levels in corrected net thrust per engine in pounds follows with actual calculations in the attached spreadsheet (Appendix B).

The Lear aircraft do not have data coefficients in the thr\_gnrl.dbf file to assist in converting N1 to pounds thrust. Data are included for three Cessna-types; therefore, it was decided to use a comparative method to determine the approximate Lear thrust levels. From the thr\_gnrl.dbf file, we obtained the regression coefficients (E, F, G<sub>A</sub>, G<sub>B</sub>, H, K<sub>1</sub>, K<sub>2</sub>) for the Cessna INM types (CNA500, CNA55B, and CNA750) and used the SAE-AIR-1845 thrust equation:

$$F_n / \delta = E + F v + G_A h + G_B h^2 + H T_C + K_1 N_1 + K_2 N_1^2$$

where

$F_n / \delta$  corrected net thrust per engine (pounds)

v equivalent/calibrated airspeed (knots)

h pressure altitude (feet) MSL

T<sub>C</sub> temperature (°C) at the aircraft

E, F, G<sub>A</sub>, G<sub>B</sub>, H, K<sub>1</sub>, K<sub>2</sub> regression coefficients

N<sub>1</sub> power setting

From the thr\_jet.dbf file we obtained the regression coefficients for the Lear 35 aircraft as before, except for K<sub>1</sub> and K<sub>2</sub>. We computed the corrected net thrust for the Cessna aircraft at a representative pressure altitude of 1,800 feet MSL and 160 knots calibrated airspeed for various N<sub>1</sub> levels (50 – 100). We then determined the percent of total thrust for each N<sub>1</sub> level and derived an average percent of total thrust for 91% and 94% N<sub>1</sub>. These average percentages were then applied to the maximum thrust determined for the Lear aircraft through use of the equation above (without the K<sub>1</sub> and K<sub>2</sub> terms). The resulting corrected net thrust levels were then input into the INM procedure profile for the Lear aircraft (91% - 2119 pounds, 94% - 2330 pounds).

**Table 4. Translated into INM Procedure**

| ACFT_ID | OP | PROF_ID1 | PROF_ID2 | STEP # | STEP_TYPE | FLAP | THR | PRM1    | PRM2  | PRM3   |
|---------|----|----------|----------|--------|-----------|------|-----|---------|-------|--------|
| L35LAC  | D  | LACY     | 1        | 1      | T         | 20   | T   | 0.0     | 0.0   | 0.0    |
| L35LAC  | D  | LACY     | 1        | 2      | A         | 10   | T   | 1698.0  | 160.0 | 0.0    |
| L35LAC  | D  | LACY     | 1        | 3      | C         | 10   | T   | 400.0   | 0.0   | 0.0    |
| L35LAC  | D  | LACY     | 1        | 4      | C         | 10   | U   | 500.0   | 0.0   | 2330.0 |
| L35LAC  | D  | LACY     | 1        | 5      | C         | 10   | U   | 1000.0  | 0.0   | 2330.0 |
| L35LAC  | D  | LACY     | 1        | 6      | C         | 10   | U   | 1100.0  | 0.0   | 2119.0 |
| L35LAC  | D  | LACY     | 1        | 7      | C         | ZERO | U   | 3000.0  | 0.0   | 2119.0 |
| L35LAC  | D  | LACY     | 1        | 8      | A         | ZERO | C   | 1500.0  | 250.0 | 0.0    |
| L35LAC  | D  | LACY     | 1        | 9      | C         | ZERO | C   | 5500.0  | 0.0   | 0.0    |
| L35LAC  | D  | LACY     | 1        | 10     | C         | ZERO | C   | 7500.0  | 0.0   | 0.0    |
| L35LAC  | D  | LACY     | 1        | 11     | C         | ZERO | C   | 10000.0 | 0.0   | 0.0    |

**HARRIS MILLER MILLER & HANSON INC.**

Lear 35 Request for Approval of User Changes to INM  
 April 23, 2007  
 Page 5

Table 5 shows the resulting profile points for the Clay Lacy Lear 35. For comparison purposes, Table 6 shows the profile points for the Standard INM profile.

**Table 5. Clay Lacy Lear 35 Departure Parameters**  
**Profile Weight: 18,300 lb**

| Distance from Brake Release, nm | Altitude Above Field Elevation (AFE), feet | True Airspeed, knots | Net Corrected Thrust per Engine, lb |
|---------------------------------|--|----------------------|-------------------------------------|
| 0.00                            | 0.0  | 35.0                 | 3412.37                             |
| 0.43                            | 0.0  | 144.3                | 2854.93                             |
| 0.73                            | 184.9                                      | 161.4                | 2789.50                             |
| 0.89                            | 400.0                                      | 161.9                | 2788.72                             |
| 0.99                            | 500.0                                      | 162.2                | 2330.00                             |
| 1.49                            | 1000.0                                     | 163.4                | 2330.00                             |
| 1.61                            | 1100.0                                     | 163.6                | 2119.00                             |
| 3.72                            | 3000.0                                     | 168.3                | 2119.00                             |
| 3.89                            | 3071.3                                     | 173.0                | 2511.56                             |
| 7.22                            | 4514.5                                     | 269.0                | 2206.27                             |
| 8.51                            | 5500.0                                     | 273.1                | 2215.97                             |
| 11.33                           | 7500.0                                     | 281.6                | 2243.94                             |
| 15.28                           | 10000.0                                    | 292.8                | 2294.54                             |

**Table 6. INM Standard Lear 35 Departure Parameters**  
**Profile Weight: 18,300 lb**

| Distance from Brake Release, nm | Altitude Above Field Elevation (AFE), feet | True Airspeed, knots | Net Corrected Thrust per Engine, lb |
|---------------------------------|--|----------------------|-------------------------------------|
| 0.00                            | 0.0  | 35.0                 | 3412.37                             |
| 0.43                            | 0.0  | 144.3                | 2854.93                             |
| 0.74                            | 192.5                                      | 159.4                | 2797.25                             |
| 1.85                            | 1500.0                                     | 162.5                | 2794.75                             |
| 2.44                            | 1815.7                                     | 189.1                | 2697.74                             |
| 2.60                            | 1993.7                                     | 189.6                | 2427.98                             |
| 3.53                            | 3000.0                                     | 192.5                | 2431.08                             |
| 6.64                            | 4452.9                                     | 268.8                | 2205.76                             |
| 8.01                            | 5500.0                                     | 273.1                | 2215.97                             |
| 10.84                           | 7500.0                                     | 281.6                | 2243.94                             |
| 14.79                           | 10000.0                                    | 292.8                | 2294.54                             |

**Section 3.2 – Comparison with Measured Data**

Noise monitor readings at permanent noise monitor V-7, located approximately two nautical miles from brake release for Runway 16R departures and near runway centerline, were gathered for the Lear 35 departures and compared to the INM results at the same point. The range of measured SEL values for the Lear 35 departures was 74 – 95 dBA. The modeled SEL for the Clay Lacy procedure was 89.7 dBA. The modeled SEL for the Lear 35 Standard profile at V-7 was 94.1 dBA.

**Section 4 – Concurrence on Aircraft Performance**

A letter from Clay Lacy Aviation stating agreement with these procedures is found in Appendix A.



**HARRIS MILLER MILLER & HANSON INC.**

Lear 35 Request for Approval of User Changes to INM  
April 23, 2007  
Page 6

**Section 5 – Certification of New Parameters**

The aircraft performance characteristics provided by Clay Lacy Aviation have been translated into INM procedure steps as shown above. We developed no new aircraft performance coefficients for this study. The procedure steps data in this study conform to the rules given in the INM User's Guide and SAE-1845. We used net corrected thrust in units of pounds for all thrust settings.

**Section 6 – Graphical and Tabular Comparison**

Figures 1-3 present the results of the modeling analysis by showing the altitude, airspeed, and net corrected thrust per engine of the modeled procedures as a function of distance from the brake release point. These correspond to the tabular data previously shown.

If you have any questions or comments regarding the content of this letter, you can reach me via telephone at 916.568.1116 or via e-mail at [rbehr@hmmh.com](mailto:rbehr@hmmh.com). Thank you for your consideration. I look forward to hearing back from you at your earliest convenience.

Sincerely yours,

**HARRIS MILLER MILLER & HANSON INC.**

Robert D. Behr  
Senior Consultant

Attachment: Lear35\_Data\_Sheet .xls

**HARRIS MILLER MILLER & HANSON INC.**

Lear 35 Request for Approval of User Changes to INM  
April 23, 2007  
Page 7

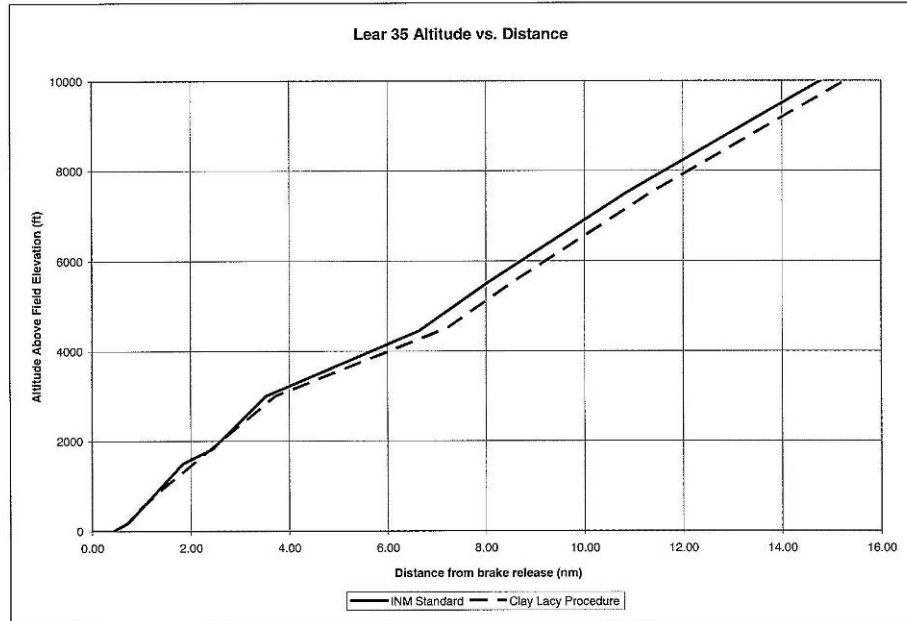


Figure 1. Altitude Profiles for Standard and Clay Lacy Procedures

**HARRIS MILLER MILLER & HANSON INC.**

Lear 35 Request for Approval of User Changes to INM  
April 23, 2007  
Page 8

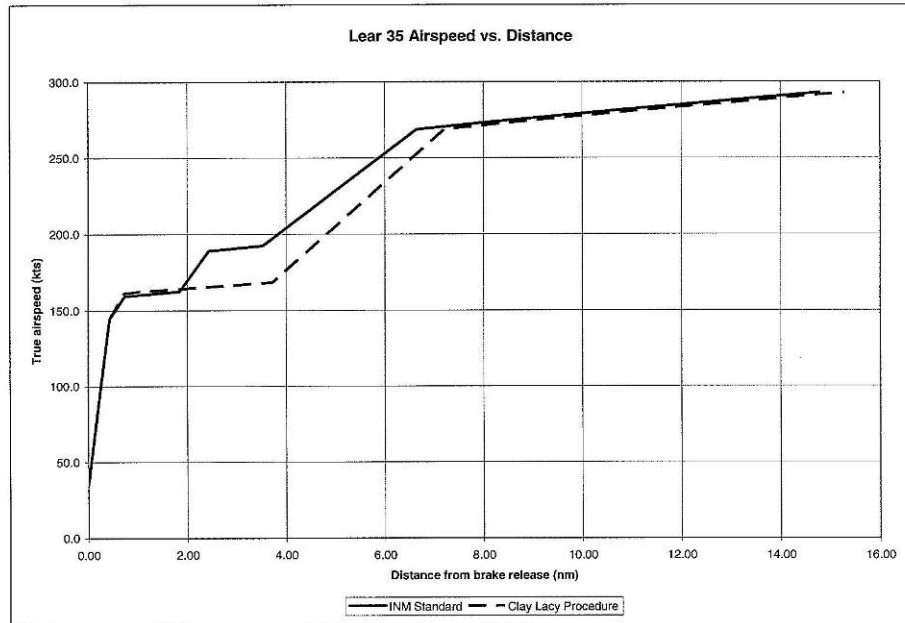


Figure 2. Airspeed Profiles for Standard and Clay Lacy Procedures

**HARRIS MILLER MILLER & HANSON INC.**

Lear 35 Request for Approval of User Changes to INM  
April 23, 2007  
Page 9

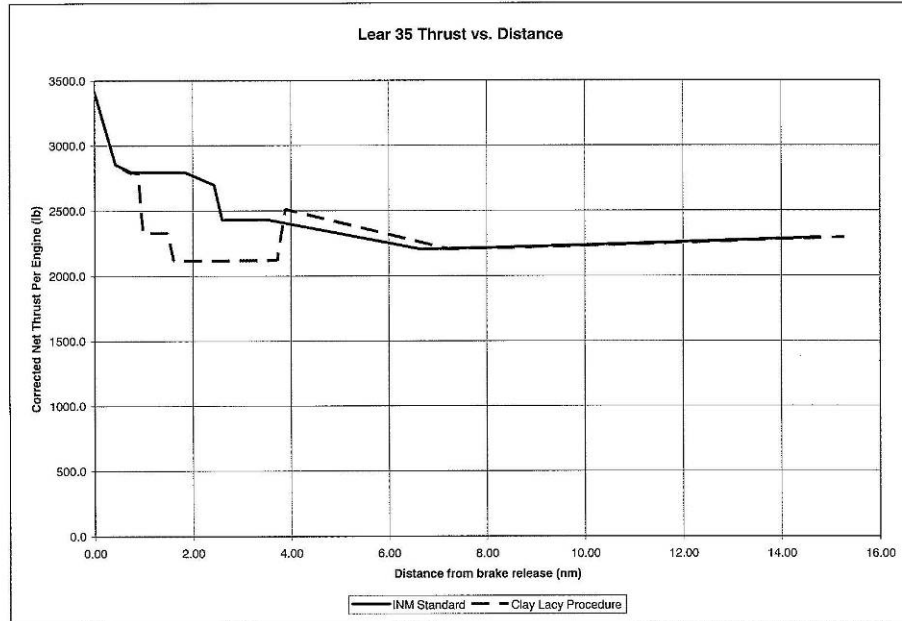


Figure 3. Thrust Profiles for Standard and Clay Lacy Procedures

**HARRIS MILLER MILLER & HANSON INC.**

B727 Request for Approval of User Changes to INM  
April 23, 2007  
Page 10

**Appendix A**

04/23/2007 09:34 6189099537


CLAY LACY AVIATION

PAGE 02

Lear 35 Request for Approval of User Changes to INM  
March 5, 2007  
Page 5

Clay Lacy Aviation concurrence with modeled procedures:

Clay Lacy Aviation certifies that the proposed profile for Lear 35 aircraft departing from Van Nuys Airport provides a reasonably accurate representation of the typical departure procedure and falls within reasonable bounds of the aircraft's performance.

  
Name



CEO CLAY LACY AVIATION  
Position/Title

Lear 25/35 Data Sheet  
 Computation of cutback thrust levels in pounds, given N1 Levels

|                 | E        | F        | G1        | G2        | H         | K2        | K3       |          |          |
|-----------------|----------|----------|-----------|-----------|-----------|-----------|----------|----------|----------|
| CNA500          | 1743.1   | -1.64678 | -2.01E-03 | -1.56E-07 | 0         | -4.97E+01 | 5.45E-01 |          |          |
| CNA55B          | 1373.8   | -2.2903  | -8.88E-05 | 3.23E-08  | 0         | -4.49E+01 | 6.63E-01 |          |          |
| CNA750          | 4778.6   | -6.56571 | 6.71E-04  | -4.11E-07 | 0         | -1.47E+02 | 1.97E+00 |          |          |
| LR25 (max)      | 2845.4   | -2.03911 | -1.68E-02 | 2.18E-06  | 0         |           |          |          |          |
| LR35 (max)      | 3412.2   | -3.888   | -4.41E-03 | 1.54E-06  | 0         |           |          |          |          |
| Speed           | 160      |          |           |           |           |           |          |          |          |
| Alt             | 1800     |          |           |           |           |           |          |          |          |
| Fn/(delta)      | N1 Level |          | CNA500    | CNA55B    | CNA750    |           |          | LEAR25   | LEAR35   |
| Absolute        | 50       |          | 354.02    | 422.42    | 1329.36   |           |          |          |          |
|                 | 60       |          | 456.73    | 703.41    | 2034.52   |           |          |          |          |
|                 | 70       |          | 668.43    | 1117.05   | 3134.64   |           |          |          |          |
|                 | 80       |          | 989.14    | 1663.34   | 4629.72   |           |          |          |          |
|                 | 90       |          | 1418.85   | 2342.29   | 6519.76   |           |          |          |          |
|                 | 91       |          | 1467.81   | 2417.48   | 6730.49   |           |          |          |          |
|                 | 94       |          | 1621.25   | 2651.02   | 7386.37   |           |          |          |          |
|                 | 96       |          | 1728.99   | 2813.34   | 7843.37   |           |          |          |          |
|                 | 100      |          | 1957.55   | 3153.90   | 8804.76   |           |          | 2496.0   | 2787.2   |
| % of max thrust | 50       |          | 18.1%     | 13.4%     | 15.1%     |           |          |          |          |
|                 | 60       |          | 23.3%     | 22.3%     | 23.1%     |           |          |          |          |
|                 | 70       |          | 34.1%     | 35.4%     | 35.6%     |           |          |          |          |
|                 | 80       |          | 50.5%     | 52.7%     | 52.6% AVG | CNAX      | STD_DEV  |          |          |
|                 | 90       |          | 72.5%     | 74.3%     | 74.0%     | 73.6%     | 1.0%     | 1837.027 | 2051.324 |
|                 | 91       |          | 75.0%     | 76.7%     | 76.4%     | 76.0%     | 0.9%     | 1897.587 | 2118.948 |
|                 | 94       |          | 82.8%     | 84.1%     | 83.9%     | 83.6%     | 0.7%     | 2086.384 | 2329.77  |
|                 | 96       |          | 88.3%     | 89.2%     | 89.1%     | 88.9%     | 0.5%     | 2218.181 | 2476.941 |
|                 | 100      |          | 100.0%    | 100.0%    | 100.0%    |           |          |          |          |



U.S. Department  
of Transportation  
**Federal Aviation  
Administration**

Office of Environment and Energy

800 Independence Ave., S.W.  
Washington, D.C. 20591

May 4, 2007

Mr. Robert D Behr Jr.  
Harris Miller Miller & Hanson Inc.  
945 University Avenue, Suite 201  
Sacramento, CA 95825

Dear Mr. Behr:

The Office of Environment and Energy has reviewed your proposed use of non-standard INM departure profile of Lear35 in aircraft noise modeling for Van Nuys Airport (VNY) in support of the Los Angeles World Airports (LAWA) FAA Part 161 Study. Our office has also reviewed the supplemental steps used in deriving the non-standard profiles.

Our office approves the proposed revision of the profiles, with the understanding that Clay Lacy Aviation has reviewed and verified that the proposed profile for Lear35 is within the bounds of performance for the aircraft, and that the operators do in fact fly the procedure being modeled.

Please understand that approvals listed above are limited to this particular Part 161 Study. Any additional projects or non-standard INM input will require separate approval.

Sincerely,

A handwritten signature in black ink, appearing to read "M. Marsan".

Dr. Mehmet Marsan  
Acting Manager  
AEE/Noise Division

**HARRIS MILLER MILLER & HANSON INC.**

945 University Avenue, Suite 201  
Sacramento, California 95825  
T 916.568.1116  
F 916.568.1201  
W www.hmmh.com

August 13, 2007

Dr. "Bill" Hua He  
Federal Aviation Administration  
Office of Environment and Energy  
800 Independence Ave., SW  
Washington, DC 20591

Subject: Request for Approval of User-defined Aircraft – Gulfstream III Aircraft with Hushkits

Reference: HMMH Project Number 300701

Dear Dr. He:

Harris Miller Miller & Hanson Inc. (HMMH) is developing existing and forecast noise exposure contours for Van Nuys Airport (VNY) in support of the Los Angeles World Airports (LAWA) FAA Part 161 Study. We are using the Integrated Noise Model (INM) Version 7.0 for all aircraft noise modeling. This memorandum requests FAA approval of a user-defined aircraft for the Gulfstream III (GIII) recertified to 14 CFR Part Stage 3 via hushkit installations.

In previous correspondence (July 10, 2007), HMMH requested FAA guidance regarding the appropriate INM aircraft to use that would reflect the GIII operating with installed hushkits. The current INM identified aircraft substitution for the GIII is the Gulfstream IIB (INM type GIIB), which the FAA recommended as a conservative estimate for the hushkitted GIII (FAA letter dated July 17, 2007). After further review, HMMH submits this request for a user-defined aircraft that is basically the INM 7.0 standard GIIB with modified noise-power-distance (npd) curves to reflect the effects of the hushkits. There are no changes to the standard GIIB INM profiles.

Attachment 1 is a spreadsheet that summarizes data from FAA AC 36-3H which displays estimated maximum A-weighted sound levels for Gulfstream aircraft. Also included in the spreadsheet is information we received from Mr. Jim Skalecky (FAA) on the latest data he had regarding estimated maximum A-weighted sound levels from hushkitted Gulfstream aircraft. Comparing these data, the hushkitted GIII has maximum A-weighted sound levels for takeoff that are approximately 7.3 dB less than the non-hushkitted GIII while the approach levels of both aircraft are nearly the same. Using these limited data and the existing INM 7.0 data, HMMH developed revised INM Lmax and SEL npd curves as detailed below. We do not have data, nor do we have a need, to create npd curves for the other INM metrics. Therefore our proposed user-defined aircraft only has Lmax and SEL npd curves.

In INM 7.0, the GIIB uses the SPEYHK noise curves. Attachment 2 reproduces the SPEYHK noise curves (INM file npd\_curve.dbf) and shows that the arrival and departure noise curves have identical values for thrust settings from 1,000 to 10,000 lbs. We assumed the aircraft was approximately 394 feet above the certification measurement position on arrival, based on the aircraft certification procedures in 14 CFR Part 36 B36.3c. In addition, we assumed that there were no changes to performance profiles between the two aircraft. Our next step was to find the thrust in the Lmax npd curves associated with 394 feet and 89.7 dBA (87.9 dBA is arrival Lmax reported in AC36-3H for the unhushkitted GIII). Table 1 shows the interpolated Lmax values for a distance of 394 feet. The



**HARRIS MILLER MILLER & HANSON INC.**

INM User-defined Aircraft Request – GIII with Hushkits

August 13, 2007

Page 2

interpolation indicates that the thrust level should be 3,228 lbs to produce an Lmax of 89.7 dBA at a distance of 394 feet.

Table 1 INM Thrust Estimate for 394 feet

| SPEYHK INM 7.0<br>npd_curve.pdf |             | Interpolated |        |
|---------------------------------|-------------|--------------|--------|
| Thrust                          | Lmax in dBA |              |        |
|                                 | 200 ft      | 400 ft       | 394 ft |
| 1,000                           | 86.5        | 80.4         | 80.6   |
| 2,000                           | 90.6        | 84.5         | 84.7   |
| 4,000                           | 98.8        | 92.7         | 92.9   |
| 6,000                           | 108.7       | 102.6        | 102.8  |
| 8,000                           | 113.5       | 107.4        | 107.6  |
| 10,000                          | 119.4       | 113.3        | 113.5  |

Both data sources for the take-off maximum A-weighted values (Attachment 1) indicate that there was a thrust-cutback during the take-off certification measurements. However, the thrust was not reported for either aircraft. Without further information, we therefore assumed that:

- There is a linear relationship between thrust and maximum A-weighted value benefit for the hushkit
- There is a constant 0.2 dB benefit at and below 3,228 lb of thrust (as reported in the INM npd\_curve.dbf)
- The hushkit provides a linear benefit, in terms of maximum A-weighted level, as a function of thrust
- The 7.3 dB reduction maximum A-weighted sound level occurred at maximum thrust. This is a conservative assumption that would under-predict the benefits of the hushkit because the 7.3 dB was actually measured at a thrust cut back setting and hushkits are typically designed to provide maximum benefit at maximum thrust.
- Aircraft performance for both aircraft is identical
- Estimates of the hushkit's maximum A-weighted sound level benefit can also be directly applied to Sound Exposure Level npd curves.

Table 2 summarizes the two assumed data points for the two aircraft. In summary, the hushkitted GIIIB has a 0.2 dB reduction at 3,228 lb of thrust and 7.3 dB reduction at 10,000 lb of thrust compared to the unhushkitted version.

**HARRIS MILLER MILLER & HANSON INC.**

INM User-defined Aircraft Request – GIII with Hushkits

August 13, 2007

Page 3

**Table 2 Summary of Thrust versus Benefit**

|           | <b>Lmax (dBA)<br/>For Non-<br/>Hushkitted GIIIB<br/>AC36-3H GIIIB</b> | <b>Lmax (dBA)<br/>For Hushkitted GIII<br/>FAA provided</b> | <b>dB<br/>Difference</b> | <b>Assumed thrust<br/>(INM npd_curve.dbf)</b> |
|-----------|---|--|--------------------------|---|
| Approach  | 89.7  | 89.5   | -0.2                     | 3,228   |
| Departure | 82.8  | 75.5   | -7.3                     | 10,000  |

Table 3 presents our proposed adjustment to the INM 7.0 npd curves as a function of thrust. We added the npd curve for 3,228 lb of thrust by interpolating between 2,000 and 4,000 lb of thrust. This allows the INM to model a constant adjustment of -0.2 dB up to 3,228 lbs of thrust. As discussed previously, we assume a linear relationship for the benefit of the hushkit between 3,228 lb and 10,000 lb of thrust.

**Table 3 Lmax Adjustment as a Function of Thrust**

| <b>Curves</b> | <b>Thrust</b> | <b>Interpolated dB adj</b> |                                  |
|---------------|---------------|----------------------------|----------------------------------|
| A             | 1000          | -0.2                       | from INM 7.0 npd                 |
| A             | 2000          | -0.2                       | from INM 7.0 npd                 |
| A             | 3228          | -0.2                       | Added to fix curve interpolation |
| A             | 4000          | -1.0                       | from INM 7.0 npd                 |
| A             | 6000          | -3.1                       | from INM 7.0 npd                 |
| A             | 8000          | -5.2                       | from INM 7.0 npd                 |
| A             | 10000         | -7.3                       | from INM 7.0 npd                 |

We created the proposed SPEYHK\_HKA entries for npd\_curve.dbf by applying these adjustments to the INM 7.0 SPEYHK npd curves Lmax (NOISE\_TYPE = M) and SEL (NOISE\_TYPE = S) (presented in Attachment 2). The proposed npd\_curve.dbf entries are designated SPEYHK\_HKA and are presented in Attachment 3. The proposed SPEYHK\_HKA noise curves do not include entries for other metrics.

Table 4 presents a grid analysis of the resulting SEL values for both the GIIIB and proposed GIIIB\_HKA aircraft on straight out departures. The GIIIB\_HKA USER profile is the same as that for the GIIIB STANDARD. As discussed above, the only changes are to the npd curves. The INM output SEL contours for 85 dB, 90 dB, and 95 dB are shown in Attachment 4 (GIIIB\_HKA in colors) for a standard day. The benefit of the proposed GIIIB\_HKA is only 2.4 to 2.7 dB at a range of 1.5 to 5.0 nautical miles because the GIIIB STANDARD profile includes a thrust cut-back. Attachment 4 shows that the proposed aircraft has little benefit on arrival, which is expected. Attachment 4 and Table 4 show most benefit associated with the start-of-take-off roll.

**HARRIS MILLER MILLER & HANSON INC.**

INM User-defined Aircraft Request – GIII with Hushkits  
 August 13, 2007  
 Page 4

**Table 4 Departure SEL Values for Proposed GIIB\_HKA versus GIIB  
 Calculated with INM 7.0 using standard conditions**

| <b>Grid Points (nmi)<br/>Distance from start-<br/>of-take-off-roll</b> | <b>GIIB (SEL, dB)</b> | <b>GIIB_HKA (SEL, dB)</b> | <b>Difference (dB)</b> |
|--|-----------------------|---------------------------|------------------------|
| 0.5  | 138.9                 | 133.6                     | -5.3                   |
| 1.0  | 116.0                 | 110.8                     | -5.2                   |
| 1.5  | 102.4                 | 99.9                      | -2.5                   |
| 2.0  | 99.5                  | 97.1                      | -2.4                   |
| 2.5  | 97.2                  | 94.8                      | -2.4                   |
| 3.0  | 95.3                  | 92.9                      | -2.4                   |
| 3.5  | 93.9                  | 91.5                      | -2.4                   |
| 4.0  | 92.7                  | 90.3                      | -2.4                   |
| 4.5  | 91.7                  | 89.2                      | -2.5                   |
| 5.0  | 91.1                  | 88.4                      | -2.7                   |
| 5.5  | 94.5                  | 89.8                      | -4.7                   |
| 6.0  | 99.2                  | 93.2                      | -6.0                   |
| 6.5  | 98.0                  | 92.1                      | -5.9                   |
| 7.0  | 96.7                  | 90.9                      | -5.8                   |
| 7.5  | 95.5                  | 89.8                      | -5.7                   |
| 8.0  | 94.4                  | 88.8                      | -5.6                   |
| 8.5  | 93.3                  | 87.8                      | -5.5                   |
| 9.0  | 92.2                  | 86.8                      | -5.4                   |
| 9.5  | 91.5                  | 86.1                      | -5.4                   |
| 10.0   | 90.7                  | 85.2                      | -5.5                   |

We have included a copy of the INM 7.0 study with the standard GIIB and GIIB\_HKA profiles and npd curves.

**HARRIS MILLER MILLER & HANSON INC.**


INM User-defined Aircraft Request – GIII with Hushkits  
August 13, 2007  
Page 5

In the absence of additional information, we request your approval for us to use these modified npd curves to represent a GIII recertified to 14 CFR Part 36 Stage 3 via a hushkit in the INM 7.0 analysis for the Van Nuys Part 161 Study.

Thank you for your consideration of this request.

Sincerely yours,

**HARRIS MILLER MILLER & HANSON INC.**



Robert D. Behr  
Senior Consultant

Inc: INM 7.0 Study

**HARRIS MILLER MILLER & HANSON INC.**

INM User-defined Aircraft Request – GIII with Hushkits  
 August 13, 2007  
 Page 6



**ATTACHMENT 1**  
**ESTIMATED MAXIMUM A-WEIGHTED SOUND LEVELS**  
**MEASURED IN ACCORDANCE WITH PART-36 APPENDIX -C- PROCEDURES**  
**(From AC 36-3H; April 25, 2002)**

| MANUFACTURER | AIRPLANE            | ENGINE         | TOGW     | MLW      | TO   | APP  | TO    | APP   | NOTES   |
|--------------|---------------------|----------------|----------|----------|------|------|-------|-------|---------|
|              |                     |                | 1000 LBS | 1000 LBS | dBA  | dBA  | FLAPS | FLAPS |         |
| GULFSTREAM   | GULFSTREAM II       | SPEY MK511-8   | 62.00    | 58.50    | 80.1 | 83.9 | -     | 20*   | 8,15,16 |
| GULFSTREAM   | GULFSTREAM II       | SPEY MK511-8   | 62.00    | 58.50    | 82.6 | 83.9 | -     | 20*   | 8,15    |
| GULFSTREAM   | GULFSTREAM II       | SPEY MK511-8   | 62.00    | 58.50    | 82.6 | 90.6 | 20    | 39    | 8,15    |
| GULFSTREAM   | GULFSTREAM II       | SPEY MK511-8   | 65.50    | 58.50    | 84.2 | 90.7 | 10    | 39    | 8,15,16 |
| GULFSTREAM   | GULFSTREAM IIB/GIII | SPEY MK511-8   | 69.70    | 58.50    | 82.8 | 82.5 | 10    | 20*   | 8,15,16 |
| GULFSTREAM   | GULFSTREAM IIB/GIII | SPEY MK511-8   | 69.70    | 58.50    | 82.8 | 89.7 | 10    | 39    | 8,15,16 |
| GULFSTREAM   | GULFSTREAM IV       | RR TAY 611-8   | 73.20    | 58.50    | 64.2 | 80.7 | 10    | 39    | 8,15    |
| GULFSTREAM   | GULFSTREAM IV - SP  | RR TAY 611-8   | 74.60    | 66.00    | 64.9 | 81.3 | 20    | 39    | 8,15    |
| GULFSTREAM   | G-V                 | BR700-710A1-10 | 90.50    | 75.30    | 68.0 | 82.0 | 10    | 39    | 8,15    |

**\*\*\*AC36-3H UPDATE INFORMATION\*\*\***  
**ESTIMATED MAXIMUM A-WEIGHTED SOUND LEVELS**  
**MEASURED IN ACCORDANCE WITH PART-36 APPENDIX -C- PROCEDURES**  
**(From James Skalecky, FAA, July 6, 2007 email to Joseph Cardello, HMMH)**

| MANUFACTURER | AIRPLANE                     | ENGINE        | TOGW     | MLW      | TO   | APP  | TO    | APP   | NOTES   |
|--------------|------------------------------|---------------|----------|----------|------|------|-------|-------|---------|
|              |                              |               | 1000 LBS | 1000 LBS | dBA  | dBA  | FLAPS | FLAPS |         |
| GULFSTREAM   | GII (QTA STC ST02618AT)      | SPEY MK 511-8 | 62       | 58.5     | 73.2 | 89.4 |       | 39    | 8,15,16 |
| GULFSTREAM   | GII (QTA STC ST02618AT)      | SPEY MK 511-8 | 64.8     | 58.5     | 74.8 | 89.4 |       | 39    | 8,15,16 |
| GULFSTREAM   | GIIIGIII (QTA STC ST02618AT) | SPEY MK 511-8 | 68.2     | 58.5     | 74.8 | 89.5 |       | 39    | 8,15,16 |
| GULFSTREAM   | GIIIGIII (QTA STC ST02618AT) | SPEY MK 511-8 | 69.7     | 58.5     | 75.5 | 89.5 |       | 39    | 8,15,16 |

Notes: 8 Thrust cutback used.  
 15 Based on manufacturer's data  
 16 Equipped with hushkit.

**HARRIS MILLER MILLER & HANSON INC.**

INM User-defined Aircraft Request – GIII with Hushkits  
 August 13, 2007  
 Page 7



**ATTACHMENT 2 INM 7.0 Unmodified npd Curves (npd\_curve.dbf)**  
**Lmax**

| NOISE_ID | NOISE_TYPE | OP_MODE | THR SET | L_200 | L_400 | L_630 | L_1000 | L_2000 | L_4000 | L_6300 | L_10000 | L_16000 | L_25000 |
|----------|------------|---------|---------|-------|-------|-------|--------|--------|--------|--------|---------|---------|---------|
| SPEYHK   | M          | A       | 1000    | 86.5  | 80.4  | 76.1  | 71.5   | 64.1   | 56.3   | 50.8   | 45      | 38.9    | 32.8    |
| SPEYHK   | M          | A       | 2000    | 90.6  | 84.5  | 80.2  | 75.6   | 68.2   | 60.4   | 54.9   | 49.1    | 43      | 36.9    |
| SPEYHK   | M          | A       | 4000    | 98.8  | 92.7  | 88.4  | 83.8   | 76.4   | 68.6   | 63.1   | 57.3    | 51.2    | 45.1    |
| SPEYHK   | M          | A       | 6000    | 108.7 | 102.6 | 98.3  | 93.7   | 86.3   | 78.5   | 73     | 67.2    | 61.1    | 55      |
| SPEYHK   | M          | A       | 8000    | 113.5 | 107.4 | 103.1 | 98.5   | 91.1   | 83.3   | 77.8   | 72      | 65.9    | 59.8    |
| SPEYHK   | M          | A       | 10000   | 119.4 | 113.3 | 109   | 104.4  | 97     | 89.2   | 83.7   | 77.9    | 71.8    | 65.7    |
| SPEYHK   | M          | D       | 1000    | 86.5  | 80.4  | 76.1  | 71.5   | 64.1   | 56.3   | 50.8   | 45      | 38.9    | 32.8    |
| SPEYHK   | M          | D       | 2000    | 90.6  | 84.5  | 80.2  | 75.6   | 68.2   | 60.4   | 54.9   | 49.1    | 43      | 36.9    |
| SPEYHK   | M          | D       | 4000    | 98.8  | 92.7  | 88.4  | 83.8   | 76.4   | 68.6   | 63.1   | 57.3    | 51.2    | 45.1    |
| SPEYHK   | M          | D       | 6000    | 108.7 | 102.6 | 98.3  | 93.7   | 86.3   | 78.5   | 73     | 67.2    | 61.1    | 55      |
| SPEYHK   | M          | D       | 8000    | 113.5 | 107.4 | 103.1 | 98.5   | 91.1   | 83.3   | 77.8   | 72      | 65.9    | 59.8    |
| SPEYHK   | M          | D       | 10000   | 119.4 | 113.3 | 109   | 104.4  | 97     | 89.2   | 83.7   | 77.9    | 71.8    | 65.7    |

**SEL**

| NOISE_ID | NOISE_TYPE | OP_MODE | THR SET | L_200 | L_400 | L_630 | L_1000 | L_2000 | L_4000 | L_6300 | L_10000 | L_16000 | L_25000 |
|----------|------------|---------|---------|-------|-------|-------|--------|--------|--------|--------|---------|---------|---------|
| SPEYHK   | S          | A       | 1000    | 89.4  | 85.5  | 82.5  | 79.1   | 73.3   | 66.8   | 62.1   | 56.9    | 51.3    | 45.6    |
| SPEYHK   | S          | A       | 2000    | 93.5  | 89.6  | 86.6  | 83.2   | 77.4   | 70.9   | 66.2   | 61      | 55.4    | 49.7    |
| SPEYHK   | S          | A       | 4000    | 101.7 | 97.8  | 94.8  | 91.4   | 85.6   | 79.1   | 74.4   | 69.2    | 63.6    | 57.9    |
| SPEYHK   | S          | A       | 6000    | 111.8 | 107.9 | 104.9 | 101.5  | 95.7   | 89.2   | 84.5   | 79.3    | 73.7    | 68      |
| SPEYHK   | S          | A       | 8000    | 117.3 | 113.4 | 110.4 | 107    | 101.2  | 94.7   | 90     | 84.8    | 79.2    | 73.5    |
| SPEYHK   | S          | A       | 10000   | 123.9 | 120   | 117   | 113.6  | 107.8  | 101.3  | 96.6   | 91.4    | 85.8    | 80.1    |
| SPEYHK   | S          | D       | 1000    | 89.4  | 85.5  | 82.5  | 79.1   | 73.3   | 66.8   | 62.1   | 56.9    | 51.3    | 45.6    |
| SPEYHK   | S          | D       | 2000    | 93.5  | 89.6  | 86.6  | 83.2   | 77.4   | 70.9   | 66.2   | 61      | 55.4    | 49.7    |
| SPEYHK   | S          | D       | 4000    | 101.7 | 97.8  | 94.8  | 91.4   | 85.6   | 79.1   | 74.4   | 69.2    | 63.6    | 57.9    |
| SPEYHK   | S          | D       | 6000    | 111.8 | 107.9 | 104.9 | 101.5  | 95.7   | 89.2   | 84.5   | 79.3    | 73.7    | 68      |
| SPEYHK   | S          | D       | 8000    | 117.3 | 113.4 | 110.4 | 107    | 101.2  | 94.7   | 90     | 84.8    | 79.2    | 73.5    |
| SPEYHK   | S          | D       | 10000   | 123.9 | 120   | 117   | 113.6  | 107.8  | 101.3  | 96.6   | 91.4    | 85.8    | 80.1    |

**HARRIS MILLER MILLER & HANSON INC.**

INM User-defined Aircraft Request – GIII with Hushkits  
 August 13, 2007  
 Page 8



**ATTACHMENT 3 Proposed INM 7.0 npd\_curve.dbf Entries for GIII Recertified to 14 CFR Part 36 Stage 3 via a Hushkit**

M = Lmax; S = SEL

| NOISE_ID   | NOISE_TYPE | OP_MODE | THR_SET | L_200 | L_400 | L_630 | L_1000 | L_2000 | L_4000 | L_6300 | L_10000 | L_16000 | L_25000 |
|------------|------------|---------|---------|-------|-------|-------|--------|--------|--------|--------|---------|---------|---------|
| SPEYHK_HKA | M          | A       | 1000    | 86.3  | 80.2  | 75.9  | 71.3   | 63.9   | 56.1   | 50.6   | 44.8    | 38.7    | 32.6    |
| SPEYHK_HKA | M          | A       | 2000    | 90.4  | 84.3  | 80    | 75.4   | 68     | 60.2   | 54.7   | 48.9    | 42.8    | 36.7    |
| SPEYHK_HKA | M          | A       | 4000    | 97.8  | 91.7  | 87.4  | 82.8   | 75.4   | 67.6   | 62.1   | 56.3    | 50.2    | 44.1    |
| SPEYHK_HKA | M          | A       | 6000    | 105.6 | 99.5  | 95.2  | 90.6   | 83.2   | 75.4   | 69.9   | 64.1    | 58      | 51.9    |
| SPEYHK_HKA | M          | A       | 8000    | 108.3 | 102.2 | 97.9  | 93.3   | 85.9   | 78.1   | 72.6   | 66.8    | 60.7    | 54.6    |
| SPEYHK_HKA | M          | A       | 10000   | 112.1 | 106   | 101.7 | 97.1   | 89.7   | 81.9   | 76.4   | 70.6    | 64.5    | 58.4    |
| SPEYHK_HKA | M          | D       | 1000    | 86.3  | 80.2  | 75.9  | 71.3   | 63.9   | 56.1   | 50.6   | 44.8    | 38.7    | 32.6    |
| SPEYHK_HKA | M          | D       | 2000    | 90.4  | 84.3  | 80    | 75.4   | 68     | 60.2   | 54.7   | 48.9    | 42.8    | 36.7    |
| SPEYHK_HKA | M          | D       | 4000    | 97.8  | 91.7  | 87.4  | 82.8   | 75.4   | 67.6   | 62.1   | 56.3    | 50.2    | 44.1    |
| SPEYHK_HKA | M          | D       | 6000    | 105.6 | 99.5  | 95.2  | 90.6   | 83.2   | 75.4   | 69.9   | 64.1    | 58      | 51.9    |
| SPEYHK_HKA | M          | D       | 8000    | 108.3 | 102.2 | 97.9  | 93.3   | 85.9   | 78.1   | 72.6   | 66.8    | 60.7    | 54.6    |
| SPEYHK_HKA | M          | D       | 10000   | 112.1 | 106   | 101.7 | 97.1   | 89.7   | 81.9   | 76.4   | 70.6    | 64.5    | 58.4    |
| SPEYHK_HKA | S          | A       | 1000    | 89.2  | 85.3  | 82.3  | 78.9   | 73.1   | 66.6   | 61.9   | 56.7    | 51.1    | 45.4    |
| SPEYHK_HKA | S          | A       | 2000    | 93.3  | 89.4  | 86.4  | 83     | 77.2   | 70.7   | 66     | 60.8    | 55.2    | 49.5    |
| SPEYHK_HKA | S          | A       | 4000    | 100.7 | 96.8  | 93.8  | 90.4   | 84.6   | 78.1   | 73.4   | 68.2    | 62.6    | 56.9    |
| SPEYHK_HKA | S          | A       | 6000    | 108.7 | 104.8 | 101.8 | 98.4   | 92.6   | 86.1   | 81.4   | 76.2    | 70.6    | 64.9    |
| SPEYHK_HKA | S          | A       | 8000    | 112.1 | 108.2 | 105.2 | 101.8  | 96     | 89.5   | 84.8   | 79.6    | 74      | 68.3    |
| SPEYHK_HKA | S          | A       | 10000   | 116.6 | 112.7 | 109.7 | 106.3  | 100.5  | 94     | 89.3   | 84.1    | 78.5    | 72.8    |
| SPEYHK_HKA | S          | D       | 1000    | 89.2  | 85.3  | 82.3  | 78.9   | 73.1   | 66.6   | 61.9   | 56.7    | 51.1    | 45.4    |
| SPEYHK_HKA | S          | D       | 2000    | 93.3  | 89.4  | 86.4  | 83     | 77.2   | 70.7   | 66     | 60.8    | 55.2    | 49.5    |
| SPEYHK_HKA | S          | D       | 4000    | 100.7 | 96.8  | 93.8  | 90.4   | 84.6   | 78.1   | 73.4   | 68.2    | 62.6    | 56.9    |
| SPEYHK_HKA | S          | D       | 6000    | 108.7 | 104.8 | 101.8 | 98.4   | 92.6   | 86.1   | 81.4   | 76.2    | 70.6    | 64.9    |
| SPEYHK_HKA | S          | D       | 8000    | 112.1 | 108.2 | 105.2 | 101.8  | 96     | 89.5   | 84.8   | 79.6    | 74      | 68.3    |
| SPEYHK_HKA | S          | D       | 10000   | 116.6 | 112.7 | 109.7 | 106.3  | 100.5  | 94     | 89.3   | 84.1    | 78.5    | 72.8    |


**HARRIS MILLER MILLER & HANSON INC.**

INM User-defined Aircraft Request – GIII with Hushkits  
August 13, 2007  
Page 9



**ATTACHMENT 4**

**Comparison of SEL Contours (85, 90, 95) for GIIIB\_HKA (Color) and GIIIB (Black)**

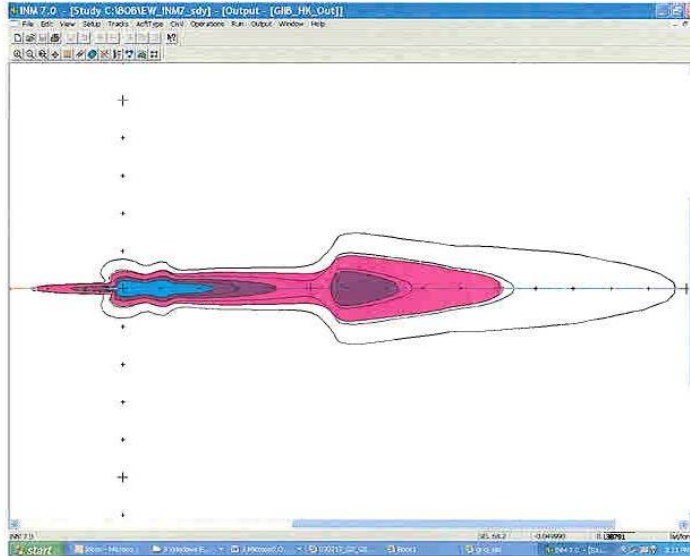





U.S. Department  
of Transportation  
**Federal Aviation  
Administration**

Office of Environment and Energy

800 Independence Ave., S.W.  
Washington, D.C. 20591

August 29, 2007

Mr. Robert Behr  
Harris Miller Miller and Hanson Inc.  
945 University Avenue, Suite 201  
Sacramento, California 95825

Dear Mr. Behr,

The Office of Environment and Energy (AEE) has received the memo dated August 13, 2007, referencing HMMH Project Number 300701 requesting approval for a user-defined aircraft type. AEE has reviewed the request for approval for INM user defined aircraft for the Gulfstream III recertified to 14 CFR Part Stage 3 via hushkit installations (GIII) for the Part 161 Study at Van Nuys Airport (VNY).

After reviewing the assumptions and methodology used to develop the GIII user-defined aircraft, the use of the GIII is accepted for the Part 161 Study at VNY.

Sincerely,

A handwritten signature in cursive script that reads "M. Marsan".

Mehmet Marsan, Ph.D.  
Acting Manager  
AEE/Noise Division



# B.5

## EXISTING NOISE MANAGEMENT MEASURES

### B.5.1 Introduction

LAWA considers noise compatibility to be a high-priority, continuing process; over many decades of effort, it has established an extensive noise compatibility program at VNY. The program—and LAWA’s continuing commitment to its implementation and improvement—is recognized for its innovation and benefits across the United States and internationally. Major elements include:

- aircraft noise abatement measures to reduce noise exposure or shift it away from sensitive land uses,
- remedial land use measures to address existing incompatible land uses that cannot be corrected through noise abatement, and
- preventive land use measures to deter introduction of new incompatible land uses.

The agency devotes significant attention, staff, and financial resources to program administration, publicity, implementation, monitoring, enforcement, review, and refinement. Sections B.5.2 and B.5.3 summarize the elements and implementation of major noise abatement and compatible land use measures, respectively.

These program elements are implemented by numerous LAWA staff, including staff in the Noise Management Division (NMD), based at LAWA headquarters and in the VNY Noise Management Office (NMO), assisted by administrative, operational, public affairs, environmental, and other staff at VNY and LAWA headquarters.

The NMD and VNY NMO operate an extensive noise and operations monitoring system at VNY, LAX, and ONT. The system supports program monitoring and enforcement, pilot training, reporting, complaint analysis, and other program implementation functions. LAWA is in the process of upgrading the system to ensure it provides state-of-the-art capabilities.

## **B.5.2 Major Noise Abatement Elements**

Major noise abatement elements of the VNY noise management program include:


- “Quiet Jet Departure Program,”
- “No Early Turn Program,”
- Departure Techniques,
- Run-Up Restriction,
- Helicopter and Route Deviation Program,
- Partial Curfew, and
- Non-Addition Rule.

The noise abatement handout reproduced on the following two pages summarizes several of these elements.

Other elements are implemented through City of Los Angeles ordinances, presented in Appendix B.6.

Descriptions of individual elements follow these two items.

VNY Noise Abatement Handout (page 1 of 2) Source: LAWA

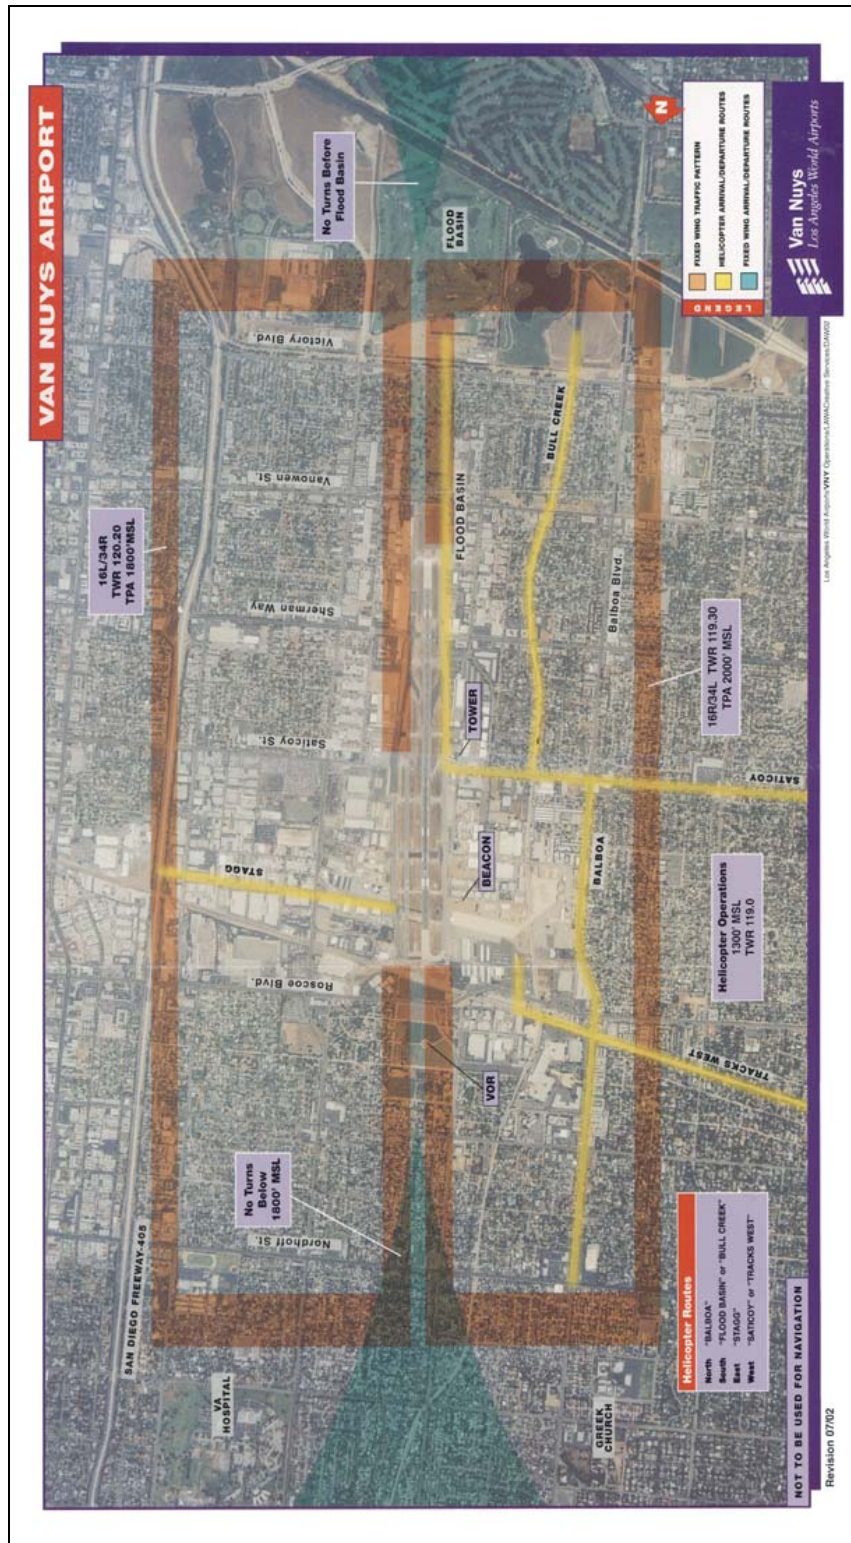

VNY Noise Abatement Handout (page 2 of 2) Source: LAWA

### VAN NUYS AIRPORT

#### GENERAL INFORMATION

- Airport attended continuously.
- Birds on and in the vicinity of airport.
- Runway 16L/34R closed nightly from 2245 to 0600 LCL.
- There is no public transient parking.
- The Air Traffic Control Tower is closed from 2245 to 0600 LCL.
- The ATIS frequency is 118.45.
- The East traffic pattern is 1800 MSL & the West pattern is 2000 MSL.
- Altimeter setting is 799'.
- Magnetic variation is 14 degrees East.
- Airport Reference Point (ARP) N34 12'55" W118 29'40"
- VNY Administration (818)785-8838.
- Airport lies beneath Burbank Class C Airspace.

#### VNY NOISE ABATEMENT ORDINANCE\*

From 2200 to 0700 LCL, any aircraft with noise levels equal to or exceed 74.0 dba, as per AC 36-3 are restricted from VNY operations. Arriving aircraft have no restrictions.

#### EXCEPTIONS

- Helicopter operations.
- Active military and any government owned and operated aircraft used in law enforcement, emergency, and/or fire and rescue operations.
- Aircraft engaged in medical or life-saving emergency flights. (Acceptable evidence must be submitted in writing to VNY management within 72 hours prior to or subsequent to the departure.)

#### CIVIL PENALTIES

- The 1st offense: not to exceed \$750.
- The 2nd offense (within 1 year of the 1st violation): not to exceed \$1,500.
- The 3rd offense (within 3 years of the 1st violation): not to exceed \$3,500.
- A crewmember, or a specific aircraft, having 3 or more violations within 3 years, will be prohibited from using VNY for 3 years.

#### AIRPORT REGULATIONS

- Runways 16L and 16R will be used when the wind is less than 5 knots.
- Low passes or flybys, except for safety checks, are prohibited.
- Pre-flight engine run-ups permitted at designated run-up areas for each runway.
- Maintenance run-ups are only permitted at the designated runup area for Runway 16R and only between the hours of 0700-1900 LCL.
- Simulated in-flight emergencies (e.g. engine failure, etc.) are not permitted in VNY airspace.
- Aircraft under tow from any point on the airport will establish two-way communication with the control tower and during periods of darkness, have its navigational lights illuminated. Upon request, VNY Airport Operations may escort aircraft.

#### ARRIVAL AND DEPARTURE PROCEDURES

##### DURING ATC TOWER CONTROLLED OPERATIONS

- Runways 16R and 34R, Right Traffic.
- Runways 16L and 34L, Left Traffic.
- Non-standard departures or turns upon ATC approval only.

**Runway 16L and 16R** - After takeoff, fly runway heading until reaching the flood control basin before initiating any turns.

**Runway 34L and 34R** - After takeoff, fly runway heading until reaching 1800 MSL before initiating any turns.

**Note: Runway 16L and 34R** is restricted to aircraft of 14,000 pounds maximum gross landing weight or less.

##### INTERSECTION DEPARTURES

**Runway 16L** - Aircraft may depart from Intersection 5 and any intersection North of that point.

**Runway 16R** - Aircraft may depart from Intersection 13 and any intersection North of that point, excluding the high speed taxiway 11G and Intersection 7.

**Runway 34L** - Aircraft may depart from Intersection 10 and any intersection South of that point.

**Runway 34R** - Aircraft may depart from Intersection 10.

**Note: Intersection departures are not permitted for turbo-jet aircraft.**

##### REPETITIVE FLIGHT OPERATION\* ("Touch & Go's", "Stop & Go's", etc.)

Limited to fixed wing piston engine aircraft only. The preferred runway for piston work is 16L/34R. Piston work may be suspended at any time as deemed necessary by VNY Management, ATC or their designated agents.

##### JET AIRCRAFT OPERATIONS

- Runway 16R is the preferential runway for jet operations.
- The full length of Runway 16R/34L will be used for departures.
- Repetitive operations (touch and go's, stop and go's) are prohibited.

##### HELICOPTER OPERATIONS

- Departures will climb to 1300 MSL prior to departing airport property.
- Arrivals maintain 1300 MSL until reaching airport property.
- Runway crossings will be made midfield at an altitude stipulated by the ATIS.
- Whenever possible, operators will avoid flights over residential areas.
- Repetitive operations, pattern work and flight training are not permitted within the airport traffic area.

#### AIRPORT LAYOUT

#### Communication Frequencies

**ARRIVALS**  
 Arrivals 118.45  
 West (obstacle) - use 120.2  
 West (obstacle) - use 120.2  
 West (obstacle) - use 118.3

**DEPARTURES**  
 Runway 16L/34R  
 Use Tower 120.2  
 Runway 16L/34L  
 Use Tower 118.3

**ASOS**  
 (818)904-9213

**ATIS**  
 118.45  
 (818)785-6993

**CLEARANCE DELIVERY**  
 128.6

**GROUND**  
 120.7

**CTAF/TOWER**  
 118.3

**HELICOPTER**  
 118.0

**HAWTHORNE FFS**  
 122.35

#### Approach & Navigation

**LOCAL APPROACH**  
 Arriving from:  
 Northeast 120.1  
 East 135.95  
 Southeast 124.5  
 Southwest 134.2  
 Northwest 120.1

**APPROACHES**  
 ILS VOR VOR/DME  
 LDA GPS RNAV

**RADIO AIDS TO NAVIGATION**  
 ILS 111.3 (Rev 16R)  
 VOR 113.1 (On Field)  
 DME Channel 78

\*Per 1981 City of Los Angeles Ordinance No. 153,277 - VNY Noise Abatement and Culture Ordinance



### **B.5.2.1 “Quiet Jet Departure Program”**

Under the “Quiet Jet Departure Program” (also called the “Fly Friendly Program” or “Fly Neighborly Program”), jet aircraft operators are to conduct south departures so that measured noise levels are below established aircraft-type-specific targets at permanent monitoring location “V7,” which is approximately 6,000 feet south of the airport (approximately 14,000 feet from brake release). The VNY NMO monitors jet departure noise levels and flight track data at V7 and contacts operators of jet aircraft that exceed the target levels set for the relevant aircraft type. This program is used to monitor and modify takeoff aircraft operations and to assist pilots in utilizing the appropriate noise mitigation takeoff procedures. LAWA formally initiated the program in February of 1994. Pilots can contact the NMO to identify departure target noise levels for a specific aircraft.

An important element of the program is a “Letter of Commitment” in which jet operators agree to use quiet departure procedures to avoid exceeding the target decibel levels on takeoff, which states:

- Pilots will fly aircraft using noise abatement techniques as outlined in manufacturers’ operating manuals or National Business Aircraft Association (NBAA) Noise Abatement Program,
- Pilots will work to research complaints from local residents regarding individual flights and to encourage participation by other jet operators, and
- Voluntary compliance will help forestall more drastic measures to reduce noise.

There is no formal penalty associated with exceeding the target noise level.

### **B.5.2.2 “No Early Turn Program”**

The “No Early Turn Program” calls for the following:

- Takeoffs on Runways 16L and 16R shall climb straight out 2.2 miles, measured from the VNY very-high-frequency omnidirectional radial (VOR) antenna, which is located off the north end of the airport) and attain a minimum altitude of 1,800 feet above mean sea level (MSL) prior to turning. Some LAWA publications describe this measure in the following visual-reference terms: “Climb straight out over flood basin before starting turn unless instructed by air traffic control.”
- Takeoffs on Runways 34R/34L shall climb to an altitude of 1,800 feet MSL before starting turn unless instructed by air traffic control (ATC).

The NMO notifies any aircraft owner identified as conducting operations contrary to this program. The program uses the notification process to communicate to the operators the requirements of this program and to assist the pilots to fly the established departure route and altitude.

There is no formal penalty associated with making an early turn without ATC instruction.

### B.5.2.3 Departure Techniques

In addition to procedures included in the “Quiet Jet Departure Program” and “No Early Turn Program,” LAWA publications also cite the following departure techniques:

- Runway 16R is the preferred runway for all jet aircraft,<sup>1</sup>
- The full length of Runway 16R/34L will be used for all jet departures, and
- Jet repetitive operations and pattern flying/training are not permitted.

There are no formal penalties associated with the first two of these techniques. Section 7 of Los Angeles City Ordinance No. 155,727, the “Noise Abatement and Curfew Regulation” (reproduced in full in Section B.6), includes formal enforcement and penalty provisions<sup>2</sup> for violation of restrictions on repetitive operations, established by Sections 1(j) and 3(a) and (b):

Section 1, “Definitions,” item (j), defines a “repetitive operation” as “A practice operation, including, but not limited to, “touch and go” or “stop and go” operations, which utilize an airport runway to land where the aircraft touching down or landing takes off again within 5 minutes. However, this definition does not include such operations as are necessary because of safety considerations or weather phenomena.”

Section 3, “Repetitive Aircraft Operations,” includes the following two restrictions:

- (a) No person shall engage in repetitive operations in any propeller-powered aircraft between the hours of 10:00 p.m. and 7:00 a.m. of the following day from June 21 through September 15 and between the hours of 9:00 p.m. and 7:00 a.m. of the following day from September 16 through June 20.
- (b) No person shall engage in repetitive operations in any turbo-jet or fan jet-powered aircraft at anytime at the airport.

<sup>1</sup> Section 4 of the Van Nuys Airport Noise Abatement and Curfew Regulation (Ordinance No. 155,727, presented in Section B.6, defines a nighttime preferential runway program:

Preferential Runway. Between the hours of 11:00 p.m. and 7:00 a.m. of the following day, weather and traffic permitting, all aircraft shall depart on Runway 16R and shall arrive on Runway 34L of the airport unless instructed otherwise by the Federal Aviation Administration air traffic controller.

However, the City has published the following notice regarding this measure (also presented in Section B.6):

PUBLIC NOTICE RE: ORDINANCE 155727\*\*

EFFECTIVE AUGUST 8, 1982, VAN NUYS AIRPORT DOES NOT HAVE AIR TRAFFIC CONTROLLERS BETWEEN THE HOURS OF 2245 AND 0600 OF THE FOLLOWING DAY, LOCAL TIME DAILY.

THE FEDERAL AVIATION ADMINISTRATION AIR TRAFFIC CONTROLLER HAS SUSPENDED THE PROVISIONS OF SECTION 4 OF THE VAN NUYS NOISE ABATEMENT AND CURFEW ORDINANCE 155727 UNTIL FURTHER NOTICE. SECTION 3, PARAGRAPH 222 AND 223 OF THE AIRMAN'S INFORMATION MANUAL APPLIES AT VAN NUYS AIRPORT BETWEEN HOURS 2245 AND 0600 OF THE FOLLOWING DAY LOCAL TIME DAILY UNTIL FURTHER NOTICE.

<sup>2</sup> These penalties include fines ranging from \$750 to \$3,500 and may include denial for permission to use the airport for up to 3 years.



### **B.5.2.4 Run-Up Restriction**

The Noise Abatement and Curfew Regulation also includes formal enforcement and penalty provisions for violation of a run-up restriction, established by Sections 1(k) and 5:

Section 1, “Definitions,” item (j), defines a “run-up” as “The ground testing or revving of an aircraft engine not immediately connected to contemporaneous air operation.

Section 5, “Run-ups,” No person shall test or run-up an aircraft engine for maintenance purposes between the hours of 7:00 p.m. and 7:00 a.m. of the following day. Engine run-ups shall be done only in areas designated in writing by the general manager.

LAWA has published a letter to tenants that permits them to conduct idle power run-ups on their leasehold property under certain conditions. Attachment F presents a copy of that letter.

### **B.5.2.5 Helicopter and Route Deviation Program**

The FAA has established six flight routes that specify ingress and egress and altitude minimums to maximize the safety and efficiency of traffic control and to mitigate the noise impact on the adjacent communities. The NMO notifies helicopter owners of operations that deviate from the established routes. The VNY Air Traffic Control Tower (ATCT) and individual operators enter into formal “letters of agreement” to implement this program. The VNY Noise Abatement Handout (presented at the beginning of Appendix Section B.5.2) depicts the routes graphically.

### **B.5.2.6 Partial Curfew**

The Noise Abatement and Curfew Regulation establishes a partial curfew. Briefly, the regulation prohibits non-Stage 3 fixed-wing aircraft with a takeoff noise level in excess of 74 dBA, as published in the most recent version of FAA AC 36-3, from departing between 10 p.m. and 7 a.m. Stage 3 fixed-wing aircraft are exempt until 11 p.m. The rule also exempts:

- Military aircraft and any government owned or operated aircraft involved in law enforcement, emergency, fire, or rescue operations;
- Aircraft not included in AC 36-3 that have been identified by the FAA in writing as having 74.0 dBA or lower takeoff noise level or for which satisfactory evidence has been furnished to the Board of Airport Commissioners (BOAC) that the departure noise will not exceed 74.0 dBA; and
- Aircraft engaged in a bona fide medical or life-saving emergency for which acceptable evidence has been submitted in writing to the VNY general manager within 72 hours of the departure.

### **B.5.2.7 Non-Addition Rule**

The Non-Addition Rule, an amendment to the Noise Abatement and Curfew Regulation, became effective on January 1, 2002. Briefly, the rule prohibits any additional non-Stage 3 aircraft with noise levels exceeding 77 dBA from being based at VNY or parked, tied down, or hangared at the airport for more than 30 days in any calendar year, subject to exceptions for major maintenance, repair, and refurbishment. The rule includes provisions that permitted operators to replace “exempt based non-Stage 3 aircraft” with aircraft exceeding the 77 dBA limit; the period for designating such replacements ended December 31, 2005, and the replacement aircraft can be based (i.e., parked, tied down, or hangared for more than 30 days a year) at the airport only through 2010. Penalties for violation of the rule have the same structure as the Noise Abatement and Curfew Regulation.

## **B.5.3 Existing VNY Compatible Land Use Measures**

LAWA, City of Los Angeles, and California programs and regulations include the following major compatible land use measures at VNY:

- Sound Insulation,
- Avigation and Noise Easements,
- Compatible Building Code, and
- Noise Disclosure.

### **B.5.3.1 Sound Insulation**

LAWA has established an Airport Noise Mitigation Program (ANMP) at VNY to sound insulate existing incompatible land uses within the 65 dB CNEL contour that LAWA prepares for VNY on a quarterly basis in accordance with the requirements of Caltrans Division of Aeronautics requirements.<sup>3</sup> LAWA has funded the program to date from internal revenue sources.

LAWA’s Residential Sound Insulation Division implements the program. Participation in the program is voluntary. Homeowners are offered treatment in a prioritized order based on the CNEL value at the parcel for the 12 months of operations ending September 30, 1998.<sup>4</sup> The treatment includes modifications needed to reduce the maximum interior CNEL to 45 dB in all habitable rooms. LAWA will continue the program until all owners of eligible property have been offered treatment and the treatment is completed on dwelling units owned by those agreeing to participate.

---

<sup>3</sup> California Code of Regulations (CCR). 1990. Title 21. Subchapter 6. *Noise Standards*. Register 90. No. 10, 3/10/90. California Division of Aeronautics, Department of Transportation. Sacramento, CA. Article 3, Implementation by Airport Proprietors. Section 5001, Validation of the Noise Impact Boundary, p. 226.2.

<sup>4</sup> This static contour is used to avoid variability in the eligible area.

As a “noise problem” airport, as defined by the Caltrans Division of Aeronautics noise standards<sup>5</sup> summarized in Appendix B.3, Section B.3.3, LAWA must operate VNY under a variance obtained from the division. In its most recent application for a variance, LAWA depicted the remaining homes to be sound insulated within the most current CNEL contours developed under Caltrans Division of Aeronautics guidelines. That figure is reproduced on the following page.

LAWA stated in that application that it anticipated all remaining homes would be sound insulated (where the owner elected to accept the offer of sound insulation) by the end of 2009 (under the assumption that property owners offered insulation will continue to accept at the historic 80% acceptance rate—and with continuation of the current \$2 million in annual funding).<sup>6</sup>

LAWA prepared an annual report on the program terms and status. The most recent report<sup>7</sup> presents the following statistics:

- LAWA has supplied \$21,746,400 in revenue-based funding for the program from its 1999/00 through 2005/06 fiscal year budgets,
- 521 residential units have been sound insulated through the end of Calendar Year 2005, and
- There are no other incompatible land uses within the ANMP eligibility contour.

### **B.5.3.2 Avigation and Noise Easements**

Property owners must sign an “avigation and noise easement” prior to receiving a sound insulation treatment.


First Quarter 2007 VNY Noise Contours Prepared for Caltrans Division of Aeronautics

---

<sup>5</sup> Noise problem airports have noise-sensitive land uses within the 65 dB CNEL contour.

<sup>6</sup> Los Angeles World Airports. 2007. *Request for Variance to Noise Regulations for California Airports*. Prepared by: Noise Management Division. Los Angeles, CA. Submitted to: Ms. Elizabeth Eskridge, Department of Transportation, Division of Aeronautics, Sacramento, CA. Submitted by: Ms. Gina Marie Lindsey, Executive Director, Los Angeles World Airports, Los Angeles, CA.

<sup>7</sup> Los Angeles World Airports. October 2006. *Van Nuys Airport Aircraft Noise Mitigation Program, 2005 Annual Compliance Report*. Noise Management Division. Los Angeles, CA.

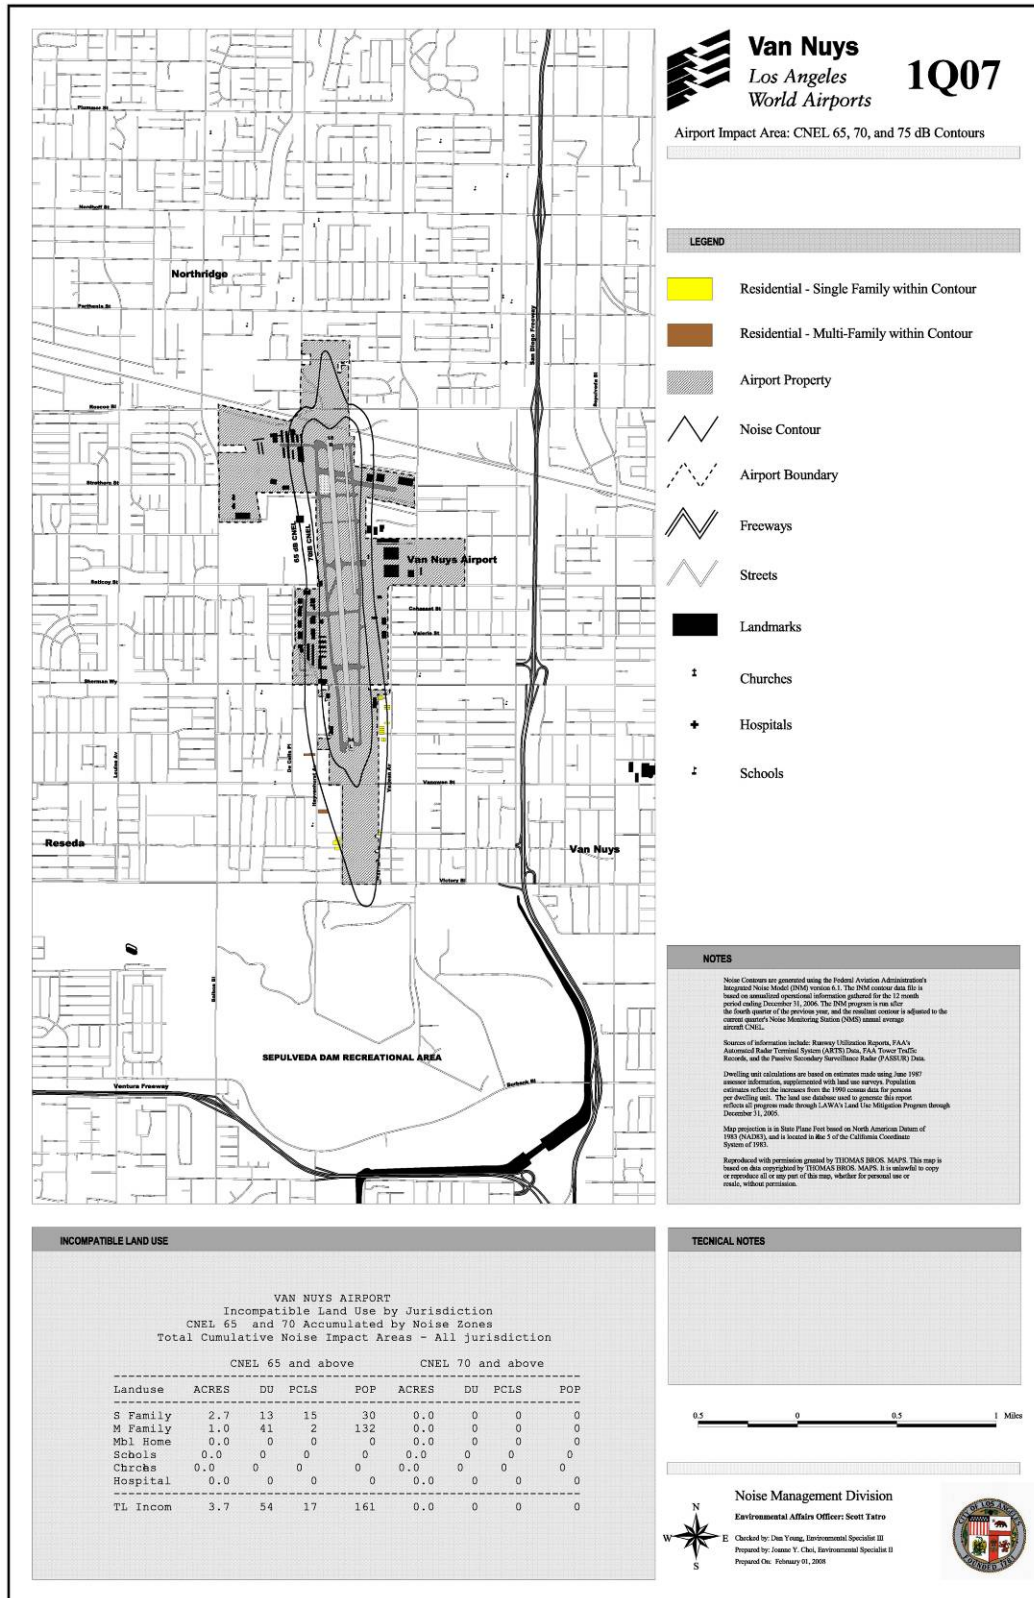

### B.5.3.3 Compatible Building Code

The City of Los Angeles Municipal Code requires acoustical analysis for new construction and alterations and additions to existing structures:<sup>8</sup>

#### CHAPTER IX BUILDING REGULATIONS

#### DIVISION 12 INTERIOR ENVIRONMENT

#### SEC. 91.1207. SOUND TRANSMISSION.

Section 1207 of the CBC is adopted by reference, except Sections 1207.1, 1207.11.1, 1207.11.3, 1207.11.4 and 1207.12 of the CBC are not adopted and in lieu, Sections 91.1207.1, 91.1207.11.1, 91.1207.11.3, 91.1207.11.4 and 91.1207.12 are added.

**91.1207.1. Purpose and Scope.** The purpose of this section is to establish uniform minimum noise insulation performance standards to protect persons within new hotels, motels, dormitories, residential care facilities, apartment houses, dwellings, private schools, and places of worship from the effects of excessive noise, including but not limited to, hearing loss or impairment and interference with speech and sleep.

**91.1207.11.1. Application Consistent with Local Land-Use Standards.** All structures identified in Section 91.1207.1 located in noise critical areas, such as proximity to highways, county roads, city streets, railroads, rapid transit lines, airports or industrial areas shall be designed to prevent the intrusion of exterior noises beyond prescribed levels. Proper design shall include, but shall not be limited to, orientation of the structure, setbacks, shielding and sound insulation of the building itself.

**91.1207.11.3. Airport Noise Sources.** Residential structures and all other structures identified in Section 91.1207.1 located where the annual  $L_{dn}$  or CNEL (as defined in Title 21, Subchapter 6, California Code of Regulations) exceeds 60 db, shall require an acoustical analysis showing that the proposed design will achieve prescribed allowable interior level.

**EXCEPTION:** New single family detached dwellings and all non-residential noise sensitive structures located outside the noise impact boundary of 65 db CNEL are exempt from Section 91.1207.

Alterations or additions to all noise sensitive structures, within the 65db and greater CNEL shall comply with the Section 91.1207. If the addition or alteration cost exceeds 75% of the replacement cost of the existing structure, then the entire structure must comply with Section 91.1207.

For public-use airports or heliports, the  $L_{dn}$  or CNEL shall be determined from the Aircraft Noise Impact Area Map prepared by the Airport Authority. For military bases, the  $L_{dn}$  shall be determined from the facility Air Installation Compatible Use Zone (AICUZ) plan. For all other airports or heliports, or public-use airports or heliports for which a land-use plan has not been developed, the  $L_{dn}$  or CNEL shall be determined from the noise element of the general plan of the local jurisdiction.

---

<sup>8</sup> Available:

<[http://www.amlegal.com/nxt/gateway.dll?f=templates&fn=default.htm&vid=amlegal:losangeles\\_ca\\_mc](http://www.amlegal.com/nxt/gateway.dll?f=templates&fn=default.htm&vid=amlegal:losangeles_ca_mc)>.

When aircraft noise is not the only significant source, noise levels from all sources shall be added to determine the composite site noise level.

**91.1207.11.4. Other Noise Sources.** All structures identified in Section 91.1207.1 located where the  $L_{dn}$  or CNEL exceeds 60db shall require an acoustical analysis showing that the proposed design will limit exterior noise to the prescribed allowable interior level. The noise element of the local general plan shall be used to the greatest extent possible to identify sites with noise levels potentially greater than 60db.

**91.1207.12. Compliance.** Evidence of compliance shall be submitted with the application for a building permit for all structures identified in Section 91.1207.1. Evidence of compliance shall consist of the submittal of an acoustical analysis report prepared under the supervision of a person experienced in the field of acoustical engineering or the use of prescriptive standards as determined by the Superintendent of Building for residential structures. The report shall show topographical relationships of noise sources and dwelling sites, identification of noise sources and their characteristics, predicted noise spectra and levels at the exterior of the proposed structure considering present and future land usage, the basis for the prediction (measured or obtained from published data), the noise attenuation measures to be applied, and an analysis of the noise insulation effectiveness of the proposed construction showing that the prescribed interior level requirements are met.

If interior allowable noise levels are met by requiring that windows be unopenable or closed, the design for the structure must also specify a ventilation or air-conditioning system to provide a habitable interior environment. The ventilation system must not compromise the interior room noise reduction.

### **B.5.3.4 Noise Disclosure**

Section 11010 of the State of California Business and Professions Code<sup>9</sup> requires any person who intends to offer subdivided lands within California for sale or lease to file with the Department of Real Estate an application for a public report that includes, among other things, the location of all existing airports and of all proposed airports shown on the general plan of any city or county located within 2 statute miles of the subdivision. A copy of the report must be given to the prospective purchaser by the owner, subdivider, or agent prior to the execution of a binding contract or agreement for the sale or lease of any lot or parcel in a subdivision or upon request by any member of the public.

If the property to be subdivided is located within an airport influence area (e.g., within the 65 dB CNEL contour at VNY), the following statement shall be included in the notice of intention:

---

<sup>9</sup> Available: <<http://www.leginfo.ca.gov/cgi-bin/displaycode?section=bpc&group=11001-12000&file=11010-11023>>.

## NOTICE OF AIRPORT IN VICINITY

This property is presently located in the vicinity of an airport, within what is known as an airport influence area. For that reason, the property may be subject to some of the annoyances or inconveniences associated with proximity to airport operations (for example: noise, vibration, or odors). Individual sensitivities to those annoyances can vary from person to person. You may wish to consider what airport annoyances, if any, are associated with the property before you complete your purchase and determine whether they are acceptable to you. (B) For purposes of this section, an “airport influence area,” also known as an “airport referral area,” is the area in which current or future airport-related noise, overflight, safety, or airspace protection factors may significantly affect land uses or necessitate restrictions on those uses as determined by an airport land use commission.

The California Department of Transportation Legal Division interprets existing law to require sellers of residential property to provide a notice of proximity to airports to prospective buyers, as reported in the California Airport Land Use Planning Handbook<sup>10</sup> (January 2002):

California state real estate law requires that sellers of real property disclose “any fact materially affecting the value and desirability of the property” (California Civil Code, Section 1102.1(a)). While this general requirement leaves to the property seller the decision as to whether airport-related information constitutes a fact warranting disclosure, other sections of state disclosure law specifically mention airports. Section 1102.17 of the Civil Code says that: “The seller of residential real property subject to this article who has actual knowledge that the property is affected by or zoned to allow industrial use described in Section 731a of the Code of Civil Procedure shall give written notice of that knowledge as soon as practicable before transfer of title.”

Section 731a of the Code of Civil Procedure then specifies: “Whenever any city, city and county, or county shall have established zones or districts under authority of law wherein certain manufacturing or commercial or airport uses are expressly permitted, except in an action to abate a public nuisance brought in the name of the people of the State of California, no person or persons, firm or corporation shall be enjoined or restrained by the injunctive process from reasonable and necessary operation in any such industrial or commercial zone or airport of any use expressly permitted therein, nor shall such use be deemed a nuisance without evidence of the employment of unnecessary and injurious methods of operation....”

---

<sup>10</sup> State of California Department of Transportation. 2002. *California Airport Land Use Planning Handbook*. Division of Aeronautics. Sacramento, CA. Prepared by Shutt Moen Associates, Santa Rosa, CA, pp. 3-26 – 3-27.

The interpretation of the Department of Transportation Legal Division is that these sections of the law establish a requirement for disclosure of information regarding the effects of airports on nearby property provided that the seller has “actual knowledge” of such effects. ALUCs have particular expertise in defining where airports have effects on surrounding lands. ALUCs thus can give authority to this disclosure requirement by establishing a policy indicating the geographic boundaries of the lands deemed to be affected by airport activity. In most cases, this boundary will coincide with commission’s planning boundary for an airport (the airport area of influence). Furthermore, ALUCs should disseminate information regarding their disclosure policy and its significance by formally mailing copies to local real estate brokers and title companies. Having received this information, the brokers would be obligated to tell sellers that the facts should be disclosed to prospective buyers.



# B.6

## VNY NOISE ORDINANCES

### B.6.1 Introduction

This appendix section presents the City of Los Angeles noise ordinances for VNY. The previous section discusses the roles these ordinances play in the existing VNY noise management program. Chapter 2 of the EIR discusses the manner in which the noisier aircraft phaseout regulation would be integrated into this ordinance framework. The existing ordinances include:

- City of Los Angeles Ordinance No. 155,727, “Van Nuys Airport Noise Abatement and Curfew Regulation.” This ordinance includes the partial night curfew (see Section B.5.2.6), limits on repetitive operations (B.5.2.3) and run-ups (B.5.2.4), and the suspended night preferential runway program (B.5.2.3). This ordinance also includes sections on definitions, enforcement, and penalties and other administrative provisions that also apply to other ordinances;
- City of Los Angeles Ordinance No. 171889, which extends the hours of the partial night curfew in Ordinance 155,727, as discussed in Section B.5.2.6; and
- City of Los Angeles Ordinance No. 173215 adds the “Non-Addition Rule,” as discussed in Section B.5.2.7.

These ordinances are published on the City of Los Angeles website at <http://cityclerk.lacity.org/ordinance/>.

**City of Los Angeles Ordinance No. 155,727**  
**Van Nuys Airport Noise Abatement and Curfew Regulation**

Section 1. Definitions: Except where the context otherwise requires, the following terms, when used in this regulation, shall have the following definitions:

- (a) Advisory Circular 36-3A - Estimated maximum A - Weighted Sound Levels for airplanes at Part 36 Appendix "C" Locations - Takeoff - as set forth in the United States Department of Transport, Federal Aviation Administration, Advisory Circular 36-3A, dated June 11, 1980, attached as Exhibit "A" to this regulation and make part hereof as though set forth in full, and as said Advisory Circular may be amended from time to time.
- (b) Aircraft - All fixed-wing aircraft driven by one or more propeller, turbojet, or turbo fan engines.
- (c) Airport - Van Nuys Airport.
- (d) Airport Manager - Van Nuys Airport Manager.
- (e) Board - Board of Airport Commissioners of the City of Los Angeles as described in Article XXIV, Section 238, et. seq. of the Charter of the City of Los Angeles.
- (f) dBA - A-weighted sound pressure level.
- (g) Depart - The movement of an aircraft from the time it commences its departure until it is airborne.
- (h) General Manager - General Manager of the Department of Airports, as described and defined in Article VI, Section 70 et. seq. and Article XXIV, Section 238, et. seq. of the Charter of the City of Los Angeles.
- (i) Person - An individual, partnership, business, corporation, joint venture, or any entity responsible for an aircraft operation.
- (j) Repetitive Operation - A practice operation, including but not limited to "touch and go" or "stop and go" operations, which utilize and Airport runway to land where the aircraft touching down or landing takes off again within five minutes. However, this definition does not include such operations as are necessary because of safety considerations or weather phenomena.
- (k) Run-up - The ground testing or revving of an aircraft engine not immediately connected to contemporaneous air operation.
- (l) "Stop and Go" Operation - The action by an aircraft consisting of a landing, followed by a complete stop on the runway, and then a takeoff from that point.
- (m) "Touch and Go" Operation - The action taken by an aircraft consisting of a landing and departure on a runway without stopping or exiting the runway.
- (n) For the purposes of this regulation, all times are local Pacific Standard Time, unless Daylight Savings Time is in force and, in such event, it shall be used.

Section 2. Curfew. No aircraft may depart from Van Nuys Airport between the hours of 11:00 pm and 7:00 am of the following day, except those aircraft listed below:

- (a) Military aircraft and any government owned or operated aircraft involved in law enforcement, emergency, fire or rescue operations.
- (b) Aircraft whose estimated takeoff noise levels, as set forth in Federal Aviation Administration Advisory Circular AC36-3H (or in any revision, supplement, or replacement thereof listing the noise levels) are equal to or less than 74 dBA.
- (c) Aircraft of a type not included in Advisory Circular 36-3H, for which evidence has been furnished to the Board that the departure noise of said aircraft will not exceed 74.0 dBA set forth in Advisory Circular 36-3A. When furnishing evidence that an aircraft has the ability to depart and not exceed the dBA level of 74.0, the person producing such evidence shall be required to provide appropriate information to validate conclusions and ability to comply with this regulation. The Board reserves the right to validate the aircraft's compliance ability through utilization of actual flight noise measurements.

(d) Aircraft which have been identified by the Federal Aviation Administration in writing as having 74.0 dBA or lower takeoff noise level although such figure is not published in Advisory Circular AC36-3H.

(e) Aircraft engaged in a bona fide medical or life-saving emergency for which acceptable evidence has been submitted in writing to the General Manager within seventy-two (72) hours prior to or subsequent to said departure.

### Section 3. Repetitive Aircraft Operations.

(a) No person shall engage in repetitive operations in any propeller powered aircraft between the hours of 10:00 pm and 7:00 am of the following day from June 21 through September 15, and between the hours of 9:00 pm and 7:00 am of the following day, from September 16 through June 20.

(b) No person shall engage in repetitive operations in any turbo-jet or fan jet powered aircraft, at anytime, at the Airport.

Section 4. Preferential Runway. Between the hours of 11:00 pm and 7:00 am of the following day, weather and traffic permitting, all aircraft shall depart on Runway 16R and shall arrive on Runway 34L of the Airport unless instructed otherwise by the Federal Aviation Administration Air Traffic Controller. \*(See Public Notice [following this ordinance]).

Section 5. Run-ups. No person shall test or run-up an aircraft engine for maintenance purposes between the hours of 7:00 pm and 7:00 am of the following day. Engine run-ups shall be done only in areas designated in writing by the General Manager.

Section 6. Presumption. For the purpose of this regulation, the beneficial owner of an aircraft shall be rebuttably presumed to be the pilot of the aircraft with authority to control the aircraft's operations, except that where the aircraft is leased, the lessee shall be presumed to be the pilot.

In the case of any pilot training operation in which both an instructor and student pilot are in the aircraft operated in violation of any provision of this regulation, the instructor shall be rebuttably presumed to have caused such violation.

### Section 7. Enforcement and Penalties.

(a) Civil Penalties. In addition to any other remedy provided for by this regulation or elsewhere, any person who violates any provision of this regulation shall be liable for a civil penalty not to exceed seven hundred and fifty (\$750) dollars. Any person who violates any provision of this regulation for a second time within one year of a prior violation shall be liable for a civil penalty not to exceed one thousand five hundred (\$1500) dollars upon such second violation.

Any person who violates any provision of this regulation for a third or any subsequent time within a three (3) year period shall be liable for a civil penalty not to exceed three thousand five hundred (\$3500) dollars.

Civil penalties shall be assessed and recovered in a civil action brought in the name of the City of Los Angeles by the City Attorney of Los Angeles in any court of competent jurisdiction in Los Angeles County. Funds recovered thereby shall be placed in the Airport Revenue Fund.

(b) Denial of Use of Airport. In the event any person has violated any provision of this regulation three (3) or more times within a three year period of the first violation, then for a period of three years thereafter, such person shall be deemed a persistent violator and be denied permission to depart from Airport in an aircraft owned, borrowed, rented or leased by such person and denied the right to lease, rent or use space for any aircraft (including tie-down) at Airport.

(c) Exclusion of Aircraft for Violations. In the event an aircraft has been operated in violation of any provision of this regulation on three or more occasions within a three-year period of the first violation, whether piloted by the same or different individuals, then it shall be presumed that future operations of said aircraft will result in continued violations. The Airport Manager shall thereafter deny said aircraft permission for a period of three years to tie-down, be based at, or takeoff from Airport provided, however, that a new owner, who has not operated the aircraft or caused it to be operated in violation of this regulation, shall be entitled to appeal such decision to the Airport Manager upon furnishing satisfactory evidence of a change in both the operating personnel and ownership of such aircraft. Upon receiving such evidence, the Airport Manager shall restore all rights to said aircraft.

(d) Other Enforcement. The provisions of the regulation may be judicially enforced by injunction or other relief deemed appropriate by any court of competent jurisdiction.

Any person, except employees of the Federal Aviation Administration acting in the course and scope of their employment, who counsels, aids, assists, or abets any other person in the operation of any aircraft in violation of this regulation is subject to the same penalty provisions as are specified in this section.

The remedies described herein shall be deemed to be cumulative, and, the election to seek any remedy shall not be deemed to be a waiver of other remedies nor a bar to seek more than one remedy for the same violation of this regulation.

Section 8. Savings Clause. If any section, subsection, sentence, clause or phrase of this regulation is for any reason held to be invalid or unconstitutional by the decision of any court of competent jurisdiction, such decision shall not affect the validity of the remaining portions of this regulation. The City Council hereby declares that it would have passed this regulation and each section, subsection, sentence, clause and phrase thereof, irrespective of the fact that any one or more sections, subsections, sentences, clauses, or phrases be declared invalid or unconstitutional.

Section 9. Designated Officers and Employees. The General Manager, and such other City employees as are designated by the General Manager, shall have the duty and authority to enforce the provisions of this regulation.

I hereby certify that the foregoing ordinance was introduced at the meeting of the Council of the City of Los Angeles of July 29, 1981 and was passed at its meeting of August 5, 1981.

REX E. LAYTON, City Clerk

By Chauncy B. Pruner, Deputy. Approved August 10, 1981.

TOM BRADLEY, Mayor.

File No. 73-2158 S1 & S2, 77-4557 (DJG9588) Aug 31

**PUBLIC NOTICE RE: ORDINANCE 155727\*\***

EFFECTIVE AUGUST 8, 1982, VAN NUYS AIRPORT DOES NOT HAVE AIR TRAFFIC CONTROLLERS BETWEEN THE HOURS OF 2245 AND 0600 OF THE FOLLOWING DAY, LOCAL TIME DAILY.

THE FEDERAL AVIATION ADMINISTRATION AIR TRAFFIC CONTROLLER HAS SUSPENDED THE PROVISIONS OF SECTION 4 OF THE VAN NUYS NOISE ABATEMENT AND CURFEW ORDINANCE NO. 155727 UNTIL FURTHER NOTICE. SECTION 3, PARAGRAPH 222 AND 223 OF THE AIRMAN'S INFORMATION MANUAL APPLIES AT VAN NUYS AIRPORT BETWEEN HOURS 2245 AND 0600 OF THE FOLLOWING DAY. LOCAL TIME DAILY UNTIL FURTHER NOTICE.

**ORDINANCE No. 171889**

An Ordinance approving a Regulation adopted by Resolution 20030 of the Board of Airport Commissioners of the City of Los Angeles amending Ordinance 155,727 of the City of Los Angeles, known as the Van Nuys Noise Abatement and Curfew Regulation, to add section 2.1 extending the curfew hours at Van Nuys Airport.

The People of the City of Los Angeles Do Ordain as Follows:

Section 1. The Regulation, adopted by Resolution No. 20030 of the Board of Airport Commissioners December 4, 1997, is hereby approved. Said Regulation contained in said Resolution provides an additional curfew hour for aircraft at Van Nuys Airport.

Section 2. Ordinance 155,727 of the City of Los Angeles is hereby amended by adding one new section to read as follows:

Section 2.1 Curfew. Except for aircraft exempted by subdivisions (a) through (e) of Section 2, no aircraft may depart from Van Nuys Airport between the hours of 10:00 pm and 11:00 pm. The provisions of this section shall not be applicable to any aircraft certificated as Stage 3 pursuant to 14 Code of Federal Regulation Part 36.

Section 3. The City Clerk shall certify to the passage of this ordinance and cause the same to be published in some daily newspaper printed and published in the City of Los Angeles.

I hereby certify that the foregoing ordinance was passed by the Council of the City of Los Angeles, at its meeting

DEC 19, 1997.

**ORDINANCE No. 173215**

An Ordinance approving a Regulation adopted by Resolution 20736 of the Board of Airport Commissioners of the City of Los Angeles amending Ordinance 155,727 of the City of Los Angeles, known as the Van Nuys Noise Abatement and Curfew Regulation, to add Section 5.1 and subsection (gg) to Section 1, thereby adding a Non-Addition Rule.

The People of the City of Los Angeles Do Ordain as Follows:

Section 1. The Regulation, adopted by Resolution No. 207736 of the Board of Airport Commissioners on July 28, 1999, is hereby approved. Said Regulation contained in said Resolution provides an additional noise abatement regulation for aircraft at Van Nuys Airport.

Section 2. Ordinance 155,727 of the City of Los Angeles is hereby amended by adding one new section and one subsection to read as follows:

Section 5.1 Non-addition.

No person or tenant may tie down, part or hangar any aircraft at Van Nuys Airport, whose Advisory Circular 36-3G takeoff noise level equals or exceeds 77 dBA, for more than thirty (30) days in any calendar year, unless said aircraft is an exempt based aircraft.

EXEMPTION A - STAGE 3: The provisions of this section shall not be applicable to any aircraft certificated as Stage 3 pursuant to 14 Code of Federal Regulations Part 36.

EXEMPTION B - REPAIR AND MAINTENANCE: Notwithstanding the restrictions of Section 5.1, a Stage 2 aircraft with a takeoff noise level in excess of 77 dBA may be parked, tied down or hangared at the Airport in excess of the 30 day limit (and such additional time as is necessary) to perform major repairs or refurbishment, required maintenance inspections or systems installations and warranty work (hereinafter "work") provided all of the following conditions are fully satisfied:

- (a) Prior to the day of arrival of the aircraft the Airport Manager receives a written "work notice" containing the anticipated date of arrival, the name of the aircraft owner and operator, the aircraft type and registration "N" number, the name of the company or entity contracted to perform the work, a description of the work to be performed, and an estimate of the duration of the stay; and
- (b) The aircraft is not being charged a tie-down fee or other use fee by an Airport tenant; and
- (c) The aircraft owner or operator obtains a written permit from the Airport Manager authorizing an exemption under this subsection prior to or within 24 hours of arrival of the aircraft at the Airport; and
- (d) The aircraft owner or operator complies with all conditions and terms stated in the written permit granted by the Airport Manager, including but not limited to mandatory daytime hours for flight arrival and departures; and
- (e) The aircraft owner or operator provides written notice of departure to the Airport Manager within 24 hours of departure from the Airport.

EXEMPTION C - REPLACEMENT: Until December 31, 2005, notwithstanding the provisions of Section 5.1, an exempt based Stage 2 aircraft, as defined in Section 1, subsection (gg), may be replaced with another Stage 2 aircraft exceeding 77 dBA ("replacement Stage 2 aircraft"), provided all of the following apply:

- (a) The Stage 2 aircraft being replaced will no longer be based at the Airport; and
- (b) Calculated on the date of replacement, the replacement Stage 2 aircraft has an Advisory Circular 36-3G takeoff noise level not exceeding 85 dBA; and
- (c) The replacement Stage 2 aircraft, after January 1, 2011, shall not be tied down, parked or hangared at Van Nuys Airport for more than thirty (30) days in any calendar year. A replacement Stage 2 aircraft exceeding 77 dBA shall not be considered an "exempt based aircraft", nor shall its continued presence at Van Nuys Airport under Exemption C ever entitle it to "exempt based aircraft" status.

Section 1, Subsection (gg) Exempt Based Aircraft - All aircraft which were parked, tied down or hangared at Airport

for ninety (90) days or more during the twelve (12) months immediately preceding December 31, 1999.

Said ordinance was presented to the Mayor on April 24, 2000; the Mayor returned said ordinance to the City Clerk on May 5, 2000 without his approval or his objections in writing, being more than ten days after the same was presented to the Mayor. Said ordinance shall become effective and be as valid as if the Mayor had approved and signed it. (Section 30, City Charter)

# B.7

## SUPPLEMENTAL NOISE ANALYSIS RESULTS

### B.7.1 Introduction

This appendix presents the supplemental threshold of significance noise analysis results for the 1,254 grid locations discussed in Section 9.4.

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| A01        | 54.7               | 55.3              | 55.6                        | 55.3   | 0.6                      | -0.3                        | 0.0  |
| A02        | 55.1               | 55.8              | 56.1                        | 55.8   | 0.7                      | -0.3                        | 0.0  |
| A03        | 55.4               | 56.1              | 56.4                        | 56.1   | 0.7                      | -0.3                        | 0.0  |
| A04        | 55.7               | 56.4              | 56.7                        | 56.4   | 0.7                      | -0.3                        | 0.0  |
| A05        | 55.8               | 56.6              | 56.8                        | 56.6   | 0.8                      | -0.2                        | 0.0  |
| A06        | 55.5               | 56.3              | 56.6                        | 56.3   | 0.8                      | -0.3                        | 0.0  |
| A07        | 55.3               | 56.1              | 56.4                        | 56.1   | 0.8                      | -0.3                        | 0.0  |
| A08        | 55.2               | 56.1              | 56.3                        | 56.1   | 0.9                      | -0.2                        | 0.0  |
| A09        | 55.1               | 55.9              | 56.1                        | 55.9   | 0.8                      | -0.2                        | 0.0  |
| A10        | 54.9               | 55.8              | 56.0                        | 55.8   | 0.9                      | -0.2                        | 0.0  |
| A11        | 54.8               | 55.7              | 55.9                        | 55.7   | 0.9                      | -0.2                        | 0.0  |
| A12        | 54.8               | 55.7              | 55.9                        | 55.7   | 0.9                      | -0.2                        | 0.0  |
| A13        | 54.8               | 55.7              | 55.9                        | 55.7   | 0.9                      | -0.2                        | 0.0  |
| A14        | 54.8               | 55.8              | 55.9                        | 55.8   | 1.0                      | -0.1                        | 0.0  |
| A15        | 54.9               | 55.9              | 56.0                        | 55.9   | 1.0                      | -0.1                        | 0.0  |
| A16        | 54.9               | 55.9              | 56.0                        | 55.9   | 1.0                      | -0.1                        | 0.0  |
| A17        | 55.0               | 55.9              | 56.1                        | 55.9   | 0.9                      | -0.2                        | 0.0  |
| A18        | 55.1               | 56.0              | 56.2                        | 56.0   | 0.9                      | -0.2                        | 0.0  |
| A19        | 55.2               | 56.1              | 56.3                        | 56.1   | 0.9                      | -0.2                        | 0.0  |
| A20        | 55.4               | 56.3              | 56.4                        | 56.3   | 0.9                      | -0.1                        | 0.0  |
| A21        | 55.7               | 56.5              | 56.6                        | 56.5   | 0.8                      | -0.1                        | 0.0  |
| A22        | 55.9               | 56.7              | 56.8                        | 56.7   | 0.8                      | -0.1                        | 0.0  |
| A23        | 56.1               | 56.8              | 57.0                        | 56.8   | 0.7                      | -0.2                        | 0.0  |
| A24        | 56.3               | 57.0              | 57.1                        | 57.0   | 0.7                      | -0.1                        | 0.0  |
| A25        | 56.5               | 57.1              | 57.3                        | 57.1   | 0.6                      | -0.2                        | 0.0  |
| A26        | 56.7               | 57.3              | 57.4                        | 57.3   | 0.6                      | -0.1                        | 0.0  |
| A27        | 56.7               | 57.3              | 57.5                        | 57.3   | 0.6                      | -0.2                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| A28        | 56.5               | 57.1              | 57.2                        | 57.1   | 0.6                      | -0.1                        | 0.0  |
| A29        | 56.2               | 56.8              | 56.9                        | 56.8   | 0.6                      | -0.1                        | 0.0  |
| A30        | 56.0               | 56.6              | 56.7                        | 56.6   | 0.6                      | -0.1                        | 0.0  |
| A31        | 55.9               | 56.5              | 56.6                        | 56.5   | 0.6                      | -0.1                        | 0.0  |
| A32        | 55.9               | 56.6              | 56.7                        | 56.6   | 0.7                      | -0.1                        | 0.0  |
| A33        | 56.1               | 56.8              | 56.9                        | 56.8   | 0.7                      | -0.1                        | 0.0  |
| A34        | 56.2               | 56.9              | 57.0                        | 56.9   | 0.7                      | -0.1                        | 0.0  |
| A35        | 55.9               | 56.6              | 56.7                        | 56.6   | 0.7                      | -0.1                        | 0.0  |
| A36        | 55.6               | 56.2              | 56.4                        | 56.2   | 0.6                      | -0.2                        | 0.0  |
| A37        | 55.4               | 56.0              | 56.2                        | 56.0   | 0.6                      | -0.2                        | 0.0  |
| A38        | 55.4               | 55.9              | 56.1                        | 55.9   | 0.5                      | -0.2                        | 0.0  |
| A39        | 55.4               | 56.0              | 56.2                        | 56.0   | 0.6                      | -0.2                        | 0.0  |
| A40        | 55.4               | 56.0              | 56.2                        | 56.0   | 0.6                      | -0.2                        | 0.0  |
| A41        | 55.3               | 56.0              | 56.2                        | 56.0   | 0.7                      | -0.2                        | 0.0  |
| A42        | 55.3               | 56.1              | 56.2                        | 56.1   | 0.8                      | -0.1                        | 0.0  |
| A43        | 55.1               | 55.9              | 56.1                        | 55.9   | 0.8                      | -0.2                        | 0.0  |
| A44        | 54.8               | 55.7              | 55.8                        | 55.7   | 0.9                      | -0.1                        | 0.0  |
| A45        | 54.5               | 55.5              | 55.6                        | 55.5   | 1.0                      | -0.1                        | 0.0  |
| A46        | 54.2               | 55.2              | 55.3                        | 55.2   | 1.0                      | -0.1                        | 0.0  |
| A47        | 54.1               | 55.0              | 55.2                        | 55.0   | 0.9                      | -0.2                        | 0.0  |
| A48        | 54.1               | 55.1              | 55.2                        | 55.1   | 1.0                      | -0.1                        | 0.0  |
| A49        | 54.3               | 55.3              | 55.4                        | 55.3   | 1.0                      | -0.1                        | 0.0  |
| A50        | 54.6               | 55.5              | 55.7                        | 55.5   | 0.9                      | -0.2                        | 0.0  |
| A51        | 54.9               | 55.9              | 56.1                        | 55.9   | 1.0                      | -0.2                        | 0.0  |
| A52        | 55.2               | 56.2              | 56.4                        | 56.2   | 1.0                      | -0.2                        | 0.0  |
| A53        | 55.5               | 56.4              | 56.6                        | 56.4   | 0.9                      | -0.2                        | 0.0  |
| A54        | 55.6               | 56.5              | 56.7                        | 56.5   | 0.9                      | -0.2                        | 0.0  |
| A55        | 55.6               | 56.4              | 56.7                        | 56.4   | 0.8                      | -0.3                        | 0.0  |
| A56        | 55.4               | 56.2              | 56.4                        | 56.2   | 0.8                      | -0.2                        | 0.0  |
| A57        | 55.1               | 55.9              | 56.2                        | 55.9   | 0.8                      | -0.3                        | 0.0  |
| A58        | 54.8               | 55.6              | 55.8                        | 55.6   | 0.8                      | -0.2                        | 0.0  |
| A59        | 54.3               | 55.2              | 55.4                        | 55.2   | 0.9                      | -0.2                        | 0.0  |
| A60        | 53.8               | 54.7              | 54.9                        | 54.7   | 0.9                      | -0.2                        | 0.0  |
| A61        | 53.3               | 54.2              | 54.4                        | 54.2   | 0.9                      | -0.2                        | 0.0  |
| A62        | 52.9               | 53.9              | 54.0                        | 53.9   | 1.0                      | -0.1                        | 0.0  |
| A63        | 52.5               | 53.6              | 53.7                        | 53.6   | 1.1                      | -0.1                        | 0.0  |
| A64        | 52.1               | 53.1              | 53.3                        | 53.1   | 1.0                      | -0.2                        | 0.0  |
| A65        | 51.7               | 52.7              | 52.8                        | 52.7   | 1.0                      | -0.1                        | 0.0  |
| A66        | 51.4               | 52.5              | 52.6                        | 52.5   | 1.1                      | -0.1                        | 0.0  |
| B01        | 54.9               | 55.5              | 55.8                        | 55.5   | 0.6                      | -0.3                        | 0.0  |
| B02        | 55.3               | 56.0              | 56.3                        | 56.0   | 0.7                      | -0.3                        | 0.0  |
| B03        | 55.6               | 56.3              | 56.6                        | 56.3   | 0.7                      | -0.3                        | 0.0  |
| B04        | 56.0               | 56.7              | 57.0                        | 56.7   | 0.7                      | -0.3                        | 0.0  |
| B05        | 56.1               | 56.8              | 57.1                        | 56.9   | 0.7                      | -0.3                        | -0.1   |
| B06        | 56.0               | 56.7              | 57.0                        | 56.7   | 0.7                      | -0.3                        | 0.0  |
| B07        | 55.8               | 56.7              | 56.9                        | 56.7   | 0.9                      | -0.2                        | 0.0  |
| B08        | 55.8               | 56.6              | 56.9                        | 56.6   | 0.8                      | -0.3                        | 0.0  |
| B09        | 55.7               | 56.5              | 56.8                        | 56.6   | 0.8                      | -0.3                        | -0.1   |
| B10        | 55.6               | 56.5              | 56.7                        | 56.5   | 0.9                      | -0.2                        | 0.0  |
| B11        | 55.5               | 56.4              | 56.6                        | 56.4   | 0.9                      | -0.2                        | 0.0  |
| B12        | 55.5               | 56.5              | 56.7                        | 56.5   | 1.0                      | -0.2                        | 0.0  |



| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| B13        | 55.5               | 56.5              | 56.7                        | 56.5   | 1.0                      | -0.2                        | 0.0  |
| B14        | 55.6               | 56.6              | 56.8                        | 56.6   | 1.0                      | -0.2                        | 0.0  |
| B15        | 55.6               | 56.6              | 56.8                        | 56.6   | 1.0                      | -0.2                        | 0.0  |
| B16        | 55.7               | 56.7              | 56.9                        | 56.7   | 1.0                      | -0.2                        | 0.0  |
| B17        | 55.9               | 56.8              | 57.0                        | 56.8   | 0.9                      | -0.2                        | 0.0  |
| B18        | 56.0               | 57.0              | 57.1                        | 57.0   | 1.0                      | -0.1                        | 0.0  |
| B19        | 56.1               | 57.1              | 57.2                        | 57.1   | 1.0                      | -0.1                        | 0.0  |
| B20        | 56.3               | 57.2              | 57.4                        | 57.2   | 0.9                      | -0.2                        | 0.0  |
| B21        | 56.6               | 57.4              | 57.6                        | 57.4   | 0.8                      | -0.2                        | 0.0  |
| B22        | 56.8               | 57.6              | 57.8                        | 57.6   | 0.8                      | -0.2                        | 0.0  |
| B23        | 57.1               | 57.8              | 58.0                        | 57.8   | 0.7                      | -0.2                        | 0.0  |
| B24        | 57.3               | 58.0              | 58.1                        | 58.0   | 0.7                      | -0.1                        | 0.0  |
| B25        | 57.5               | 58.1              | 58.2                        | 58.1   | 0.6                      | -0.1                        | 0.0  |
| B26        | 57.6               | 58.2              | 58.3                        | 58.2   | 0.6                      | -0.1                        | 0.0  |
| B27        | 57.6               | 58.2              | 58.3                        | 58.2   | 0.6                      | -0.1                        | 0.0  |
| B28        | 57.5               | 58.0              | 58.2                        | 58.0   | 0.5                      | -0.2                        | 0.0  |
| B29        | 57.2               | 57.7              | 57.9                        | 57.7   | 0.5                      | -0.2                        | 0.0  |
| B30        | 56.9               | 57.4              | 57.6                        | 57.4   | 0.5                      | -0.2                        | 0.0  |
| B31        | 56.8               | 57.3              | 57.5                        | 57.3   | 0.5                      | -0.2                        | 0.0  |
| B32        | 56.8               | 57.5              | 57.6                        | 57.5   | 0.7                      | -0.1                        | 0.0  |
| B33        | 57.0               | 57.7              | 57.9                        | 57.7   | 0.7                      | -0.2                        | 0.0  |
| B34        | 57.1               | 57.8              | 57.9                        | 57.8   | 0.7                      | -0.1                        | 0.0  |
| B35        | 57.0               | 57.7              | 57.8                        | 57.7   | 0.7                      | -0.1                        | 0.0  |
| B36        | 57.0               | 57.6              | 57.8                        | 57.6   | 0.6                      | -0.2                        | 0.0  |
| B37        | 57.1               | 57.7              | 57.9                        | 57.7   | 0.6                      | -0.2                        | 0.0  |
| B38        | 57.3               | 57.9              | 58.1                        | 57.9   | 0.6                      | -0.2                        | 0.0  |
| B39        | 57.5               | 58.1              | 58.3                        | 58.1   | 0.6                      | -0.2                        | 0.0  |
| B40        | 57.3               | 58.0              | 58.1                        | 58.0   | 0.7                      | -0.1                        | 0.0  |
| B41        | 57.0               | 57.7              | 57.8                        | 57.7   | 0.7                      | -0.1                        | 0.0  |
| B42        | 56.6               | 57.4              | 57.6                        | 57.4   | 0.8                      | -0.2                        | 0.0  |
| B43        | 55.9               | 56.8              | 56.9                        | 56.8   | 0.9                      | -0.1                        | 0.0  |
| B44        | 55.4               | 56.3              | 56.5                        | 56.3   | 0.9                      | -0.2                        | 0.0  |
| B45        | 55.1               | 56.0              | 56.1                        | 56.0   | 0.9                      | -0.1                        | 0.0  |
| B46        | 54.8               | 55.8              | 55.9                        | 55.8   | 1.0                      | -0.1                        | 0.0  |
| B47        | 54.8               | 55.8              | 55.9                        | 55.8   | 1.0                      | -0.1                        | 0.0  |
| B48        | 54.9               | 55.9              | 56.0                        | 55.9   | 1.0                      | -0.1                        | 0.0  |
| B49        | 55.1               | 56.1              | 56.3                        | 56.1   | 1.0                      | -0.2                        | 0.0  |
| B50        | 55.4               | 56.4              | 56.6                        | 56.4   | 1.0                      | -0.2                        | 0.0  |
| B51        | 55.7               | 56.7              | 56.9                        | 56.7   | 1.0                      | -0.2                        | 0.0  |
| B52        | 56.0               | 56.9              | 57.1                        | 56.9   | 0.9                      | -0.2                        | 0.0  |
| B53        | 56.1               | 57.0              | 57.3                        | 57.0   | 0.9                      | -0.3                        | 0.0  |
| B54        | 56.2               | 57.1              | 57.3                        | 57.1   | 0.9                      | -0.2                        | 0.0  |
| B55        | 56.1               | 57.0              | 57.2                        | 57.0   | 0.9                      | -0.2                        | 0.0  |
| B56        | 55.9               | 56.7              | 56.9                        | 56.7   | 0.8                      | -0.2                        | 0.0  |
| B57        | 55.5               | 56.4              | 56.6                        | 56.4   | 0.9                      | -0.2                        | 0.0  |
| B58        | 55.2               | 56.0              | 56.2                        | 56.0   | 0.8                      | -0.2                        | 0.0  |
| B59        | 54.7               | 55.6              | 55.8                        | 55.6   | 0.9                      | -0.2                        | 0.0  |
| B60        | 54.2               | 55.1              | 55.3                        | 55.1   | 0.9                      | -0.2                        | 0.0  |
| B61        | 53.7               | 54.7              | 54.8                        | 54.7   | 1.0                      | -0.1                        | 0.0  |
| B62        | 53.4               | 54.4              | 54.5                        | 54.4   | 1.0                      | -0.1                        | 0.0  |
| B63        | 53.0               | 54.1              | 54.2                        | 54.1   | 1.1                      | -0.1                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| B64        | 52.7               | 53.7              | 53.9                        | 53.7   | 1.0                      | -0.2                        | 0.0  |
| B65        | 52.4               | 53.5              | 53.6                        | 53.5   | 1.1                      | -0.1                        | 0.0  |
| B66        | 52.3               | 53.3              | 53.4                        | 53.3   | 1.0                      | -0.1                        | 0.0  |
| C01        | 55.1               | 55.7              | 56.0                        | 55.7   | 0.6                      | -0.3                        | 0.0  |
| C02        | 55.5               | 56.2              | 56.5                        | 56.2   | 0.7                      | -0.3                        | 0.0  |
| C03        | 55.9               | 56.6              | 56.9                        | 56.6   | 0.7                      | -0.3                        | 0.0  |
| C04        | 56.3               | 57.0              | 57.3                        | 57.0   | 0.7                      | -0.3                        | 0.0  |
| C05        | 56.5               | 57.2              | 57.5                        | 57.2   | 0.7                      | -0.3                        | 0.0  |
| C06        | 56.5               | 57.2              | 57.5                        | 57.2   | 0.7                      | -0.3                        | 0.0  |
| C07        | 56.4               | 57.2              | 57.5                        | 57.2   | 0.8                      | -0.3                        | 0.0  |
| C08        | 56.4               | 57.3              | 57.5                        | 57.3   | 0.9                      | -0.2                        | 0.0  |
| C09        | 56.3               | 57.2              | 57.5                        | 57.2   | 0.9                      | -0.3                        | 0.0  |
| C10        | 56.3               | 57.2              | 57.4                        | 57.2   | 0.9                      | -0.2                        | 0.0  |
| C11        | 56.3               | 57.3              | 57.5                        | 57.3   | 1.0                      | -0.2                        | 0.0  |
| C12        | 56.4               | 57.4              | 57.6                        | 57.4   | 1.0                      | -0.2                        | 0.0  |
| C13        | 56.5               | 57.5              | 57.6                        | 57.5   | 1.0                      | -0.1                        | 0.0  |
| C14        | 56.5               | 57.5              | 57.7                        | 57.5   | 1.0                      | -0.2                        | 0.0  |
| C15        | 56.6               | 57.6              | 57.8                        | 57.6   | 1.0                      | -0.2                        | 0.0  |
| C16        | 56.7               | 57.7              | 57.9                        | 57.7   | 1.0                      | -0.2                        | 0.0  |
| C17        | 56.9               | 57.9              | 58.1                        | 57.9   | 1.0                      | -0.2                        | 0.0  |
| C18        | 57.0               | 58.0              | 58.2                        | 58.0   | 1.0                      | -0.2                        | 0.0  |
| C19        | 57.2               | 58.1              | 58.3                        | 58.1   | 0.9                      | -0.2                        | 0.0  |
| C20        | 57.4               | 58.3              | 58.5                        | 58.3   | 0.9                      | -0.2                        | 0.0  |
| C21        | 57.7               | 58.5              | 58.7                        | 58.5   | 0.8                      | -0.2                        | 0.0  |
| C22        | 57.9               | 58.7              | 58.9                        | 58.7   | 0.8                      | -0.2                        | 0.0  |
| C23        | 58.2               | 58.9              | 59.1                        | 58.9   | 0.7                      | -0.2                        | 0.0  |
| C24        | 58.5               | 59.2              | 59.3                        | 59.2   | 0.7                      | -0.1                        | 0.0  |
| C25        | 58.7               | 59.3              | 59.5                        | 59.3   | 0.6                      | -0.2                        | 0.0  |
| C26        | 58.8               | 59.3              | 59.5                        | 59.3   | 0.5                      | -0.2                        | 0.0  |
| C27        | 58.8               | 59.3              | 59.5                        | 59.3   | 0.5                      | -0.2                        | 0.0  |
| C28        | 58.7               | 59.2              | 59.4                        | 59.2   | 0.5                      | -0.2                        | 0.0  |
| C29        | 58.5               | 59.0              | 59.2                        | 59.0   | 0.5                      | -0.2                        | 0.0  |
| C30        | 58.2               | 58.7              | 58.9                        | 58.7   | 0.5                      | -0.2                        | 0.0  |
| C31        | 58.0               | 58.5              | 58.7                        | 58.5   | 0.5                      | -0.2                        | 0.0  |
| C32        | 58.0               | 58.6              | 58.8                        | 58.6   | 0.6                      | -0.2                        | 0.0  |
| C33        | 58.2               | 58.9              | 59.0                        | 58.9   | 0.7                      | -0.1                        | 0.0  |
| C34        | 58.3               | 59.0              | 59.2                        | 59.0   | 0.7                      | -0.2                        | 0.0  |
| C35        | 58.5               | 59.2              | 59.3                        | 59.2   | 0.7                      | -0.1                        | 0.0  |
| C36        | 58.9               | 59.6              | 59.8                        | 59.6   | 0.7                      | -0.2                        | 0.0  |
| C37        | 59.6               | 60.4              | 60.6                        | 60.4   | 0.8                      | -0.2                        | 0.0  |
| C38        | 60.6               | 61.4              | 61.5                        | 61.4   | 0.8                      | -0.1                        | 0.0  |
| C39        | 61.2               | 62.1              | 62.2                        | 62.1   | 0.9                      | -0.1                        | 0.0  |
| C40        | 59.7               | 60.4              | 60.6                        | 60.4   | 0.7                      | -0.2                        | 0.0  |
| C41        | 58.7               | 59.5              | 59.6                        | 59.5   | 0.8                      | -0.1                        | 0.0  |
| C42        | 57.7               | 58.4              | 58.6                        | 58.4   | 0.7                      | -0.2                        | 0.0  |
| C43        | 56.9               | 57.7              | 57.9                        | 57.7   | 0.8                      | -0.2                        | 0.0  |
| C44        | 56.4               | 57.3              | 57.4                        | 57.3   | 0.9                      | -0.1                        | 0.0  |
| C45        | 56.1               | 57.0              | 57.1                        | 57.0   | 0.9                      | -0.1                        | 0.0  |
| C46        | 55.9               | 56.8              | 57.0                        | 56.8   | 0.9                      | -0.2                        | 0.0  |
| C47        | 55.9               | 56.9              | 57.0                        | 56.9   | 1.0                      | -0.1                        | 0.0  |
| C48        | 56.0               | 57.0              | 57.2                        | 57.0   | 1.0                      | -0.2                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| C49        | 56.2               | 57.2              | 57.4                        | 57.2   | 1.0                      | -0.2                        | 0.0  |
| C50        | 56.4               | 57.4              | 57.6                        | 57.4   | 1.0                      | -0.2                        | 0.0  |
| C51        | 56.7               | 57.7              | 57.9                        | 57.7   | 1.0                      | -0.2                        | 0.0  |
| C52        | 56.9               | 57.9              | 58.1                        | 57.9   | 1.0                      | -0.2                        | 0.0  |
| C53        | 57.0               | 57.9              | 58.1                        | 57.9   | 0.9                      | -0.2                        | 0.0  |
| C54        | 57.0               | 57.9              | 58.1                        | 57.9   | 0.9                      | -0.2                        | 0.0  |
| C55        | 56.8               | 57.8              | 58.0                        | 57.8   | 1.0                      | -0.2                        | 0.0  |
| C56        | 56.6               | 57.5              | 57.7                        | 57.5   | 0.9                      | -0.2                        | 0.0  |
| C57        | 56.2               | 57.1              | 57.3                        | 57.1   | 0.9                      | -0.2                        | 0.0  |
| C58        | 55.8               | 56.7              | 56.9                        | 56.7   | 0.9                      | -0.2                        | 0.0  |
| C59        | 55.3               | 56.2              | 56.4                        | 56.2   | 0.9                      | -0.2                        | 0.0  |
| C60        | 54.8               | 55.8              | 56.0                        | 55.8   | 1.0                      | -0.2                        | 0.0  |
| C61        | 54.5               | 55.5              | 55.6                        | 55.5   | 1.0                      | -0.1                        | 0.0  |
| C62        | 54.2               | 55.2              | 55.4                        | 55.2   | 1.0                      | -0.2                        | 0.0  |
| C63        | 53.9               | 55.0              | 55.1                        | 55.0   | 1.1                      | -0.1                        | 0.0  |
| C64        | 53.7               | 54.8              | 54.9                        | 54.8   | 1.1                      | -0.1                        | 0.0  |
| C65        | 53.6               | 54.6              | 54.7                        | 54.6   | 1.0                      | -0.1                        | 0.0  |
| C66        | 53.4               | 54.5              | 54.6                        | 54.5   | 1.1                      | -0.1                        | 0.0  |
| D01        | 55.2               | 55.9              | 56.2                        | 55.9   | 0.7                      | -0.3                        | 0.0  |
| D02        | 55.7               | 56.4              | 56.7                        | 56.4   | 0.7                      | -0.3                        | 0.0  |
| D03        | 56.2               | 56.9              | 57.2                        | 56.9   | 0.7                      | -0.3                        | 0.0  |
| D04        | 56.7               | 57.4              | 57.7                        | 57.4   | 0.7                      | -0.3                        | 0.0  |
| D05        | 56.9               | 57.6              | 57.9                        | 57.7   | 0.7                      | -0.3                        | -0.1   |
| D06        | 57.0               | 57.8              | 58.1                        | 57.8   | 0.8                      | -0.3                        | 0.0  |
| D07        | 57.1               | 57.9              | 58.1                        | 57.9   | 0.8                      | -0.2                        | 0.0  |
| D08        | 57.1               | 57.9              | 58.2                        | 57.9   | 0.8                      | -0.3                        | 0.0  |
| D09        | 57.1               | 58.0              | 58.2                        | 58.0   | 0.9                      | -0.2                        | 0.0  |
| D10        | 57.2               | 58.1              | 58.3                        | 58.1   | 0.9                      | -0.2                        | 0.0  |
| D11        | 57.3               | 58.2              | 58.5                        | 58.2   | 0.9                      | -0.3                        | 0.0  |
| D12        | 57.4               | 58.4              | 58.6                        | 58.4   | 1.0                      | -0.2                        | 0.0  |
| D13        | 57.4               | 58.4              | 58.6                        | 58.4   | 1.0                      | -0.2                        | 0.0  |
| D14        | 57.5               | 58.6              | 58.8                        | 58.6   | 1.1                      | -0.2                        | 0.0  |
| D15        | 57.7               | 58.7              | 58.9                        | 58.7   | 1.0                      | -0.2                        | 0.0  |
| D16        | 57.8               | 58.9              | 59.1                        | 58.9   | 1.1                      | -0.2                        | 0.0  |
| D17        | 58.0               | 59.0              | 59.2                        | 59.0   | 1.0                      | -0.2                        | 0.0  |
| D18        | 58.2               | 59.2              | 59.4                        | 59.2   | 1.0                      | -0.2                        | 0.0  |
| D19        | 58.4               | 59.4              | 59.5                        | 59.4   | 1.0                      | -0.1                        | 0.0  |
| D20        | 58.7               | 59.6              | 59.8                        | 59.6   | 0.9                      | -0.2                        | 0.0  |
| D21        | 59.0               | 59.8              | 60.0                        | 59.8   | 0.8                      | -0.2                        | 0.0  |
| D22        | 59.3               | 60.1              | 60.3                        | 60.1   | 0.8                      | -0.2                        | 0.0  |
| D23        | 59.6               | 60.4              | 60.6                        | 60.4   | 0.8                      | -0.2                        | 0.0  |
| D24        | 60.0               | 60.7              | 60.9                        | 60.7   | 0.7                      | -0.2                        | 0.0  |
| D25        | 60.3               | 60.9              | 61.1                        | 60.9   | 0.6                      | -0.2                        | 0.0  |
| D26        | 60.5               | 60.9              | 61.2                        | 61.0   | 0.4                      | -0.3                        | -0.1   |
| D27        | 60.5               | 60.9              | 61.1                        | 60.9   | 0.4                      | -0.2                        | 0.0  |
| D28        | 60.4               | 60.8              | 61.0                        | 60.8   | 0.4                      | -0.2                        | 0.0  |
| D29        | 60.2               | 60.6              | 60.8                        | 60.6   | 0.4                      | -0.2                        | 0.0  |
| D30        | 59.9               | 60.4              | 60.6                        | 60.4   | 0.5                      | -0.2                        | 0.0  |
| D31        | 59.7               | 60.2              | 60.4                        | 60.2   | 0.5                      | -0.2                        | 0.0  |
| D32        | 59.6               | 60.2              | 60.4                        | 60.2   | 0.6                      | -0.2                        | 0.0  |
| D33        | 59.7               | 60.3              | 60.5                        | 60.3   | 0.6                      | -0.2                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| D34        | 59.9               | 60.6              | 60.8                        | 60.6   | 0.7                      | -0.2                        | 0.0  |
| D35        | 60.3               | 61.0              | 61.2                        | 61.0   | 0.7                      | -0.2                        | 0.0  |
| D36        | 61.1               | 61.9              | 62.0                        | 61.9   | 0.8                      | -0.1                        | 0.0  |
| D37        | 62.5               | 63.4              | 63.5                        | 63.4   | 0.9                      | -0.1                        | 0.0  |
| D38        | 64.3               | 65.3              | 65.4                        | 65.3   | 1.0                      | -0.1                        | 0.0  |
| D39        | 67.4               | 68.5              | 68.6                        | 68.5   | 1.1                      | -0.1                        | 0.0  |
| D40        | 62.8               | 63.6              | 63.8                        | 63.6   | 0.8                      | -0.2                        | 0.0  |
| D41        | 60.7               | 61.4              | 61.6                        | 61.4   | 0.7                      | -0.2                        | 0.0  |
| D42        | 59.4               | 60.1              | 60.3                        | 60.1   | 0.7                      | -0.2                        | 0.0  |
| D43        | 58.5               | 59.2              | 59.4                        | 59.2   | 0.7                      | -0.2                        | 0.0  |
| D44        | 57.9               | 58.7              | 58.9                        | 58.7   | 0.8                      | -0.2                        | 0.0  |
| D45        | 57.5               | 58.4              | 58.6                        | 58.4   | 0.9                      | -0.2                        | 0.0  |
| D46        | 57.4               | 58.3              | 58.5                        | 58.3   | 0.9                      | -0.2                        | 0.0  |
| D47        | 57.4               | 58.4              | 58.6                        | 58.4   | 1.0                      | -0.2                        | 0.0  |
| D48        | 57.5               | 58.5              | 58.7                        | 58.5   | 1.0                      | -0.2                        | 0.0  |
| D49        | 57.7               | 58.7              | 58.9                        | 58.7   | 1.0                      | -0.2                        | 0.0  |
| D50        | 57.9               | 58.9              | 59.1                        | 58.9   | 1.0                      | -0.2                        | 0.0  |
| D51        | 58.1               | 59.0              | 59.2                        | 59.0   | 0.9                      | -0.2                        | 0.0  |
| D52        | 58.1               | 59.1              | 59.3                        | 59.1   | 1.0                      | -0.2                        | 0.0  |
| D53        | 58.1               | 59.1              | 59.2                        | 59.1   | 1.0                      | -0.1                        | 0.0  |
| D54        | 58.0               | 58.9              | 59.1                        | 58.9   | 0.9                      | -0.2                        | 0.0  |
| D55        | 57.7               | 58.7              | 58.9                        | 58.7   | 1.0                      | -0.2                        | 0.0  |
| D56        | 57.4               | 58.4              | 58.6                        | 58.4   | 1.0                      | -0.2                        | 0.0  |
| D57        | 57.1               | 58.0              | 58.2                        | 58.0   | 0.9                      | -0.2                        | 0.0  |
| D58        | 56.6               | 57.6              | 57.8                        | 57.6   | 1.0                      | -0.2                        | 0.0  |
| D59        | 56.2               | 57.2              | 57.4                        | 57.2   | 1.0                      | -0.2                        | 0.0  |
| D60        | 55.9               | 56.9              | 57.1                        | 57.0   | 1.0                      | -0.2                        | -0.1   |
| D61        | 55.7               | 56.7              | 56.8                        | 56.7   | 1.0                      | -0.1                        | 0.0  |
| D62        | 55.4               | 56.5              | 56.6                        | 56.5   | 1.1                      | -0.1                        | 0.0  |
| D63        | 55.3               | 56.4              | 56.5                        | 56.4   | 1.1                      | -0.1                        | 0.0  |
| D64        | 55.1               | 56.3              | 56.3                        | 56.3   | 1.2                      | 0.0                         | 0.0  |
| D65        | 55.0               | 56.1              | 56.2                        | 56.1   | 1.1                      | -0.1                        | 0.0  |
| D66        | 54.9               | 56.0              | 56.1                        | 56.0   | 1.1                      | -0.1                        | 0.0  |
| E01        | 55.4               | 56.1              | 56.4                        | 56.1   | 0.7                      | -0.3                        | 0.0  |
| E02        | 55.9               | 56.6              | 56.9                        | 56.6   | 0.7                      | -0.3                        | 0.0  |
| E03        | 56.5               | 57.2              | 57.5                        | 57.2   | 0.7                      | -0.3                        | 0.0  |
| E04        | 57.0               | 57.8              | 58.1                        | 57.8   | 0.8                      | -0.3                        | 0.0  |
| E05        | 57.4               | 58.1              | 58.4                        | 58.1   | 0.7                      | -0.3                        | 0.0  |
| E06        | 57.6               | 58.4              | 58.6                        | 58.4   | 0.8                      | -0.2                        | 0.0  |
| E07        | 57.8               | 58.6              | 58.8                        | 58.6   | 0.8                      | -0.2                        | 0.0  |
| E08        | 57.9               | 58.7              | 59.0                        | 58.7   | 0.8                      | -0.3                        | 0.0  |
| E09        | 58.0               | 58.9              | 59.1                        | 58.9   | 0.9                      | -0.2                        | 0.0  |
| E10        | 58.2               | 59.1              | 59.3                        | 59.1   | 0.9                      | -0.2                        | 0.0  |
| E11        | 58.3               | 59.3              | 59.5                        | 59.3   | 1.0                      | -0.2                        | 0.0  |
| E12        | 58.4               | 59.4              | 59.7                        | 59.4   | 1.0                      | -0.3                        | 0.0  |
| E13        | 58.5               | 59.6              | 59.8                        | 59.6   | 1.1                      | -0.2                        | 0.0  |
| E14        | 58.7               | 59.8              | 60.0                        | 59.8   | 1.1                      | -0.2                        | 0.0  |
| E15        | 58.9               | 60.0              | 60.2                        | 60.0   | 1.1                      | -0.2                        | 0.0  |
| E16        | 59.2               | 60.2              | 60.4                        | 60.2   | 1.0                      | -0.2                        | 0.0  |
| E17        | 59.4               | 60.4              | 60.6                        | 60.4   | 1.0                      | -0.2                        | 0.0  |
| E18        | 59.6               | 60.6              | 60.8                        | 60.6   | 1.0                      | -0.2                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| E19        | 59.9               | 60.9              | 61.1                        | 60.9   | 1.0                      | -0.2                        | 0.0  |
| E20        | 60.2               | 61.2              | 61.4                        | 61.2   | 1.0                      | -0.2                        | 0.0  |
| E21        | 60.6               | 61.5              | 61.7                        | 61.5   | 0.9                      | -0.2                        | 0.0  |
| E22        | 61.0               | 61.9              | 62.0                        | 61.9   | 0.9                      | -0.1                        | 0.0  |
| E23        | 61.5               | 62.3              | 62.4                        | 62.3   | 0.8                      | -0.1                        | 0.0  |
| E24        | 61.9               | 62.7              | 62.9                        | 62.7   | 0.8                      | -0.2                        | 0.0  |
| E25        | 62.4               | 63.0              | 63.2                        | 63.0   | 0.6                      | -0.2                        | 0.0  |
| E26        | 62.6               | 63.1              | 63.4                        | 63.1   | 0.5                      | -0.3                        | 0.0  |
| E27        | 62.6               | 63.0              | 63.3                        | 63.0   | 0.4                      | -0.3                        | 0.0  |
| E28        | 62.5               | 62.9              | 63.2                        | 62.9   | 0.4                      | -0.3                        | 0.0  |
| E29        | 62.4               | 62.7              | 63.0                        | 62.7   | 0.3                      | -0.3                        | 0.0  |
| E30        | 62.2               | 62.5              | 62.8                        | 62.5   | 0.3                      | -0.3                        | 0.0  |
| E31        | 61.9               | 62.3              | 62.6                        | 62.3   | 0.4                      | -0.3                        | 0.0  |
| E32        | 61.8               | 62.2              | 62.5                        | 62.3   | 0.4                      | -0.3                        | -0.1   |
| E33        | 61.8               | 62.3              | 62.6                        | 62.3   | 0.5                      | -0.3                        | 0.0  |
| E34        | 61.9               | 62.5              | 62.7                        | 62.5   | 0.6                      | -0.2                        | 0.0  |
| E35        | 62.3               | 62.9              | 63.1                        | 62.9   | 0.6                      | -0.2                        | 0.0  |
| E36        | 63.2               | 63.9              | 64.1                        | 63.9   | 0.7                      | -0.2                        | 0.0  |
| E37        | 64.8               | 65.7              | 65.8                        | 65.7   | 0.9                      | -0.1                        | 0.0  |
| E38        | 68.2               | 69.3              | 69.4                        | 69.3   | 1.1                      | -0.1                        | 0.0  |
| E39        | 78.1               | 79.4              | 79.4                        | 79.4   | 1.3                      | 0.0                         | 0.0  |
| E40        | 67.1               | 68.1              | 68.2                        | 68.1   | 1.0                      | -0.1                        | 0.0  |
| E41        | 63.5               | 64.1              | 64.4                        | 64.1   | 0.6                      | -0.3                        | 0.0  |
| E42        | 61.7               | 62.3              | 62.6                        | 62.3   | 0.6                      | -0.3                        | 0.0  |
| E43        | 60.5               | 61.2              | 61.5                        | 61.2   | 0.7                      | -0.3                        | 0.0  |
| E44        | 59.9               | 60.7              | 60.9                        | 60.7   | 0.8                      | -0.2                        | 0.0  |
| E45        | 59.5               | 60.4              | 60.6                        | 60.4   | 0.9                      | -0.2                        | 0.0  |
| E46        | 59.3               | 60.3              | 60.5                        | 60.3   | 1.0                      | -0.2                        | 0.0  |
| E47        | 59.3               | 60.3              | 60.5                        | 60.3   | 1.0                      | -0.2                        | 0.0  |
| E48        | 59.4               | 60.4              | 60.6                        | 60.4   | 1.0                      | -0.2                        | 0.0  |
| E49        | 59.5               | 60.5              | 60.7                        | 60.5   | 1.0                      | -0.2                        | 0.0  |
| E50        | 59.6               | 60.6              | 60.7                        | 60.6   | 1.0                      | -0.1                        | 0.0  |
| E51        | 59.6               | 60.6              | 60.8                        | 60.6   | 1.0                      | -0.2                        | 0.0  |
| E52        | 59.6               | 60.5              | 60.7                        | 60.5   | 0.9                      | -0.2                        | 0.0  |
| E53        | 59.4               | 60.4              | 60.6                        | 60.4   | 1.0                      | -0.2                        | 0.0  |
| E54        | 59.2               | 60.2              | 60.4                        | 60.2   | 1.0                      | -0.2                        | 0.0  |
| E55        | 59.0               | 60.0              | 60.1                        | 60.0   | 1.0                      | -0.1                        | 0.0  |
| E56        | 58.7               | 59.7              | 59.9                        | 59.7   | 1.0                      | -0.2                        | 0.0  |
| E57        | 58.4               | 59.4              | 59.6                        | 59.4   | 1.0                      | -0.2                        | 0.0  |
| E58        | 58.1               | 59.2              | 59.3                        | 59.2   | 1.1                      | -0.1                        | 0.0  |
| E59        | 57.9               | 58.9              | 59.0                        | 58.9   | 1.0                      | -0.1                        | 0.0  |
| E60        | 57.6               | 58.7              | 58.8                        | 58.7   | 1.1                      | -0.1                        | 0.0  |
| E61        | 57.4               | 58.6              | 58.6                        | 58.6   | 1.2                      | 0.0                         | 0.0  |
| E62        | 57.3               | 58.4              | 58.5                        | 58.4   | 1.1                      | -0.1                        | 0.0  |
| E63        | 57.1               | 58.3              | 58.4                        | 58.3   | 1.2                      | -0.1                        | 0.0  |
| E64        | 57.0               | 58.1              | 58.2                        | 58.2   | 1.1                      | -0.1                        | -0.1   |
| E65        | 56.8               | 58.0              | 58.0                        | 58.0   | 1.2                      | 0.0                         | 0.0  |
| E66        | 56.6               | 57.8              | 57.8                        | 57.8   | 1.2                      | 0.0                         | 0.0  |
| F01        | 55.5               | 56.2              | 56.5                        | 56.2   | 0.7                      | -0.3                        | 0.0  |
| F02        | 56.2               | 56.9              | 57.2                        | 56.9   | 0.7                      | -0.3                        | 0.0  |
| F03        | 56.8               | 57.6              | 57.9                        | 57.6   | 0.8                      | -0.3                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| F04        | 57.4               | 58.1              | 58.4                        | 58.1   | 0.7                      | -0.3                        | 0.0  |
| F05        | 57.8               | 58.6              | 58.9                        | 58.6   | 0.8                      | -0.3                        | 0.0  |
| F06        | 58.2               | 59.0              | 59.2                        | 59.0   | 0.8                      | -0.2                        | 0.0  |
| F07        | 58.5               | 59.3              | 59.6                        | 59.3   | 0.8                      | -0.3                        | 0.0  |
| F08        | 58.7               | 59.6              | 59.9                        | 59.6   | 0.9                      | -0.3                        | 0.0  |
| F09        | 59.0               | 59.9              | 60.1                        | 59.9   | 0.9                      | -0.2                        | 0.0  |
| F10        | 59.2               | 60.2              | 60.4                        | 60.2   | 1.0                      | -0.2                        | 0.0  |
| F11        | 59.4               | 60.4              | 60.7                        | 60.4   | 1.0                      | -0.3                        | 0.0  |
| F12        | 59.6               | 60.6              | 60.9                        | 60.6   | 1.0                      | -0.3                        | 0.0  |
| F13        | 59.9               | 60.9              | 61.1                        | 60.9   | 1.0                      | -0.2                        | 0.0  |
| F14        | 60.1               | 61.2              | 61.4                        | 61.2   | 1.1                      | -0.2                        | 0.0  |
| F15        | 60.4               | 61.5              | 61.7                        | 61.5   | 1.1                      | -0.2                        | 0.0  |
| F16        | 60.7               | 61.8              | 62.0                        | 61.8   | 1.1                      | -0.2                        | 0.0  |
| F17        | 61.0               | 62.1              | 62.3                        | 62.1   | 1.1                      | -0.2                        | 0.0  |
| F18        | 61.3               | 62.4              | 62.6                        | 62.4   | 1.1                      | -0.2                        | 0.0  |
| F19        | 61.7               | 62.7              | 62.9                        | 62.7   | 1.0                      | -0.2                        | 0.0  |
| F20        | 62.1               | 63.1              | 63.3                        | 63.1   | 1.0                      | -0.2                        | 0.0  |
| F21        | 62.6               | 63.6              | 63.7                        | 63.6   | 1.0                      | -0.1                        | 0.0  |
| F22        | 63.1               | 64.0              | 64.2                        | 64.0   | 0.9                      | -0.2                        | 0.0  |
| F23        | 63.7               | 64.5              | 64.8                        | 64.6   | 0.8                      | -0.3                        | -0.1   |
| F24        | 64.4               | 65.2              | 65.4                        | 65.2   | 0.8                      | -0.2                        | 0.0  |
| F25        | 65.1               | 65.8              | 66.0                        | 65.8   | 0.7                      | -0.2                        | 0.0  |
| F26        | 65.4               | 65.9              | 66.2                        | 65.9   | 0.5                      | -0.3                        | 0.0  |
| F27        | 65.3               | 65.7              | 66.0                        | 65.7   | 0.4                      | -0.3                        | 0.0  |
| F28        | 65.3               | 65.6              | 65.9                        | 65.6   | 0.3                      | -0.3                        | 0.0  |
| F29        | 65.1               | 65.4              | 65.7                        | 65.4   | 0.3                      | -0.3                        | 0.0  |
| F30        | 65.0               | 65.2              | 65.6                        | 65.2   | 0.2                      | -0.4                        | 0.0  |
| F31        | 64.8               | 65.1              | 65.4                        | 65.1   | 0.3                      | -0.3                        | 0.0  |
| F32        | 64.6               | 65.0              | 65.3                        | 65.0   | 0.4                      | -0.3                        | 0.0  |
| F33        | 64.6               | 65.1              | 65.3                        | 65.1   | 0.5                      | -0.2                        | 0.0  |
| F34        | 64.6               | 65.0              | 65.3                        | 65.0   | 0.4                      | -0.3                        | 0.0  |
| F35        | 64.7               | 65.1              | 65.4                        | 65.1   | 0.4                      | -0.3                        | 0.0  |
| F36        | 65.3               | 65.8              | 66.1                        | 65.8   | 0.5                      | -0.3                        | 0.0  |
| F37        | 66.4               | 66.9              | 67.2                        | 66.9   | 0.5                      | -0.3                        | 0.0  |
| F38        | 69.9               | 70.8              | 71.0                        | 70.8   | 0.9                      | -0.2                        | 0.0  |
| F39        | 78.7               | 79.9              | 79.9                        | 79.9   | 1.2                      | 0.0                         | 0.0  |
| F40        | 69.7               | 70.5              | 70.7                        | 70.5   | 0.8                      | -0.2                        | 0.0  |
| F41        | 66.9               | 67.4              | 67.7                        | 67.4   | 0.5                      | -0.3                        | 0.0  |
| F42        | 64.7               | 65.2              | 65.5                        | 65.2   | 0.5                      | -0.3                        | 0.0  |
| F43        | 63.2               | 63.8              | 64.1                        | 63.8   | 0.6                      | -0.3                        | 0.0  |
| F44        | 62.5               | 63.2              | 63.4                        | 63.2   | 0.7                      | -0.2                        | 0.0  |
| F45        | 62.1               | 62.9              | 63.1                        | 62.9   | 0.8                      | -0.2                        | 0.0  |
| F46        | 61.9               | 62.8              | 63.0                        | 62.8   | 0.9                      | -0.2                        | 0.0  |
| F47        | 61.8               | 62.8              | 62.9                        | 62.8   | 1.0                      | -0.1                        | 0.0  |
| F48        | 61.8               | 62.7              | 62.9                        | 62.7   | 0.9                      | -0.2                        | 0.0  |
| F49        | 61.8               | 62.7              | 62.9                        | 62.7   | 0.9                      | -0.2                        | 0.0  |
| F50        | 61.7               | 62.7              | 62.8                        | 62.7   | 1.0                      | -0.1                        | 0.0  |
| F51        | 61.7               | 62.6              | 62.7                        | 62.6   | 0.9                      | -0.1                        | 0.0  |
| F52        | 61.5               | 62.5              | 62.6                        | 62.5   | 1.0                      | -0.1                        | 0.0  |
| F53        | 61.3               | 62.3              | 62.5                        | 62.3   | 1.0                      | -0.2                        | 0.0  |
| F54        | 61.1               | 62.2              | 62.3                        | 62.2   | 1.1                      | -0.1                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| F55        | 60.9               | 62.0              | 62.1                        | 62.0   | 1.1                      | -0.1                        | 0.0  |
| F56        | 60.7               | 61.8              | 61.9                        | 61.8   | 1.1                      | -0.1                        | 0.0  |
| F57        | 60.5               | 61.6              | 61.7                        | 61.6   | 1.1                      | -0.1                        | 0.0  |
| F58        | 60.2               | 61.4              | 61.5                        | 61.4   | 1.2                      | -0.1                        | 0.0  |
| F59        | 60.0               | 61.2              | 61.3                        | 61.2   | 1.2                      | -0.1                        | 0.0  |
| F60        | 59.7               | 60.9              | 61.0                        | 61.0   | 1.2                      | -0.1                        | -0.1   |
| F61        | 59.5               | 60.7              | 60.7                        | 60.7   | 1.2                      | 0.0                         | 0.0  |
| F62        | 59.2               | 60.4              | 60.4                        | 60.4   | 1.2                      | 0.0                         | 0.0  |
| F63        | 58.9               | 60.1              | 60.1                        | 60.1   | 1.2                      | 0.0                         | 0.0  |
| F64        | 58.5               | 59.8              | 59.8                        | 59.8   | 1.3                      | 0.0                         | 0.0  |
| F65        | 58.2               | 59.5              | 59.5                        | 59.5   | 1.3                      | 0.0                         | 0.0  |
| F66        | 57.8               | 59.1              | 59.1                        | 59.1   | 1.3                      | 0.0                         | 0.0  |
| G01        | 55.7               | 56.5              | 56.8                        | 56.5   | 0.8                      | -0.3                        | 0.0  |
| G02        | 56.4               | 57.2              | 57.5                        | 57.2   | 0.8                      | -0.3                        | 0.0  |
| G03        | 57.1               | 57.9              | 58.2                        | 57.9   | 0.8                      | -0.3                        | 0.0  |
| G04        | 57.7               | 58.5              | 58.8                        | 58.5   | 0.8                      | -0.3                        | 0.0  |
| G05        | 58.3               | 59.1              | 59.3                        | 59.1   | 0.8                      | -0.2                        | 0.0  |
| G06        | 58.8               | 59.6              | 59.8                        | 59.6   | 0.8                      | -0.2                        | 0.0  |
| G07        | 59.2               | 60.0              | 60.3                        | 60.1   | 0.8                      | -0.3                        | -0.1   |
| G08        | 59.7               | 60.5              | 60.8                        | 60.5   | 0.8                      | -0.3                        | 0.0  |
| G09        | 60.0               | 61.0              | 61.2                        | 61.0   | 1.0                      | -0.2                        | 0.0  |
| G10        | 60.4               | 61.3              | 61.6                        | 61.4   | 0.9                      | -0.3                        | -0.1   |
| G11        | 60.7               | 61.7              | 61.9                        | 61.7   | 1.0                      | -0.2                        | 0.0  |
| G12        | 61.0               | 62.0              | 62.3                        | 62.0   | 1.0                      | -0.3                        | 0.0  |
| G13        | 61.4               | 62.4              | 62.7                        | 62.4   | 1.0                      | -0.3                        | 0.0  |
| G14        | 61.8               | 62.8              | 63.0                        | 62.8   | 1.0                      | -0.2                        | 0.0  |
| G15        | 62.1               | 63.2              | 63.4                        | 63.2   | 1.1                      | -0.2                        | 0.0  |
| G16        | 62.5               | 63.6              | 63.8                        | 63.6   | 1.1                      | -0.2                        | 0.0  |
| G17        | 62.9               | 64.0              | 64.2                        | 64.0   | 1.1                      | -0.2                        | 0.0  |
| G18        | 63.2               | 64.3              | 64.5                        | 64.3   | 1.1                      | -0.2                        | 0.0  |
| G19        | 63.7               | 64.7              | 64.9                        | 64.7   | 1.0                      | -0.2                        | 0.0  |
| G20        | 64.3               | 65.2              | 65.4                        | 65.2   | 0.9                      | -0.2                        | 0.0  |
| G21        | 64.9               | 65.8              | 66.0                        | 65.8   | 0.9                      | -0.2                        | 0.0  |
| G22        | 65.5               | 66.4              | 66.6                        | 66.4   | 0.9                      | -0.2                        | 0.0  |
| G23        | 66.3               | 67.2              | 67.4                        | 67.2   | 0.9                      | -0.2                        | 0.0  |
| G24        | 67.6               | 68.4              | 68.6                        | 68.4   | 0.8                      | -0.2                        | 0.0  |
| G25        | 68.9               | 69.7              | 69.9                        | 69.7   | 0.8                      | -0.2                        | 0.0  |
| G26        | 69.3               | 69.8              | 70.1                        | 69.8   | 0.5                      | -0.3                        | 0.0  |
| G27        | 68.9               | 69.3              | 69.6                        | 69.3   | 0.4                      | -0.3                        | 0.0  |
| G28        | 68.9               | 69.1              | 69.5                        | 69.1   | 0.2                      | -0.4                        | 0.0  |
| G29        | 68.9               | 69.1              | 69.5                        | 69.1   | 0.2                      | -0.4                        | 0.0  |
| G30        | 68.9               | 69.1              | 69.5                        | 69.1   | 0.2                      | -0.4                        | 0.0  |
| G31        | 69.0               | 69.2              | 69.6                        | 69.2   | 0.2                      | -0.4                        | 0.0  |
| G32        | 69.0               | 69.3              | 69.7                        | 69.3   | 0.3                      | -0.4                        | 0.0  |
| G33        | 69.1               | 69.5              | 69.8                        | 69.5   | 0.4                      | -0.3                        | 0.0  |
| G34        | 69.2               | 69.5              | 69.9                        | 69.5   | 0.3                      | -0.4                        | 0.0  |
| G35        | 69.2               | 69.4              | 69.8                        | 69.4   | 0.2                      | -0.4                        | 0.0  |
| G36        | 69.6               | 69.8              | 70.2                        | 69.8   | 0.2                      | -0.4                        | 0.0  |
| G37        | 70.2               | 70.4              | 70.9                        | 70.4   | 0.2                      | -0.5                        | 0.0  |
| G38        | 71.5               | 71.7              | 72.1                        | 71.7   | 0.2                      | -0.4                        | 0.0  |
| G39        | 73.7               | 74.2              | 74.6                        | 74.2   | 0.5                      | -0.4                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| G40        | 74.4               | 74.8              | 75.3                        | 74.8   | 0.4                      | -0.5                        | 0.0  |
| G41        | 73.0               | 73.4              | 73.9                        | 73.4   | 0.4                      | -0.5                        | 0.0  |
| G42        | 68.8               | 69.1              | 69.5                        | 69.1   | 0.3                      | -0.4                        | 0.0  |
| G43        | 66.6               | 67.1              | 67.3                        | 67.1   | 0.5                      | -0.2                        | 0.0  |
| G44        | 65.9               | 66.6              | 66.7                        | 66.6   | 0.7                      | -0.1                        | 0.0  |
| G45        | 65.5               | 66.2              | 66.4                        | 66.2   | 0.7                      | -0.2                        | 0.0  |
| G46        | 65.2               | 66.1              | 66.2                        | 66.1   | 0.9                      | -0.1                        | 0.0  |
| G47        | 65.1               | 66.0              | 66.1                        | 66.0   | 0.9                      | -0.1                        | 0.0  |
| G48        | 65.0               | 65.9              | 66.0                        | 65.9   | 0.9                      | -0.1                        | 0.0  |
| G49        | 64.8               | 65.8              | 65.9                        | 65.8   | 1.0                      | -0.1                        | 0.0  |
| G50        | 64.6               | 65.6              | 65.8                        | 65.6   | 1.0                      | -0.2                        | 0.0  |
| G51        | 64.4               | 65.4              | 65.5                        | 65.4   | 1.0                      | -0.1                        | 0.0  |
| G52        | 64.1               | 65.2              | 65.3                        | 65.2   | 1.1                      | -0.1                        | 0.0  |
| G53        | 63.7               | 64.8              | 64.9                        | 64.8   | 1.1                      | -0.1                        | 0.0  |
| G54        | 63.3               | 64.5              | 64.5                        | 64.5   | 1.2                      | 0.0                         | 0.0  |
| G55        | 62.8               | 64.0              | 64.1                        | 64.0   | 1.2                      | -0.1                        | 0.0  |
| G56        | 62.4               | 63.6              | 63.6                        | 63.6   | 1.2                      | 0.0                         | 0.0  |
| G57        | 61.9               | 63.1              | 63.2                        | 63.1   | 1.2                      | -0.1                        | 0.0  |
| G58        | 61.4               | 62.6              | 62.7                        | 62.6   | 1.2                      | -0.1                        | 0.0  |
| G59        | 60.9               | 62.2              | 62.2                        | 62.2   | 1.3                      | 0.0                         | 0.0  |
| G60        | 60.4               | 61.6              | 61.6                        | 61.6   | 1.2                      | 0.0                         | 0.0  |
| G61        | 59.8               | 61.1              | 61.1                        | 61.1   | 1.3                      | 0.0                         | 0.0  |
| G62        | 59.3               | 60.6              | 60.6                        | 60.6   | 1.3                      | 0.0                         | 0.0  |
| G63        | 58.8               | 60.0              | 60.1                        | 60.0   | 1.2                      | -0.1                        | 0.0  |
| G64        | 58.3               | 59.5              | 59.6                        | 59.5   | 1.2                      | -0.1                        | 0.0  |
| G65        | 57.8               | 59.0              | 59.1                        | 59.0   | 1.2                      | -0.1                        | 0.0  |
| G66        | 57.3               | 58.5              | 58.5                        | 58.5   | 1.2                      | 0.0                         | 0.0  |
| H01        | 55.9               | 56.8              | 57.0                        | 56.8   | 0.9                      | -0.2                        | 0.0  |
| H02        | 56.7               | 57.6              | 57.8                        | 57.6   | 0.9                      | -0.2                        | 0.0  |
| H03        | 57.5               | 58.3              | 58.6                        | 58.3   | 0.8                      | -0.3                        | 0.0  |
| H04        | 58.1               | 58.9              | 59.2                        | 58.9   | 0.8                      | -0.3                        | 0.0  |
| H05        | 58.7               | 59.5              | 59.8                        | 59.5   | 0.8                      | -0.3                        | 0.0  |
| H06        | 59.4               | 60.2              | 60.5                        | 60.2   | 0.8                      | -0.3                        | 0.0  |
| H07        | 60.0               | 60.8              | 61.1                        | 60.8   | 0.8                      | -0.3                        | 0.0  |
| H08        | 60.5               | 61.4              | 61.7                        | 61.4   | 0.9                      | -0.3                        | 0.0  |
| H09        | 61.1               | 62.0              | 62.2                        | 62.0   | 0.9                      | -0.2                        | 0.0  |
| H10        | 61.5               | 62.5              | 62.7                        | 62.5   | 1.0                      | -0.2                        | 0.0  |
| H11        | 62.0               | 62.9              | 63.2                        | 62.9   | 0.9                      | -0.3                        | 0.0  |
| H12        | 62.4               | 63.4              | 63.6                        | 63.4   | 1.0                      | -0.2                        | 0.0  |
| H13        | 62.9               | 63.9              | 64.1                        | 63.9   | 1.0                      | -0.2                        | 0.0  |
| H14        | 63.3               | 64.4              | 64.6                        | 64.4   | 1.1                      | -0.2                        | 0.0  |
| H15        | 63.8               | 64.8              | 65.0                        | 64.8   | 1.0                      | -0.2                        | 0.0  |
| H16        | 64.3               | 65.3              | 65.5                        | 65.3   | 1.0                      | -0.2                        | 0.0  |
| H17        | 64.7               | 65.8              | 66.0                        | 65.8   | 1.1                      | -0.2                        | 0.0  |
| H18        | 65.2               | 66.2              | 66.4                        | 66.2   | 1.0                      | -0.2                        | 0.0  |
| H19        | 65.8               | 66.8              | 67.0                        | 66.8   | 1.0                      | -0.2                        | 0.0  |
| H20        | 66.6               | 67.5              | 67.7                        | 67.5   | 0.9                      | -0.2                        | 0.0  |
| H21        | 67.4               | 68.3              | 68.5                        | 68.3   | 0.9                      | -0.2                        | 0.0  |
| H22        | 68.3               | 69.1              | 69.3                        | 69.1   | 0.8                      | -0.2                        | 0.0  |
| H23        | 69.4               | 70.2              | 70.4                        | 70.2   | 0.8                      | -0.2                        | 0.0  |
| H24        | 71.8               | 72.6              | 72.8                        | 72.6   | 0.8                      | -0.2                        | 0.0  |



| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| H25        | 76.0               | 76.9              | 77.1                        | 77.0   | 0.9                      | -0.2                        | -0.1   |
| H26        | 74.9               | 75.6              | 75.8                        | 75.6   | 0.7                      | -0.2                        | 0.0  |
| H27        | 73.7               | 74.0              | 74.3                        | 74.0   | 0.3                      | -0.3                        | 0.0  |
| H28        | 73.9               | 74.0              | 74.4                        | 74.0   | 0.1                      | -0.4                        | 0.0  |
| H29        | 74.2               | 74.3              | 74.7                        | 74.3   | 0.1                      | -0.4                        | 0.0  |
| H30        | 74.6               | 74.7              | 75.2                        | 74.7   | 0.1                      | -0.5                        | 0.0  |
| H31        | 75.2               | 75.3              | 75.8                        | 75.3   | 0.1                      | -0.5                        | 0.0  |
| H32        | 75.8               | 76.0              | 76.6                        | 76.0   | 0.2                      | -0.6                        | 0.0  |
| H33        | 76.4               | 76.8              | 77.3                        | 76.8   | 0.4                      | -0.5                        | 0.0  |
| H34        | 77.0               | 77.4              | 77.9                        | 77.4   | 0.4                      | -0.5                        | 0.0  |
| H35        | 77.6               | 77.6              | 78.2                        | 77.6   | 0.0                      | -0.6                        | 0.0  |
| H36        | 78.4               | 78.6              | 79.1                        | 78.6   | 0.2                      | -0.5                        | 0.0  |
| H37        | 79.6               | 79.9              | 80.4                        | 79.9   | 0.3                      | -0.5                        | 0.0  |
| H38        | 81.7               | 82.1              | 82.7                        | 82.2   | 0.4                      | -0.6                        | -0.1   |
| H39        | 84.5               | 85.0              | 85.5                        | 85.1   | 0.5                      | -0.5                        | -0.1   |
| H40        | 88.7               | 89.5              | 89.9                        | 89.5   | 0.8                      | -0.4                        | 0.0  |
| H41        | 83.5               | 84.1              | 84.5                        | 84.1   | 0.6                      | -0.4                        | 0.0  |
| H42        | 71.7               | 72.4              | 72.6                        | 72.4   | 0.7                      | -0.2                        | 0.0  |
| H43        | 70.6               | 71.5              | 71.6                        | 71.5   | 0.9                      | -0.1                        | 0.0  |
| H44        | 69.8               | 70.7              | 70.8                        | 70.7   | 0.9                      | -0.1                        | 0.0  |
| H45        | 68.9               | 69.8              | 69.9                        | 69.8   | 0.9                      | -0.1                        | 0.0  |
| H46        | 67.9               | 68.9              | 69.0                        | 68.9   | 1.0                      | -0.1                        | 0.0  |
| H47        | 67.1               | 68.0              | 68.1                        | 68.0   | 0.9                      | -0.1                        | 0.0  |
| H48        | 66.3               | 67.2              | 67.3                        | 67.2   | 0.9                      | -0.1                        | 0.0  |
| H49        | 65.5               | 66.5              | 66.6                        | 66.5   | 1.0                      | -0.1                        | 0.0  |
| H50        | 64.8               | 65.7              | 65.8                        | 65.8   | 0.9                      | -0.1                        | -0.1   |
| H51        | 64.0               | 65.0              | 65.1                        | 65.0   | 1.0                      | -0.1                        | 0.0  |
| H52        | 63.3               | 64.3              | 64.4                        | 64.3   | 1.0                      | -0.1                        | 0.0  |
| H53        | 62.6               | 63.6              | 63.7                        | 63.6   | 1.0                      | -0.1                        | 0.0  |
| H54        | 61.9               | 63.0              | 63.1                        | 63.0   | 1.1                      | -0.1                        | 0.0  |
| H55        | 61.2               | 62.3              | 62.4                        | 62.3   | 1.1                      | -0.1                        | 0.0  |
| H56        | 60.6               | 61.7              | 61.8                        | 61.7   | 1.1                      | -0.1                        | 0.0  |
| H57        | 60.0               | 61.1              | 61.2                        | 61.1   | 1.1                      | -0.1                        | 0.0  |
| H58        | 59.4               | 60.6              | 60.6                        | 60.6   | 1.2                      | 0.0                         | 0.0  |
| H59        | 58.9               | 60.0              | 60.1                        | 60.0   | 1.1                      | -0.1                        | 0.0  |
| H60        | 58.3               | 59.5              | 59.5                        | 59.5   | 1.2                      | 0.0                         | 0.0  |
| H61        | 57.8               | 58.9              | 59.0                        | 58.9   | 1.1                      | -0.1                        | 0.0  |
| H62        | 57.3               | 58.5              | 58.5                        | 58.5   | 1.2                      | 0.0                         | 0.0  |
| H63        | 56.8               | 58.0              | 58.0                        | 58.0   | 1.2                      | 0.0                         | 0.0  |
| H64        | 56.4               | 57.5              | 57.5                        | 57.5   | 1.1                      | 0.0                         | 0.0  |
| H65        | 55.9               | 57.0              | 57.1                        | 57.0   | 1.1                      | -0.1                        | 0.0  |
| H66        | 55.5               | 56.6              | 56.6                        | 56.6   | 1.1                      | 0.0                         | 0.0  |
| I01        | 56.3               | 57.1              | 57.4                        | 57.1   | 0.8                      | -0.3                        | 0.0  |
| I02        | 57.1               | 58.0              | 58.2                        | 58.0   | 0.9                      | -0.2                        | 0.0  |
| I03        | 57.8               | 58.6              | 58.9                        | 58.7   | 0.8                      | -0.3                        | -0.1   |
| I04        | 58.5               | 59.3              | 59.6                        | 59.3   | 0.8                      | -0.3                        | 0.0  |
| I05        | 59.2               | 60.0              | 60.3                        | 60.0   | 0.8                      | -0.3                        | 0.0  |
| I06        | 59.9               | 60.8              | 61.0                        | 60.8   | 0.9                      | -0.2                        | 0.0  |
| I07        | 60.6               | 61.5              | 61.7                        | 61.5   | 0.9                      | -0.2                        | 0.0  |
| I08        | 61.3               | 62.2              | 62.4                        | 62.2   | 0.9                      | -0.2                        | 0.0  |
| I09        | 61.9               | 62.8              | 63.1                        | 62.8   | 0.9                      | -0.3                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| I10        | 62.5               | 63.4              | 63.7                        | 63.4   | 0.9                      | -0.3                        | 0.0  |
| I11        | 63.1               | 64.0              | 64.2                        | 64.0   | 0.9                      | -0.2                        | 0.0  |
| I12        | 63.6               | 64.5              | 64.8                        | 64.5   | 0.9                      | -0.3                        | 0.0  |
| I13        | 64.2               | 65.1              | 65.3                        | 65.1   | 0.9                      | -0.2                        | 0.0  |
| I14        | 64.7               | 65.6              | 65.9                        | 65.6   | 0.9                      | -0.3                        | 0.0  |
| I15        | 65.3               | 66.2              | 66.4                        | 66.2   | 0.9                      | -0.2                        | 0.0  |
| I16        | 65.8               | 66.7              | 66.9                        | 66.7   | 0.9                      | -0.2                        | 0.0  |
| I17        | 66.4               | 67.3              | 67.5                        | 67.3   | 0.9                      | -0.2                        | 0.0  |
| I18        | 67.0               | 67.9              | 68.1                        | 67.9   | 0.9                      | -0.2                        | 0.0  |
| I19        | 67.7               | 68.6              | 68.8                        | 68.6   | 0.9                      | -0.2                        | 0.0  |
| I20        | 68.8               | 69.5              | 69.7                        | 69.5   | 0.7                      | -0.2                        | 0.0  |
| I21        | 70.0               | 70.7              | 70.9                        | 70.7   | 0.7                      | -0.2                        | 0.0  |
| I22        | 71.0               | 71.6              | 71.8                        | 71.6   | 0.6                      | -0.2                        | 0.0  |
| I23        | 72.4               | 73.0              | 73.2                        | 73.0   | 0.6                      | -0.2                        | 0.0  |
| I24        | 76.9               | 77.6              | 77.9                        | 77.6   | 0.7                      | -0.3                        | 0.0  |
| I25        | 83.6               | 84.6              | 84.9                        | 84.6   | 1.0                      | -0.3                        | 0.0  |
| I26        | 82.0               | 82.6              | 83.1                        | 82.7   | 0.6                      | -0.5                        | -0.1   |
| I27        | 81.6               | 82.0              | 82.5                        | 82.0   | 0.4                      | -0.5                        | 0.0  |
| I28        | 82.2               | 82.3              | 82.9                        | 82.3   | 0.1                      | -0.6                        | 0.0  |
| I29        | 83.0               | 83.1              | 83.7                        | 83.2   | 0.1                      | -0.6                        | -0.1   |
| I30        | 84.2               | 84.4              | 84.9                        | 84.4   | 0.2                      | -0.5                        | 0.0  |
| I31        | 85.8               | 85.9              | 86.4                        | 85.9   | 0.1                      | -0.5                        | 0.0  |
| I32        | 85.9               | 85.8              | 86.4                        | 85.9   | -0.1                     | -0.6                        | -0.1   |
| I33        | 85.4               | 85.8              | 86.3                        | 85.8   | 0.4                      | -0.5                        | 0.0  |
| I34        | 84.6               | 85.1              | 85.5                        | 85.1   | 0.5                      | -0.4                        | 0.0  |
| I35        | 83.3               | 83.4              | 83.9                        | 83.4   | 0.1                      | -0.5                        | 0.0  |
| I36        | 82.6               | 82.7              | 83.1                        | 82.7   | 0.1                      | -0.4                        | 0.0  |
| I37        | 81.6               | 81.8              | 82.2                        | 81.8   | 0.2                      | -0.4                        | 0.0  |
| I38        | 81.7               | 81.9              | 82.3                        | 82.0   | 0.2                      | -0.4                        | -0.1   |
| I39        | 81.4               | 81.8              | 82.1                        | 81.8   | 0.4                      | -0.3                        | 0.0  |
| I40        | 83.5               | 84.1              | 84.4                        | 84.1   | 0.6                      | -0.3                        | 0.0  |
| I41        | 78.3               | 78.8              | 79.3                        | 78.8   | 0.5                      | -0.5                        | 0.0  |
| I42        | 71.2               | 71.5              | 71.9                        | 71.5   | 0.3                      | -0.4                        | 0.0  |
| I43        | 68.1               | 68.5              | 68.7                        | 68.5   | 0.4                      | -0.2                        | 0.0  |
| I44        | 66.7               | 67.3              | 67.4                        | 67.3   | 0.6                      | -0.1                        | 0.0  |
| I45        | 65.6               | 66.3              | 66.4                        | 66.3   | 0.7                      | -0.1                        | 0.0  |
| I46        | 64.7               | 65.4              | 65.5                        | 65.4   | 0.7                      | -0.1                        | 0.0  |
| I47        | 64.0               | 64.7              | 64.8                        | 64.7   | 0.7                      | -0.1                        | 0.0  |
| I48        | 63.3               | 64.0              | 64.2                        | 64.1   | 0.7                      | -0.2                        | -0.1   |
| I49        | 62.6               | 63.4              | 63.5                        | 63.4   | 0.8                      | -0.1                        | 0.0  |
| I50        | 61.9               | 62.7              | 62.8                        | 62.7   | 0.8                      | -0.1                        | 0.0  |
| I51        | 61.1               | 62.0              | 62.2                        | 62.0   | 0.9                      | -0.2                        | 0.0  |
| I52        | 60.4               | 61.4              | 61.5                        | 61.4   | 1.0                      | -0.1                        | 0.0  |
| I53        | 59.7               | 60.7              | 60.8                        | 60.7   | 1.0                      | -0.1                        | 0.0  |
| I54        | 59.1               | 60.1              | 60.2                        | 60.1   | 1.0                      | -0.1                        | 0.0  |
| I55        | 58.4               | 59.5              | 59.6                        | 59.5   | 1.1                      | -0.1                        | 0.0  |
| I56        | 57.9               | 58.9              | 59.0                        | 58.9   | 1.0                      | -0.1                        | 0.0  |
| I57        | 57.3               | 58.4              | 58.5                        | 58.4   | 1.1                      | -0.1                        | 0.0  |
| I58        | 56.8               | 57.9              | 58.0                        | 57.9   | 1.1                      | -0.1                        | 0.0  |
| I59        | 56.3               | 57.4              | 57.5                        | 57.4   | 1.1                      | -0.1                        | 0.0  |
| I60        | 55.9               | 56.9              | 57.0                        | 57.0   | 1.0                      | -0.1                        | -0.1   |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| I61        | 55.4               | 56.5              | 56.6                        | 56.5   | 1.1                      | -0.1                        | 0.0  |
| I62        | 55.0               | 56.1              | 56.2                        | 56.1   | 1.1                      | -0.1                        | 0.0  |
| I63        | 54.6               | 55.7              | 55.8                        | 55.7   | 1.1                      | -0.1                        | 0.0  |
| I64        | 54.2               | 55.3              | 55.4                        | 55.3   | 1.1                      | -0.1                        | 0.0  |
| I65        | 53.9               | 54.9              | 55.0                        | 54.9   | 1.0                      | -0.1                        | 0.0  |
| I66        | 53.5               | 54.6              | 54.6                        | 54.6   | 1.1                      | 0.0                         | 0.0  |
| J01        | 56.7               | 57.6              | 57.9                        | 57.6   | 0.9                      | -0.3                        | 0.0  |
| J02        | 57.5               | 58.4              | 58.7                        | 58.4   | 0.9                      | -0.3                        | 0.0  |
| J03        | 58.2               | 59.1              | 59.4                        | 59.1   | 0.9                      | -0.3                        | 0.0  |
| J04        | 58.9               | 59.8              | 60.1                        | 59.8   | 0.9                      | -0.3                        | 0.0  |
| J05        | 59.7               | 60.5              | 60.8                        | 60.5   | 0.8                      | -0.3                        | 0.0  |
| J06        | 60.4               | 61.2              | 61.5                        | 61.2   | 0.8                      | -0.3                        | 0.0  |
| J07        | 61.1               | 62.0              | 62.2                        | 62.0   | 0.9                      | -0.2                        | 0.0  |
| J08        | 61.8               | 62.7              | 63.0                        | 62.7   | 0.9                      | -0.3                        | 0.0  |
| J09        | 62.5               | 63.4              | 63.7                        | 63.4   | 0.9                      | -0.3                        | 0.0  |
| J10        | 63.2               | 64.1              | 64.3                        | 64.1   | 0.9                      | -0.2                        | 0.0  |
| J11        | 63.8               | 64.7              | 64.9                        | 64.7   | 0.9                      | -0.2                        | 0.0  |
| J12        | 64.4               | 65.3              | 65.5                        | 65.3   | 0.9                      | -0.2                        | 0.0  |
| J13        | 65.0               | 65.8              | 66.1                        | 65.8   | 0.8                      | -0.3                        | 0.0  |
| J14        | 65.6               | 66.4              | 66.7                        | 66.4   | 0.8                      | -0.3                        | 0.0  |
| J15        | 66.2               | 67.0              | 67.2                        | 67.0   | 0.8                      | -0.2                        | 0.0  |
| J16        | 66.7               | 67.6              | 67.8                        | 67.6   | 0.9                      | -0.2                        | 0.0  |
| J17        | 67.4               | 68.2              | 68.4                        | 68.2   | 0.8                      | -0.2                        | 0.0  |
| J18        | 68.0               | 68.8              | 69.0                        | 68.8   | 0.8                      | -0.2                        | 0.0  |
| J19        | 68.8               | 69.5              | 69.7                        | 69.5   | 0.7                      | -0.2                        | 0.0  |
| J20        | 69.8               | 70.4              | 70.6                        | 70.4   | 0.6                      | -0.2                        | 0.0  |
| J21        | 71.1               | 71.6              | 71.8                        | 71.6   | 0.5                      | -0.2                        | 0.0  |
| J22        | 71.8               | 72.4              | 72.5                        | 72.4   | 0.6                      | -0.1                        | 0.0  |
| J23        | 72.8               | 73.3              | 73.5                        | 73.3   | 0.5                      | -0.2                        | 0.0  |
| J24        | 76.6               | 77.2              | 77.6                        | 77.2   | 0.6                      | -0.4                        | 0.0  |
| J25        | 81.1               | 82.0              | 82.4                        | 82.0   | 0.9                      | -0.4                        | 0.0  |
| J26        | 78.9               | 79.3              | 79.7                        | 79.3   | 0.4                      | -0.4                        | 0.0  |
| J27        | 77.6               | 77.7              | 78.2                        | 77.7   | 0.1                      | -0.5                        | 0.0  |
| J28        | 77.0               | 77.0              | 77.4                        | 77.0   | 0.0                      | -0.4                        | 0.0  |
| J29        | 76.5               | 76.6              | 77.0                        | 76.6   | 0.1                      | -0.4                        | 0.0  |
| J30        | 76.2               | 76.2              | 76.6                        | 76.2   | 0.0                      | -0.4                        | 0.0  |
| J31        | 75.9               | 76.0              | 76.4                        | 76.0   | 0.1                      | -0.4                        | 0.0  |
| J32        | 75.9               | 76.0              | 76.4                        | 76.0   | 0.1                      | -0.4                        | 0.0  |
| J33        | 76.7               | 76.9              | 77.1                        | 76.9   | 0.2                      | -0.2                        | 0.0  |
| J34        | 76.3               | 76.3              | 76.5                        | 76.3   | 0.0                      | -0.2                        | 0.0  |
| J35        | 75.3               | 75.3              | 75.5                        | 75.3   | 0.0                      | -0.2                        | 0.0  |
| J36        | 74.5               | 74.5              | 74.7                        | 74.5   | 0.0                      | -0.2                        | 0.0  |
| J37        | 73.1               | 73.1              | 73.4                        | 73.2   | 0.0                      | -0.3                        | -0.1   |
| J38        | 72.3               | 72.4              | 72.7                        | 72.4   | 0.1                      | -0.3                        | 0.0  |
| J39        | 71.6               | 71.8              | 72.2                        | 71.8   | 0.2                      | -0.4                        | 0.0  |
| J40        | 71.7               | 72.0              | 72.4                        | 72.0   | 0.3                      | -0.4                        | 0.0  |
| J41        | 70.2               | 70.6              | 71.0                        | 70.6   | 0.4                      | -0.4                        | 0.0  |
| J42        | 66.9               | 67.3              | 67.6                        | 67.3   | 0.4                      | -0.3                        | 0.0  |
| J43        | 64.7               | 65.1              | 65.3                        | 65.1   | 0.4                      | -0.2                        | 0.0  |
| J44        | 63.3               | 63.9              | 64.1                        | 63.9   | 0.6                      | -0.2                        | 0.0  |
| J45        | 62.4               | 63.1              | 63.2                        | 63.1   | 0.7                      | -0.1                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| J46        | 61.7               | 62.4              | 62.6                        | 62.4   | 0.7                      | -0.2                        | 0.0  |
| J47        | 61.2               | 61.9              | 62.0                        | 61.9   | 0.7                      | -0.1                        | 0.0  |
| J48        | 60.6               | 61.4              | 61.5                        | 61.4   | 0.8                      | -0.1                        | 0.0  |
| J49        | 60.1               | 60.9              | 61.0                        | 60.9   | 0.8                      | -0.1                        | 0.0  |
| J50        | 59.4               | 60.3              | 60.4                        | 60.3   | 0.9                      | -0.1                        | 0.0  |
| J51        | 58.8               | 59.6              | 59.7                        | 59.6   | 0.8                      | -0.1                        | 0.0  |
| J52        | 58.1               | 59.0              | 59.1                        | 59.0   | 0.9                      | -0.1                        | 0.0  |
| J53        | 57.4               | 58.3              | 58.4                        | 58.3   | 0.9                      | -0.1                        | 0.0  |
| J54        | 56.7               | 57.7              | 57.8                        | 57.7   | 1.0                      | -0.1                        | 0.0  |
| J55        | 56.1               | 57.1              | 57.3                        | 57.1   | 1.0                      | -0.2                        | 0.0  |
| J56        | 55.6               | 56.6              | 56.7                        | 56.6   | 1.0                      | -0.1                        | 0.0  |
| J57        | 55.1               | 56.1              | 56.3                        | 56.1   | 1.0                      | -0.2                        | 0.0  |
| J58        | 54.7               | 55.7              | 55.8                        | 55.7   | 1.0                      | -0.1                        | 0.0  |
| J59        | 54.3               | 55.3              | 55.4                        | 55.3   | 1.0                      | -0.1                        | 0.0  |
| J60        | 53.9               | 54.9              | 55.0                        | 54.9   | 1.0                      | -0.1                        | 0.0  |
| J61        | 53.5               | 54.5              | 54.6                        | 54.5   | 1.0                      | -0.1                        | 0.0  |
| J62        | 53.1               | 54.2              | 54.3                        | 54.2   | 1.1                      | -0.1                        | 0.0  |
| J63        | 52.8               | 53.9              | 54.0                        | 53.9   | 1.1                      | -0.1                        | 0.0  |
| J64        | 52.5               | 53.5              | 53.6                        | 53.6   | 1.0                      | -0.1                        | -0.1   |
| J65        | 52.2               | 53.2              | 53.3                        | 53.2   | 1.0                      | -0.1                        | 0.0  |
| J66        | 51.9               | 52.9              | 53.0                        | 52.9   | 1.0                      | -0.1                        | 0.0  |
| K01        | 57.2               | 58.1              | 58.4                        | 58.1   | 0.9                      | -0.3                        | 0.0  |
| K02        | 57.9               | 58.8              | 59.1                        | 58.8   | 0.9                      | -0.3                        | 0.0  |
| K03        | 58.6               | 59.5              | 59.7                        | 59.5   | 0.9                      | -0.2                        | 0.0  |
| K04        | 59.3               | 60.1              | 60.4                        | 60.1   | 0.8                      | -0.3                        | 0.0  |
| K05        | 60.0               | 60.8              | 61.1                        | 60.8   | 0.8                      | -0.3                        | 0.0  |
| K06        | 60.6               | 61.4              | 61.7                        | 61.4   | 0.8                      | -0.3                        | 0.0  |
| K07        | 61.3               | 62.1              | 62.4                        | 62.1   | 0.8                      | -0.3                        | 0.0  |
| K08        | 62.0               | 62.8              | 63.1                        | 62.8   | 0.8                      | -0.3                        | 0.0  |
| K09        | 62.6               | 63.5              | 63.8                        | 63.5   | 0.9                      | -0.3                        | 0.0  |
| K10        | 63.2               | 64.1              | 64.3                        | 64.1   | 0.9                      | -0.2                        | 0.0  |
| K11        | 63.7               | 64.6              | 64.9                        | 64.6   | 0.9                      | -0.3                        | 0.0  |
| K12        | 64.2               | 65.1              | 65.3                        | 65.1   | 0.9                      | -0.2                        | 0.0  |
| K13        | 64.7               | 65.6              | 65.8                        | 65.6   | 0.9                      | -0.2                        | 0.0  |
| K14        | 65.2               | 66.0              | 66.3                        | 66.0   | 0.8                      | -0.3                        | 0.0  |
| K15        | 65.6               | 66.5              | 66.7                        | 66.5   | 0.9                      | -0.2                        | 0.0  |
| K16        | 66.1               | 66.9              | 67.2                        | 66.9   | 0.8                      | -0.3                        | 0.0  |
| K17        | 66.5               | 67.4              | 67.6                        | 67.4   | 0.9                      | -0.2                        | 0.0  |
| K18        | 67.0               | 67.8              | 68.0                        | 67.8   | 0.8                      | -0.2                        | 0.0  |
| K19        | 67.5               | 68.3              | 68.5                        | 68.3   | 0.8                      | -0.2                        | 0.0  |
| K20        | 68.1               | 68.9              | 69.1                        | 68.9   | 0.8                      | -0.2                        | 0.0  |
| K21        | 68.9               | 69.6              | 69.8                        | 69.6   | 0.7                      | -0.2                        | 0.0  |
| K22        | 69.4               | 70.1              | 70.3                        | 70.1   | 0.7                      | -0.2                        | 0.0  |
| K23        | 70.0               | 70.6              | 70.8                        | 70.6   | 0.6                      | -0.2                        | 0.0  |
| K24        | 71.1               | 71.8              | 72.0                        | 71.8   | 0.7                      | -0.2                        | 0.0  |
| K25        | 72.2               | 72.8              | 73.1                        | 72.8   | 0.6                      | -0.3                        | 0.0  |
| K26        | 72.1               | 72.5              | 72.8                        | 72.5   | 0.4                      | -0.3                        | 0.0  |
| K27        | 71.7               | 71.9              | 72.3                        | 71.9   | 0.2                      | -0.4                        | 0.0  |
| K28        | 71.4               | 71.5              | 71.9                        | 71.5   | 0.1                      | -0.4                        | 0.0  |
| K29        | 71.0               | 71.1              | 71.5                        | 71.1   | 0.1                      | -0.4                        | 0.0  |
| K30        | 70.6               | 70.6              | 71.0                        | 70.7   | 0.0                      | -0.4                        | -0.1   |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| K31        | 70.1               | 70.2              | 70.6                        | 70.2   | 0.1                      | -0.4                        | 0.0  |
| K32        | 69.8               | 70.0              | 70.3                        | 70.0   | 0.2                      | -0.3                        | 0.0  |
| K33        | 69.5               | 69.7              | 70.0                        | 69.7   | 0.2                      | -0.3                        | 0.0  |
| K34        | 69.0               | 69.2              | 69.5                        | 69.2   | 0.2                      | -0.3                        | 0.0  |
| K35        | 68.2               | 68.4              | 68.7                        | 68.4   | 0.2                      | -0.3                        | 0.0  |
| K36        | 67.6               | 67.8              | 68.0                        | 67.8   | 0.2                      | -0.2                        | 0.0  |
| K37        | 66.9               | 67.1              | 67.4                        | 67.1   | 0.2                      | -0.3                        | 0.0  |
| K38        | 66.4               | 66.6              | 66.9                        | 66.6   | 0.2                      | -0.3                        | 0.0  |
| K39        | 66.1               | 66.3              | 66.6                        | 66.3   | 0.2                      | -0.3                        | 0.0  |
| K40        | 65.8               | 66.1              | 66.5                        | 66.1   | 0.3                      | -0.4                        | 0.0  |
| K41        | 65.0               | 65.3              | 65.7                        | 65.3   | 0.3                      | -0.4                        | 0.0  |
| K42        | 63.2               | 63.6              | 63.9                        | 63.6   | 0.4                      | -0.3                        | 0.0  |
| K43        | 61.7               | 62.1              | 62.4                        | 62.1   | 0.4                      | -0.3                        | 0.0  |
| K44        | 60.6               | 61.1              | 61.3                        | 61.1   | 0.5                      | -0.2                        | 0.0  |
| K45        | 59.8               | 60.5              | 60.6                        | 60.5   | 0.7                      | -0.1                        | 0.0  |
| K46        | 59.3               | 60.0              | 60.1                        | 60.0   | 0.7                      | -0.1                        | 0.0  |
| K47        | 58.9               | 59.6              | 59.8                        | 59.6   | 0.7                      | -0.2                        | 0.0  |
| K48        | 58.5               | 59.2              | 59.3                        | 59.2   | 0.7                      | -0.1                        | 0.0  |
| K49        | 58.0               | 58.7              | 58.9                        | 58.7   | 0.7                      | -0.2                        | 0.0  |
| K50        | 57.5               | 58.2              | 58.3                        | 58.2   | 0.7                      | -0.1                        | 0.0  |
| K51        | 56.9               | 57.6              | 57.7                        | 57.6   | 0.7                      | -0.1                        | 0.0  |
| K52        | 56.2               | 57.0              | 57.1                        | 57.0   | 0.8                      | -0.1                        | 0.0  |
| K53        | 55.5               | 56.4              | 56.5                        | 56.4   | 0.9                      | -0.1                        | 0.0  |
| K54        | 54.9               | 55.8              | 55.9                        | 55.8   | 0.9                      | -0.1                        | 0.0  |
| K55        | 54.3               | 55.3              | 55.4                        | 55.3   | 1.0                      | -0.1                        | 0.0  |
| K56        | 53.8               | 54.8              | 54.9                        | 54.8   | 1.0                      | -0.1                        | 0.0  |
| K57        | 53.4               | 54.4              | 54.5                        | 54.4   | 1.0                      | -0.1                        | 0.0  |
| K58        | 53.0               | 54.0              | 54.1                        | 54.0   | 1.0                      | -0.1                        | 0.0  |
| K59        | 52.6               | 53.6              | 53.7                        | 53.6   | 1.0                      | -0.1                        | 0.0  |
| K60        | 52.2               | 53.2              | 53.4                        | 53.2   | 1.0                      | -0.2                        | 0.0  |
| K61        | 51.9               | 52.9              | 53.0                        | 52.9   | 1.0                      | -0.1                        | 0.0  |
| K62        | 51.6               | 52.6              | 52.7                        | 52.6   | 1.0                      | -0.1                        | 0.0  |
| K63        | 51.4               | 52.4              | 52.5                        | 52.4   | 1.0                      | -0.1                        | 0.0  |
| K64        | 51.1               | 52.1              | 52.2                        | 52.1   | 1.0                      | -0.1                        | 0.0  |
| K65        | 50.8               | 51.8              | 51.9                        | 51.8   | 1.0                      | -0.1                        | 0.0  |
| K66        | 50.6               | 51.6              | 51.7                        | 51.6   | 1.0                      | -0.1                        | 0.0  |
| L01        | 57.6               | 58.4              | 58.7                        | 58.4   | 0.8                      | -0.3                        | 0.0  |
| L02        | 58.2               | 59.0              | 59.3                        | 59.0   | 0.8                      | -0.3                        | 0.0  |
| L03        | 58.8               | 59.6              | 59.9                        | 59.6   | 0.8                      | -0.3                        | 0.0  |
| L04        | 59.4               | 60.1              | 60.4                        | 60.2   | 0.7                      | -0.3                        | -0.1   |
| L05        | 59.9               | 60.7              | 61.0                        | 60.7   | 0.8                      | -0.3                        | 0.0  |
| L06        | 60.5               | 61.2              | 61.5                        | 61.2   | 0.7                      | -0.3                        | 0.0  |
| L07        | 61.0               | 61.8              | 62.1                        | 61.8   | 0.8                      | -0.3                        | 0.0  |
| L08        | 61.5               | 62.4              | 62.6                        | 62.4   | 0.9                      | -0.2                        | 0.0  |
| L09        | 62.1               | 62.9              | 63.2                        | 62.9   | 0.8                      | -0.3                        | 0.0  |
| L10        | 62.5               | 63.4              | 63.6                        | 63.4   | 0.9                      | -0.2                        | 0.0  |
| L11        | 62.8               | 63.8              | 64.0                        | 63.8   | 1.0                      | -0.2                        | 0.0  |
| L12        | 63.2               | 64.1              | 64.4                        | 64.1   | 0.9                      | -0.3                        | 0.0  |
| L13        | 63.5               | 64.5              | 64.7                        | 64.5   | 1.0                      | -0.2                        | 0.0  |
| L14        | 63.9               | 64.8              | 65.1                        | 64.8   | 0.9                      | -0.3                        | 0.0  |
| L15        | 64.2               | 65.2              | 65.4                        | 65.2   | 1.0                      | -0.2                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| L16        | 64.6               | 65.5              | 65.8                        | 65.5   | 0.9                      | -0.3                        | 0.0  |
| L17        | 64.9               | 65.9              | 66.1                        | 65.9   | 1.0                      | -0.2                        | 0.0  |
| L18        | 65.2               | 66.1              | 66.4                        | 66.1   | 0.9                      | -0.3                        | 0.0  |
| L19        | 65.5               | 66.4              | 66.6                        | 66.4   | 0.9                      | -0.2                        | 0.0  |
| L20        | 65.9               | 66.8              | 67.0                        | 66.8   | 0.9                      | -0.2                        | 0.0  |
| L21        | 66.4               | 67.2              | 67.4                        | 67.2   | 0.8                      | -0.2                        | 0.0  |
| L22        | 66.7               | 67.5              | 67.7                        | 67.5   | 0.8                      | -0.2                        | 0.0  |
| L23        | 67.0               | 67.7              | 67.9                        | 67.7   | 0.7                      | -0.2                        | 0.0  |
| L24        | 67.4               | 68.1              | 68.3                        | 68.1   | 0.7                      | -0.2                        | 0.0  |
| L25        | 67.8               | 68.4              | 68.6                        | 68.4   | 0.6                      | -0.2                        | 0.0  |
| L26        | 67.9               | 68.3              | 68.6                        | 68.3   | 0.4                      | -0.3                        | 0.0  |
| L27        | 67.7               | 68.0              | 68.3                        | 68.0   | 0.3                      | -0.3                        | 0.0  |
| L28        | 67.5               | 67.6              | 68.0                        | 67.6   | 0.1                      | -0.4                        | 0.0  |
| L29        | 67.1               | 67.2              | 67.5                        | 67.2   | 0.1                      | -0.3                        | 0.0  |
| L30        | 66.6               | 66.7              | 67.0                        | 66.7   | 0.1                      | -0.3                        | 0.0  |
| L31        | 66.1               | 66.2              | 66.5                        | 66.2   | 0.1                      | -0.3                        | 0.0  |
| L32        | 65.6               | 65.9              | 66.1                        | 65.9   | 0.3                      | -0.2                        | 0.0  |
| L33        | 65.2               | 65.5              | 65.7                        | 65.5   | 0.3                      | -0.2                        | 0.0  |
| L34        | 64.8               | 65.2              | 65.4                        | 65.2   | 0.4                      | -0.2                        | 0.0  |
| L35        | 64.3               | 64.7              | 64.9                        | 64.7   | 0.4                      | -0.2                        | 0.0  |
| L36        | 63.9               | 64.3              | 64.5                        | 64.3   | 0.4                      | -0.2                        | 0.0  |
| L37        | 63.5               | 63.9              | 64.1                        | 63.9   | 0.4                      | -0.2                        | 0.0  |
| L38        | 63.0               | 63.3              | 63.6                        | 63.3   | 0.3                      | -0.3                        | 0.0  |
| L39        | 62.6               | 62.8              | 63.2                        | 62.8   | 0.2                      | -0.4                        | 0.0  |
| L40        | 62.2               | 62.5              | 62.8                        | 62.5   | 0.3                      | -0.3                        | 0.0  |
| L41        | 61.6               | 61.9              | 62.2                        | 61.9   | 0.3                      | -0.3                        | 0.0  |
| L42        | 60.4               | 60.8              | 61.1                        | 60.8   | 0.4                      | -0.3                        | 0.0  |
| L43        | 59.3               | 59.8              | 60.0                        | 59.8   | 0.5                      | -0.2                        | 0.0  |
| L44        | 58.4               | 58.9              | 59.1                        | 58.9   | 0.5                      | -0.2                        | 0.0  |
| L45        | 57.8               | 58.4              | 58.6                        | 58.4   | 0.6                      | -0.2                        | 0.0  |
| L46        | 57.4               | 58.0              | 58.2                        | 58.0   | 0.6                      | -0.2                        | 0.0  |
| L47        | 57.1               | 57.7              | 57.8                        | 57.7   | 0.6                      | -0.1                        | 0.0  |
| L48        | 56.7               | 57.3              | 57.5                        | 57.3   | 0.6                      | -0.2                        | 0.0  |
| L49        | 56.3               | 56.9              | 57.0                        | 56.9   | 0.6                      | -0.1                        | 0.0  |
| L50        | 55.8               | 56.5              | 56.6                        | 56.5   | 0.7                      | -0.1                        | 0.0  |
| L51        | 55.3               | 56.0              | 56.1                        | 56.0   | 0.7                      | -0.1                        | 0.0  |
| L52        | 54.7               | 55.4              | 55.6                        | 55.4   | 0.7                      | -0.2                        | 0.0  |
| L53        | 54.1               | 54.9              | 55.0                        | 54.9   | 0.8                      | -0.1                        | 0.0  |
| L54        | 53.4               | 54.3              | 54.4                        | 54.3   | 0.9                      | -0.1                        | 0.0  |
| L55        | 52.9               | 53.8              | 53.9                        | 53.8   | 0.9                      | -0.1                        | 0.0  |
| L56        | 52.4               | 53.4              | 53.5                        | 53.4   | 1.0                      | -0.1                        | 0.0  |
| L57        | 52.0               | 52.9              | 53.1                        | 52.9   | 0.9                      | -0.2                        | 0.0  |
| L58        | 51.6               | 52.6              | 52.7                        | 52.6   | 1.0                      | -0.1                        | 0.0  |
| L59        | 51.3               | 52.2              | 52.4                        | 52.3   | 0.9                      | -0.2                        | -0.1   |
| L60        | 51.0               | 51.9              | 52.1                        | 51.9   | 0.9                      | -0.2                        | 0.0  |
| L61        | 50.7               | 51.6              | 51.8                        | 51.6   | 0.9                      | -0.2                        | 0.0  |
| L62        | 50.4               | 51.4              | 51.5                        | 51.4   | 1.0                      | -0.1                        | 0.0  |
| L63        | 50.3               | 51.2              | 51.4                        | 51.2   | 0.9                      | -0.2                        | 0.0  |
| L64        | 50.1               | 51.0              | 51.1                        | 51.0   | 0.9                      | -0.1                        | 0.0  |
| L65        | 49.9               | 50.8              | 50.9                        | 50.8   | 0.9                      | -0.1                        | 0.0  |
| L66        | 49.7               | 50.6              | 50.7                        | 50.6   | 0.9                      | -0.1                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| M01        | 57.7               | 58.6              | 58.8                        | 58.6   | 0.9                      | -0.2                        | 0.0  |
| M02        | 58.3               | 59.1              | 59.4                        | 59.1   | 0.8                      | -0.3                        | 0.0  |
| M03        | 58.8               | 59.6              | 59.9                        | 59.6   | 0.8                      | -0.3                        | 0.0  |
| M04        | 59.3               | 60.0              | 60.3                        | 60.0   | 0.7                      | -0.3                        | 0.0  |
| M05        | 59.7               | 60.5              | 60.8                        | 60.5   | 0.8                      | -0.3                        | 0.0  |
| M06        | 60.1               | 60.9              | 61.2                        | 60.9   | 0.8                      | -0.3                        | 0.0  |
| M07        | 60.5               | 61.3              | 61.6                        | 61.3   | 0.8                      | -0.3                        | 0.0  |
| M08        | 60.9               | 61.7              | 62.0                        | 61.7   | 0.8                      | -0.3                        | 0.0  |
| M09        | 61.3               | 62.1              | 62.4                        | 62.1   | 0.8                      | -0.3                        | 0.0  |
| M10        | 61.5               | 62.4              | 62.7                        | 62.4   | 0.9                      | -0.3                        | 0.0  |
| M11        | 61.7               | 62.7              | 62.9                        | 62.7   | 1.0                      | -0.2                        | 0.0  |
| M12        | 61.9               | 62.9              | 63.1                        | 62.9   | 1.0                      | -0.2                        | 0.0  |
| M13        | 62.1               | 63.1              | 63.4                        | 63.1   | 1.0                      | -0.3                        | 0.0  |
| M14        | 62.4               | 63.4              | 63.6                        | 63.4   | 1.0                      | -0.2                        | 0.0  |
| M15        | 62.6               | 63.6              | 63.9                        | 63.6   | 1.0                      | -0.3                        | 0.0  |
| M16        | 62.9               | 63.9              | 64.1                        | 63.9   | 1.0                      | -0.2                        | 0.0  |
| M17        | 63.1               | 64.1              | 64.3                        | 64.1   | 1.0                      | -0.2                        | 0.0  |
| M18        | 63.3               | 64.3              | 64.5                        | 64.3   | 1.0                      | -0.2                        | 0.0  |
| M19        | 63.5               | 64.4              | 64.6                        | 64.4   | 0.9                      | -0.2                        | 0.0  |
| M20        | 63.8               | 64.7              | 64.9                        | 64.7   | 0.9                      | -0.2                        | 0.0  |
| M21        | 64.1               | 64.9              | 65.1                        | 64.9   | 0.8                      | -0.2                        | 0.0  |
| M22        | 64.3               | 65.1              | 65.3                        | 65.1   | 0.8                      | -0.2                        | 0.0  |
| M23        | 64.4               | 65.2              | 65.4                        | 65.2   | 0.8                      | -0.2                        | 0.0  |
| M24        | 64.6               | 65.3              | 65.5                        | 65.3   | 0.7                      | -0.2                        | 0.0  |
| M25        | 64.8               | 65.4              | 65.6                        | 65.4   | 0.6                      | -0.2                        | 0.0  |
| M26        | 64.9               | 65.3              | 65.6                        | 65.3   | 0.4                      | -0.3                        | 0.0  |
| M27        | 64.8               | 65.1              | 65.4                        | 65.1   | 0.3                      | -0.3                        | 0.0  |
| M28        | 64.5               | 64.8              | 65.0                        | 64.8   | 0.3                      | -0.2                        | 0.0  |
| M29        | 64.2               | 64.4              | 64.6                        | 64.4   | 0.2                      | -0.2                        | 0.0  |
| M30        | 63.7               | 63.9              | 64.1                        | 63.9   | 0.2                      | -0.2                        | 0.0  |
| M31        | 63.2               | 63.4              | 63.6                        | 63.4   | 0.2                      | -0.2                        | 0.0  |
| M32        | 62.7               | 63.0              | 63.2                        | 63.0   | 0.3                      | -0.2                        | 0.0  |
| M33        | 62.4               | 62.8              | 63.0                        | 62.8   | 0.4                      | -0.2                        | 0.0  |
| M34        | 62.2               | 62.7              | 62.9                        | 62.7   | 0.5                      | -0.2                        | 0.0  |
| M35        | 62.0               | 62.6              | 62.7                        | 62.6   | 0.6                      | -0.1                        | 0.0  |
| M36        | 61.8               | 62.4              | 62.6                        | 62.4   | 0.6                      | -0.2                        | 0.0  |
| M37        | 61.5               | 62.0              | 62.2                        | 62.0   | 0.5                      | -0.2                        | 0.0  |
| M38        | 60.9               | 61.3              | 61.5                        | 61.3   | 0.4                      | -0.2                        | 0.0  |
| M39        | 60.2               | 60.6              | 60.8                        | 60.6   | 0.4                      | -0.2                        | 0.0  |
| M40        | 59.7               | 60.0              | 60.3                        | 60.0   | 0.3                      | -0.3                        | 0.0  |
| M41        | 59.1               | 59.4              | 59.7                        | 59.5   | 0.3                      | -0.3                        | -0.1   |
| M42        | 58.3               | 58.6              | 58.9                        | 58.6   | 0.3                      | -0.3                        | 0.0  |
| M43        | 57.4               | 57.8              | 58.1                        | 57.8   | 0.4                      | -0.3                        | 0.0  |
| M44        | 56.7               | 57.2              | 57.4                        | 57.2   | 0.5                      | -0.2                        | 0.0  |
| M45        | 56.2               | 56.7              | 56.9                        | 56.7   | 0.5                      | -0.2                        | 0.0  |
| M46        | 55.9               | 56.4              | 56.6                        | 56.4   | 0.5                      | -0.2                        | 0.0  |
| M47        | 55.7               | 56.2              | 56.3                        | 56.2   | 0.5                      | -0.1                        | 0.0  |
| M48        | 55.3               | 55.8              | 56.0                        | 55.8   | 0.5                      | -0.2                        | 0.0  |
| M49        | 55.0               | 55.5              | 55.6                        | 55.5   | 0.5                      | -0.1                        | 0.0  |
| M50        | 54.6               | 55.1              | 55.3                        | 55.1   | 0.5                      | -0.2                        | 0.0  |
| M51        | 54.2               | 54.7              | 54.8                        | 54.7   | 0.5                      | -0.1                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| M52        | 53.7               | 54.3              | 54.4                        | 54.3   | 0.6                      | -0.1                        | 0.0  |
| M53        | 53.0               | 53.7              | 53.8                        | 53.7   | 0.7                      | -0.1                        | 0.0  |
| M54        | 52.4               | 53.2              | 53.3                        | 53.2   | 0.8                      | -0.1                        | 0.0  |
| M55        | 51.9               | 52.7              | 52.8                        | 52.7   | 0.8                      | -0.1                        | 0.0  |
| M56        | 51.4               | 52.3              | 52.4                        | 52.3   | 0.9                      | -0.1                        | 0.0  |
| M57        | 51.0               | 51.9              | 52.0                        | 51.9   | 0.9                      | -0.1                        | 0.0  |
| M58        | 50.7               | 51.6              | 51.7                        | 51.6   | 0.9                      | -0.1                        | 0.0  |
| M59        | 50.4               | 51.3              | 51.5                        | 51.3   | 0.9                      | -0.2                        | 0.0  |
| M60        | 50.1               | 51.0              | 51.2                        | 51.0   | 0.9                      | -0.2                        | 0.0  |
| M61        | 49.8               | 50.8              | 50.9                        | 50.8   | 1.0                      | -0.1                        | 0.0  |
| M62        | 49.7               | 50.6              | 50.8                        | 50.6   | 0.9                      | -0.2                        | 0.0  |
| M63        | 49.6               | 50.5              | 50.6                        | 50.5   | 0.9                      | -0.1                        | 0.0  |
| M64        | 49.4               | 50.3              | 50.5                        | 50.3   | 0.9                      | -0.2                        | 0.0  |
| M65        | 49.3               | 50.2              | 50.3                        | 50.2   | 0.9                      | -0.1                        | 0.0  |
| M66        | 49.1               | 50.0              | 50.2                        | 50.0   | 0.9                      | -0.2                        | 0.0  |
| N01        | 57.8               | 58.6              | 58.9                        | 58.6   | 0.8                      | -0.3                        | 0.0  |
| N02        | 58.3               | 59.1              | 59.4                        | 59.1   | 0.8                      | -0.3                        | 0.0  |
| N03        | 58.8               | 59.5              | 59.8                        | 59.5   | 0.7                      | -0.3                        | 0.0  |
| N04        | 59.2               | 59.8              | 60.2                        | 59.8   | 0.6                      | -0.4                        | 0.0  |
| N05        | 59.5               | 60.2              | 60.5                        | 60.2   | 0.7                      | -0.3                        | 0.0  |
| N06        | 59.8               | 60.4              | 60.8                        | 60.5   | 0.6                      | -0.4                        | -0.1   |
| N07        | 60.0               | 60.7              | 61.0                        | 60.7   | 0.7                      | -0.3                        | 0.0  |
| N08        | 60.2               | 61.0              | 61.3                        | 61.0   | 0.8                      | -0.3                        | 0.0  |
| N09        | 60.4               | 61.2              | 61.5                        | 61.2   | 0.8                      | -0.3                        | 0.0  |
| N10        | 60.5               | 61.4              | 61.7                        | 61.4   | 0.9                      | -0.3                        | 0.0  |
| N11        | 60.5               | 61.5              | 61.7                        | 61.5   | 1.0                      | -0.2                        | 0.0  |
| N12        | 60.6               | 61.6              | 61.8                        | 61.6   | 1.0                      | -0.2                        | 0.0  |
| N13        | 60.7               | 61.7              | 61.9                        | 61.7   | 1.0                      | -0.2                        | 0.0  |
| N14        | 60.8               | 61.8              | 62.1                        | 61.8   | 1.0                      | -0.3                        | 0.0  |
| N15        | 61.0               | 62.0              | 62.2                        | 62.0   | 1.0                      | -0.2                        | 0.0  |
| N16        | 61.2               | 62.2              | 62.4                        | 62.2   | 1.0                      | -0.2                        | 0.0  |
| N17        | 61.3               | 62.3              | 62.5                        | 62.3   | 1.0                      | -0.2                        | 0.0  |
| N18        | 61.5               | 62.4              | 62.6                        | 62.4   | 0.9                      | -0.2                        | 0.0  |
| N19        | 61.6               | 62.5              | 62.7                        | 62.5   | 0.9                      | -0.2                        | 0.0  |
| N20        | 61.8               | 62.7              | 62.8                        | 62.7   | 0.9                      | -0.1                        | 0.0  |
| N21        | 62.0               | 62.8              | 63.0                        | 62.8   | 0.8                      | -0.2                        | 0.0  |
| N22        | 62.2               | 62.9              | 63.1                        | 62.9   | 0.7                      | -0.2                        | 0.0  |
| N23        | 62.3               | 63.0              | 63.2                        | 63.0   | 0.7                      | -0.2                        | 0.0  |
| N24        | 62.4               | 63.0              | 63.2                        | 63.1   | 0.6                      | -0.2                        | -0.1   |
| N25        | 62.5               | 63.1              | 63.3                        | 63.1   | 0.6                      | -0.2                        | 0.0  |
| N26        | 62.5               | 63.0              | 63.2                        | 63.0   | 0.5                      | -0.2                        | 0.0  |
| N27        | 62.4               | 62.8              | 63.0                        | 62.8   | 0.4                      | -0.2                        | 0.0  |
| N28        | 62.2               | 62.5              | 62.7                        | 62.5   | 0.3                      | -0.2                        | 0.0  |
| N29        | 61.8               | 62.1              | 62.3                        | 62.1   | 0.3                      | -0.2                        | 0.0  |
| N30        | 61.4               | 61.6              | 61.8                        | 61.6   | 0.2                      | -0.2                        | 0.0  |
| N31        | 60.9               | 61.2              | 61.4                        | 61.2   | 0.3                      | -0.2                        | 0.0  |
| N32        | 60.6               | 61.0              | 61.2                        | 61.0   | 0.4                      | -0.2                        | 0.0  |
| N33        | 60.5               | 61.0              | 61.2                        | 61.0   | 0.5                      | -0.2                        | 0.0  |
| N34        | 60.5               | 61.2              | 61.3                        | 61.2   | 0.7                      | -0.1                        | 0.0  |
| N35        | 60.5               | 61.2              | 61.4                        | 61.2   | 0.7                      | -0.2                        | 0.0  |
| N36        | 60.5               | 61.3              | 61.4                        | 61.3   | 0.8                      | -0.1                        | 0.0  |



| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| N37        | 60.3               | 61.0              | 61.1                        | 61.0   | 0.7                      | -0.1                        | 0.0  |
| N38        | 59.6               | 60.2              | 60.4                        | 60.2   | 0.6                      | -0.2                        | 0.0  |
| N39        | 58.8               | 59.3              | 59.4                        | 59.3   | 0.5                      | -0.1                        | 0.0  |
| N40        | 58.1               | 58.5              | 58.7                        | 58.5   | 0.4                      | -0.2                        | 0.0  |
| N41        | 57.5               | 57.9              | 58.1                        | 57.9   | 0.4                      | -0.2                        | 0.0  |
| N42        | 56.8               | 57.1              | 57.3                        | 57.1   | 0.3                      | -0.2                        | 0.0  |
| N43        | 56.1               | 56.5              | 56.7                        | 56.5   | 0.4                      | -0.2                        | 0.0  |
| N44        | 55.6               | 56.0              | 56.2                        | 56.0   | 0.4                      | -0.2                        | 0.0  |
| N45        | 55.1               | 55.6              | 55.7                        | 55.6   | 0.5                      | -0.1                        | 0.0  |
| N46        | 54.8               | 55.3              | 55.4                        | 55.3   | 0.5                      | -0.1                        | 0.0  |
| N47        | 54.6               | 55.0              | 55.1                        | 55.0   | 0.4                      | -0.1                        | 0.0  |
| N48        | 54.3               | 54.8              | 54.9                        | 54.8   | 0.5                      | -0.1                        | 0.0  |
| N49        | 54.0               | 54.5              | 54.6                        | 54.5   | 0.5                      | -0.1                        | 0.0  |
| N50        | 53.8               | 54.2              | 54.3                        | 54.2   | 0.4                      | -0.1                        | 0.0  |
| N51        | 53.4               | 53.9              | 54.0                        | 53.9   | 0.5                      | -0.1                        | 0.0  |
| N52        | 53.0               | 53.5              | 53.6                        | 53.5   | 0.5                      | -0.1                        | 0.0  |
| N53        | 52.4               | 53.0              | 53.1                        | 53.0   | 0.6                      | -0.1                        | 0.0  |
| N54        | 51.8               | 52.4              | 52.5                        | 52.4   | 0.6                      | -0.1                        | 0.0  |
| N55        | 51.2               | 52.0              | 52.1                        | 52.0   | 0.8                      | -0.1                        | 0.0  |
| N56        | 50.8               | 51.7              | 51.8                        | 51.7   | 0.9                      | -0.1                        | 0.0  |
| N57        | 50.4               | 51.3              | 51.4                        | 51.3   | 0.9                      | -0.1                        | 0.0  |
| N58        | 50.1               | 51.0              | 51.1                        | 51.0   | 0.9                      | -0.1                        | 0.0  |
| N59        | 49.9               | 50.8              | 50.9                        | 50.8   | 0.9                      | -0.1                        | 0.0  |
| N60        | 49.6               | 50.6              | 50.7                        | 50.6   | 1.0                      | -0.1                        | 0.0  |
| N61        | 49.5               | 50.4              | 50.5                        | 50.4   | 0.9                      | -0.1                        | 0.0  |
| N62        | 49.4               | 50.3              | 50.4                        | 50.3   | 0.9                      | -0.1                        | 0.0  |
| N63        | 49.3               | 50.2              | 50.4                        | 50.2   | 0.9                      | -0.2                        | 0.0  |
| N64        | 49.2               | 50.1              | 50.2                        | 50.1   | 0.9                      | -0.1                        | 0.0  |
| N65        | 49.2               | 50.0              | 50.2                        | 50.1   | 0.8                      | -0.2                        | -0.1   |
| N66        | 49.1               | 50.0              | 50.1                        | 50.0   | 0.9                      | -0.1                        | 0.0  |
| O01        | 57.9               | 58.6              | 58.9                        | 58.6   | 0.7                      | -0.3                        | 0.0  |
| O02        | 58.3               | 59.0              | 59.3                        | 59.0   | 0.7                      | -0.3                        | 0.0  |
| O03        | 58.6               | 59.3              | 59.6                        | 59.3   | 0.7                      | -0.3                        | 0.0  |
| O04        | 58.9               | 59.6              | 59.9                        | 59.6   | 0.7                      | -0.3                        | 0.0  |
| O05        | 59.2               | 59.8              | 60.2                        | 59.8   | 0.6                      | -0.4                        | 0.0  |
| O06        | 59.3               | 60.0              | 60.4                        | 60.0   | 0.7                      | -0.4                        | 0.0  |
| O07        | 59.5               | 60.2              | 60.5                        | 60.2   | 0.7                      | -0.3                        | 0.0  |
| O08        | 59.5               | 60.3              | 60.6                        | 60.3   | 0.8                      | -0.3                        | 0.0  |
| O09        | 59.5               | 60.3              | 60.6                        | 60.3   | 0.8                      | -0.3                        | 0.0  |
| O10        | 59.4               | 60.3              | 60.6                        | 60.3   | 0.9                      | -0.3                        | 0.0  |
| O11        | 59.3               | 60.3              | 60.6                        | 60.3   | 1.0                      | -0.3                        | 0.0  |
| O12        | 59.3               | 60.3              | 60.5                        | 60.3   | 1.0                      | -0.2                        | 0.0  |
| O13        | 59.3               | 60.3              | 60.6                        | 60.3   | 1.0                      | -0.3                        | 0.0  |
| O14        | 59.4               | 60.4              | 60.6                        | 60.4   | 1.0                      | -0.2                        | 0.0  |
| O15        | 59.5               | 60.5              | 60.7                        | 60.5   | 1.0                      | -0.2                        | 0.0  |
| O16        | 59.7               | 60.6              | 60.8                        | 60.6   | 0.9                      | -0.2                        | 0.0  |
| O17        | 59.8               | 60.7              | 60.9                        | 60.7   | 0.9                      | -0.2                        | 0.0  |
| O18        | 59.9               | 60.8              | 61.0                        | 60.8   | 0.9                      | -0.2                        | 0.0  |
| O19        | 60.0               | 60.8              | 61.0                        | 60.8   | 0.8                      | -0.2                        | 0.0  |
| O20        | 60.1               | 60.9              | 61.1                        | 60.9   | 0.8                      | -0.2                        | 0.0  |
| O21        | 60.2               | 61.0              | 61.2                        | 61.0   | 0.8                      | -0.2                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| O22        | 60.4               | 61.1              | 61.3                        | 61.1   | 0.7                      | -0.2                        | 0.0  |
| O23        | 60.5               | 61.2              | 61.4                        | 61.2   | 0.7                      | -0.2                        | 0.0  |
| O24        | 60.6               | 61.2              | 61.4                        | 61.2   | 0.6                      | -0.2                        | 0.0  |
| O25        | 60.7               | 61.3              | 61.4                        | 61.3   | 0.6                      | -0.1                        | 0.0  |
| O26        | 60.7               | 61.2              | 61.4                        | 61.2   | 0.5                      | -0.2                        | 0.0  |
| O27        | 60.6               | 61.0              | 61.2                        | 61.0   | 0.4                      | -0.2                        | 0.0  |
| O28        | 60.4               | 60.8              | 61.0                        | 60.8   | 0.4                      | -0.2                        | 0.0  |
| O29        | 60.1               | 60.4              | 60.6                        | 60.4   | 0.3                      | -0.2                        | 0.0  |
| O30        | 59.7               | 60.0              | 60.2                        | 60.0   | 0.3                      | -0.2                        | 0.0  |
| O31        | 59.3               | 59.7              | 59.8                        | 59.7   | 0.4                      | -0.1                        | 0.0  |
| O32        | 59.2               | 59.6              | 59.8                        | 59.6   | 0.4                      | -0.2                        | 0.0  |
| O33        | 59.3               | 59.9              | 60.0                        | 59.9   | 0.6                      | -0.1                        | 0.0  |
| O34        | 59.5               | 60.3              | 60.4                        | 60.3   | 0.8                      | -0.1                        | 0.0  |
| O35        | 59.7               | 60.5              | 60.5                        | 60.5   | 0.8                      | 0.0                         | 0.0  |
| O36        | 59.7               | 60.6              | 60.6                        | 60.6   | 0.9                      | 0.0                         | 0.0  |
| O37        | 59.6               | 60.4              | 60.5                        | 60.4   | 0.8                      | -0.1                        | 0.0  |
| O38        | 59.0               | 59.7              | 59.8                        | 59.7   | 0.7                      | -0.1                        | 0.0  |
| O39        | 58.1               | 58.6              | 58.8                        | 58.7   | 0.5                      | -0.2                        | -0.1   |
| O40        | 57.2               | 57.7              | 57.9                        | 57.7   | 0.5                      | -0.2                        | 0.0  |
| O41        | 56.6               | 57.1              | 57.2                        | 57.1   | 0.5                      | -0.1                        | 0.0  |
| O42        | 56.0               | 56.4              | 56.6                        | 56.4   | 0.4                      | -0.2                        | 0.0  |
| O43        | 55.4               | 55.8              | 56.0                        | 55.8   | 0.4                      | -0.2                        | 0.0  |
| O44        | 54.9               | 55.3              | 55.5                        | 55.3   | 0.4                      | -0.2                        | 0.0  |
| O45        | 54.6               | 55.0              | 55.1                        | 55.0   | 0.4                      | -0.1                        | 0.0  |
| O46        | 54.3               | 54.7              | 54.8                        | 54.7   | 0.4                      | -0.1                        | 0.0  |
| O47        | 54.0               | 54.4              | 54.5                        | 54.4   | 0.4                      | -0.1                        | 0.0  |
| O48        | 53.8               | 54.2              | 54.3                        | 54.2   | 0.4                      | -0.1                        | 0.0  |
| O49        | 53.6               | 54.0              | 54.1                        | 54.0   | 0.4                      | -0.1                        | 0.0  |
| O50        | 53.4               | 53.8              | 53.9                        | 53.8   | 0.4                      | -0.1                        | 0.0  |
| O51        | 53.1               | 53.5              | 53.6                        | 53.5   | 0.4                      | -0.1                        | 0.0  |
| O52        | 52.6               | 53.1              | 53.2                        | 53.1   | 0.5                      | -0.1                        | 0.0  |
| O53        | 52.1               | 52.6              | 52.7                        | 52.6   | 0.5                      | -0.1                        | 0.0  |
| O54        | 51.5               | 52.1              | 52.2                        | 52.1   | 0.6                      | -0.1                        | 0.0  |
| O55        | 51.0               | 51.8              | 51.9                        | 51.8   | 0.8                      | -0.1                        | 0.0  |
| O56        | 50.6               | 51.4              | 51.5                        | 51.4   | 0.8                      | -0.1                        | 0.0  |
| O57        | 50.3               | 51.1              | 51.3                        | 51.1   | 0.8                      | -0.2                        | 0.0  |
| O58        | 50.1               | 50.9              | 51.0                        | 50.9   | 0.8                      | -0.1                        | 0.0  |
| O59        | 49.9               | 50.8              | 50.9                        | 50.8   | 0.9                      | -0.1                        | 0.0  |
| O60        | 49.7               | 50.6              | 50.7                        | 50.6   | 0.9                      | -0.1                        | 0.0  |
| O61        | 49.6               | 50.5              | 50.6                        | 50.5   | 0.9                      | -0.1                        | 0.0  |
| O62        | 49.6               | 50.6              | 50.7                        | 50.6   | 1.0                      | -0.1                        | 0.0  |
| O63        | 49.6               | 50.5              | 50.6                        | 50.5   | 0.9                      | -0.1                        | 0.0  |
| O64        | 49.6               | 50.5              | 50.6                        | 50.5   | 0.9                      | -0.1                        | 0.0  |
| O65        | 49.6               | 50.5              | 50.6                        | 50.5   | 0.9                      | -0.1                        | 0.0  |
| O66        | 49.6               | 50.5              | 50.6                        | 50.5   | 0.9                      | -0.1                        | 0.0  |
| P01        | 57.9               | 58.6              | 58.9                        | 58.6   | 0.7                      | -0.3                        | 0.0  |
| P02        | 58.2               | 58.9              | 59.2                        | 58.9   | 0.7                      | -0.3                        | 0.0  |
| P03        | 58.5               | 59.1              | 59.5                        | 59.2   | 0.6                      | -0.4                        | -0.1   |
| P04        | 58.7               | 59.4              | 59.7                        | 59.4   | 0.7                      | -0.3                        | 0.0  |
| P05        | 58.8               | 59.5              | 59.8                        | 59.5   | 0.7                      | -0.3                        | 0.0  |
| P06        | 58.9               | 59.6              | 59.9                        | 59.6   | 0.7                      | -0.3                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| P07        | 58.9               | 59.6              | 59.9                        | 59.6   | 0.7                      | -0.3                        | 0.0  |
| P08        | 58.8               | 59.5              | 59.8                        | 59.5   | 0.7                      | -0.3                        | 0.0  |
| P09        | 58.6               | 59.4              | 59.7                        | 59.4   | 0.8                      | -0.3                        | 0.0  |
| P10        | 58.4               | 59.3              | 59.6                        | 59.3   | 0.9                      | -0.3                        | 0.0  |
| P11        | 58.3               | 59.2              | 59.5                        | 59.2   | 0.9                      | -0.3                        | 0.0  |
| P12        | 58.2               | 59.1              | 59.4                        | 59.1   | 0.9                      | -0.3                        | 0.0  |
| P13        | 58.1               | 59.1              | 59.3                        | 59.1   | 1.0                      | -0.2                        | 0.0  |
| P14        | 58.2               | 59.1              | 59.4                        | 59.1   | 0.9                      | -0.3                        | 0.0  |
| P15        | 58.3               | 59.2              | 59.4                        | 59.2   | 0.9                      | -0.2                        | 0.0  |
| P16        | 58.4               | 59.3              | 59.5                        | 59.3   | 0.9                      | -0.2                        | 0.0  |
| P17        | 58.5               | 59.4              | 59.6                        | 59.4   | 0.9                      | -0.2                        | 0.0  |
| P18        | 58.6               | 59.4              | 59.6                        | 59.4   | 0.8                      | -0.2                        | 0.0  |
| P19        | 58.6               | 59.5              | 59.6                        | 59.5   | 0.9                      | -0.1                        | 0.0  |
| P20        | 58.7               | 59.5              | 59.7                        | 59.5   | 0.8                      | -0.2                        | 0.0  |
| P21        | 58.9               | 59.6              | 59.8                        | 59.6   | 0.7                      | -0.2                        | 0.0  |
| P22        | 59.0               | 59.7              | 59.9                        | 59.7   | 0.7                      | -0.2                        | 0.0  |
| P23        | 59.2               | 59.8              | 60.0                        | 59.8   | 0.6                      | -0.2                        | 0.0  |
| P24        | 59.3               | 59.9              | 60.1                        | 59.9   | 0.6                      | -0.2                        | 0.0  |
| P25        | 59.4               | 60.0              | 60.1                        | 60.0   | 0.6                      | -0.1                        | 0.0  |
| P26        | 59.5               | 60.0              | 60.1                        | 60.0   | 0.5                      | -0.1                        | 0.0  |
| P27        | 59.4               | 59.8              | 60.0                        | 59.8   | 0.4                      | -0.2                        | 0.0  |
| P28        | 59.2               | 59.6              | 59.8                        | 59.6   | 0.4                      | -0.2                        | 0.0  |
| P29        | 58.9               | 59.3              | 59.4                        | 59.3   | 0.4                      | -0.1                        | 0.0  |
| P30        | 58.6               | 58.9              | 59.1                        | 59.0   | 0.3                      | -0.2                        | -0.1   |
| P31        | 58.3               | 58.7              | 58.9                        | 58.8   | 0.4                      | -0.2                        | -0.1   |
| P32        | 58.3               | 58.8              | 58.9                        | 58.8   | 0.5                      | -0.1                        | 0.0  |
| P33        | 58.6               | 59.3              | 59.4                        | 59.3   | 0.7                      | -0.1                        | 0.0  |
| P34        | 59.0               | 59.8              | 59.9                        | 59.8   | 0.8                      | -0.1                        | 0.0  |
| P35        | 59.2               | 60.0              | 60.1                        | 60.0   | 0.8                      | -0.1                        | 0.0  |
| P36        | 59.3               | 60.1              | 60.2                        | 60.1   | 0.8                      | -0.1                        | 0.0  |
| P37        | 59.2               | 60.0              | 60.1                        | 60.0   | 0.8                      | -0.1                        | 0.0  |
| P38        | 58.7               | 59.5              | 59.6                        | 59.5   | 0.8                      | -0.1                        | 0.0  |
| P39        | 57.9               | 58.5              | 58.6                        | 58.5   | 0.6                      | -0.1                        | 0.0  |
| P40        | 57.0               | 57.5              | 57.6                        | 57.5   | 0.5                      | -0.1                        | 0.0  |
| P41        | 56.3               | 56.7              | 56.9                        | 56.7   | 0.4                      | -0.2                        | 0.0  |
| P42        | 55.8               | 56.2              | 56.3                        | 56.2   | 0.4                      | -0.1                        | 0.0  |
| P43        | 55.2               | 55.6              | 55.8                        | 55.6   | 0.4                      | -0.2                        | 0.0  |
| P44        | 54.8               | 55.2              | 55.3                        | 55.2   | 0.4                      | -0.1                        | 0.0  |
| P45        | 54.5               | 54.9              | 55.0                        | 54.9   | 0.4                      | -0.1                        | 0.0  |
| P46        | 54.2               | 54.6              | 54.7                        | 54.6   | 0.4                      | -0.1                        | 0.0  |
| P47        | 54.0               | 54.3              | 54.4                        | 54.3   | 0.3                      | -0.1                        | 0.0  |
| P48        | 53.8               | 54.2              | 54.3                        | 54.2   | 0.4                      | -0.1                        | 0.0  |
| P49        | 53.7               | 54.1              | 54.1                        | 54.1   | 0.4                      | 0.0                         | 0.0  |
| P50        | 53.4               | 53.8              | 53.9                        | 53.8   | 0.4                      | -0.1                        | 0.0  |
| P51        | 53.1               | 53.5              | 53.6                        | 53.5   | 0.4                      | -0.1                        | 0.0  |
| P52        | 52.7               | 53.1              | 53.2                        | 53.1   | 0.4                      | -0.1                        | 0.0  |
| P53        | 52.2               | 52.7              | 52.8                        | 52.7   | 0.5                      | -0.1                        | 0.0  |
| P54        | 51.7               | 52.4              | 52.4                        | 52.4   | 0.7                      | 0.0                         | 0.0  |
| P55        | 51.3               | 52.1              | 52.1                        | 52.1   | 0.8                      | 0.0                         | 0.0  |
| P56        | 51.0               | 51.8              | 51.9                        | 51.8   | 0.8                      | -0.1                        | 0.0  |
| P57        | 50.7               | 51.6              | 51.7                        | 51.6   | 0.9                      | -0.1                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| P58        | 50.6               | 51.5              | 51.6                        | 51.5   | 0.9                      | -0.1                        | 0.0  |
| P59        | 50.5               | 51.4              | 51.5                        | 51.4   | 0.9                      | -0.1                        | 0.0  |
| P60        | 50.4               | 51.4              | 51.4                        | 51.4   | 1.0                      | 0.0                         | 0.0  |
| P61        | 50.4               | 51.4              | 51.5                        | 51.4   | 1.0                      | -0.1                        | 0.0  |
| P62        | 50.5               | 51.5              | 51.5                        | 51.5   | 1.0                      | 0.0                         | 0.0  |
| P63        | 50.5               | 51.4              | 51.5                        | 51.4   | 0.9                      | -0.1                        | 0.0  |
| P64        | 50.6               | 51.5              | 51.6                        | 51.5   | 0.9                      | -0.1                        | 0.0  |
| P65        | 50.6               | 51.5              | 51.6                        | 51.5   | 0.9                      | -0.1                        | 0.0  |
| P66        | 50.6               | 51.5              | 51.6                        | 51.5   | 0.9                      | -0.1                        | 0.0  |
| Q01        | 57.9               | 58.6              | 58.9                        | 58.6   | 0.7                      | -0.3                        | 0.0  |
| Q02        | 58.1               | 58.8              | 59.1                        | 58.8   | 0.7                      | -0.3                        | 0.0  |
| Q03        | 58.4               | 59.0              | 59.3                        | 59.0   | 0.6                      | -0.3                        | 0.0  |
| Q04        | 58.5               | 59.1              | 59.5                        | 59.1   | 0.6                      | -0.4                        | 0.0  |
| Q05        | 58.5               | 59.2              | 59.5                        | 59.2   | 0.7                      | -0.3                        | 0.0  |
| Q06        | 58.5               | 59.2              | 59.5                        | 59.2   | 0.7                      | -0.3                        | 0.0  |
| Q07        | 58.4               | 59.1              | 59.4                        | 59.1   | 0.7                      | -0.3                        | 0.0  |
| Q08        | 58.1               | 58.9              | 59.2                        | 58.9   | 0.8                      | -0.3                        | 0.0  |
| Q09        | 57.8               | 58.6              | 58.9                        | 58.6   | 0.8                      | -0.3                        | 0.0  |
| Q10        | 57.5               | 58.4              | 58.7                        | 58.4   | 0.9                      | -0.3                        | 0.0  |
| Q11        | 57.3               | 58.3              | 58.5                        | 58.3   | 1.0                      | -0.2                        | 0.0  |
| Q12        | 57.2               | 58.1              | 58.4                        | 58.1   | 0.9                      | -0.3                        | 0.0  |
| Q13        | 57.1               | 58.1              | 58.3                        | 58.1   | 1.0                      | -0.2                        | 0.0  |
| Q14        | 57.2               | 58.1              | 58.3                        | 58.1   | 0.9                      | -0.2                        | 0.0  |
| Q15        | 57.3               | 58.2              | 58.4                        | 58.2   | 0.9                      | -0.2                        | 0.0  |
| Q16        | 57.4               | 58.3              | 58.5                        | 58.3   | 0.9                      | -0.2                        | 0.0  |
| Q17        | 57.6               | 58.4              | 58.5                        | 58.4   | 0.8                      | -0.1                        | 0.0  |
| Q18        | 57.7               | 58.5              | 58.6                        | 58.5   | 0.8                      | -0.1                        | 0.0  |
| Q19        | 57.7               | 58.5              | 58.7                        | 58.5   | 0.8                      | -0.2                        | 0.0  |
| Q20        | 57.8               | 58.6              | 58.7                        | 58.6   | 0.8                      | -0.1                        | 0.0  |
| Q21        | 57.9               | 58.7              | 58.8                        | 58.7   | 0.8                      | -0.1                        | 0.0  |
| Q22        | 58.1               | 58.8              | 58.9                        | 58.8   | 0.7                      | -0.1                        | 0.0  |
| Q23        | 58.3               | 58.9              | 59.0                        | 58.9   | 0.6                      | -0.1                        | 0.0  |
| Q24        | 58.5               | 59.1              | 59.2                        | 59.1   | 0.6                      | -0.1                        | 0.0  |
| Q25        | 58.6               | 59.2              | 59.3                        | 59.2   | 0.6                      | -0.1                        | 0.0  |
| Q26        | 58.7               | 59.2              | 59.3                        | 59.2   | 0.5                      | -0.1                        | 0.0  |
| Q27        | 58.6               | 59.1              | 59.2                        | 59.1   | 0.5                      | -0.1                        | 0.0  |
| Q28        | 58.5               | 58.9              | 59.0                        | 58.9   | 0.4                      | -0.1                        | 0.0  |
| Q29        | 58.2               | 58.6              | 58.7                        | 58.6   | 0.4                      | -0.1                        | 0.0  |
| Q30        | 57.9               | 58.4              | 58.5                        | 58.4   | 0.5                      | -0.1                        | 0.0  |
| Q31        | 57.8               | 58.3              | 58.4                        | 58.3   | 0.5                      | -0.1                        | 0.0  |
| Q32        | 57.9               | 58.5              | 58.6                        | 58.5   | 0.6                      | -0.1                        | 0.0  |
| Q33        | 58.3               | 59.0              | 59.1                        | 59.0   | 0.7                      | -0.1                        | 0.0  |
| Q34        | 58.8               | 59.6              | 59.6                        | 59.6   | 0.8                      | 0.0                         | 0.0  |
| Q35        | 58.9               | 59.8              | 59.8                        | 59.8   | 0.9                      | 0.0                         | 0.0  |
| Q36        | 59.0               | 59.9              | 59.9                        | 59.9   | 0.9                      | 0.0                         | 0.0  |
| Q37        | 59.0               | 59.8              | 59.9                        | 59.8   | 0.8                      | -0.1                        | 0.0  |
| Q38        | 58.6               | 59.4              | 59.5                        | 59.4   | 0.8                      | -0.1                        | 0.0  |
| Q39        | 57.9               | 58.6              | 58.7                        | 58.6   | 0.7                      | -0.1                        | 0.0  |
| Q40        | 57.1               | 57.6              | 57.7                        | 57.7   | 0.5                      | -0.1                        | -0.1   |
| Q41        | 56.4               | 56.9              | 57.0                        | 56.9   | 0.5                      | -0.1                        | 0.0  |
| Q42        | 55.9               | 56.3              | 56.4                        | 56.3   | 0.4                      | -0.1                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| Q43        | 55.5               | 55.9              | 56.0                        | 55.9   | 0.4                      | -0.1                        | 0.0  |
| Q44        | 55.1               | 55.5              | 55.6                        | 55.5   | 0.4                      | -0.1                        | 0.0  |
| Q45        | 54.8               | 55.2              | 55.3                        | 55.2   | 0.4                      | -0.1                        | 0.0  |
| Q46        | 54.6               | 55.0              | 55.0                        | 55.0   | 0.4                      | 0.0                         | 0.0  |
| Q47        | 54.3               | 54.7              | 54.8                        | 54.7   | 0.4                      | -0.1                        | 0.0  |
| Q48        | 54.2               | 54.5              | 54.6                        | 54.6   | 0.3                      | -0.1                        | -0.1   |
| Q49        | 54.1               | 54.4              | 54.5                        | 54.4   | 0.3                      | -0.1                        | 0.0  |
| Q50        | 53.8               | 54.2              | 54.3                        | 54.2   | 0.4                      | -0.1                        | 0.0  |
| Q51        | 53.5               | 53.9              | 54.0                        | 53.9   | 0.4                      | -0.1                        | 0.0  |
| Q52        | 53.1               | 53.7              | 53.7                        | 53.7   | 0.6                      | 0.0                         | 0.0  |
| Q53        | 52.7               | 53.3              | 53.4                        | 53.3   | 0.6                      | -0.1                        | 0.0  |
| Q54        | 52.3               | 53.0              | 53.1                        | 53.0   | 0.7                      | -0.1                        | 0.0  |
| Q55        | 52.0               | 52.8              | 52.9                        | 52.8   | 0.8                      | -0.1                        | 0.0  |
| Q56        | 51.8               | 52.6              | 52.7                        | 52.6   | 0.8                      | -0.1                        | 0.0  |
| Q57        | 51.6               | 52.5              | 52.6                        | 52.5   | 0.9                      | -0.1                        | 0.0  |
| Q58        | 51.5               | 52.5              | 52.6                        | 52.5   | 1.0                      | -0.1                        | 0.0  |
| Q59        | 51.5               | 52.5              | 52.6                        | 52.5   | 1.0                      | -0.1                        | 0.0  |
| Q60        | 51.5               | 52.5              | 52.6                        | 52.5   | 1.0                      | -0.1                        | 0.0  |
| Q61        | 51.6               | 52.6              | 52.7                        | 52.6   | 1.0                      | -0.1                        | 0.0  |
| Q62        | 51.7               | 52.7              | 52.8                        | 52.7   | 1.0                      | -0.1                        | 0.0  |
| Q63        | 51.6               | 52.6              | 52.7                        | 52.6   | 1.0                      | -0.1                        | 0.0  |
| Q64        | 51.7               | 52.7              | 52.8                        | 52.7   | 1.0                      | -0.1                        | 0.0  |
| Q65        | 51.7               | 52.7              | 52.7                        | 52.7   | 1.0                      | 0.0                         | 0.0  |
| Q66        | 51.7               | 52.7              | 52.7                        | 52.7   | 1.0                      | 0.0                         | 0.0  |
| R01        | 57.9               | 58.6              | 58.9                        | 58.6   | 0.7                      | -0.3                        | 0.0  |
| R02        | 58.1               | 58.8              | 59.1                        | 58.8   | 0.7                      | -0.3                        | 0.0  |
| R03        | 58.2               | 58.9              | 59.2                        | 58.9   | 0.7                      | -0.3                        | 0.0  |
| R04        | 58.3               | 59.0              | 59.3                        | 59.0   | 0.7                      | -0.3                        | 0.0  |
| R05        | 58.3               | 58.9              | 59.2                        | 58.9   | 0.6                      | -0.3                        | 0.0  |
| R06        | 58.1               | 58.8              | 59.1                        | 58.8   | 0.7                      | -0.3                        | 0.0  |
| R07        | 57.9               | 58.6              | 58.9                        | 58.6   | 0.7                      | -0.3                        | 0.0  |
| R08        | 57.5               | 58.3              | 58.6                        | 58.3   | 0.8                      | -0.3                        | 0.0  |
| R09        | 57.2               | 58.0              | 58.3                        | 58.0   | 0.8                      | -0.3                        | 0.0  |
| R10        | 56.9               | 57.7              | 58.0                        | 57.8   | 0.8                      | -0.3                        | -0.1   |
| R11        | 56.6               | 57.5              | 57.8                        | 57.6   | 0.9                      | -0.3                        | -0.1   |
| R12        | 56.5               | 57.4              | 57.6                        | 57.4   | 0.9                      | -0.2                        | 0.0  |
| R13        | 56.4               | 57.3              | 57.5                        | 57.3   | 0.9                      | -0.2                        | 0.0  |
| R14        | 56.5               | 57.4              | 57.6                        | 57.4   | 0.9                      | -0.2                        | 0.0  |
| R15        | 56.6               | 57.5              | 57.6                        | 57.5   | 0.9                      | -0.1                        | 0.0  |
| R16        | 56.8               | 57.6              | 57.7                        | 57.6   | 0.8                      | -0.1                        | 0.0  |
| R17        | 56.9               | 57.7              | 57.9                        | 57.7   | 0.8                      | -0.2                        | 0.0  |
| R18        | 57.1               | 57.8              | 57.9                        | 57.8   | 0.7                      | -0.1                        | 0.0  |
| R19        | 57.2               | 57.9              | 58.0                        | 57.9   | 0.7                      | -0.1                        | 0.0  |
| R20        | 57.3               | 57.9              | 58.1                        | 57.9   | 0.6                      | -0.2                        | 0.0  |
| R21        | 57.4               | 58.0              | 58.1                        | 58.0   | 0.6                      | -0.1                        | 0.0  |
| R22        | 57.5               | 58.2              | 58.3                        | 58.2   | 0.7                      | -0.1                        | 0.0  |
| R23        | 57.7               | 58.4              | 58.4                        | 58.4   | 0.7                      | 0.0                         | 0.0  |
| R24        | 58.0               | 58.6              | 58.7                        | 58.6   | 0.6                      | -0.1                        | 0.0  |
| R25        | 58.2               | 58.7              | 58.8                        | 58.7   | 0.5                      | -0.1                        | 0.0  |
| R26        | 58.2               | 58.8              | 58.9                        | 58.8   | 0.6                      | -0.1                        | 0.0  |
| R27        | 58.2               | 58.7              | 58.8                        | 58.7   | 0.5                      | -0.1                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| R28        | 58.1               | 58.6              | 58.7                        | 58.6   | 0.5                      | -0.1                        | 0.0  |
| R29        | 57.9               | 58.3              | 58.4                        | 58.3   | 0.4                      | -0.1                        | 0.0  |
| R30        | 57.6               | 58.1              | 58.2                        | 58.1   | 0.5                      | -0.1                        | 0.0  |
| R31        | 57.6               | 58.1              | 58.2                        | 58.1   | 0.5                      | -0.1                        | 0.0  |
| R32        | 57.8               | 58.4              | 58.5                        | 58.4   | 0.6                      | -0.1                        | 0.0  |
| R33        | 58.2               | 59.0              | 59.0                        | 59.0   | 0.8                      | 0.0                         | 0.0  |
| R34        | 58.7               | 59.5              | 59.5                        | 59.5   | 0.8                      | 0.0                         | 0.0  |
| R35        | 58.8               | 59.6              | 59.7                        | 59.6   | 0.8                      | -0.1                        | 0.0  |
| R36        | 58.8               | 59.7              | 59.7                        | 59.7   | 0.9                      | 0.0                         | 0.0  |
| R37        | 58.8               | 59.6              | 59.7                        | 59.6   | 0.8                      | -0.1                        | 0.0  |
| R38        | 58.6               | 59.3              | 59.4                        | 59.3   | 0.7                      | -0.1                        | 0.0  |
| R39        | 58.0               | 58.7              | 58.8                        | 58.7   | 0.7                      | -0.1                        | 0.0  |
| R40        | 57.3               | 57.9              | 58.0                        | 57.9   | 0.6                      | -0.1                        | 0.0  |
| R41        | 56.7               | 57.2              | 57.3                        | 57.2   | 0.5                      | -0.1                        | 0.0  |
| R42        | 56.2               | 56.7              | 56.8                        | 56.7   | 0.5                      | -0.1                        | 0.0  |
| R43        | 55.9               | 56.3              | 56.4                        | 56.3   | 0.4                      | -0.1                        | 0.0  |
| R44        | 55.6               | 56.0              | 56.1                        | 56.0   | 0.4                      | -0.1                        | 0.0  |
| R45        | 55.3               | 55.7              | 55.8                        | 55.7   | 0.4                      | -0.1                        | 0.0  |
| R46        | 55.1               | 55.5              | 55.5                        | 55.5   | 0.4                      | 0.0                         | 0.0  |
| R47        | 54.8               | 55.2              | 55.3                        | 55.2   | 0.4                      | -0.1                        | 0.0  |
| R48        | 54.6               | 55.1              | 55.1                        | 55.1   | 0.5                      | 0.0                         | 0.0  |
| R49        | 54.5               | 54.9              | 55.0                        | 54.9   | 0.4                      | -0.1                        | 0.0  |
| R50        | 54.2               | 54.7              | 54.8                        | 54.7   | 0.5                      | -0.1                        | 0.0  |
| R51        | 53.9               | 54.5              | 54.5                        | 54.5   | 0.6                      | 0.0                         | 0.0  |
| R52        | 53.6               | 54.3              | 54.3                        | 54.3   | 0.7                      | 0.0                         | 0.0  |
| R53        | 53.3               | 54.0              | 54.1                        | 54.0   | 0.7                      | -0.1                        | 0.0  |
| R54        | 53.0               | 53.8              | 53.9                        | 53.8   | 0.8                      | -0.1                        | 0.0  |
| R55        | 52.7               | 53.6              | 53.7                        | 53.6   | 0.9                      | -0.1                        | 0.0  |
| R56        | 52.6               | 53.5              | 53.6                        | 53.5   | 0.9                      | -0.1                        | 0.0  |
| R57        | 52.5               | 53.5              | 53.5                        | 53.5   | 1.0                      | 0.0                         | 0.0  |
| R58        | 52.5               | 53.5              | 53.5                        | 53.5   | 1.0                      | 0.0                         | 0.0  |
| R59        | 52.5               | 53.5              | 53.6                        | 53.5   | 1.0                      | -0.1                        | 0.0  |
| R60        | 52.5               | 53.5              | 53.6                        | 53.5   | 1.0                      | -0.1                        | 0.0  |
| R61        | 52.6               | 53.6              | 53.7                        | 53.6   | 1.0                      | -0.1                        | 0.0  |
| R62        | 52.6               | 53.7              | 53.7                        | 53.7   | 1.1                      | 0.0                         | 0.0  |
| R63        | 52.4               | 53.5              | 53.5                        | 53.5   | 1.1                      | 0.0                         | 0.0  |
| R64        | 52.5               | 53.6              | 53.6                        | 53.6   | 1.1                      | 0.0                         | 0.0  |
| R65        | 52.4               | 53.4              | 53.5                        | 53.4   | 1.0                      | -0.1                        | 0.0  |
| R66        | 52.3               | 53.3              | 53.4                        | 53.3   | 1.0                      | -0.1                        | 0.0  |
| S01        | 57.9               | 58.6              | 58.9                        | 58.6   | 0.7                      | -0.3                        | 0.0  |
| S02        | 58.1               | 58.8              | 59.0                        | 58.8   | 0.7                      | -0.2                        | 0.0  |
| S03        | 58.2               | 58.8              | 59.1                        | 58.8   | 0.6                      | -0.3                        | 0.0  |
| S04        | 58.1               | 58.8              | 59.1                        | 58.8   | 0.7                      | -0.3                        | 0.0  |
| S05        | 58.0               | 58.7              | 59.0                        | 58.7   | 0.7                      | -0.3                        | 0.0  |
| S06        | 57.8               | 58.5              | 58.8                        | 58.5   | 0.7                      | -0.3                        | 0.0  |
| S07        | 57.5               | 58.2              | 58.5                        | 58.2   | 0.7                      | -0.3                        | 0.0  |
| S08        | 57.1               | 57.9              | 58.2                        | 57.9   | 0.8                      | -0.3                        | 0.0  |
| S09        | 56.8               | 57.6              | 57.9                        | 57.6   | 0.8                      | -0.3                        | 0.0  |
| S10        | 56.4               | 57.3              | 57.6                        | 57.3   | 0.9                      | -0.3                        | 0.0  |
| S11        | 56.2               | 57.1              | 57.3                        | 57.1   | 0.9                      | -0.2                        | 0.0  |
| S12        | 56.0               | 56.9              | 57.1                        | 56.9   | 0.9                      | -0.2                        | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| S13        | 55.9               | 56.9              | 57.0                        | 56.9   | 1.0                      | -0.1                        | 0.0  |
| S14        | 56.0               | 56.9              | 57.1                        | 56.9   | 0.9                      | -0.2                        | 0.0  |
| S15        | 56.2               | 57.0              | 57.2                        | 57.0   | 0.8                      | -0.2                        | 0.0  |
| S16        | 56.4               | 57.2              | 57.3                        | 57.2   | 0.8                      | -0.1                        | 0.0  |
| S17        | 56.6               | 57.3              | 57.4                        | 57.3   | 0.7                      | -0.1                        | 0.0  |
| S18        | 56.7               | 57.4              | 57.5                        | 57.4   | 0.7                      | -0.1                        | 0.0  |
| S19        | 56.8               | 57.5              | 57.6                        | 57.5   | 0.7                      | -0.1                        | 0.0  |
| S20        | 56.9               | 57.6              | 57.7                        | 57.6   | 0.7                      | -0.1                        | 0.0  |
| S21        | 57.1               | 57.7              | 57.8                        | 57.7   | 0.6                      | -0.1                        | 0.0  |
| S22        | 57.3               | 57.9              | 58.0                        | 57.9   | 0.6                      | -0.1                        | 0.0  |
| S23        | 57.5               | 58.1              | 58.2                        | 58.1   | 0.6                      | -0.1                        | 0.0  |
| S24        | 57.8               | 58.4              | 58.5                        | 58.4   | 0.6                      | -0.1                        | 0.0  |
| S25        | 58.0               | 58.6              | 58.7                        | 58.6   | 0.6                      | -0.1                        | 0.0  |
| S26        | 58.1               | 58.7              | 58.8                        | 58.7   | 0.6                      | -0.1                        | 0.0  |
| S27        | 58.1               | 58.7              | 58.7                        | 58.7   | 0.6                      | 0.0                         | 0.0  |
| S28        | 58.0               | 58.5              | 58.6                        | 58.5   | 0.5                      | -0.1                        | 0.0  |
| S29        | 57.8               | 58.3              | 58.4                        | 58.3   | 0.5                      | -0.1                        | 0.0  |
| S30        | 57.6               | 58.1              | 58.2                        | 58.1   | 0.5                      | -0.1                        | 0.0  |
| S31        | 57.6               | 58.2              | 58.3                        | 58.2   | 0.6                      | -0.1                        | 0.0  |
| S32        | 57.9               | 58.5              | 58.6                        | 58.5   | 0.6                      | -0.1                        | 0.0  |
| S33        | 58.3               | 59.0              | 59.0                        | 59.0   | 0.7                      | 0.0                         | 0.0  |
| S34        | 58.6               | 59.4              | 59.4                        | 59.4   | 0.8                      | 0.0                         | 0.0  |
| S35        | 58.6               | 59.4              | 59.5                        | 59.4   | 0.8                      | -0.1                        | 0.0  |
| S36        | 58.6               | 59.4              | 59.5                        | 59.4   | 0.8                      | -0.1                        | 0.0  |
| S37        | 58.6               | 59.4              | 59.4                        | 59.4   | 0.8                      | 0.0                         | 0.0  |
| S38        | 58.4               | 59.2              | 59.2                        | 59.2   | 0.8                      | 0.0                         | 0.0  |
| S39        | 58.0               | 58.7              | 58.7                        | 58.7   | 0.7                      | 0.0                         | 0.0  |
| S40        | 57.4               | 58.0              | 58.1                        | 58.0   | 0.6                      | -0.1                        | 0.0  |
| S41        | 56.9               | 57.5              | 57.6                        | 57.5   | 0.6                      | -0.1                        | 0.0  |
| S42        | 56.5               | 57.0              | 57.1                        | 57.0   | 0.5                      | -0.1                        | 0.0  |
| S43        | 56.2               | 56.7              | 56.7                        | 56.7   | 0.5                      | 0.0                         | 0.0  |
| S44        | 55.9               | 56.4              | 56.5                        | 56.4   | 0.5                      | -0.1                        | 0.0  |
| S45        | 55.6               | 56.1              | 56.2                        | 56.1   | 0.5                      | -0.1                        | 0.0  |
| S46        | 55.4               | 55.9              | 55.9                        | 55.9   | 0.5                      | 0.0                         | 0.0  |
| S47        | 55.2               | 55.7              | 55.7                        | 55.7   | 0.5                      | 0.0                         | 0.0  |
| S48        | 55.0               | 55.5              | 55.6                        | 55.5   | 0.5                      | -0.1                        | 0.0  |
| S49        | 54.8               | 55.4              | 55.4                        | 55.4   | 0.6                      | 0.0                         | 0.0  |
| S50        | 54.5               | 55.2              | 55.2                        | 55.2   | 0.7                      | 0.0                         | 0.0  |
| S51        | 54.3               | 55.0              | 55.0                        | 55.0   | 0.7                      | 0.0                         | 0.0  |
| S52        | 54.0               | 54.8              | 54.8                        | 54.8   | 0.8                      | 0.0                         | 0.0  |
| S53        | 53.8               | 54.6              | 54.6                        | 54.6   | 0.8                      | 0.0                         | 0.0  |
| S54        | 53.5               | 54.4              | 54.5                        | 54.4   | 0.9                      | -0.1                        | 0.0  |
| S55        | 53.4               | 54.3              | 54.4                        | 54.3   | 0.9                      | -0.1                        | 0.0  |
| S56        | 53.2               | 54.2              | 54.3                        | 54.2   | 1.0                      | -0.1                        | 0.0  |
| S57        | 53.1               | 54.2              | 54.2                        | 54.2   | 1.1                      | 0.0                         | 0.0  |
| S58        | 53.1               | 54.1              | 54.2                        | 54.1   | 1.0                      | -0.1                        | 0.0  |
| S59        | 53.1               | 54.1              | 54.2                        | 54.1   | 1.0                      | -0.1                        | 0.0  |
| S60        | 53.0               | 54.1              | 54.1                        | 54.1   | 1.1                      | 0.0                         | 0.0  |
| S61        | 53.0               | 54.0              | 54.1                        | 54.0   | 1.0                      | -0.1                        | 0.0  |
| S62        | 53.1               | 54.2              | 54.2                        | 54.2   | 1.1                      | 0.0                         | 0.0  |
| S63        | 52.9               | 54.0              | 54.0                        | 54.0   | 1.1                      | 0.0                         | 0.0  |

| Grid Point | 2007 Baseline CNEL | 2014 Project CNEL | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL | 2014 Project CNEL Minus: |                             |  |
|------------|--------------------|-------------------|-----------------------------|--|--------------------------|-----------------------------|--|
|            |                    |                   |                             |  | 2007 Baseline CNEL       | 2014 Alt. 1 No-Project CNEL | 2014 Alt. 2 Exempt Stage 3 and 4 Aircraft CNEL |
| S64        | 52.8               | 53.8              | 53.9                        | 53.8   | 1.0                      | -0.1                        | 0.0  |
| S65        | 52.6               | 53.6              | 53.6                        | 53.6   | 1.0                      | 0.0                         | 0.0  |
| S66        | 52.4               | 53.4              | 53.5                        | 53.4   | 1.0                      | -0.1                        | 0.0  |



# B.8

## SUPPLEMENTAL BERKELEY JETS ANALYSIS

### B.8.1 Introduction

This appendix presents additional analysis to supplement the “Berkeley Jets” single-event noise analysis discussed in Section 10.2.

Specifically, this section presents analysis to take into consideration the fact that the operations that would be diverted to other airports from VNY under the proposed project and Alternative 2 (Exempted Stage 3 and 4 Aircraft Alternative) would be in relatively noisy aircraft. To take this factor into account, the number and frequency of potential diversions were categorized according to their relative “noisiness” and compared to the underlying frequency of operations at the airports in the same categories. The fundamental purpose of this supplemental analysis was to determine whether the diversions would result in a dramatic shift in the overall distribution of operations by noisiness. The result of this additional analysis was consistent with the preceding AEM and overall statistical reviews (i.e., the diversions would not result in a significant change in activity at the airports).

#### Summary of Methodology

Information on numbers of operations and associated sound levels is provided for each of the five diversion airports by time of day (day, evening, and night) for the forecast year (2014 or 2016, as discussed in Section 1.4 of the EIR) that is relevant to each airport.

Single-event noise exposure is presented in terms of the departure Sound Exposure Level (SEL). As discussed in appendix section B.5.7, SEL is the most commonly used measure of the total noise exposure associated with an individual aircraft noise event. Departure SEL values are used because they generally are louder, affect more people, and are more likely to be noticed than arrival levels; therefore, use of departure SELs presents “worst-case” information.

Obviously, the SEL values vary depending on location. To examine the noise levels of single events, selection of a specific location is necessary and appropriate. Hence, the SEL values are those estimated to occur 15,000 feet from the start of the takeoff

roll, directly under the flight path. This location is selected to be neither very close to nor too distant from an airport.


Figure B.8.1 shows the SEL “footprint” of aircraft that produce different sound levels at 15,000 feet from start of takeoff. They are sorted by the level at this distance, and the vertical line identifies this 15,000-foot distance. (For reference, an SEL of 70 dB is about the sound level that just starts to produce some speech interference.) These plots may not be exactly the shapes of the sound levels produced by diverted aircraft, but they do show how different the areas of sound exposure can be. Note that for two of the loudest jets (Gulfstream II and Gulfstream III), the footprint shows an increase of thrust occurring at about 6 miles. This increase in thrust may not occur for all diverted jets that produce these sound levels.

In the following sections, fleet mixes and operations numbers by single-event levels are summarized for each potential diversion airport. An initial table gives the baseline and diverted fleet mixes in percentages by common aircraft category. This table shows how the diverted fleet compares with the existing fleet. It also permits some interpretation of the following charts and tables that give the distribution of SEL values for the existing and diverted fleets. Next, a figure shows the distances to 15,000 feet from start of takeoff for each runway of the subject airport.

Finally, for day, evening, and night (when there are diverted operations in each of those periods), bar charts show the distribution of SEL values for the baseline fleet (no diversions) and for both the baseline and the diversion fleet, and a table gives the numbers of operations and the percent increases for each SEL value.

**Figure B.8.1** Comparison of SEL Values Produced by Aircraft Types with Noise Levels at 15,000 Feet from Start of Takeoff Roll Similar to the SEL Values of Diverted Types

Source: HMMH

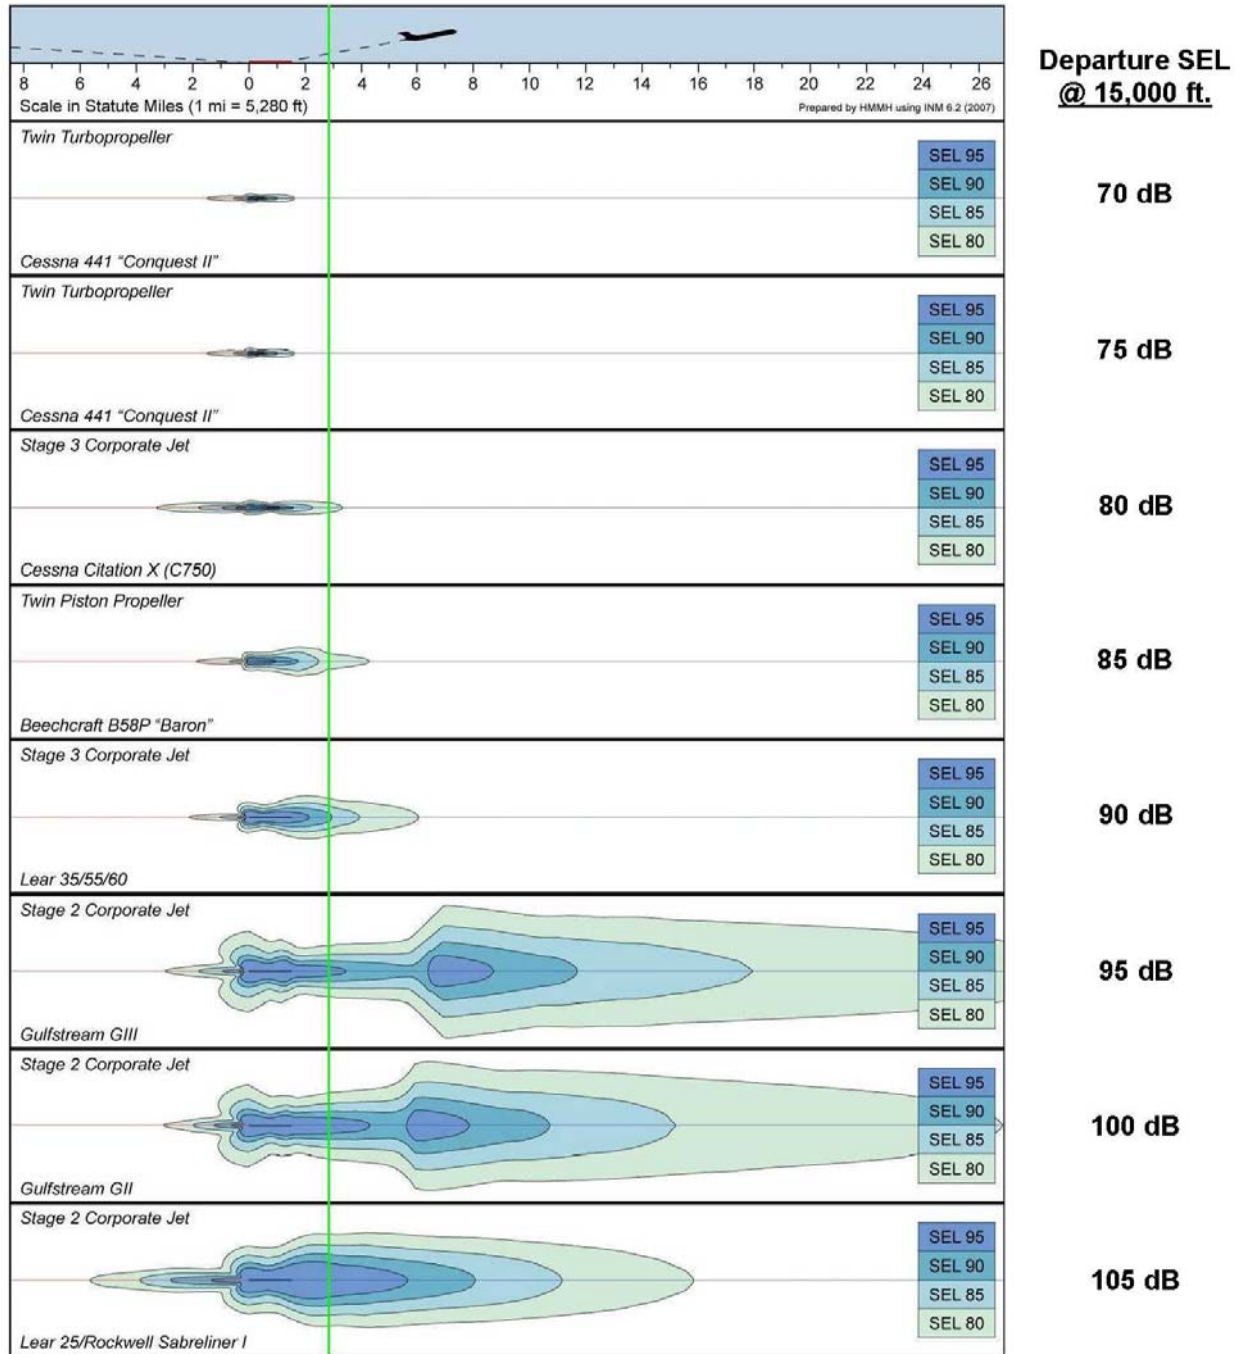

### Los Angeles International Airport (LAX)

Table B.8.1 provides relative fleet mixes for baseline and diverted operations for LAX. This table shows that most baseline daytime operations, before diverted aircraft use the airport, are either air carrier jets or regional jets (66% and 23%, respectively, during the day). The aircraft expected to be diverted to LAX from VNY during the day would be primarily business jets and air carrier jets.

**Table B.8.1** Baseline and Diverted Fleet Mixes for LAX

Source: HMMH

| Aircraft Group     | LAX Departure Operations Distribution by Aircraft Group |          |                          |          |                        |          |
|--------------------|---|----------|--------------------------|----------|------------------------|----------|
|                    | Day (7 a.m.–7 p.m.)                                     |          | Evening (7 p.m.–10 p.m.) |          | Night (10 p.m.–7 a.m.) |          |
|                    | Baseline  | Diverted | Baseline                 | Diverted | Baseline               | Diverted |
| Business Jets      | 4%  | 77%      | 2%                       | 11%      | 2%                     | 100%     |
| Regional Jets      | 23%   | --       | 24%                      | --       | 11%                    | --       |
| Air Carrier Jets   | 66%   | 23%      | 62%                      | 89%      | 82%                    | --       |
| Turboprop Aircraft | 1%  | --       | 3%                       | --       | < 1%                   | --       |
| Propeller Aircraft | < 1%  | --       | < 1%                     | --       | < 1%                   | --       |
| Military Aircraft  | 5%  | --       | 8%                       | --       | 2%                     | --       |
| Helicopters        | < 1%  | --       | --                       | --       | 2%                     | --       |
| Total              | 100%  | 100%     | 100%                     | 100%     | 100%                   | 100%     |

Figure B.8.2 identifies the regions that are 15,000 feet from start of takeoff roll (the departure SEL values are given in the following figures and tables).

Figure B.8.3 and Figure B.8.4 show the distributions of the SEL values for the two conditions—baseline with no diversions and baseline compared to diversions. Each bar, with its labels, shows how many departures on an average day will produce SEL values in each of the ranges shown, from 70 dB to 110 dB. Note that because diverted operations are so few compared with the baseline, Figure B.8.4 must have an expanded vertical axis to make the numbers of diverted operations visible.


While the diverted operations produce SEL values comparable to the higher baseline levels, there are relatively few diverted operations; all diverted operations are much less than one per day. Table B.8.2 is provided to help interpret such small numbers of operations. When total departures are less than one, the column “Days Between” translates the number of operations into how many days will occur between each operation at the given value of SEL. Hence, departures that produce SEL in the range of 90 dB will occur approximately every 273 days. The last column gives the percent increase in departures in each SEL range that results from the diverted operations. The following two pages provide similar information for evening and night departures.

It should be noted that this diversion analysis applies only to the proposed project, since no aircraft would be diverted to LAX under either Alternative 1 (No-Project Alternative) or Alternative 2 (Exempted Stage 3 and 4 Aircraft Alternative).

**Figure B.8.2** LAX—Regions 15,000 feet from Start of Takeoff Roll

Source:

HMMH

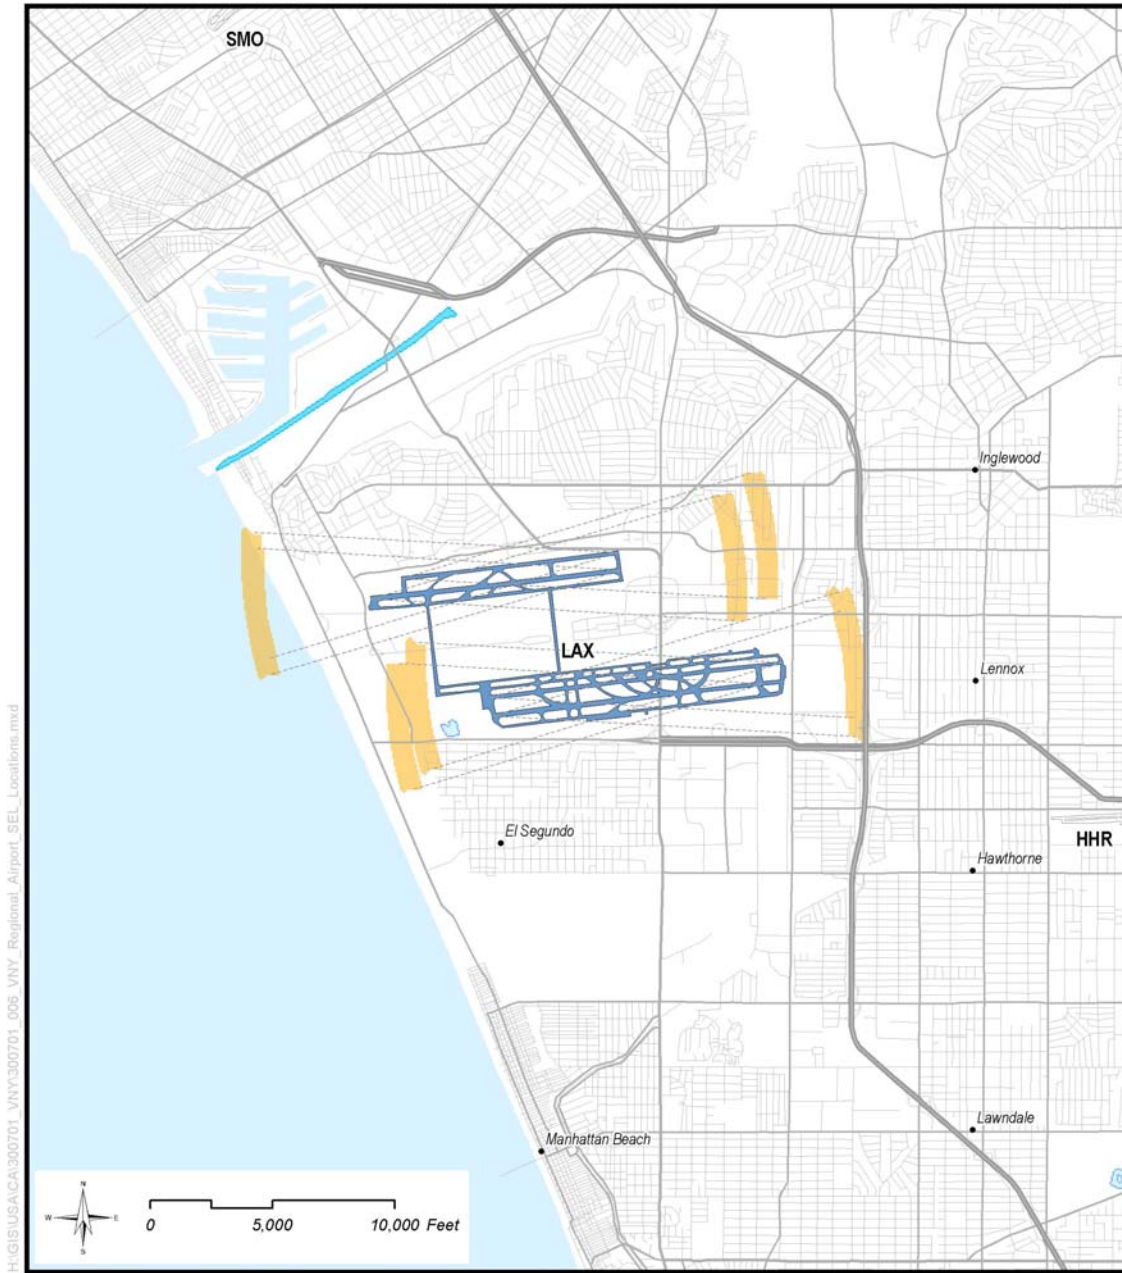


Example regions, 15,000ft from start of take off roll

**Los Angeles Int. Airport**  
Representative Computed Departure SEL  
Locations for VNY CEQA Diversion Airports


Basemap: United States Department of Agriculture Geospatial Data Gateway; United States Geological Survey (USGS); Environmental Systems Research Institute (ESRI)



**Figure B.8.3** LAX—Daytime Distribution of Baseline SEL Values  
Source: HMMH

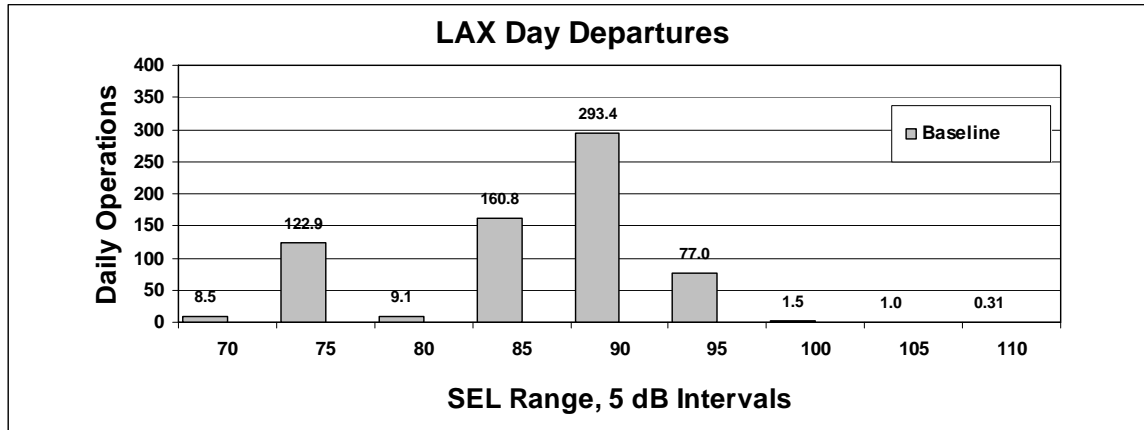

**Figure B.8.4** LAX—Daytime Distributions of Baseline and Diverted SEL Values  
Source: HMMH

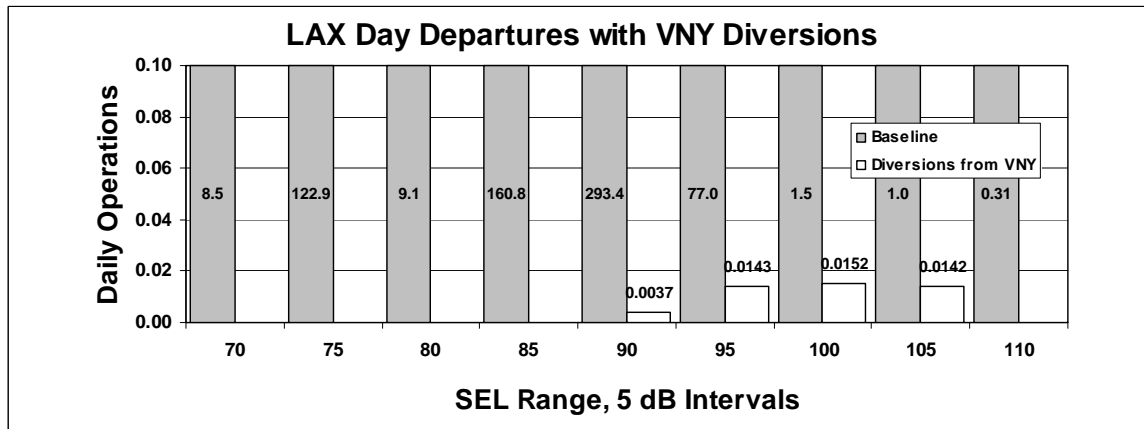

**Table B.8.2** LAX—Average Day (7 a.m.–7 p.m.) Departures with and without Diverted Operations


Source: HMMH

| SEL Range | LAX Average Day Departures—2014 |                     |                 |                          | Approx. Days between Diversions |
|-----------|---------------------------------|---------------------|-----------------|--------------------------|---------------------------------|
|           | Without Diversions              | Forecast Diversions | With Diversions | % Increase in Departures |                                 |
| 70        | 8.5                             | --                  | 8.5             | --                       | --                              |
| 75        | 122.9                           | --                  | 122.9           | --                       | --                              |
| 80        | 9.1                             | --                  | 9.1             | --                       | --                              |
| 85        | 160.8                           | --                  | 160.8           | --                       | --                              |
| 90        | 293.45                          | .0037               | 293.45          | 0.001%                   | 273                             |
| 95        | 76.98                           | .0143               | 77.00           | 0.02%                    | 70                              |
| 100       | 1.52                            | .0152               | 1.53            | 1.0%                     | 66                              |
| 105       | 1.03                            | .0142               | 1.04            | 1.4%                     | 70                              |
| 110       | 0.3                             | --                  | 0.31            | --                       | --                              |
| Total     | 674.558                         | .0475               | 674.61          | 0.01%                    | 21                              |


[Note: Numbers may not add due to rounding. More decimal places shown for diverted operations because of small numbers involved.]

**Figure B.8.5** LAX—Evening Distribution of Baseline SEL Values

Source: HMMH

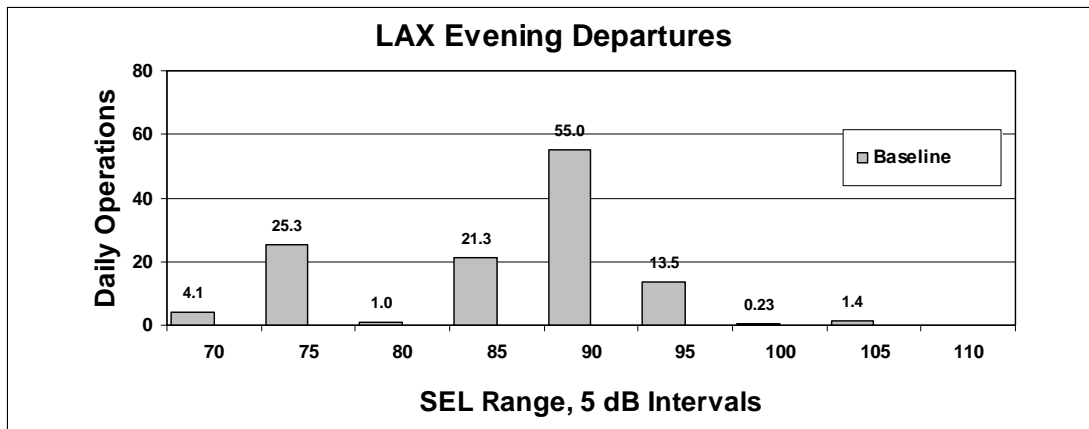

**Figure B.8.6** LAX—Evening Distributions of Baseline and Diverted SEL Values  
 Source: HMMH

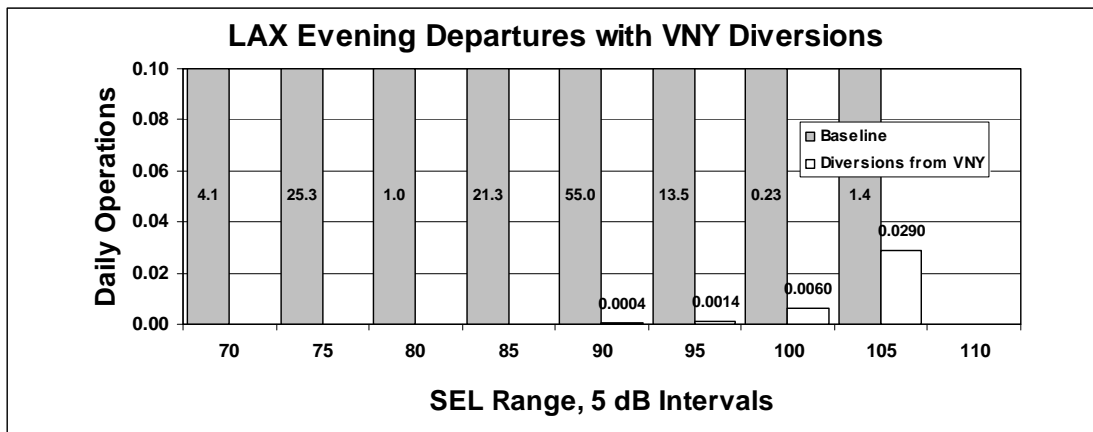

**Table B.8.3** LAX—Average Evening (7 p.m.–10 p.m.) Departures with and without Diverted Operations

Source: HMMH


| SEL Range | LAX Average Evening Departures—2014 |                     |                 |                          | Approx. Days between Diversions |
|-----------|-------------------------------------|---------------------|-----------------|--------------------------|---------------------------------|
|           | Without Diversions                  | Forecast Diversions | With Diversions | % Increase in Departures |                                 |
| 70        | 4.1                                 | --                  | 4.1             | --                       | --                              |
| 75        | 25.27                               | --                  | 25.27           | --                       | --                              |
| 80        | 1.0                                 | --                  | 1.0             | --                       | --                              |
| 85        | 21.3                                | --                  | 21.308          | --                       | --                              |
| 90        | 54.97                               | .0004               | 54.973          | 0.001%                   | 2,271                           |
| 95        | 13.54                               | .0014               | 13.543          | 0.010%                   | 711                             |
| 100       | 0.23                                | .0060               | 0.24            | 2.6%                     | 168                             |
| 105       | 1.45                                | .0290               | 1.474           | 2.0%                     | 34                              |
| 110       | --                                  | --                  | --              | --                       | --                              |
| Total     | 121.88                              | .0368               | 121.92          | 0.03%                    | 27                              |

[Note: Numbers may not add due to rounding. More decimal places shown for diverted operations because of small numbers involved.]




**Figure B.8.7** LAX—Nighttime Distribution of Baseline SEL Values

Source: HMMH

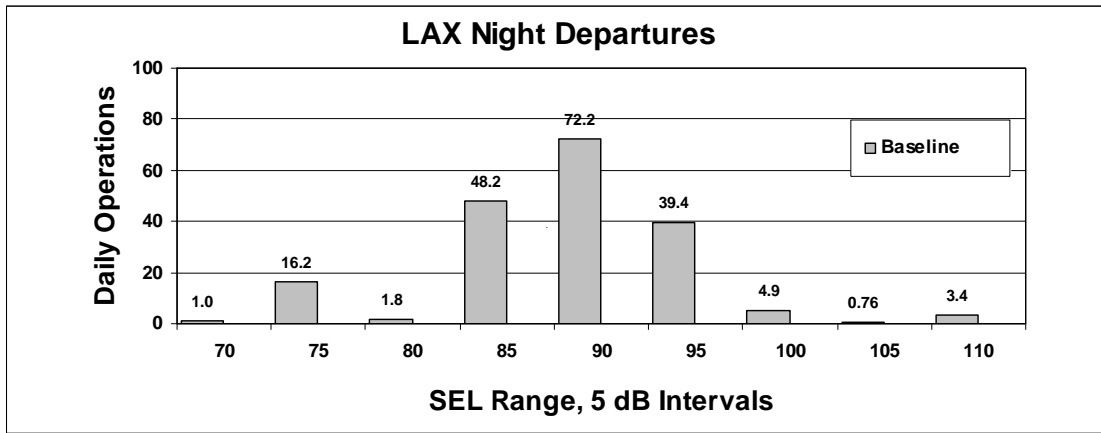

**Figure B.8.8** LAX—Nighttime Distributions of Baseline and Diverted SEL Values

Source: HMMH

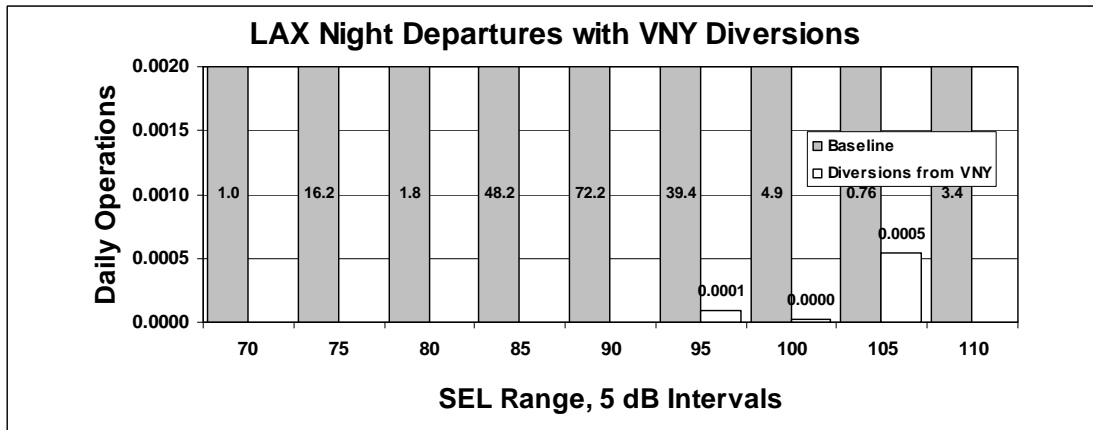

**Table B.8.4** LAX—Average Night (10 p.m.–7 a.m.) Departures with and without Diverted Operations

Source: HMMH

| SEL Range | LAX Average Night Departures |                     |                 |                          | Approx. Days between Diversions |
|-----------|------------------------------|---------------------|-----------------|--------------------------|---------------------------------|
|           | Without Diversions           | Forecast Diversions | With Diversions | % Increase in Departures |                                 |
| 70        | 1.0                          | --                  | 1.0             | --                       | --                              |
| 75        | 19.2                         | --                  | 19.2            | --                       | --                              |
| 80        | 1.8                          | --                  | 1.8             | --                       | --                              |
| 85        | 48.17                        | --                  | 48.17           | --                       | --                              |
| 90        | 72.21                        | --                  | 72.21           | --                       | --                              |
| 95        | 39.407                       | .00009              | 39.4072         | 0.0002%                  | 11,234                          |
| 100       | 4.882                        | .00002              | 4.88160         | 0.0004%                  | 54,512                          |
| 105       | 0.759                        | .0005               | 0.760           | 0.1%                     | 1,825                           |
| 110       | 3.4                          | --                  | 3.4             | --                       | --                              |
| Total     | 187.833                      | .0007               | 187.833         | 0.0003%                  | 1,526                           |

[Note: Numbers may not add due to rounding. More decimal places shown for diverted operations because of small numbers involved.]

### Bob Hope Airport (BUR)

Table B.8.5 provides relative fleet mixes for baseline and diverted operations for BUR. This table shows that most baseline daytime operations, before diverted aircraft use the airport, are either air carrier jets, business jets, or propeller aircraft (46%, 21%, and 16% during the day, respectively). The aircraft expected to be diverted to BUR from VNY during the day would be business jets.

**Table B.8.5** Baseline and Diverted Fleet Mixes for BUR

Source: HMMH

| Aircraft Group         | BUR Departure Operations Distribution by Aircraft Group |          |                          |          |                        |          |
|------------------------|---|----------|--------------------------|----------|------------------------|----------|
|                        | Day (7 a.m.–7 p.m.)                                     |          | Evening (7 p.m.–10 p.m.) |          | Night (10 p.m.–7 a.m.) |          |
|                        | Baseline  | Diverted | Baseline                 | Diverted | Baseline               | Diverted |
| Business Jets          | 27%   | 100%     | 15%                      | 100%     | 21%                    | 100%     |
| Regional Jets          | 7%  | --       | 9%                       | --       | 7%                     | --       |
| Air Carrier Jets       | 46%   | --       | 62%                      | --       | 10%                    | --       |
| Turboprop Aircraft     | 1%  | --       | 3%                       | --       | 41%                    | --       |
| Propeller Aircraft     | 16%   | --       | 9%                       | --       | 20%                    | --       |
| Military Type Aircraft | <1%   | --       | --                       | --       | --                     | --       |
| Helicopters            | 3%  | --       | 2%                       | --       | <1%                    | --       |
| Total                  | 100%  | 100%     | 100%                     | 100%     | 100%                   | 100%     |


Figure B.8.9 identifies the regions that are 15,000 feet from start of takeoff roll (the departure SEL values are given in the following figures and tables).

Figures B.8.10 and B.8.11 show the distributions of the SEL values for the two conditions—baseline with no diversions and baseline compared to diversions. Each bar, with its labels, shows how many departures on an average day will produce SEL values in each of the ranges shown, from 70 dB to 110 dB. Note that because diverted operations are so few compared with the baseline, Figure B.8.11 must have an expanded vertical axis to make the numbers of diverted operations visible.

While the diverted operations produce SEL values comparable to the higher baseline levels, there are relatively few diverted operations; all diverted operations are much less than one per day. Table B.8.6 is provided to help interpret such small numbers of operations. When total departures are less than one, the column “Days Between” translates the number of operations into how many days will occur between each operation at the given value of SEL. Hence, departures that produce SEL in the range of 100 dB will change from one every 5 days (5.03) to one every 3 days (3.28). The last column gives the percent increase in departures in each SEL range that results from the diverted operations. The following two pages provide similar information for evening and night departures.

It should be noted that this diversion analysis applies only to the proposed project and Alternative 2 (exempted Stage 3 and 4 Aircraft Alternative), since no aircraft would be diverted to BUR under Alternative 2 (exempted Stage 3 and 4 Aircraft Alternative). The analysis is identical for the proposed project and Alternative 2, since the same operations would be diverted in both cases.

**Figure B.8.9** BUR—Regions 15,000 feet from Start of Takeoff Roll

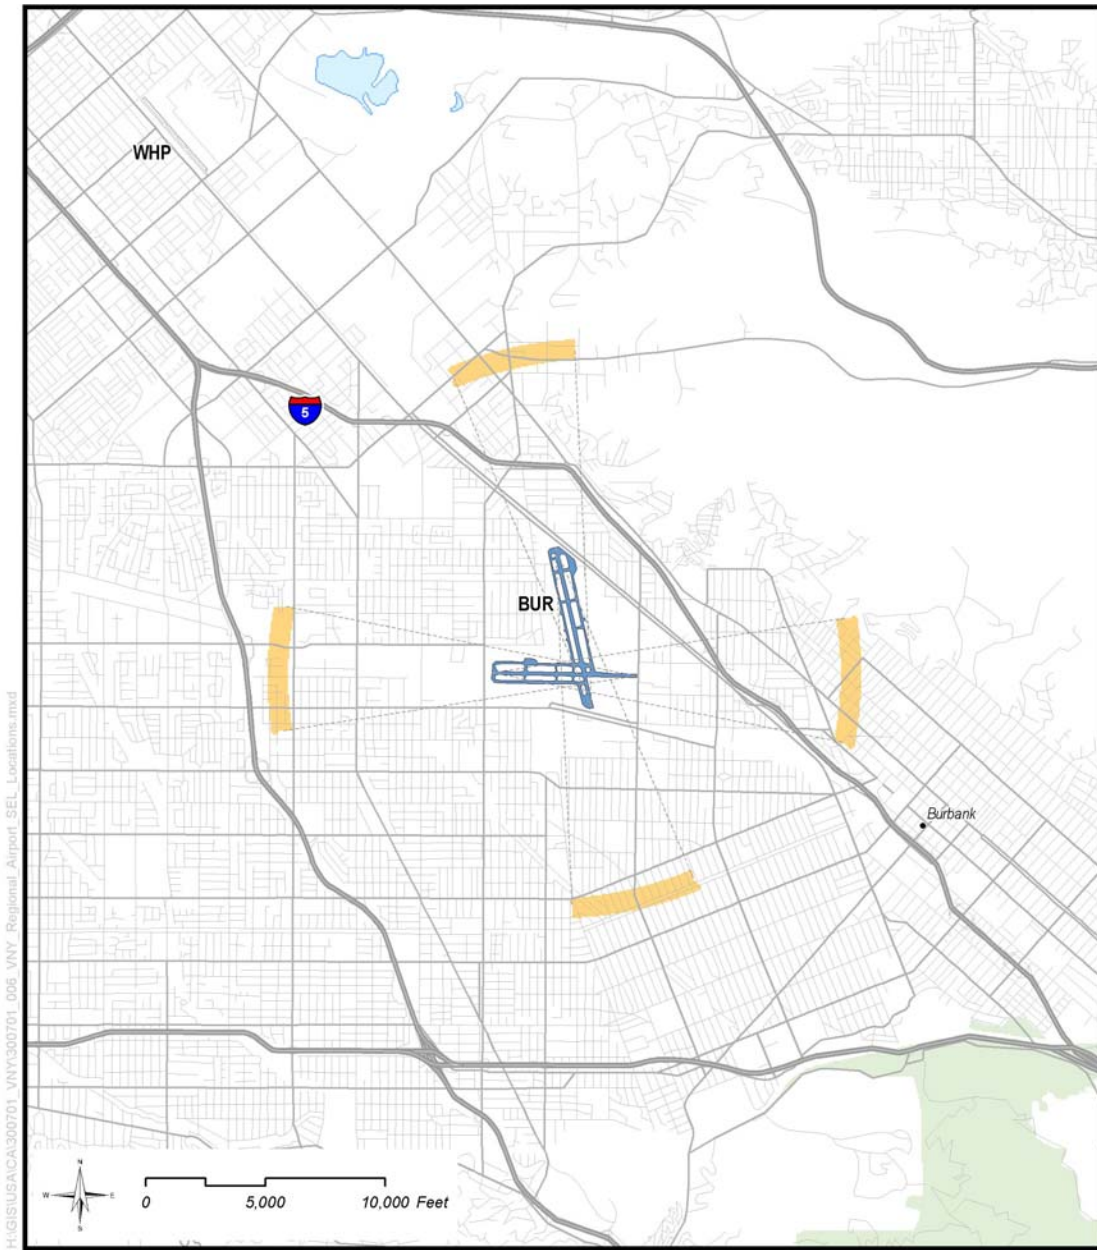

Example regions, 15,000ft from start of take off roll


### Burbank Airport

Representative Computed Departure SEL Locations for VNY CEQA Diversion Airports


Basemap: United States Department of Agriculture Geospatial Data Gateway, United States Geological Survey (USGS), Environmental Systems Research Institute (ESRI)

 **HARRIS MILLER MILLER & HANSON INC.**

**Figure B.8.10** BUR— Daytime Distribution of Baseline SEL Values  
 Source: HMMH

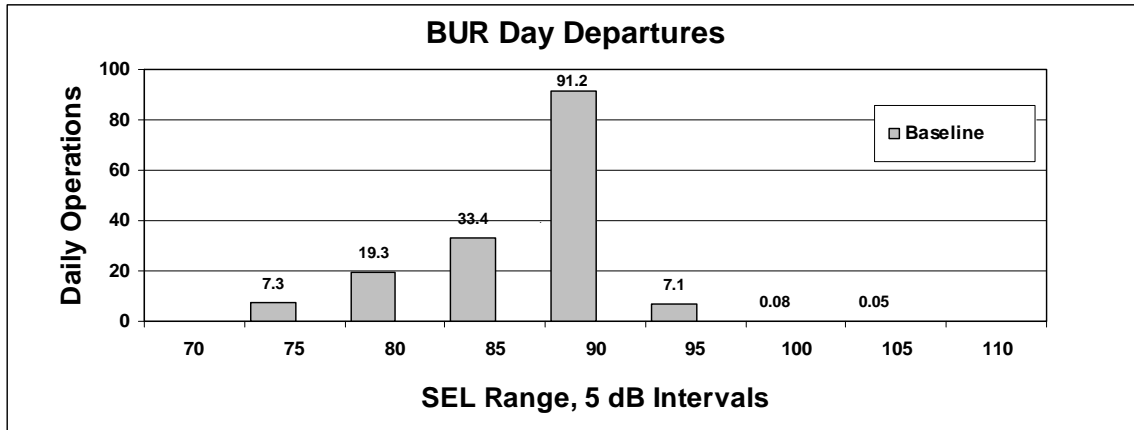

**Figure B.8.11** BUR—Daytime Distributions of Baseline and Diverted SEL Values  
 Source: HMMH

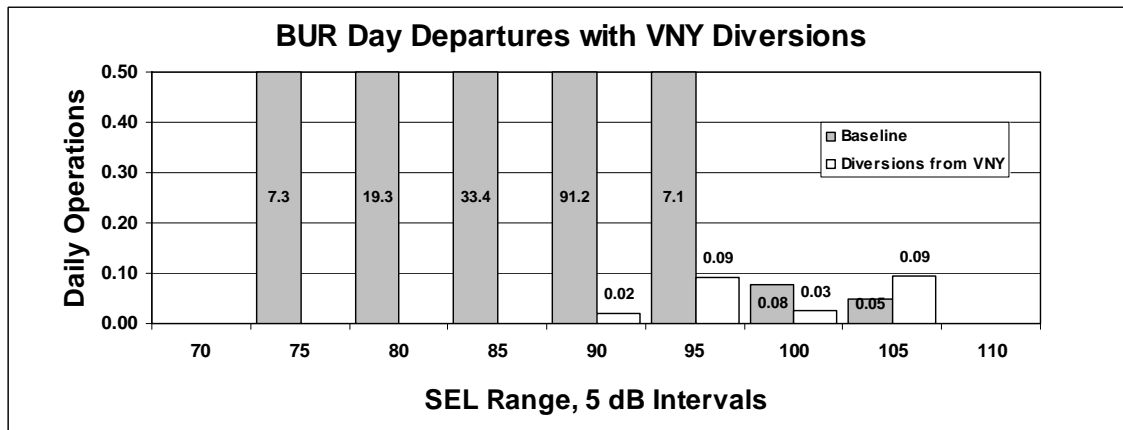


**Table B.8.6** BUR—Average Daytime (7 a.m.–7 p.m.) Departures with and without Diverted Operations

Source: HMMH


| SEL Range | BUR Average Daytime Departures |                     |                 |                          | Approx. Days between Diversions |
|-----------|--------------------------------|---------------------|-----------------|--------------------------|---------------------------------|
|           | Without Diversions             | Forecast Diversions | With Diversions | % Increase in Departures |                                 |
| 70        | --                             | --                  | --              | --                       | --                              |
| 75        | 7.3                            | --                  | 7.3             | --                       | --                              |
| 80        | 19.3                           | --                  | 19.3            | --                       | --                              |
| 85        | 33.4                           | --                  | 33.4            | --                       | --                              |
| 90        | 91.18                          | 0.02                | 91.20           | 0.02%                    | 48                              |
| 95        | 7.1                            | 0.09                | 7.2             | 1.3%                     | 11                              |
| 100       | 0.08                           | 0.03                | 0.11            | 34.6%                    | 37                              |
| 105       | 0.05                           | 0.09                | 0.14            | 189.8%                   | 11                              |
| 110       | --                             | --                  | --              | --                       | --                              |
| Total     | 158.35                         | 0.23                | 158.60          | 0.15%                    | 4                               |

[Note: Numbers may not add due to rounding. More decimal places shown for diverted operations because of small numbers involved.]

**Figure B.8.12** BUR—Evening Distribution of Baseline SEL Values  
Source: HMMH

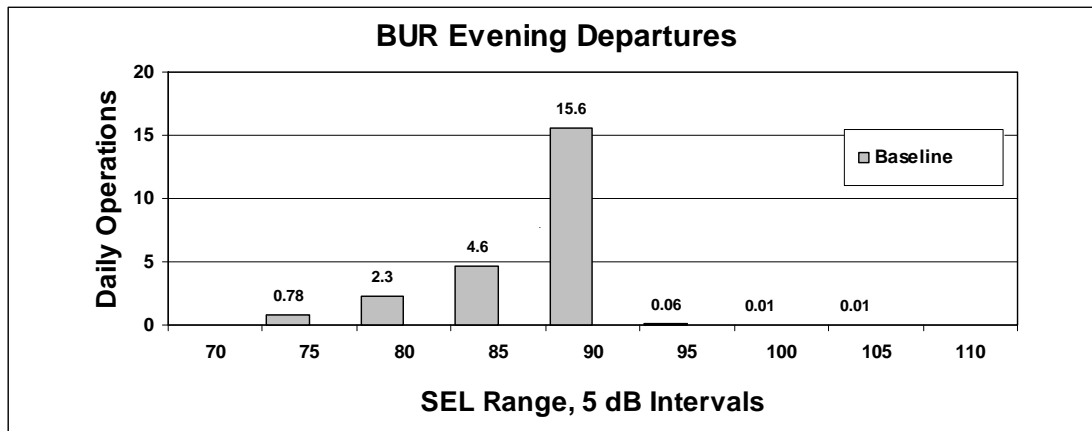

**Figure B.8.13** BUR—Evening Distributions of Baseline and Diverted SEL Values  
Source: HMMH

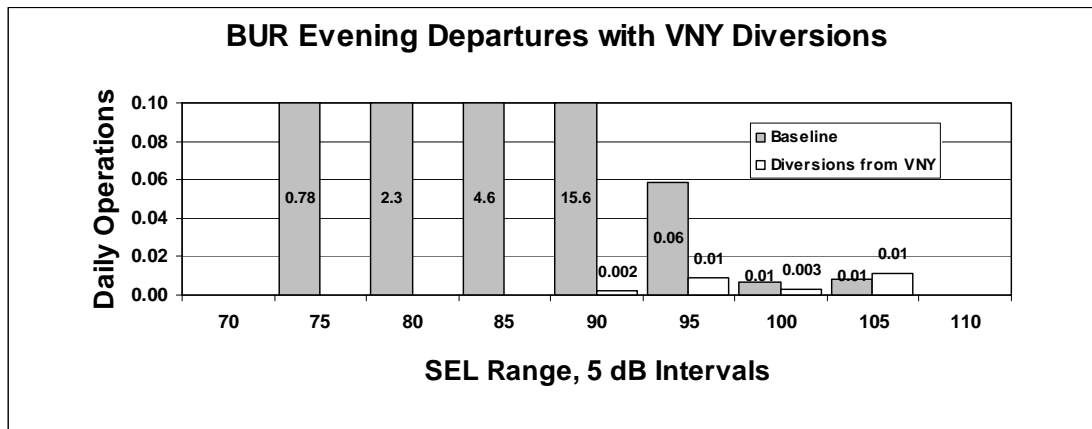


**Table B.8.7** BUR—Average Evening (7 p.m.–10 p.m.) Departures with and without Diverted Operations

Source: HMMH


| SEL Range | BUR Average Evening Departures |                     |                 |                          | Approx. Days between Diversions |
|-----------|--------------------------------|---------------------|-----------------|--------------------------|---------------------------------|
|           | Without Diversions             | Forecast Diversions | With Diversions | % Increase in Departures |                                 |
| 70        | --                             | --                  | --              | --                       | --                              |
| 75        | 0.78                           | --                  | 0.78            | --                       | --                              |
| 80        | 2.3                            | --                  | 2.3             | --                       | --                              |
| 85        | 4.6                            | --                  | 4.6             | --                       | --                              |
| 90        | 15.59                          | .0024               | 15.60           | 0.02%                    | 401                             |
| 95        | 0.06                           | .0089               | 0.07            | 15.2%                    | 112                             |
| 100       | 0.007                          | .0030               | 0.010           | 43.4%                    | 333                             |
| 105       | 0.01                           | .0110               | 0.02            | 127.7%                   | 91                              |
| 110       | --                             | --                  | --              | --                       | --                              |
| Total     | 23.37                          | .025                | 23.40           | 0.11%                    | 39                              |

[Note: Numbers may not add due to rounding. More decimal places shown for diverted operations because of small numbers involved.]

**Figure B.8.14** BUR—Nighttime Distribution of Baseline SEL Values  
Source: HMMH

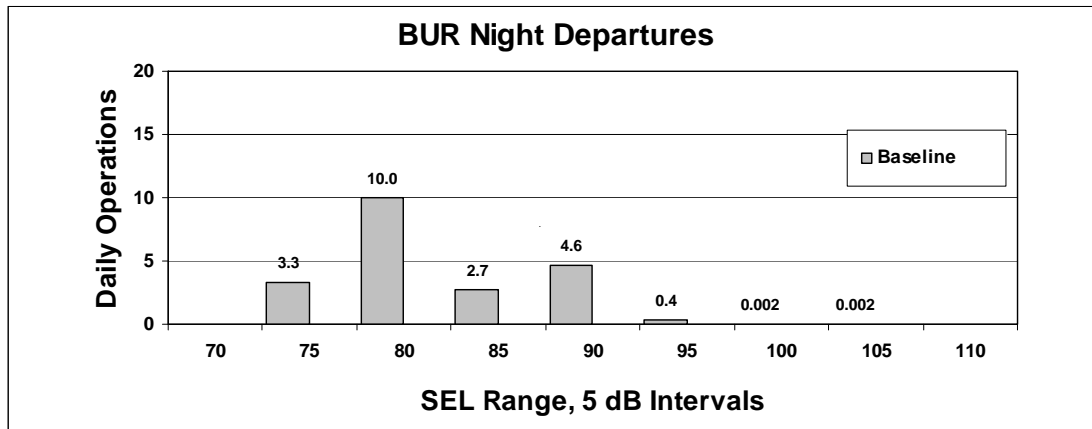

**Figure B.8.15** BUR—Nighttime Distributions of Baseline and Diverted SEL Values  
Source: HMMH

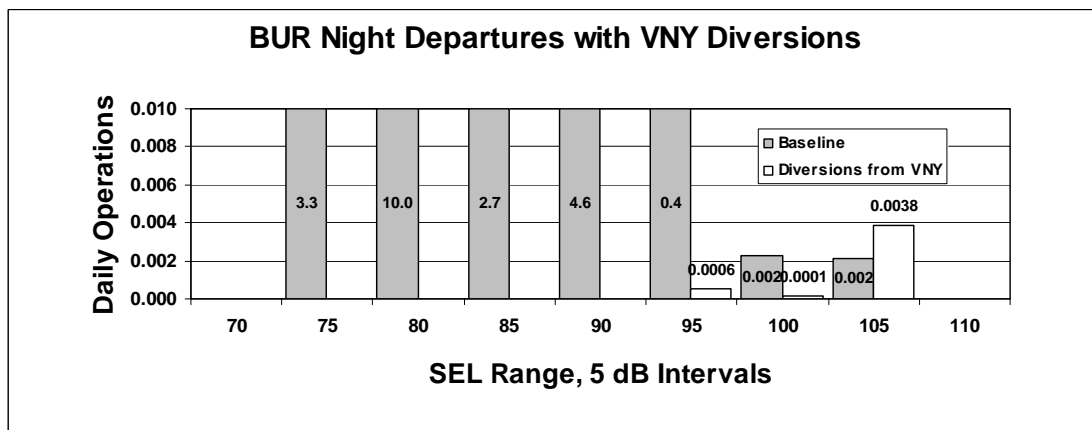



**Table B.8.8** BUR—Average Night (10 p.m.–7 a.m.) Departures with and without Diverted Operations

Source: HMMH

| SEL Range | BUR Average Night Departures |                     |                 |                          | Approx. Days between Diversions |
|-----------|------------------------------|---------------------|-----------------|--------------------------|---------------------------------|
|           | Without Diversions           | Forecast Diversions | With Diversions | % Increase in Departures |                                 |
| 70        | --                           | --                  | --              | --                       | --                              |
| 75        | 3.3                          | --                  | 3.3             | --                       | --                              |
| 80        | 10.0                         | --                  | 10.0            | --                       | --                              |
| 85        | 2.72                         | --                  | 2.72            | --                       | --                              |
| 90        | 4.63                         | --                  | 4.63            | --                       | --                              |
| 95        | 0.374                        | .0006               | 0.375           | 0.2%                     | 1,774                           |
| 100       | 0.0023                       | .0001               | 0.0024          | 5.0%                     | 8,607                           |
| 105       | 0.002                        | .0038               | 0.006           | 178.7%                   | 260                             |
| 110       | --                           | --                  | --              | --                       | --                              |
| Total     | 21.086                       | .005                | 21.090          | 0.02%                    | 221                             |

[Note: Numbers may not add due to rounding. More decimal places shown for diverted operations because of small numbers involved.]

**Camarillo Airport (CMA)**

Table B.8.9 provides relative fleet mixes for baseline and diverted operations for CMA. This table shows that most baseline daytime operations, before diverted aircraft use the airport, are propeller aircraft (93% in the day). The aircraft expected to be diverted to CMA from VNY would be business jets.

**Table B.8.9** Baseline and Diverted Fleet Mixes for CMA

Source: HMMH

| Aircraft Group         | CMA Departure Operations Distribution by Aircraft Group |          |                          |          |                        |          |
|------------------------|---|----------|--------------------------|----------|------------------------|----------|
|                        | Day (7 a.m.–7 p.m.)                                     |          | Evening (7 p.m.–10 p.m.) |          | Night (10 p.m.–7 a.m.) |          |
|                        | Baseline  | Diverted | Baseline                 | Diverted | Baseline               | Diverted |
| Business Jets          | 4%  | 100%     | 4%                       | 100%     | 8%                     | 100%     |
| Regional Jets          | < 1%  | --       | < 1%                     | --       | 2%                     | --       |
| Air Carrier Jets       | --  | --       | --                       | --       | --                     | --       |
| Turboprop Aircraft     | 1%  | --       | 2%                       | --       | 2%                     | --       |
| Propeller Aircraft     | 93%   | --       | 93%                      | --       | 88%                    | --       |
| Military Type Aircraft | < 1%  | --       | < 1%                     | --       | < 1%                   | --       |
| Helicopters            | < 1%  | --       | < 1%                     | --       | < 1%                   | --       |
| Total                  | 100%  | 100%     | 100%                     | 100%     | 100%                   | 100%     |

Figure B.8.16 identifies the regions that are 15,000 feet from start of takeoff roll (the departure SEL values are given in the following figures and tables).

Figures B.8.17 and B.8.18 show the distributions of the SEL values for the two conditions—baseline with no diversions and baseline compared to diversions. Each

bar, with its labels, shows how many departures on an average day will produce SEL values in each of the ranges shown, from 70 dB to 110 dB. Note that because diverted operations are so few compared with the baseline, Figure B.8.18 must have an expanded vertical axis to make the numbers of diverted operations visible.

While the diverted operations produce SEL values comparable to the higher baseline levels, there are relatively few diverted operations; all diverted operations are much less than one per day. Table B.8.10 is provided to help interpret such small numbers of operations. When total departures are less than one, the column “Days Between” translates the number of operations into how many days will occur between each operation at the given value of SEL. Hence, departures that produce SEL in the range of 100 dB will change from one every 5 days (5.03) to one every 3 days (3.28). The last column gives the percent increase in departures in each SEL range that results from the diverted operations. The following two pages provide similar information for evening and night departures.

It should be noted that this diversion analysis applies only to the proposed project and Alternative 2 (Exempted Stage 3 and 4 Aircraft Alternative), since no aircraft would be diverted to CMA under Alternative 2 (Exempted Stage 3 and 4 Aircraft Alternative). The analysis is identical for the proposed project and Alternative 2, since the same operations would be diverted in both cases.

**Figure B.8.16** CMA—Regions 15,000 feet from Start of Takeoff Roll  
Source: HMMH




 Example regions, 15,000ft from start of take off roll

**Camarillo Airport**  
Representative Computed Departure SEL  
Locations for VNY CEQA Diversion Airports


Basemap: United States Department of Agriculture Geospatial Data Gateway, United States Geological Survey (USGS), Environmental Systems Research Institute (ESRI)

 **HARRIS MILLER MILLER & HANSON INC.**

**Figure B.8.17** CMA—Daytime Distribution of Baseline SEL Values  
 Source: HMMH

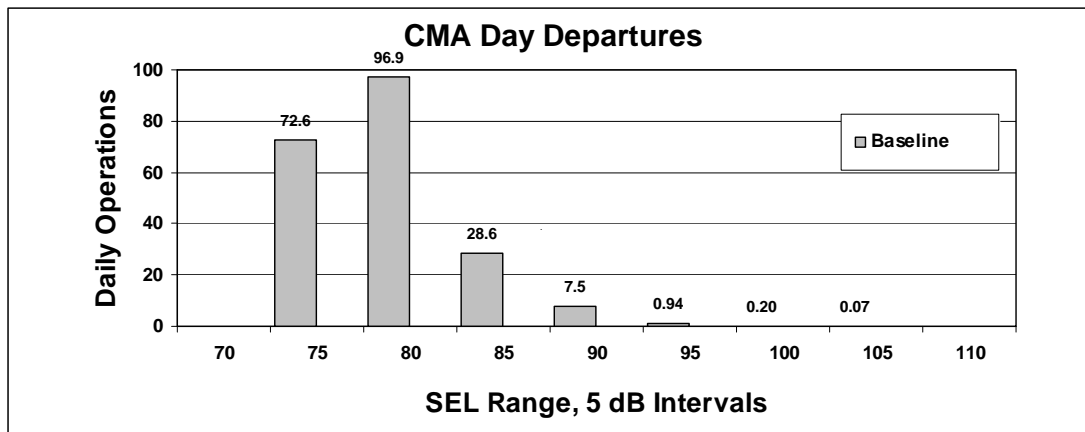

**Figure B.8.18** CMA—Daytime Distributions of Baseline and Diverted SEL Values  
 Source: HMMH

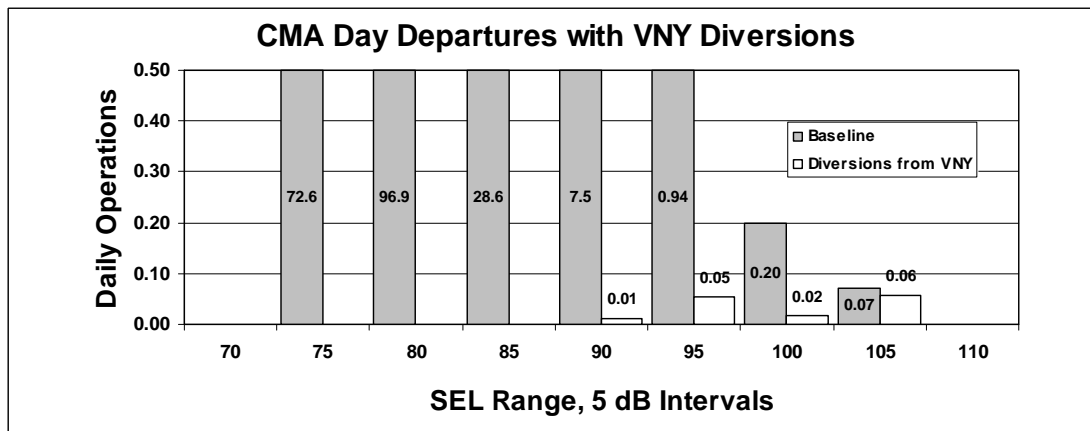

**Table B.8.10** CMA—Average Day (7 a.m.–7 p.m.) Departures with and without Diverted Operations


Source: HMMH

| SEL Range | CMA Average Day Departures |                     |                 |                          | Approx. Days between Diversions |
|-----------|----------------------------|---------------------|-----------------|--------------------------|---------------------------------|
|           | Without Diversions         | Forecast Diversions | With Diversions | % Increase in Departures |                                 |
| 70        | --                         | --                  | --              | --                       | --                              |
| 75        | 72.6                       | --                  | 72.6            | --                       | --                              |
| 80        | 96.9                       | --                  | 96.9            | --                       | --                              |
| 85        | 28.6                       | --                  | 28.6            | --                       | --                              |
| 90        | 7.5                        | .0122               | 7.6             | 0.16%                    | 82                              |
| 95        | 0.94                       | .0541               | 0.99            | 5.8%                     | 18                              |
| 100       | 0.20                       | .0161               | 0.21            | 8.1%                     | 62                              |
| 105       | 0.07                       | .0570               | 0.13            | 79.3%                    | 18                              |
| 110       | --                         | --                  | --              | --                       | --                              |
| Total     | 206.9                      | .1394               | 207.1           | 0.07%                    | 7                               |


[Note: Numbers may not add due to rounding. More decimal places shown for diverted operations because of small numbers involved.]

**Figure B.8.19** CMA—Evening Distribution of Baseline SEL Values

Source: HMMH

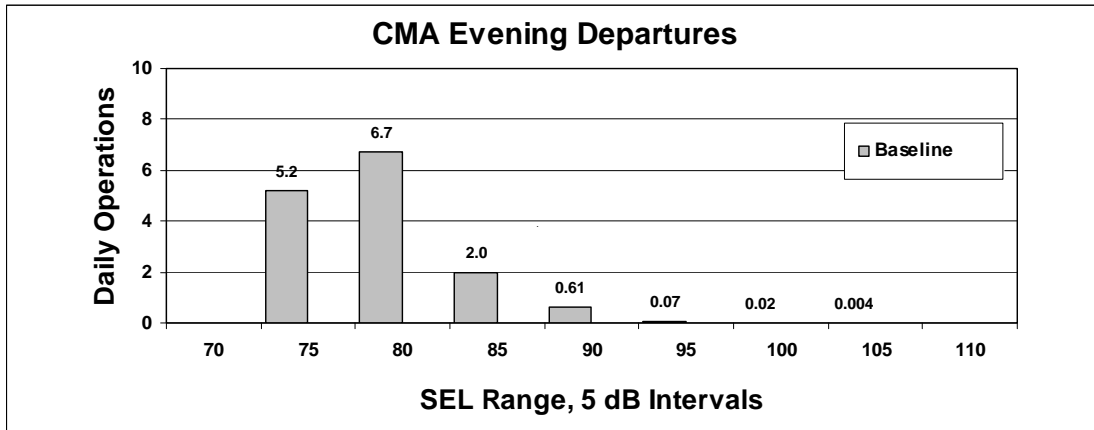

**Figure B.8.20** CMA—Evening Distributions of Baseline and Diverted SEL Values  
 Source: HMMH

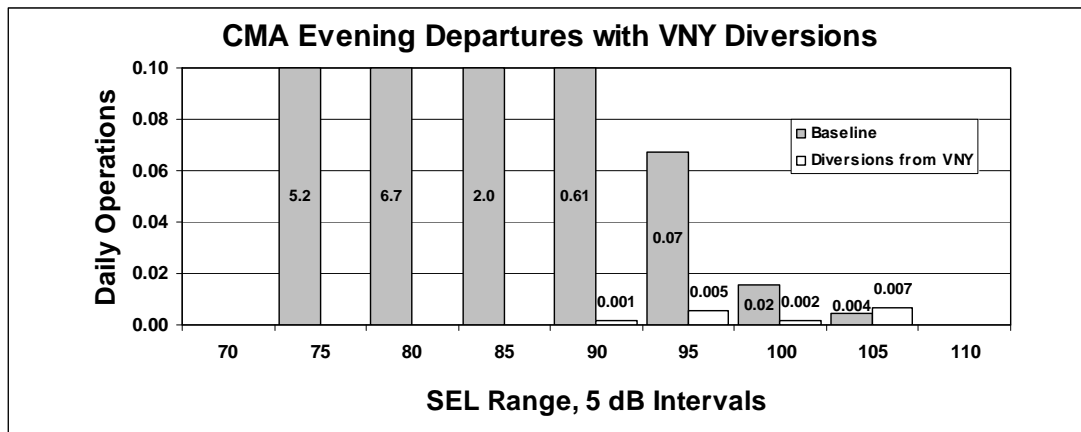


**Table B.8.11** CMA—Average Evening (7 p.m.–10 p.m.) Departures with and without Diverted Operations

Source: HMMH


| SEL Range | CMA Average Evening Departures |                     |                 |                          | Approx. Days between Diversions |
|-----------|--------------------------------|---------------------|-----------------|--------------------------|---------------------------------|
|           | Without Diversions             | Forecast Diversions | With Diversions | % Increase in Departures |                                 |
| 70        | --                             | --                  | --              | --                       | --                              |
| 75        | 5.2                            | --                  | 5.2             | --                       | --                              |
| 80        | 6.7                            | --                  | 6.7             | --                       | --                              |
| 85        | 2.0                            | --                  | 2.0             | --                       | --                              |
| 90        | 0.609                          | .0014               | 0.611           | 0.24%                    | 681                             |
| 95        | 0.067                          | .0053               | 0.073           | 7.9%                     | 188                             |
| 100       | 0.016                          | .0018               | 0.017           | 11.4%                    | 558                             |
| 105       | 0.004                          | .0065               | 0.011           | 151.7%                   | 153                             |
| 110       | --                             | --                  | --              | --                       | --                              |
| Total     | 14.56                          | .0151               | 14.57           | 0.10%                    | 66                              |

[Note: Numbers may not add due to rounding. More decimal places shown for diverted operations because of small numbers involved.]

**Figure B.8.21** CMA—Nighttime Distribution of Baseline SEL Values  
 Source: HMMH

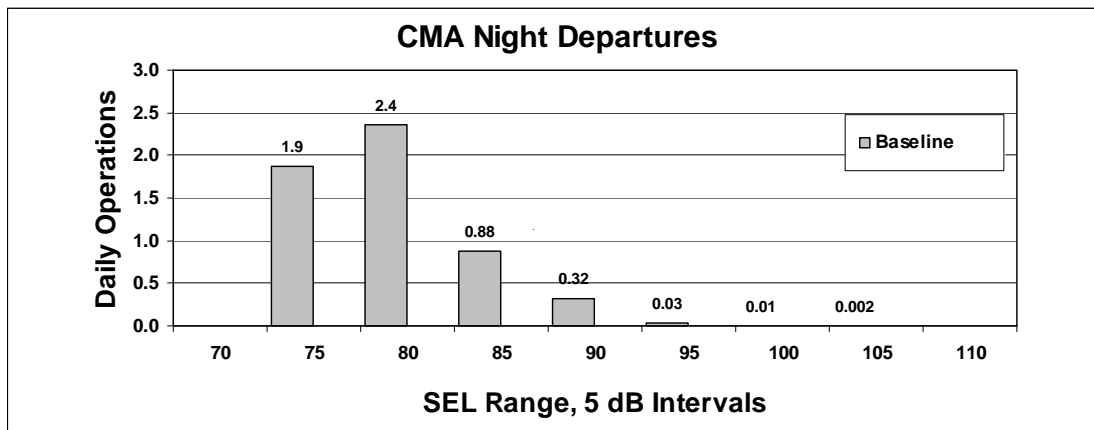

**Figure B.8.22** CMA—Nighttime Distributions of Baseline and Diverted SEL Values  
 Source: HMMH

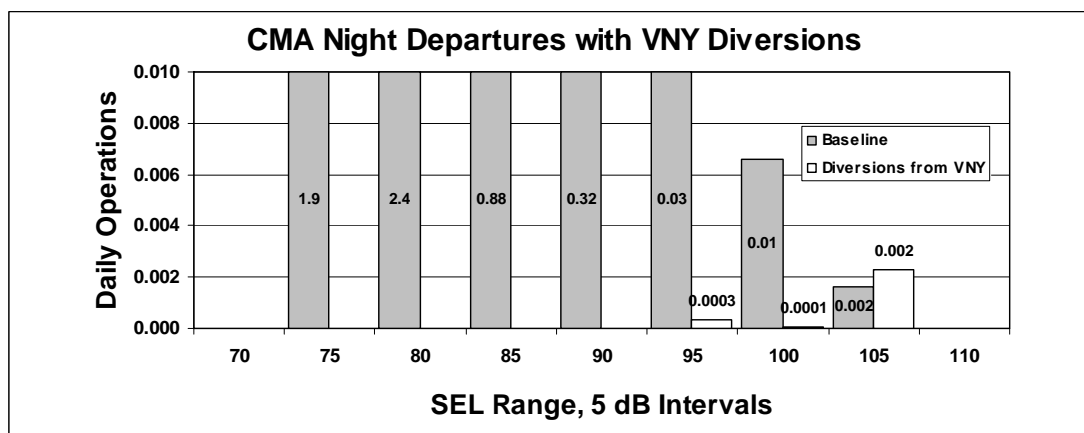

**Table B.8.12** CMA—Average Night (10 p.m.–7 a.m.) Departures with and without Diverted Operations

Source: HMMH

| SEL Range | CMA Night Departures |                     |                 |                          | Approx. Days between Diversions |
|-----------|----------------------|---------------------|-----------------|--------------------------|---------------------------------|
|           | Without Diversions   | Forecast Diversions | With Diversions | % Increase in Departures |                                 |
| 70        | --                   | --                  | --              | --                       | --                              |
| 75        | 1.9                  | --                  | 1.9             | --                       | --                              |
| 80        | 2.4                  | --                  | 2.4             | --                       | --                              |
| 85        | 0.88                 | --                  | 0.88            | --                       | --                              |
| 90        | 0.32                 | --                  | 0.32            | --                       | --                              |
| 95        | 0.0280               | .0003               | 0.0284          | 1.2%                     | 2,974                           |
| 100       | 0.0066               | .0001               | 0.0067          | 1.1%                     | 14,430                          |
| 105       | 0.002                | .0023               | 0.004           | 140.4%                   | 441                             |
| 110       | --                   | --                  | --              | --                       | --                              |
| Total     | 5.462                | .0027               | 5.465           | 0.05%                    | 374                             |

[Note: Numbers may not add due to rounding. More decimal places shown for diverted operations because of small numbers involved.]

### Chino Airport (CNO)

Table B.8.13 provides relative fleet mixes for baseline and diverted operations for CNO. This table shows that most baseline daytime operations, before diverted aircraft use the airport, are propeller aircraft (98%). The aircraft expected to be diverted to CNO from VNY would be helicopters.

**Table B.8.13** Baseline and Diverted Fleet Mixes for CNO

Source: HMMH

| Aircraft Group         | CNO Departure Operations Distribution by Aircraft Group |          |                          |          |                        |          |
|------------------------|---|----------|--------------------------|----------|------------------------|----------|
|                        | Day (7 a.m.–7 p.m.)                                     |          | Evening (7 p.m.–10 p.m.) |          | Night (10 p.m.–7 a.m.) |          |
|                        | Baseline  | Diverted | Baseline                 | Diverted | Baseline               | Diverted |
| Business Jets          | 1%  | --       | 1%                       | --       | 9%                     | --       |
| Regional Jets          | < 1%  | --       | < 1%                     | --       | 3%                     | --       |
| Air Carrier Jets       | --  | --       | --                       | --       | --                     | --       |
| Turboprop Aircraft     | < 1%  | --       | < 1%                     | --       | 1%                     | --       |
| Propeller Aircraft     | 98%   | --       | 97%                      | --       | 86%                    | --       |
| Military Type Aircraft | < 1%  | 100%     | < 1%                     | 100%     | < 1%                   | 100%     |
| Helicopters            | < 1%  | --       | < 1%                     | --       | < 1%                   | --       |
| Total                  | 100%  | 100%     | 100%                     | 100%     | 100%                   | 100%     |

Figure B.8.23 identifies the regions that are 15,000 feet from start of takeoff roll (the departure SEL values are given in the following figures and tables).


Figures B.8.24 and B.8.25 show the distributions of the SEL values for the two conditions—baseline with no diversions and baseline compared to diversions. Each bar, with its labels, shows how many departures on an average day will produce SEL values in each of the ranges shown, from 70 dB to 110 dB. Note that because diverted operations are so few compared with the baseline, Figure B.8.25 must have an expanded vertical axis to make the numbers of diverted operations visible.

The diverted operations produce SEL values comparable to the baseline levels, and there are relatively few diverted operations; all diverted operations are much less than one per day. Table B.8.14 is provided to help interpret such small numbers of operations. When total departures are less than one, the column “Days Between” translates the number of operations into how many days will occur between each operation at the given value of SEL. Hence, daytime departures that produce SEL in the range of 100 dB will change from one every 24 days to one every 7 days. The last column gives the percent increase in departures in each SEL range that results from the diverted operations. The following two pages provide similar information for evening and night departures.



It should be noted that this diversion analysis applies only to the proposed project and Alternative 2 (Exempted Stage 3 and 4 Aircraft Alternative), since no aircraft would be diverted to CNO under Alternative 2 (Exempted Stage 3 and 4 Aircraft Alternative). The analysis is identical for the proposed project and Alternative 2, since the same operations would be diverted in both cases.

Figure B.8.23 CNO—Regions 15,000 feet from Start of Takeoff Roll

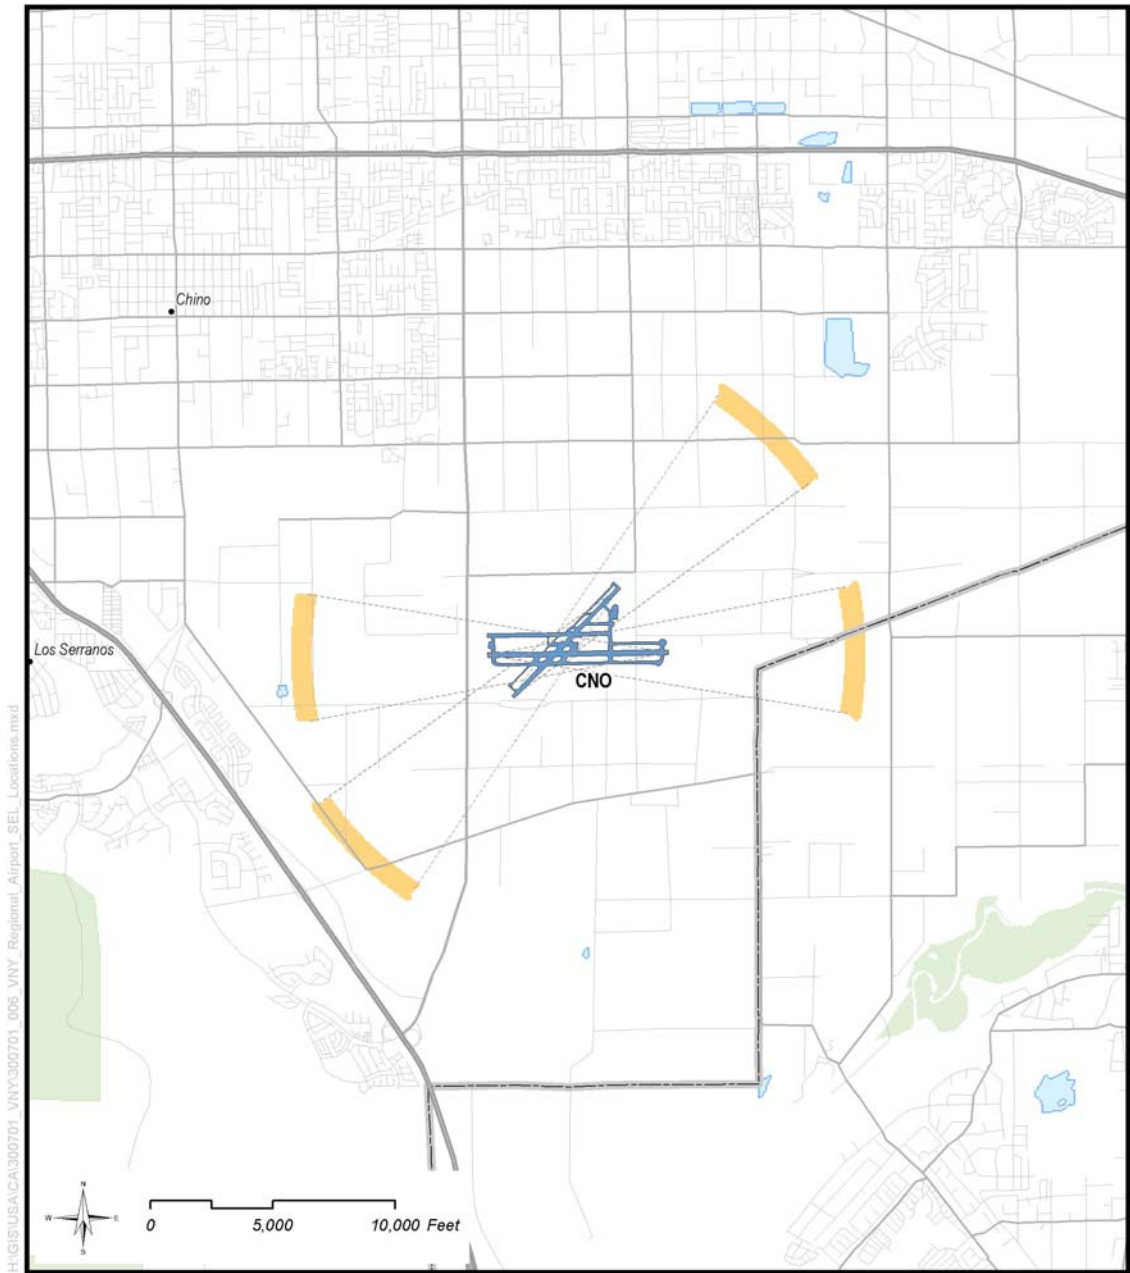

Example regions, 15,000ft from start of take off roll


### Chino Airport

Representative Computed Departure SEL Locations for VNY CEQA Diversion Airports


Basemap: United States Department of Agriculture Geospatial Data Gateway; United States Geological Survey (USGS); Environmental Systems Research Institute (ESRI)

 HARRIS MILLER MILLER & HANSON INC.

**Figure B.8.24** CNO—Daytime Distribution of Baseline SEL Values  
 Source: HMMH

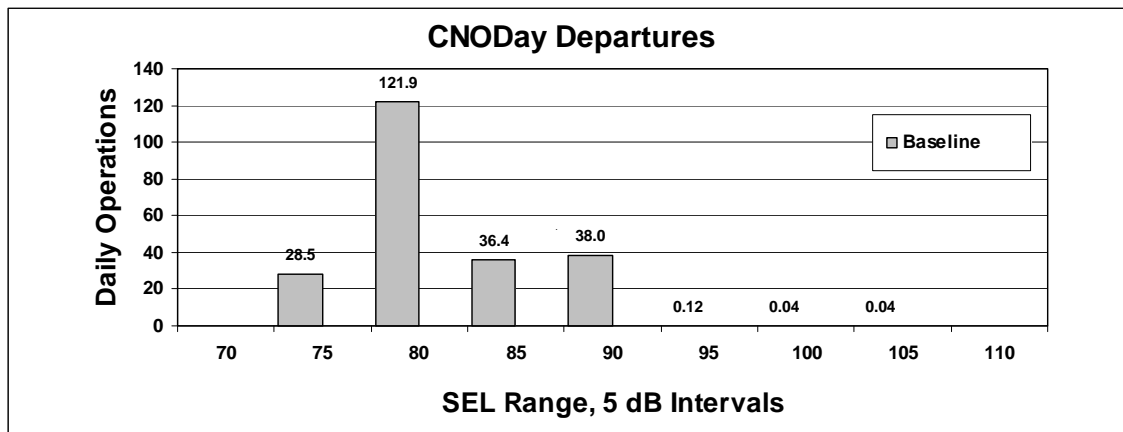

**Figure B.8.25** CNO—Daytime Distributions of Baseline and Diverted SEL Values  
 Source: HMMH

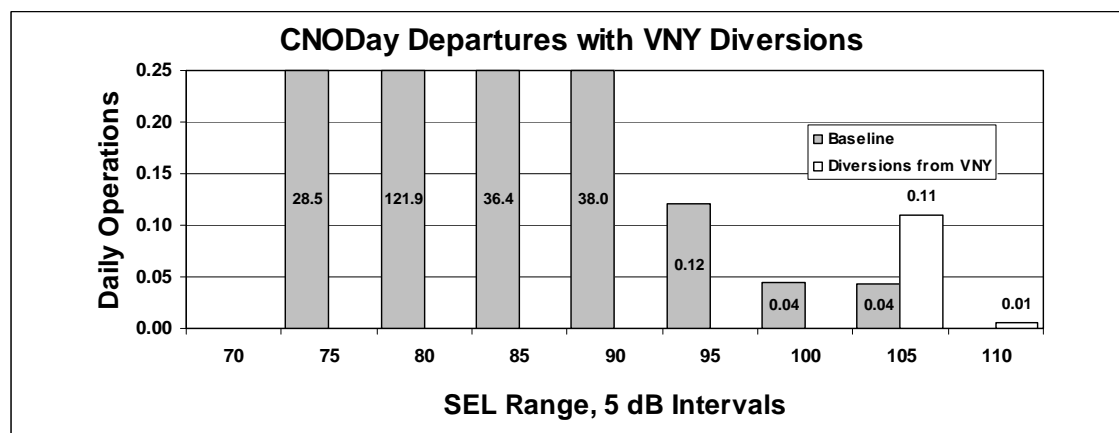

**Table B.8.14** CNO—Average Day (7 a.m.–7 p.m.) Departures with and without Diverted Operations


Source: HMMH

| SEL Range | CNO Average Day Departures |                     |                 |                          | Approx. Days between Diversions |
|-----------|----------------------------|---------------------|-----------------|--------------------------|---------------------------------|
|           | Without Diversions         | Forecast Diversions | With Diversions | % Increase in Departures |                                 |
| 70        | --                         | --                  | --              | --                       | --                              |
| 75        | 28.5                       | --                  | 28.5            | --                       | --                              |
| 80        | 121.9                      | --                  | 121.9           | --                       | --                              |
| 85        | 36.4                       | --                  | 36.4            | --                       | --                              |
| 90        | 38.0                       | --                  | 38.0            | --                       | --                              |
| 95        | 0.12                       | --                  | 0.1             | --                       | --                              |
| 100       | < 0.1                      | --                  | < 0.1           | --                       | --                              |
| 105       | < 0.1                      | .1093               | 0.1             | 257.8%                   | 9                               |
| 110       | --                         | .0055               | < 0.1           | new                      | 183                             |
| Total     | 224.9                      | .1148               | 225.0           | 0.05%                    | 9                               |

[Note: Numbers may not add due to rounding. More decimal places shown for diverted operations because of small numbers involved.]


**Figure B.8.26** CNO—Evening Distribution of Baseline SEL Values

Source: HMMH

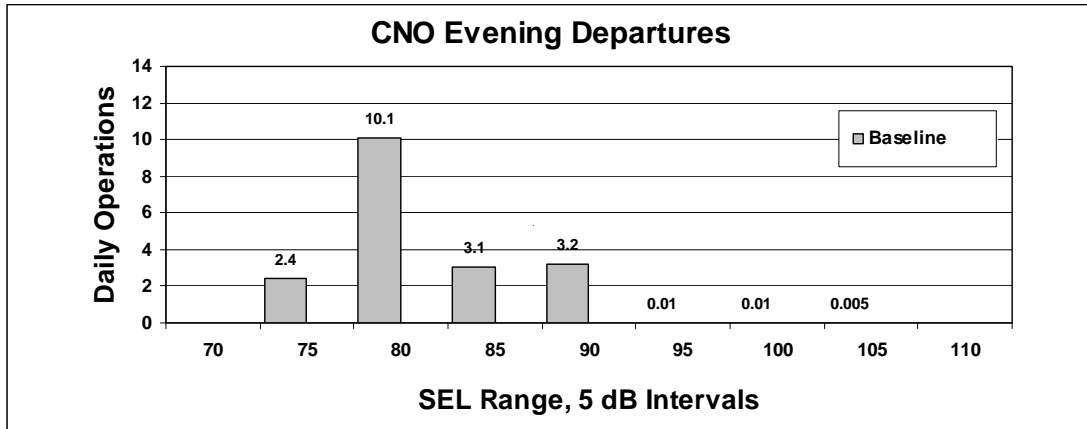

**Figure B.8.27** CNO—Evening Distributions of Baseline and Diverted SEL Values

Source: HMMH

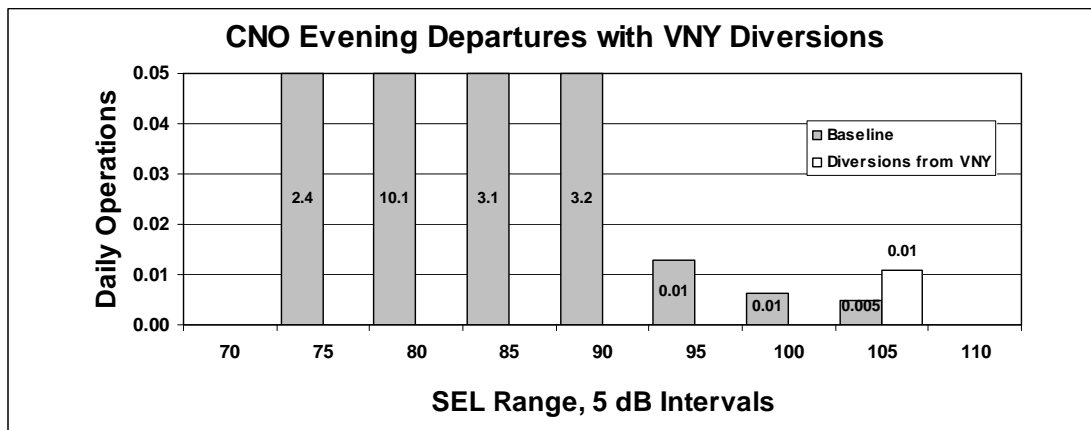


**Table B.8.15** CNO—Average Evening (7 p.m.–10 p.m.) Departures with and without Diverted Operations


| SEL Range | CNO Average Evening Departures |                     |                 |                          | Approx. Days between Diversions |
|-----------|--------------------------------|---------------------|-----------------|--------------------------|---------------------------------|
|           | Without Diversions             | Forecast Diversions | With Diversions | % Increase in Departures |                                 |
| 70        | --                             | --                  | --              | --                       | --                              |
| 75        | 2.4                            | --                  | 2.4             | --                       | --                              |
| 80        | 10.1                           | --                  | 10.1            | --                       | --                              |
| 85        | 3.1                            | --                  | 3.1             | --                       | --                              |
| 90        | 3.2                            | --                  | 3.2             | --                       | --                              |
| 95        | < 0.1                          | --                  | < 0.1           | --                       | --                              |
| 100       | < 0.1                          | --                  | < 0.1           | --                       | --                              |
| 105       | < 0.1                          | .0109               | < 0.1           | 224.9%                   | 92                              |
| 110       | --                             | --                  | --              | --                       | --                              |
| Total     | 18.9                           | .0109               | 18.9            | 0.06%                    | 92                              |

[Note: Numbers may not add due to rounding. More decimal places shown for diverted operations because of small numbers involved.]

**Figure B.8.28** CNO—Nighttime Distribution of Baseline SEL Values  
Source: HMMH

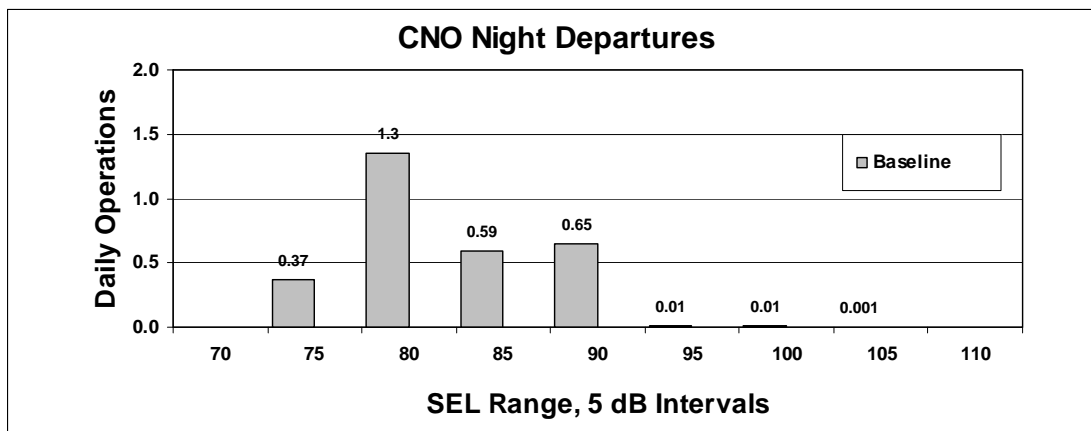

**Figure B.8.29** CNO—Nighttime Distributions of Baseline and Diverted SEL Values  
 Source: HMMH

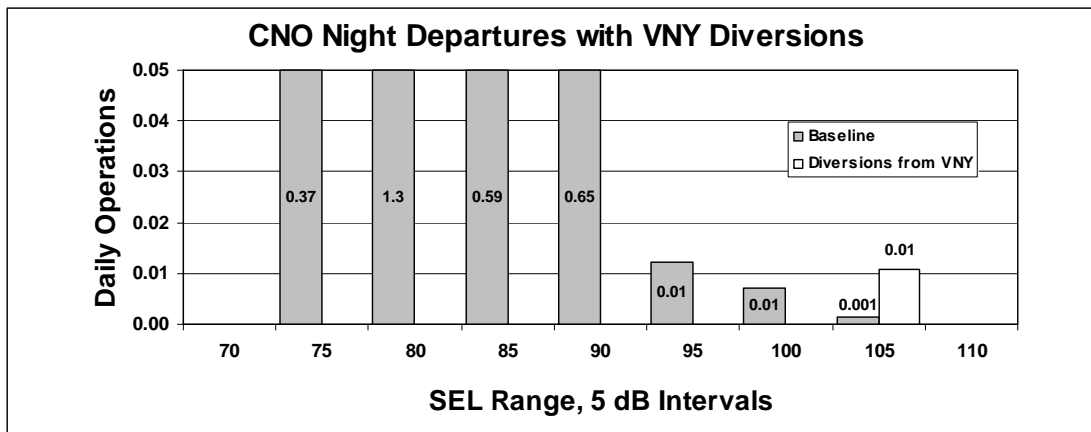

**Table B.8.16** CNO—Average Night (10 p.m.–7 a.m.) Departures with and without Diverted Operations

Source: HMMH

| SEL Range | CNO Average Night Departures |                     |                 |                          | Approx. Days between Diversions |
|-----------|------------------------------|---------------------|-----------------|--------------------------|---------------------------------|
|           | Without Diversions           | Forecast Diversions | With Diversions | % Increase in Departures |                                 |
| 70        | --                           | --                  | --              | --                       | --                              |
| 75        | 0.4                          | --                  | 0.4             | --                       | --                              |
| 80        | 1.3                          | --                  | 1.3             | --                       | --                              |
| 85        | 0.6                          | --                  | 0.6             | --                       | --                              |
| 90        | 0.6                          | --                  | 0.6             | --                       | --                              |
| 95        | < 0.1                        | --                  | < 0.1           | --                       | --                              |
| 100       | < 0.1                        | --                  | < 0.1           | --                       | --                              |
| 105       | < 0.1                        | .0109               | < 0.1           | 763.7%                   | 92                              |
| 110       | --                           | --                  | --              | --                       | --                              |
| Total     | 3.0                          | .0109               | 3.0             | 0.37%                    | 92                              |

[Note: Numbers may not add due to rounding. More decimal places shown for diverted operations because of small numbers involved.]

**William J. Fox Airfield (WJF)**

Table B.8.17 provides relative fleet mixes for baseline and diverted operations for WJF. This table shows that most baseline operations, before diverted aircraft use the airport, are propeller aircraft (93% daytime). The aircraft expected to be diverted to WJF from VNY would be business jets but only in the daytime.

**Table B.8.17** Baseline and Diverted Fleet Mixes for WJF

Source: HMMH

| Aircraft Group         | WJF Departure Operations Distribution by Aircraft Group |          |                          |          |                        |          |
|------------------------|---|----------|--------------------------|----------|------------------------|----------|
|                        | Day (7 a.m.–7 p.m.)                                     |          | Evening (7 p.m.–10 p.m.) |          | Night (10 p.m.–7 a.m.) |          |
|                        | Baseline  | Diverted | Baseline                 | Diverted | Baseline               | Diverted |
| Business Jets          | < 1%  | 100%     | < 1%                     | --       | 2%                     | --       |
| Regional Jets          | < 1%  | --       | < 1%                     | --       | --                     | --       |
| Air Carrier Jets       | --  | --       | --                       | --       | --                     | --       |
| Turboprop Aircraft     | --  | --       | --                       | --       | --                     | --       |
| Propeller Aircraft     | 93%   | --       | 94%                      | --       | 92%                    | --       |
| Military Type Aircraft | 3%  | --       | 3%                       | --       | 3%                     | --       |
| Helicopters            | 3%  | --       | 3%                       | --       | 3%                     | --       |
| Total                  | 100%  | 100%     | 100%                     | --       | 100%                   | --       |


Figure B.8.30 identifies the regions that are 15,000 feet from start of takeoff roll (the departure SEL values are given in the following figures and tables).

Figures B.8.31 and B.8.32 show the distributions of the SEL values for the two conditions—baseline with no diversions and baseline compared to diversions. Each bar, with its labels, shows how many departures on an average day will produce SEL values in each of the ranges shown, from 70 dB to 110 dB. Note that because diverted operations are so few compared with the baseline, Figure B.8.32 must have an expanded vertical axis to make the numbers of diverted operations visible.

The diverted operations produce SEL values comparable to the higher baseline levels, and there are relatively few diverted operations; all diverted operations are much less than one per day. Table B.8.18 is provided to help interpret such small numbers of operations. When total departures are less than one, the column “Days Between” translates the number of operations into how many days will occur between each operation at the given value of SEL. The last column gives the percent increase in departures in each SEL range that results from the diverted operations.

It should be noted that this diversion analysis applies only to the proposed project and Alternative 2 (Exempted Stage 3 and 4 Aircraft Alternative), since no aircraft would be diverted to WJF under Alternative 2 (Exempted Stage 3 and 4 Aircraft Alternative). The analysis is identical for the proposed project and Alternative 2, since the same operations would be diverted in both cases.

Figure B.8.30 WJF—Regions 15,000 feet from Start of Takeoff Roll

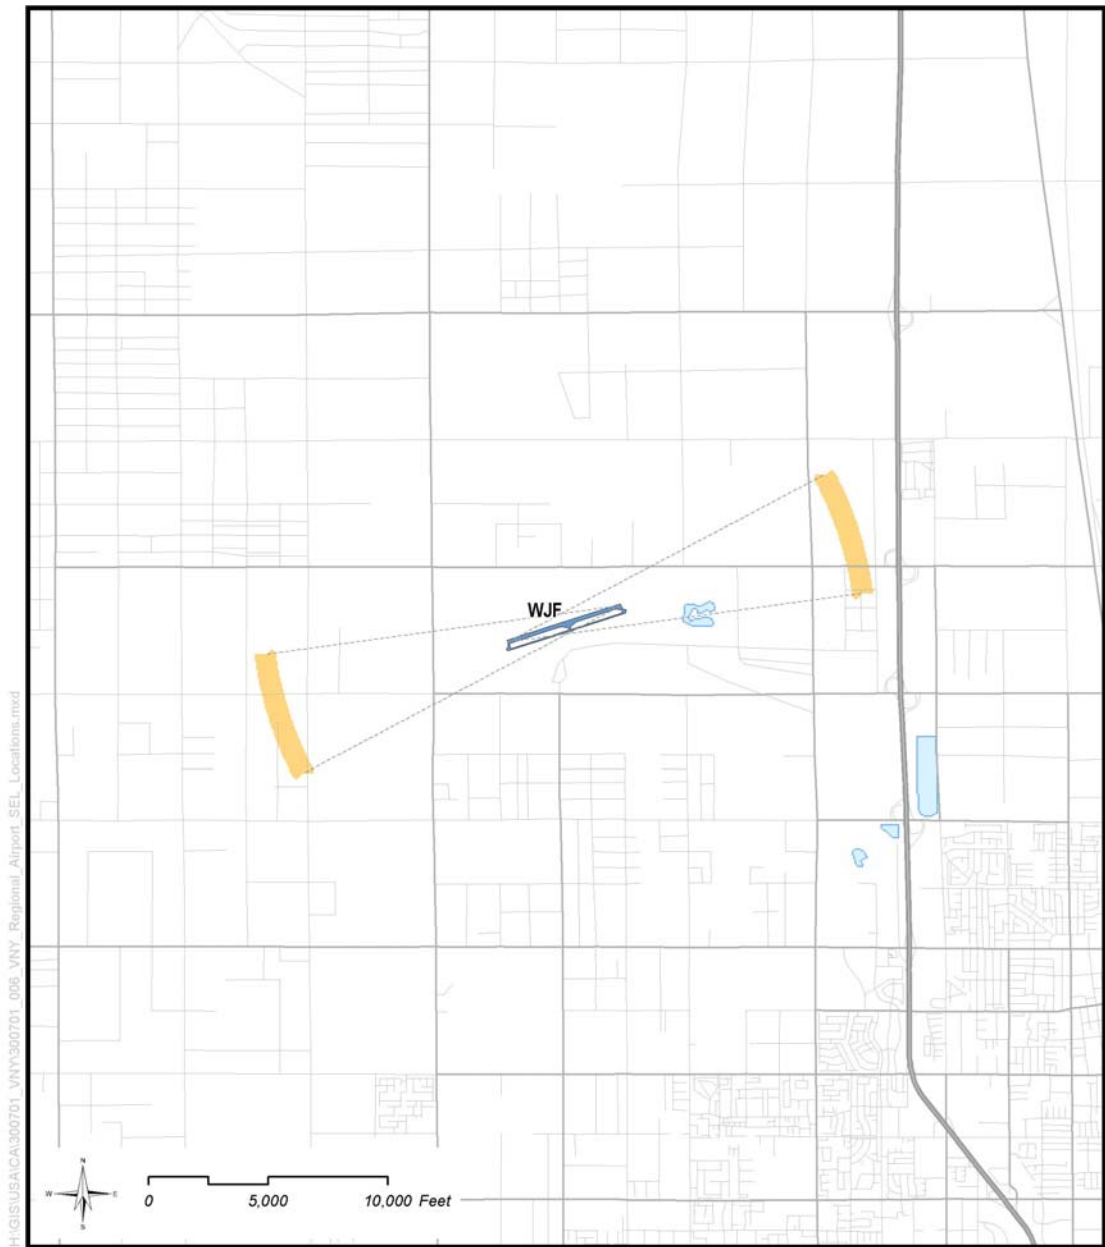

Example regions, 15,000ft from start of take off roll

**General Wm J Fox Airfield**  
Representative Computed Departure SEL  
Locations for VNY CEQA Diversion Airports

Basemap: United States Department of Agriculture Geospatial Data Gateway, United States Geological Survey (USGS), Environmental Systems Research Institute (ESRI)

 **HARRIS MILLER MILLER & HANSON INC.**

Figure B.8.31 WJF—Daytime Distributions of Baseline and Diverted SEL Values



Source: HMMH


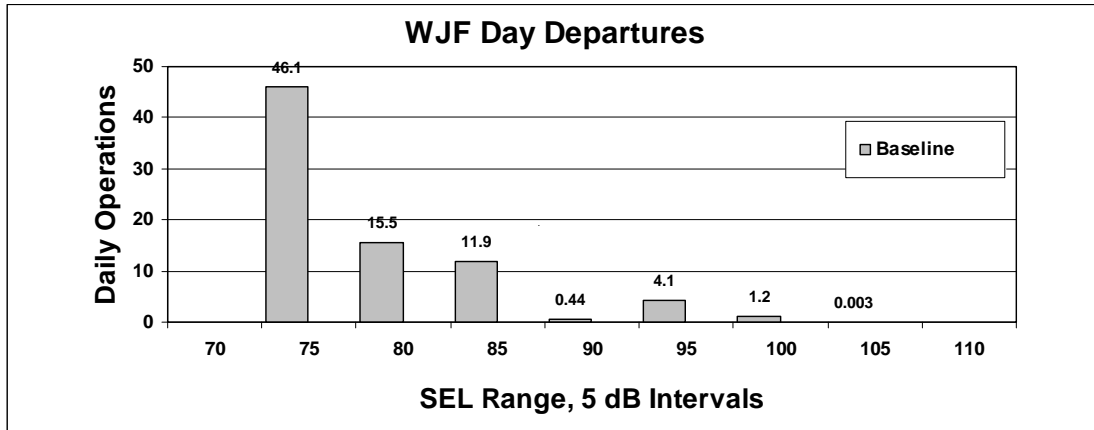


Figure B.8.32 WJF—Daytime Distributions of Baseline and Diverted SEL Values  
Source: HMMH

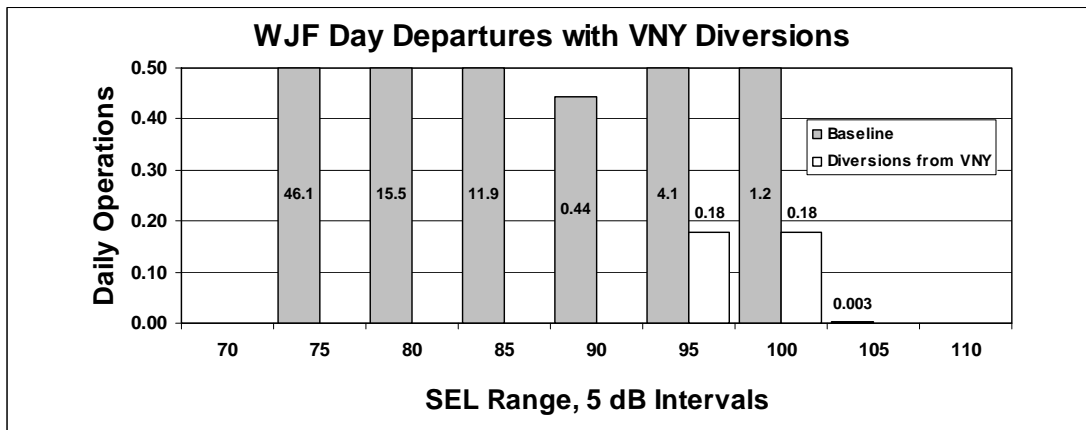

**Table B.8.18** WJF—Average Day (7 a.m.–7 p.m.) Departures with and without Diverted Operations

Source: HMMH

| SEL Range | WJF Average Day Departures |                     |                 |                          | Approx. Days between Diversions |
|-----------|----------------------------|---------------------|-----------------|--------------------------|---------------------------------|
|           | Without Diversions         | Forecast Diversions | With Diversions | % Increase in Departures |                                 |
| 70        | --                         | --                  | --              | --                       | --                              |
| 75        | 46.1                       | --                  | 46.1            | --                       | --                              |
| 80        | 15.5                       | --                  | 15.5            | --                       | --                              |
| 85        | 11.9                       | --                  | 11.9            | --                       | --                              |
| 90        | 0.4                        | --                  | 0.4             | --                       | --                              |
| 95        | 4.1                        | .2                  | 4.3             | 4.3%                     | 6                               |
| 100       | 1.2                        | .2                  | 1.4             | 15.0%                    | 6                               |
| 105       | < 0.1                      | --                  | < 0.1           | --                       | --                              |
| 110       | --                         | --                  | --              | --                       | --                              |
| Total     | 79.2                       | .4                  | 79.6            | 0.45%                    | 3                               |

[Note: Numbers may not add due to rounding. More decimal places shown for diverted operations because of small numbers involved.]


**APPENDIX C**  
**NOTICE OF PREPARATION**



## **APPENDIX C**

**NOTICE OF PREPARATION  
NOTICE OF COMPLETION  
SCOPING COMMENTS**

**NOTICE OF PREPARATION OF A  
DRAFT FOCUSED ENVIRONMENTAL IMPACT REPORT  
FOR THE  
VAN NUYS AIRPORT PHASEOUT OF NOISIER AIRCRAFT  
FILE NO. AD 016-07**



**DATE:** November 1, 2007

**TO:** State Clearinghouse, Responsible Agencies, Trustee Agencies, Organizations, and Interested Parties

**LEAD AGENCY:** Los Angeles World Airports  
7301 World Way West, 3<sup>rd</sup> Floor  
Los Angeles, CA 90045  
Contact: Karen Hoo Phone: (310) 646-3853 X 1003

Los Angeles World Airports (LAWA), a department of the City of Los Angeles, plans to prepare a Focused Environmental Impact Report (EIR) for the Van Nuys Airport Phaseout of Noisier Aircraft project. In accordance with Section 15082 of the State California Environmental Quality Act (CEQA) Guidelines, LAWA has prepared this Notice of Preparation (NOP) to provide responsible agencies and other interested parties with information describing the project's proposal and its potential environmental effects. Environmental factors that would be potentially affected by the project have been determined by LAWA to be limited to aircraft noise.

**PROJECT APPLICANT:** Los Angeles World Airports (LAWA)

**PROJECT LOCATION:** Van Nuys Airport (VNY) is located in the northwestern portion of the City of Los Angeles, in the San Fernando Valley, and is generally bounded by Roscoe Boulevard to the north, Vanowen Street to the south, Balboa Boulevard to the west, and Woodley Avenue to the east. See general vicinity map below, Figure 1.

**PROJECT DESCRIPTION:** LAWA proposes to establish a maximum noise level for all aircraft arriving at and departing from Van Nuys Airport (VNY). This would be accomplished by gradually phasing out aircraft that generate noise in excess of the established level of 77 dBA (per FAA Advisory Circular 36-3), beginning with the noisiest aircraft and periodically lowering the maximum noise level. The project proposes no physical development or change in land use, only operational modifications at the existing facility. The reduction in air traffic at VNY would likely increase air traffic at other existing airports in the region; this redistribution of air traffic and its resulting potential for environmental effects related to aircraft noise will be addressed in the Focused EIR.


The Focused EIR will provide an analysis of the potential aircraft noise effects associated with the proposed project, as well as a discussion of those environmental resources determined not to be significant. The Focused EIR will consider alternatives to the proposed project, including a No Project Alternative, and another alternative or other alternatives deemed to be feasible.

**REVIEW PERIOD:** As specified by the State CEQA Guidelines, this NOP will be circulated for a 30-day review period. LAWA welcomes agency and public input during this period regarding the scope and content of environmental information that must be included in the Draft Focused EIR, including input from agencies on matters related to each of their areas of responsibility. **Comments may be submitted, in writing, by 5:00 p.m. on November 30, 2007** and addressed to:

Karen Hoo  
Los Angeles World Airports  
Environmental Planning  
7301 World Way West, 3<sup>rd</sup> Floor  
Los Angeles, CA 90045  
Phone: (310) 646-3853 X 1003 or  
<http://www.lawa.org/vny/vnyEnvironment.cfm>

**SCOPING MEETING:** LAWA is scheduled to hold a Public Scoping Meeting for the EIR on November 15, 2007 to describe the proposed project and the CEQA environmental process, and to receive public and agency input on the information to be included in the EIR. The Public Scoping Meeting will be held from 6:00 PM to 8:30 PM at:

Van Nuys Airtel Plaza Hotel  
7277 Valjean Avenue, Van Nuys  
California 91406

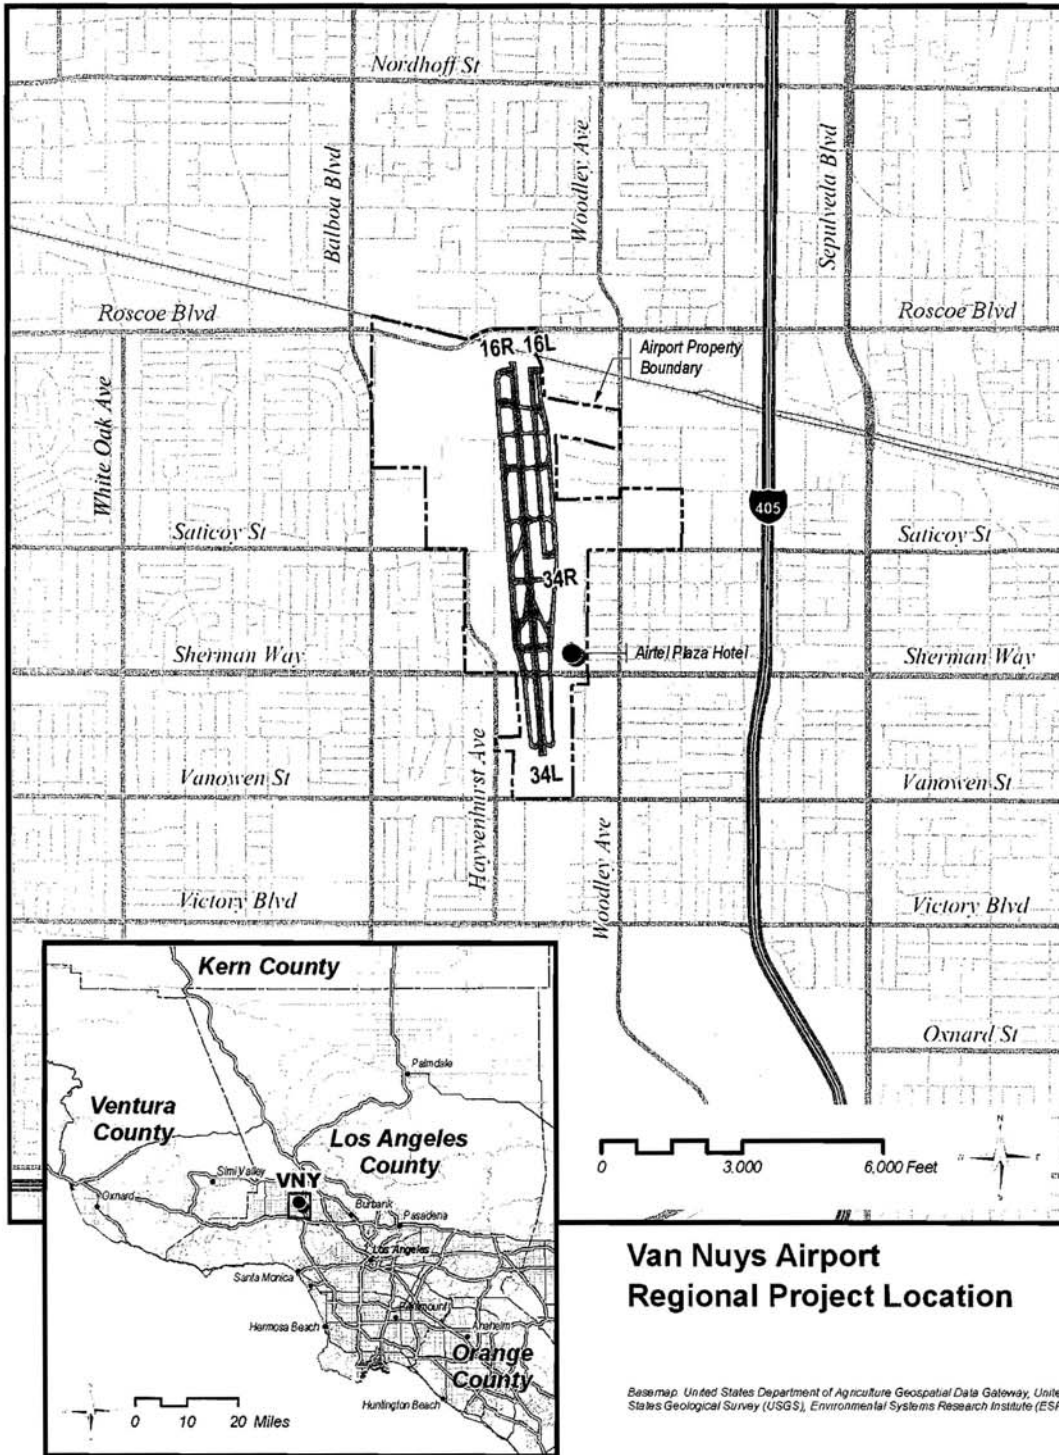

**Form A**

**Notice of Completion and Environmental Document Transmittal**

|       |
|-------|
| SCH # |
|-------|

For U.S. Mail: State Clearinghouse, P.O. Box 3044, Sacramento, CA 95812-3044  
 For Hand Delivery/Street Address: 1400 Tenth Street, Sacramento, CA 95814

**Project Title:** Van Nuys Airport Phaseout of Noisier Aircraft  
**Lead Agency:** Los Angeles World Airports **Contact Person:** Karen Hoo  
**Street Address:** 7301 World Way West, 3<sup>rd</sup> Floor **Telephone:** (310) 646-3853 X 1003  
**City:** Los Angeles **Zip Code:** 90045 **County:** Los Angeles

**Project Location:**  
**County:** Los Angeles **City/Nearest Community:** Los Angeles (Van Nuys, Reseda, Mission Hills)  
**Cross Streets:** Roscoe Boulevard and Balboa Boulevard **Zip Code:** 91406  
**Assessor's Parcel No.:** 2205-010-905 **Section:** \_\_\_\_\_ **Twp.:** \_\_\_\_\_ **Range:** \_\_\_\_\_ **Base:** \_\_\_\_\_  
**Within 2 Miles:** State Hwy #: I-405 **Waterways:** [none]  
**Airports:** Van Nuys Airport (project site) **Railways:** Southern Pacific / MTA **Schools:** various

**Document Type:**  
**CEQA:**  NOP  Draft EIR **NEPA:**  NOI **Other:**  Joint Document  
 Early Cons  Supplement to EIR  EA  Final Document  
 Neg Dec  Subsequent EIR  Draft EIS  Other: \_\_\_\_\_  
 Mit Neg Dec  Other: \_\_\_\_\_  FONSI \_\_\_\_\_

**Local Action Type:**  
 General Plan Update  Specific Plan  Rezone  Annexation  
 General Plan Amendment  Master Plan  Prezone  Redevelopment  
 General Plan Element  Planned Unit Development  Use Permit  Coastal Permit  
 Community Plan  Site Plan  Land Division (Subdivision, etc.)  Other: Restriction of aircraft operations

**Development Type:**  
 Residential: *Units* \_\_\_\_\_ *Acres* \_\_\_\_\_  Water Facilities: *Type* \_\_\_\_\_ *MGD* \_\_\_\_\_  
 Office: *Sq.ft.* \_\_\_\_\_ *Acres* \_\_\_\_\_ *Employees* \_\_\_\_\_  Transportation: *Type* \_\_\_\_\_  
 Commercial: *Sq.ft.* \_\_\_\_\_ *Acres* \_\_\_\_\_ *Employees* \_\_\_\_\_  Mining: *Mineral* \_\_\_\_\_  
 Industrial: *Sq.ft.* \_\_\_\_\_ *Acres* \_\_\_\_\_ *Employees* \_\_\_\_\_  Power: *Type* \_\_\_\_\_ *MW* \_\_\_\_\_  
 Educational: \_\_\_\_\_  Waste Treatment: *Type* \_\_\_\_\_ *MGD* \_\_\_\_\_  
 Recreational: \_\_\_\_\_  Hazardous Waste: *Type* \_\_\_\_\_  
**Total Acres (approximate):** [none]  Other: [No physical development is proposed]

**Project Issues That May Have a Significant or Potentially Significant Impact:**  
 Aesthetic/Visual  Fiscal  Recreation/Parks  Vegetation  
 Agricultural Land  Flood Plain/Flooding  Schools/Universities  Water Quality  
 Air Quality  Forest Land/Fire Hazard  Septic Systems  Water Supply/Groundwater  
 Archeological/Historical  Geologic/Seismic  Sewer Capacity  Wetland/Riparian  
 Biological Resources  Minerals  Soil Erosion/Compaction/Grading  Growth Inducement  
 Coastal Zone  Noise  Solid Waste  Land Use  
 Drainage/Absorption  Population/Housing Balance  Toxic/Hazardous  Cumulative Effects  
 Economic/Jobs  Public Services/Facilities  Traffic/Circulation  Other: \_\_\_\_\_

**Present Land Use/Zoning/General Plan Designation:**  
 GP Land Use: Light Industrial  
 Zones: [Q]M2-1VL; [T][Q]M2-1VL (Heavy Manufacturing)

**Project Description:** (please use a separate page if necessary)  
 Los Angeles World Airports (LAWA) proposes to establish a maximum noise level for all aircraft arriving at and departing from Van Nuys Airport. This would be accomplished by gradually phasing out aircraft that generate noise in excess of the established level of 77 dBA, beginning with the noisiest aircraft and periodically lowering the maximum noise level. The project proposes no physical development or change in land use, only operational modifications at the existing facility.

NOTE: Clearinghouse will assign identification numbers for all new projects. If an SCH number already exists for a project (e.g., Notice of Preparation or previous draft document), please fill in. Revised 2004



**Form A, continued**  
**Notice of Completion and Environmental Document Transmittal**

|   |
|---|
| <b>Key</b><br><b>S</b> = Document sent by lead agency<br><b>X</b> = Document sent by SCH<br><b>D</b> = Suggested distribution |
|---|

**Reviewing Agencies Checklist**

Lead Agencies may recommend State Clearinghouse distribution by marking agencies below.

- |  |  |
|--|--|
| <input type="checkbox"/> Air Resources Board                         | <input type="checkbox"/> Office of Emergency Services  |
| <input type="checkbox"/> Boating and Waterways, Department of        | <input type="checkbox"/> Office of Historic Preservation   |
| <input type="checkbox"/> California Highway Patrol                   | <input type="checkbox"/> Parks and Recreation  |
| <input checked="" type="checkbox"/> Caltrans District # <u>7</u>     | <input type="checkbox"/> Pesticide Regulation, Department of   |
| <input checked="" type="checkbox"/> Caltrans Division of Aeronautics | <input type="checkbox"/> Public Utilities Commission   |
| <input type="checkbox"/> Caltrans Planning                           | <input type="checkbox"/> Reclamation Board   |
| <input type="checkbox"/> Coachella Valley Mountains Conservancy      | <input type="checkbox"/> Regional WQCB # _____   |
| <input type="checkbox"/> Coastal Commission                          | <input type="checkbox"/> Resources Agency  |
| <input type="checkbox"/> Colorado River Board Commission             | <input type="checkbox"/> S.F. Bay Conservation and Development Commission                                |
| <input type="checkbox"/> Conservation, Department of                 | <input type="checkbox"/> San Gabriel and Lower Los Angeles Rivers and Mountains Conservancy              |
| <input type="checkbox"/> Corrections, Department of                  | <input type="checkbox"/> San Joaquin River Conservancy   |
| <input type="checkbox"/> Delta Protection Commission                 | <input type="checkbox"/> Santa Monica Mountains Conservancy  |
| <input type="checkbox"/> Education, Department of                    | <input type="checkbox"/> State Lands Commission  |
| <input type="checkbox"/> Office of Public School Construction        | <input type="checkbox"/> SWRCB: Clean Water Grants   |
| <input type="checkbox"/> Energy Commission                           | <input type="checkbox"/> SWRCB: Water Quality  |
| <input type="checkbox"/> Fish and Game Region # _____                | <input type="checkbox"/> SWRCB: Water Rights   |
| <input type="checkbox"/> Food and Agriculture, Department of         | <input type="checkbox"/> Tahoe Regional Planning Agency  |
| <input type="checkbox"/> Forestry and Fire Protection                | <input type="checkbox"/> Toxic Substances Control, Department of   |
| <input type="checkbox"/> General Services, Department of             | <input type="checkbox"/> Water Resources, Department of  |
| <input type="checkbox"/> Health Services, Department of              | <input checked="" type="checkbox"/> Other: <u>Federal Aviation Administration Western Pacific Region</u> |
| <input type="checkbox"/> Housing and Community Development           | <input type="checkbox"/> <u>Southern California Association of Governments</u>                           |
| <input type="checkbox"/> Integrated Waste Management Board           | <input checked="" type="checkbox"/> Other: <u>South Coast Air Quality Management District</u>            |
| <input type="checkbox"/> Native American Heritage Commission         | <input type="checkbox"/> <u>Los Angeles County Airport Land Use Commission</u>                           |

**Local Public Review Period** (to be filled in by lead agency):

Starting Date: November 1, 2007 Ending Date: November 30, 2007

|   |
|---|
| <b>Lead Agency</b> (complete if applicable):<br>Consulting Firm: _____<br>Address: _____<br>City/State/Zip: _____<br>Contact: _____<br>Telephone: _____ |
|---|

|  |
|--|
| <b>Applicant:</b><br>Name: <u>Los Angeles World Airports</u><br>Address: <u>7301 World Way West, 3<sup>rd</sup> Floor</u><br>City/State/Zip: <u>Los Angeles, CA 90045</u><br>Telephone: <u>Karen Hoo (310) 646-3853 X 1003</u> |
|--|

Signature of Lead Agency Representative \_\_\_\_\_ Date: November 1, 2007

Authority cited: Sections 21083 and 21087, Public Resources Code. Reference: Section 21161, Public Resources Code.

Revised 2004

# Scoping Comments

Comment Period: November 1–30, 2007

| No.             | Author/Contact/Address   | Letter Date | Comment Summary   | EIR Issue          |
|-----------------|--|-------------|---|--------------------|
| <b>Agencies</b> |  |             |   |                    |
| 1               | <b>South Coast Air Quality Management District</b><br>Attn: Steve Smith, Ph.D.<br>21865 Copley Drive<br>Diamond Bar, CA 91765                            | 10/26/07    | Recommends lead agency consider analysis pursuant to <i>SCAQMD CEQA Handbook</i> and gives additional web links for updated thresholds/analysis methodology and mitigation information.<br><br>In addition to requesting copies of EIR and relevant technical appendices, requests electronic versions of modeling and health risk assessment files for review. | Air Quality        |
| 2               | <b>Native American Heritage Commission</b><br>Dave Singleton<br>915 Capitol Mall, Room 364<br>Sacramento, CA 95814                                       | 11/01/07    | Requests CHRIS records search, Sacred Lands Files search, tribal consultation, and proper accounting for cultural resources management.   | Cultural Resources |
| 3               | <b>Southern California Association of Governments</b><br>Attn: Laverne Jones<br>818 West Seventh Street, 12 <sup>th</sup> Floor<br>Los Angeles, CA 90017 | 11/15/07    | Notes that project does not qualify as “regionally significant.”  | None               |

| No. | Author/Contact/Address   | Letter Date | Comment Summary   | EIR Issue   |
|-----|--|-------------|---|---|
| 4   | <b>County of Ventura Department of Airports</b><br>Attn: Todd L. McNamee, AAE<br>555 Airport Way<br>Camarillo, CA 93010                                | 11/28/07    | <p>Summarizes statistics for Camarillo (CMA) and Oxnard (OXR) airports, and notes these facilities are relatively busy but garnering few noise complaints, due primarily to an effective outreach program and activity curfew at the airports; attaches pilot guides that are a component of their outreach.</p> <p>Requests analysis of how redistribution of VNY's Stage 2 aircraft will affect noise and air quality, as well as economic effects on VNY operators.</p> <p>Requests analysis of whether impacts of redistributing air traffic are able to be mitigated.</p> <p>Requests analysis of whether other regional airports have physical space to store/house aircraft, and to accommodate increased business operations associated with the redistributed operators.</p> | Noise<br><br>Noise, Air Quality, Economics<br><br>General<br><br>Land Use |
| 5   | <b>County of Los Angeles Department of Public Works Land Development Division</b><br>Attn: Conal McNamara, AICP<br>P.O. Box 1460<br>Alhambra, CA 91802 | 11/29/07    | No comment; requests copy of the Draft EIR.   | None  |
| 6   | <b>U.S. Congressman Brad Sherman</b><br>Attn: Michael Tou, Policy Deputy<br>5000 Van Nuys Boulevard, Suite 420<br>Sherman Oaks, CA 91403               | 11/15/07    | <p>Supports project; states existing noise is excessive and exceeds the established level of 77 dBA.</p> <p>Encourages LAWA to adopt the City's "pre-ANCA Stage 2 Phase-Out proposal.</p> <p>Encourages LAWA to adopt a provision allowing temporary Stage 2 operations for operators who obtain modifications to comply</p>  | Noise<br><br>Non-CEQA   |

| No.                  | Author/Contact/Address  | Letter Date | Comment Summary   | EIR Issue                                      |
|----------------------|---|-------------|---|--|
|                      |   |             | <p>with Stage 3 noise levels.</p> <p>States VNY is critical to local economy; needs to balance ongoing productivity with citizen desire for peace and quiet.</p>  | Non-CEQA                                       |
| <b>Organizations</b> |   |             |   |  |
| 7                    | <p><b>National Business Aviation Association</b><br/> c/o Zuckert Scoutt &amp; Rasenberger, LLP<br/> Attn: Frank J. Costello<br/> 888 Seventeenth Street NW<br/> Washington, D.C. 20006</p> | 11/30/07    | <p>States that project is unlawful (conflicts with ANCA, Part 161, Federal Aviation Act, Commerce Clause).</p> <p>States that project is inconsistent with the interests of business aviation.</p> <p>States that project will have an impact on other communities where aircraft is redistributed; may also result in operators moving all their business out of VNY to avoid splitting operations, with Stage 3/4 in one location and Stage 1/2 in another.</p> | <p>Non-CEQA</p> <p>Non-CEQA</p> <p>General</p> |

| No.   | Author/Contact/Address   | Letter Date | Comment Summary   | EIR Issue   |
|---|--|-------------|---|---|
| <b><i>Residents/Residents Organizations</i></b> |  |             |   |   |
| 8   | <b>Homeowners of Encino</b><br>Attn: Gerald Silver, President<br>P.O. Box 260205<br>Encino, CA 91426 | 11/04/07    | Supports project; states existing noise is excessive. States belief that the project will have no negative consequences, and that there is no feasible alternative to a complete Stage 2 jet phaseout.<br><br>States that phaseout is consistent with City policy, VNY Master Plan.<br><br>States phaseout is grandfathered, pre-ANCA, and does not require FAA permission.<br><br>Suggests EIR must only consider environmental consequences and not economic consequences.<br><br>Indicates that aircraft operators have many options for reducing existing aircraft noise. | Noise<br><br>Land Use<br><br>Non-CEQA<br><br>General<br><br>Noise |
| 9   | Joel Marks<br>3757 Sheridge Drive<br>Sherman Oaks, CA 91403  | 11/16/07    | Supports project; states existing noise is excessive.   | Noise   |
| 10  | Valerie Kurokawa<br>4816 Norwich Avenue<br>Sherman Oaks, CA 91403                                    | 11/24/07    | Supports project; states existing noise is excessive and affects quality of life.   | Noise   |
| 11  | Robert B. Greene<br>4012 Sumac Drive<br>Sherman Oaks, CA 91403                                       | 11/26/07    | Supports project; states existing noise is excessive.   | Noise   |
| 12  | Daniel Prisk<br>16648 Calahan Street<br>North Hills, CA 91343  | 11/26/07    | Supports project; states existing noise is excessive and makes outdoor activity difficult; noise devalues property.   | Noise   |



## South Coast Air Quality Management District

21865 Copley Drive, Diamond Bar, CA 91765-4178  
(909) 396-2000 • www.aqmd.gov

'07 NOV 6 PM 12:02 *CL*

October 26, 2007

Ms. Karen Hoo  
Los Angeles World Airports  
Environmental Planning  
7301 World Way West, 3<sup>rd</sup> Floor  
Los Angeles, CA 90045

Dear Ms. Hoo:

### **Notice of Preparation of a Draft Environmental Impact Report (Draft EIR) for the Van Nuys Airport Phaseout of Noisier Aircraft Project**

The South Coast Air Quality Management District (SCAQMD) appreciates the opportunity to comment on the above-mentioned document. The SCAQMD's comments are recommendations regarding the analysis of potential air quality impacts from the proposed project that should be included in the draft environmental impact report (EIR). Please send the SCAQMD a copy of the Draft EIR upon its completion. **In addition, please send with the draft EIR all appendices or technical documents related to the air quality analysis and electronic versions of all air quality modeling and health risk assessment files. Without all files and supporting air quality documentation, the SCAQMD will be unable to complete its review of the air quality analysis in a timely manner. Any delays in providing all supporting air quality documentation will require additional time for review beyond the end of the comment period.**

#### Air Quality Analysis

The SCAQMD adopted its California Environmental Quality Act (CEQA) Air Quality Handbook in 1993 to assist other public agencies with the preparation of air quality analyses. The SCAQMD recommends that the Lead Agency use this Handbook as guidance when preparing its air quality analysis. Copies of the Handbook are available from the SCAQMD's Subscription Services Department by calling (909) 396-3720. Alternatively, the lead agency may wish to consider using the California Air Resources Board (CARB) approved URBEMIS 2007 Model. This model is available on the SCAQMD Website at: [www.aqmd.gov/ceqa/models.html](http://www.aqmd.gov/ceqa/models.html).

The Lead Agency should identify any potential adverse air quality impacts that could occur from all phases of the project and all air pollutant sources related to the project. Air quality impacts from both construction (including demolition, if any) and operations should be calculated. Construction-related air quality impacts typically include, but are not limited to, emissions from the use of heavy-duty equipment from grading, earth-loading/unloading, paving, architectural coatings, off-road mobile sources (e.g., heavy-duty construction equipment) and on-road mobile sources (e.g., construction worker vehicle trips, material transport trips). Operation-related air quality impacts may include, but are not limited to, emissions from stationary sources (e.g., boilers), area sources (e.g., solvents and coatings), and vehicular trips (e.g., on- and off-road tailpipe emissions and entrained dust). Air quality impacts from indirect sources, that is, sources that generate or attract vehicular trips should be included in the analysis.

The SCAQMD has developed a methodology for calculating PM<sub>2.5</sub> emissions from construction and operational activities and processes. In connection with developing PM<sub>2.5</sub> calculation methodologies, the SCAQMD has also developed both regional and localized significance thresholds. The SCAQMD requests that the lead agency quantify PM<sub>2.5</sub> emissions and compare the results to the recommended PM<sub>2.5</sub> significance thresholds. Guidance for calculating PM<sub>2.5</sub> emissions and PM<sub>2.5</sub> significance thresholds can be found at the following internet address: [http://www.aqmd.gov/ceqa/handbook/PM2\\_5/PM2\\_5.html](http://www.aqmd.gov/ceqa/handbook/PM2_5/PM2_5.html).

**Comment Letter 1**

Ms. Karen Hoo

-2-

October 26, 2007

In addition to analyzing regional air quality impacts the SCAQMD recommends calculating localized air quality impacts and comparing the results to localized significance thresholds (LSTs). LST's can be used in addition to the recommended regional significance thresholds as a second indication of air quality impacts when preparing a CEQA document. Therefore, when preparing the air quality analysis for the proposed project, it is recommended that the lead agency perform a localized significance analysis by either using the LSTs developed by the SCAQMD or performing dispersion modeling as necessary. Guidance for performing a localized air quality analysis can be found at <http://www.aqmd.gov/ceqa/handbook/LST/LST.html>.

It is recommended that lead agencies for projects generating or attracting vehicular trips, especially heavy-duty diesel-fueled vehicles, perform a mobile source health risk assessment. Guidance for performing a mobile source health risk assessment ("Health Risk Assessment Guidance for Analyzing Cancer Risk from Mobile Source Diesel Idling Emissions for CEQA Air Quality Analysis") can be found on the SCAQMD's CEQA web pages at the following internet address: [http://www.aqmd.gov/ceqa/handbook/mobile\\_toxic/mobile\\_toxic.html](http://www.aqmd.gov/ceqa/handbook/mobile_toxic/mobile_toxic.html). An analysis of all toxic air contaminant impacts due to the decommissioning or use of equipment potentially generating such air pollutants should also be included.

**Mitigation Measures**


In the event that the project generates significant adverse air quality impacts, CEQA requires that all feasible mitigation measures that go beyond what is required by law be utilized during project construction and operation to minimize or eliminate significant adverse air quality impacts. To assist the Lead Agency with identifying possible mitigation measures for the project, please refer to Chapter 11 of the SCAQMD CEQA Air Quality Handbook for sample air quality mitigation measures. Additional mitigation measures can be found on the SCAQMD's CEQA web pages at the following internet address: [www.aqmd.gov/ceqa/handbook/mitigation/MM\\_intro.html](http://www.aqmd.gov/ceqa/handbook/mitigation/MM_intro.html) Additionally, SCAQMD's Rule 403 – Fugitive Dust, and the Implementation Handbook contain numerous measures for controlling construction-related emissions that should be considered for use as CEQA mitigation if not otherwise required. Other measures to reduce air quality impacts from land use projects can be found in the SCAQMD's Guidance Document for Addressing Air Quality Issues in General Plans and Local Planning. This document can be found at the following internet address: <http://www.aqmd.gov/prdas/aqguide/aqguide.html>. In addition, guidance on siting incompatible land uses can be found in the California Air Resources Board's Air Quality and Land Use Handbook: A Community Perspective, which can be found at the following internet address: <http://www.arb.ca.gov/ch/handbook.pdf>. Pursuant to state CEQA Guidelines §15126.4 (a)(1)(D), any impacts resulting from mitigation measures must also be discussed.

**Data Sources**

SCAQMD rules and relevant air quality reports and data are available by calling the SCAQMD's Public Information Center at (909) 396-2039. Much of the information available through the Public Information Center is also available via the SCAQMD's World Wide Web Homepage (<http://www.aqmd.gov>).

The SCAQMD is willing to work with the Lead Agency to ensure that project-related emissions are accurately identified, categorized, and evaluated. Please call Charles Blankson, Ph.D., Air Quality Specialist, CEQA Section, at (909) 396-3304 if you have any questions regarding this letter.

Sincerely,



Steve Smith, Ph.D.  
Program Supervisor, CEQA Section  
Planning, Rule Development and Area Sources

SS:CB:AK  
LAC071023-03AK  
Control Number

## Comment Letter 2

(2)

STATE OF CALIFORNIA

Arnold Schwarzenegger, Governor

## NATIVE AMERICAN HERITAGE COMMISSION

915 CAPITOL MALL, ROOM 364  
SACRAMENTO, CA 95814  
(916) 653-6251  
Fax (916) 657-5390  
[www.nahc.ca.gov](http://www.nahc.ca.gov)  
ds\_nahc@pacbell.net



November 1, 2007

Ms. Karen Hoo  
**Los Angeles World Airports**  
7301 World Way West, 3<sup>rd</sup> Floor  
Los Angeles, CA 91406

Re: SCH# 2007101110, CEQA Notice of Preparation (NOP) draft Environmental Impact Report (DEIR) for the Van Nuys Airport Phaseout of Noisier Aircraft, Los Angeles County, California

Dear Ms. Hoo:

Thank you for the opportunity to comment on the above-referenced document. The California Environmental Quality Act (CEQA) requires that any project that causes a substantial adverse change in the significance of an historical resource, that includes archeological resources, is a 'significant effect' requiring the preparation of an Environmental Impact Report (EIR per CEQA guidelines § 15064.5(b)(c)). In order to comply with this provision, the lead agency is required to assess whether the project will have an adverse impact on these resources within the 'area of potential effect (APE),' and if so, to mitigate that effect. To adequately assess the project-related impacts on historical resources, the Commission recommends the following action:

- ✓ Contact the appropriate California Historic Resources Information Center (CHRIS). Contact information for the 'Information Center' nearest you is available from the State Office of Historic Preservation in Sacramento (916) 653-7278. The record search will determine:
  - If a part or the entire (APE) has been previously surveyed for cultural resources.
  - If any known cultural resources have already been recorded in or adjacent to the APE.
  - If the probability is low, moderate, or high that cultural resources are located in the APE.
  - If a survey is required to determine whether previously unrecorded cultural resources are present.
- ✓ If an archaeological inventory survey is required, the final stage is the preparation of a professional report detailing the findings and recommendations of the records search and field survey.
  - The final report containing site forms, site significance, and mitigation measures should be submitted immediately to the planning department. All information regarding site locations, Native American human remains, and associated funerary objects should be in a separate confidential addendum, and not be made available for public disclosure.
  - The final written report should be submitted within 3 months after work has been completed to the appropriate regional archaeological Information Center.
- ✓ Contact the Native American Heritage Commission (NAHC) for:
  - A Sacred Lands File (SLF) search of the project area and information on tribal contacts in the project vicinity who may have information on cultural resources in or near the APE. Please provide us site identification as follows: USGS 7.5-minute quadrangle citation with name, township, range and section. This will assist us with the SLF.
  - Also, we recommend that you contact the Native American contacts on the attached list to get their input on the effect of potential project (e.g. APE) impact. In many cases a culturally-affiliated Native American tribe or person will be the only source of information about the existence of a cultural resource.
- ✓ Lack of surface evidence of archeological resources does not preclude their subsurface existence.
  - Lead agencies should include in their mitigation plan provisions for the identification and evaluation of accidentally discovered archeological resources, per California Environmental Quality Act (CEQA) §15064.5 (f). In areas of identified archaeological sensitivity, a certified archaeologist and a culturally affiliated Native American, with knowledge in cultural resources, should monitor all ground-disturbing activities.
  - Lead agencies should include in their mitigation plan provisions for the disposition of recovered artifacts, in consultation with culturally affiliated Native Americans.



Comment Letter 2


√ Lead agencies should include provisions for discovery of Native American human remains or unmarked cemeteries in their mitigations plans.

- CEQA Guidelines §15064.5(d) requires the lead agency to work with the Native Americans identified by this Commission if the Initial Study identifies the presence or likely presence of Native American human remains within the APE. CEQA Guidelines provide for agreements with Native American groups, identified by the NAHE, to ensure the appropriate and dignified treatment of Native American human remains and any associated grave goods.
- Health and Safety Code §7050.5, Public Resources Code §5097.98 and CEQA Guidelines §15064.5(d) mandate procedures to be followed in the event of an accidental discovery of any human remains in a location other than a dedicated cemetery.

√ Lead agencies should consider avoidance, as defined in CEQA Guidelines §15370 when significant cultural resources are discovered during the course of project planning or execution.

Please feel free to contact me at (916) 653-6251 if you have any questions.

Sincerely,

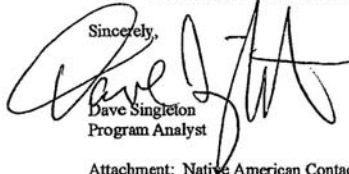

Dave Singleton  
Program Analyst

Attachment: Native American Contact List

**Comment Letter 2**

**Native American Contacts  
Los Angeles County  
November 1, 2007**

Beverly Salazar Folkes  
1931 Shadybrook Drive  
Thousand Oaks , CA 91362  
805 492-7255

Chumash  
Tataviam  
Fernandeño

Tongva Ancestral Territorial Tribal Nation  
John Tommy Rosas, Tribal Administrator  
4712 Admiralty Way, Suite 172  
Marina Del Rey , CA 90292  
310-570-6567  
Gabrielino Tongva

Fernandeno Tataviam Band of Mission Indians  
Randy Guzman-Folkes, Cultural/Environ Depart  
601 South Brand Boulevard, Suite 102  
San Fernando , CA 91340  
ced@tataviam.org  
(818) 837-0794 Office  
(805) 501-5279 Cell  
(818) 837-0796 Fax

Fernandeno  
Tataviam

Kitanemuk & Yowlumne Tejon Indians  
Delia Dominguez  
981 N. Virginia  
Covina , CA 91722  
(626) 339-6785  
Yowlumne  
Kitanemuk

LA City/County Native American Indian Comm  
Ron Andrade, Director  
3175 West 6th Street, Rm. 403  
Los Angeles , CA 90020  
(213) 351-5324  
(213) 386-3995 FAX

San Fernando Band of Mission Indians  
John Valenzuela, Chairperson  
P.O. Box 221838  
Newhall , CA 91322  
tsen2u@msn.com  
(661) 753-9833 Office  
(760) 885-0955 Cell  
(760) 949-1604 Fax  
Fernandeño  
Tataviam  
Serrano  
Vanyume  
Kitanemuk

Ti'At Society  
Cindi Alvitre  
6515 E. Seaside Walk, #C  
Long Beach , CA 90803  
calvitre@yahoo.com  
(714) 504-2468 Cell

Gabrielino

Gabrieleno/Tongva San Gabriel Band of Mission  
Indians - Anthony Morales, Chairperson.  
PO Box 693  
San Gabriel , CA 91778  
ChiefRBwife@aol.com  
(626) 286-1632  
(626) 286-1758 - Home  
(626) 286-1262 Fax  
Gabrielino Tongva

This list is current only as of the date of this document.

Distribution of this list does not relieve any person of statutory responsibility as defined in Section 7050.5 of the Health and Safety Code, Section 5097.94 of the Public Resources Code and Section 5097.98 of the Public Resources Code.

This list is only applicable for contacting local Native American with regard to cultural resources for the proposed SCH#2007101110; CEQA Notice of Preparation (NOP) and draft Environment Impact Report (DEIR) for the Van Nuys Airport Phaseout of Noisier Aircraft; Los Angeles World Airports; Los Angeles County, California.

**Comment Letter 3**

③



**ASSOCIATION of GOVERNMENTS**

**Main Office**  
 818 West Seventh Street  
 12th Floor  
 Los Angeles, California  
 90017-3435  
 t (213) 236-1800  
 f (213) 236-1825  
 www.scag.ca.gov

**Officers:** President: Gary O'Neil, San Bernardino County  
 First Vice President: Richard Dixon, Lake Forest  
 Second Vice President: Harry Baldwin, San Gabriel  
 Immediate Past President: Yvonne B. Burke, Los Angeles County

**Imperial County:** Victor Castillo, Imperial County -  
 Jim Henry, El Centro

**Los Angeles County:** Yvonne B. Burke, Los Angeles County -  
 Don Naranjo, Los Angeles County - Richard Abadía, Los Angeles - Jim Aldinger, Manhattan Beach -  
 Rany Baldwin, San Gabriel - Tony Cardenas, Los Angeles - Sean Carroll, La Habra Heights - Margaret Clark, Rosemead - Gene Daniels, Pompano - Jerry Durkin, Inglewood - Rae Garcelick, Long Beach - David Goff, Downey - Eric Garcelick, Los Angeles - Wendy Grant, Los Angeles - Frank Garcia, Calabasas - Janice Hahn, Los Angeles - Nadine Hall, Compton - Keith W. Hanks, Azusa - Neil Hixson, Los Angeles - Jim Jeffa, Lancaster - Tom LaBerge, Los Angeles - Paula Lantz, Pomona - Barbara Medina, Alhambra - Larry Nelson, Artesia - Paul Novak, Torrance - Pam O'Connor, Santa Monica - Bernard Park, Los Angeles - Jan Perry, Los Angeles - Ed Reyes, Los Angeles - Bill Rosenfeld, Los Angeles - Greg Smith, Los Angeles - Ross Sykes, Walnut -  
 John Lee, South Pasadena - Jack Ryan, Long Beach - Antonio Mitalipani, Los Angeles - Dennis Wulfborn, Calabasas - Jack West, Los Angeles - Herb J. Weston, Jr., Los Angeles - Dennis Zier, Los Angeles

**Orange County:** Chris Morby, Orange County -  
 Christine Barnes, La Palma - John Beaman, Brea - Lisa Bane, Northridge - Debbie Cook, Huntington Beach - Leslie Dalgle, Newport Beach - Richard Olson, Lake Forest -  
 Troy Edgar, Los Alamitos - Paul Glask, Laguna Niguel - Robert Hernandez, Anaheim - Sharon Quirk, Fullerton

**Riverside County:** Jeff Stone, Riverside County -  
 Thomas Buckley, Lake Elsinore - Russel Ridgeway, Moreno Valley - Tom Lovelidge, Riverside - Greg Prentiss, Cathedral City - Tom Roberts, Temecula

**San Bernardino County:** Gary O'Neil, San Bernardino County -  
 Lawrence Sida, Redwood - Paul Eskin, Montclair - Lee Ann Garcia, Grand Terrace - Tim Jasper, Iowa of Apple Valley - Larry McCallion, Highland - Deborah Robertson, Reddo - Alan Wagner, Ontario

**Ventura County:** Linda Parks, Yuba County -  
 Glen Becerra, Siski Youly - Carl Mantheune, San Buenaventura - Tom Young, Fort Huachuca

**Tribal Government Representative:** Andrew Masel, Sr., Pechanga Band of Luiseño Indians

**Orange County Transportation Authority:** Art Brown, Burren Park

**Riverside County Transportation Commission:** Robin Lowe, Hemet

**San Bernardino Associated Governments:** Paul Leon

**Ventura County Transportation Commission:** Keith Millhouse, Moorpark

November 15, 2007

Ms. Karen Hoo  
 City of Los Angeles  
 Los Angeles World Airports  
 1 World Way, P. O. Box 92216  
 Los Angeles, CA 90009-2216

**RE: SCAG Clearinghouse No. I 20070641 Van Nuys Airport Phaseout of Noisier Aircraft**

Dear Ms. Hoo:

Thank you for submitting the **Van Nuys Airport Phaseout of Noisier Aircraft** for review and comment. As areawide clearinghouse for regionally significant projects, SCAG reviews the consistency of local plans, projects and programs with regional plans. This activity is based on SCAG's responsibilities as a regional planning organization pursuant to state and federal laws and regulations. Guidance provided by these reviews is intended to assist local agencies and project sponsors to take actions that contribute to the attainment of regional goals and policies.

We have reviewed the **Van Nuys Airport Phaseout of Noisier Aircraft**, and have determined that the proposed Project is not regionally significant per SCAG Intergovernmental Review (IGR) Criteria and California Environmental Quality Act (CEQA) Guidelines (Section 15206). Therefore, the proposed Project does not warrant comments at this time. Should there be a change in the scope of the proposed Project, we would appreciate the opportunity to review and comment at that time.

A description of the proposed Project was published in SCAG's **October 16-31, 2007 Intergovernmental Review Clearinghouse Report** for public review and comment.

The project title and SCAG Clearinghouse number should be used in all correspondence with SCAG concerning this Project. Correspondence should be sent to the attention of the Clearinghouse Coordinator. If you have any questions, please contact me at (213) 236-1857. Thank you.

Sincerely,  
  
 LAVERNE JONES, Planning Technician  
 Program Development and Evaluation Division

Doc #141741

**Comment Letter 4**

④

**county of ventura**  
 DEPARTMENT OF AIRPORTS  
 www.ventura.org/airports




---

555 Airport Way ♦ Camarillo, CA 93010 ♦ (805) 388-4274 ♦ Fax: (805) 388-4366

---

November 28, 2007

Ms. Karen Woo  
 Los Angeles World Airports  
 Environmental Planning  
 7301 World Way West, 3<sup>rd</sup> Floor  
 Los Angeles, CA 90045

**Re: Notice of Preparation of a Draft Focused Environmental Impact Report  
 Van Nuys Airport Phase Out of Noisier Aircraft, File # AD 016-07**

Dear Ms Woo:

Thank you for the opportunity to comment on the above referenced project. The County of Ventura operates two General Aviation airports within the cities of Camarillo and Oxnard. Summary statistics are as follows:

|                                |                   |
|--------------------------------|-------------------|
| <b>Camarillo Airport (CMA)</b> |                   |
| Based aircraft                 | 650 (approx.)     |
| Based jet aircraft             | 20 (approx.)      |
| Annual operations              | 150,000 (approx.) |
| Monthly noise complaints       | 8 (avg.)          |
| <b>Oxnard Airport (OXR)</b>    |                   |
| Based aircraft                 | 150 (approx.)     |
| Based jet aircraft             | 2 (approx.)       |
| Annual operations              | 90,000 (approx.)  |
| Monthly noise complaints       | 7 (avg.)          |

As you can see, the County of Ventura operates two relatively busy airports with very few complaints being filed due to aircraft noise. This has been accomplished by years of public outreach to the communities around the airports, educating the pilot population utilizing the airports with regard to noise sensitive areas, and voluntary and legal measures to reduce hours of operation. The County has established ordinance dating back to 1976 that prohibits departures at CMA between the hours of 12:00 A.M. and 5:00 A.M. without prior permission. Additionally, aviation related businesses at CMA and OXR have voluntarily minimized the number of Stage II aircraft to no more than 1/3 of their based aircraft, and the actual percentage is much less. Attached are pilot guides that are a component of our outreach program that further describe some of these measures.

**Comment Letter 4**

Karen Woo – Van Nuys NOP AD 016-07  
November 28, 2007  
Page 2

The notion of Van Nuys Airport phasing out noisier aircraft, thus causing them to be redistributed to surrounding airports is of great concern to Ventura County, as it will potentially have a significant negative impact. Many elements should be considered when preparing your environmental report, including but not limited to:

- What will be the noise impact to the surrounding airports?
- What will the emissions/pollutants impact be to the surrounding airports?
- How can one mitigate those impacts?
- Will the VNY Phase Out cause operators of these aircraft to phase out operating them or relocate them?
- What is the economic impact to the aircraft operators due to the VNY Phase Out?
- Do the surrounding airports that can accommodate the aircraft (i.e. adequate runway length) have facilities available to store/house the aircraft?
- Do the surrounding airports have facilities to house the operator's business operation?

Thank you for the opportunity to comment, and we look forward to reviewing materials as they are developed.

Feel free to contact me at 388-4200 if you have any questions.

Sincerely,



TODD L. MCNAMEE, AAE  
Director of Airports

Attachment

cc : Camarillo Airport Authority  
Aviation Advisory Commission

Chances/#A1/working letters/NOP Van Nuys stage II phase out 112807

## Comment Letter 4

# OXNARD

2889 West Fifth Street  
Oxnard, California 93030  
phone: 805-382-3022/3024  
fax: 805-382-9845  
[www.ventura.org/airports](http://www.ventura.org/airports)

Location: 1 mile west of city  
Coordinates: N34° 12.05' W119° 12.43'  
Field elevation: 45'  
Runway 07-25: 5,953' x 100'  
(Runway 25 displaced threshold landing distance available: 4,576')

Traffic Pattern Altitudes:  
Single Engine Aircraft - 1,043'  
Multi-engine/Turbine Aircraft - 1,443'

#### COMMUNICATIONS:

CTAF: 134.95 (Pilot Controlled Lighting)  
ATIS: 118.05 Phone: 805-985-1758  
Oxnard Ground Control: 121.9  
Oxnard Tower: 134.95 (7:00 a.m. - 9:00 p.m.)  
Point Mugu App/Dep Control: 124.7  
Los Angeles Center: 135.5  
Santa Barbara RCAG: 327.1  
Hawthorne FSS - 1-800-WX-BRIEF  
ASOS - 118.05 (ATIS freq.) or (805) 382-0592  
Nearest NAVAID: CMA VOR 115.8, 067°5.2 DME  
ILS-Runway 25: 108.7


#### LANDING FEE:

Aircraft over 12,500 lbs.: Fee is \$1.00 per 1,000 lbs.  
Fee is \$4.00 or \$1.00 per 1,000 lbs., whichever is greater

#### PARKING RATES:

Single Engine: \$7.00  
Multi-engine: \$9.00  
Aircraft over 12,500 lbs.: \$1.00 per 1,000 lbs.

NOVEMBER 2006

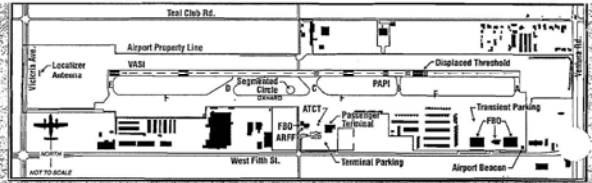

#### AIRPORT SERVICES:

##### Full Service FBOs:

Aspen Helicopters  
(805) 985-5416; (888) 447-7901  
Unicom: 122.95  
Chevron fuel, 100LL, and Jet A  
[www.aspenhelo.com](http://www.aspenhelo.com)

Oxnard Jet Center  
(805) 985-2490

Signature Flight Support  
(805) 382-9893  
Air BP Fuel, 100LL, and Jet A  
[www.bba-aviation.com/flightsupport](http://www.bba-aviation.com/flightsupport)

##### Airline:

United Express (800) 241-6622

##### Lodging:

Courtyard by Marriott (805) 986-8600  
Embassy Suites (805) 989-2400  
Residence Inn (805) 278-2268

##### Rental Cars:

Budget (805) 382-8351  
Dollar (805) 483-6662  
Enterprise (805) 985-8888  
Hertz (805) 985-0911

##### Taxis:

Yellow Cab (805) 483-2444


#### NOISE ABATEMENT PROCEDURES:

The airport environs are noise sensitive in all quadrants. Aircraft operators are requested to practice noise abatement by quiet procedures whenever possible consistent with safety.

- Voluntary curfew - ATC operations - 11:00 p.m. to 5:00 a.m.
- Stage 2 aircraft are restricted to which takeoffs after 10:00 p.m. and before 7:00 a.m.
- Older/louder turbojet aircraft are requested to avoid use of the airport.
- Late night arrivals use GPS Runway 7 approach when wind, weather, and safety permit.
- Remain as high as practical over residential areas during overflight, approaches, and departures.
- Use best rate of climb when departing any runway.
- No touch-and-go or stop-and-go's between 8:00 p.m. and 7:00 a.m. (8:00 a.m. on weekends).
- No formation takeoffs or landings without air traffic permission from the Airport Director.
- Full stop taxi back on taxiways will be permitted only if the aircraft plans to leave the airport traffic area.
- Southbound departures of Runway 25 by turbo-prop turbojet aircraft and aircraft over 12,500 pounds fly to coastline before turning left.
- Southbound departures of Runway 25 by piston powered less than 12,500 lbs. aircraft, after reaching 700' AGL, turn left past the runway end and left before the Edison Canal, or continue to coastline.
- No high power engine run-ups for maintenance between 7:00 p.m. and 7:00 a.m.
- Straight-in arrivals on Runway 25 cross the Camanche Airport at or above 2000' and remain as high as practical over the city until commencing final descent.
- Exercise extreme caution on Runway 25 due to Camanche traffic and instrument approaches being conducted to Oxnard's Runway 25.
- NG departures on Runway 7 from midfield intersection (Taxiway C).
- Use extreme caution when departing Runway 7 due to opposite direction instrument approach traffic.

Compliance with recommended noise abatement procedures is encouraged.  
No procedure should be allowed to compromise flight safety.

**Comment Letter 4**

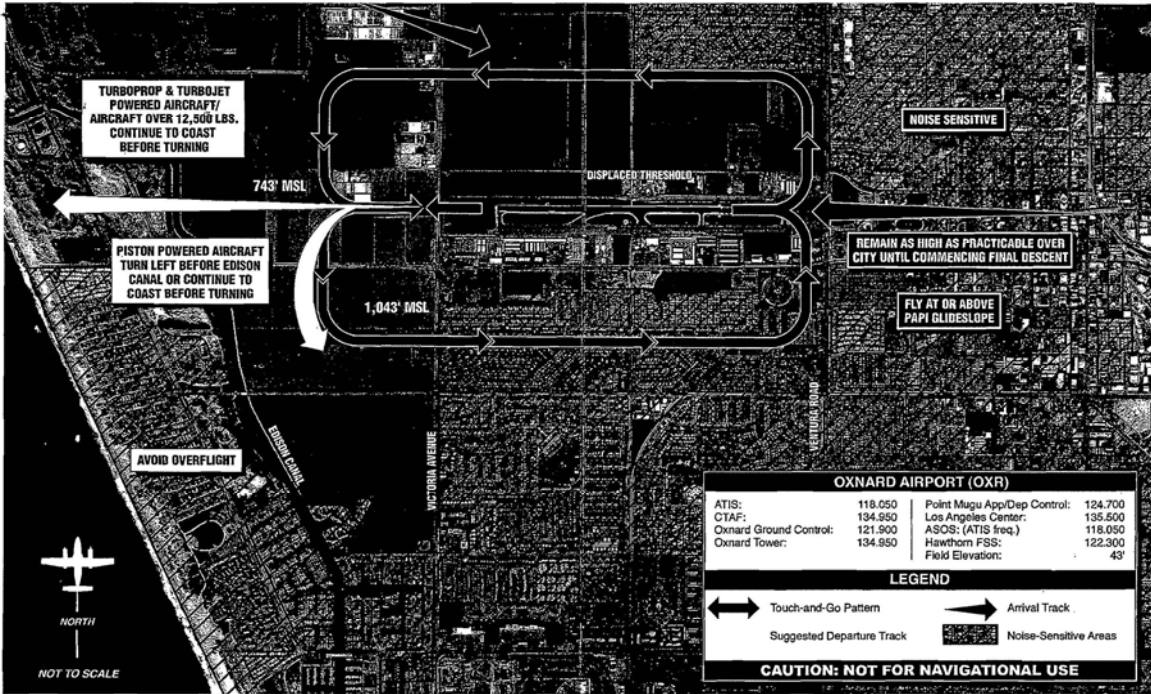

**A.O.P.A. NOISE AWARENESS STEPS**

1. If practical, avoid noise-sensitive areas such as residential areas, open-air assemblies (e.g., sporting events and concerts), and national park areas. Make every effort to fly at or above 2,000 feet over the surface of such areas when overflight cannot be avoided.
  2. Consider using a reduced power setting if flight must be low because of cloud cover or overlying controlled airspace or when approaching the airport of destination. Propellers generate more noise than engines; flying with the lowest practical rpm setting will reduce the aircraft's noise level substantially.
  3. Perform stalls, spins, and other practice maneuvers over uninhabited terrain.
  4. Familiarize yourself and comply with airport noise abatement procedures.
  5. Work with airport managers and fixed base operators to develop procedures to reduce the impact on noise-sensitive areas.
  6. To contain aircraft noise within airport boundaries, avoid performing engine run-ups at the ends of runways near housing developments. Instead, select a location for engine run-up closer to the center of the field.
  7. On takeoff, gain altitude as quickly as possible without compromising safety. Begin takeoffs at the start of a runway, not at an intersection.
  8. Retract the landing gear either as soon as a landing straight ahead on the runway can no longer be accomplished or as soon as the aircraft achieves a positive rate of climb. If practical, maintain best-angle-of-climb airspeed until reaching 50 feet or an altitude that provides clearance from terrain or obstacles. Then accelerate to best-rate-of-climb airspeed. If consistent with safety, make the first power reduction at 500 feet.
  9. Fly a tight landing pattern to keep noise as close to the airport as possible. Practice descent to the runway at low power settings and with as few power changes as possible.
  10. If a VASI or other visual approach guidance system is available, use it. These devices will indicate a safe glidepath and allow a smooth, quiet descent to the runway.
  11. If possible, do not adjust the propeller control for flat pitch on the downwind leg; instead, wait until short final. This practice not only provides a quieter approach, but also reduces stress on the engine and propeller governor.
  12. Avoid low-level, high-power approaches, which not only create high noise impacts, but also limit options in the event of engine failure.
  13. Flying between 11 p.m. and 7 a.m. should be avoided whenever possible. (Most aircraft noise complaints are registered by residents whose sleep has been disturbed by noisy, low-flying aircraft.)
- Note: These recommendations are general in nature; some may not be advisable for every aircraft in every situation. No noise reduction procedure should be allowed to compromise flight safety.

**Comment Letter 4**

# Camarillo Airport

**(CMA)**

Ventura County Department of Airports  
555 Airport Way, Suite B • Camarillo, CA 93010-9822  
Phone: (805) 388-4497/4246 • FAX: (805) 388-4366  
[www.ventura.org/airports](http://www.ventura.org/airports)

Location: 3 miles west of city  
Coordinates: N34° 12.83' W119° 05.66'  
Field Elevation: 77'  
Runway 08-26: 6,010' x 150'

Traffic Pattern Altitudes:  
Light Aircraft - 875'  
Multi-engine/Jet - 1,075'

**COMMUNICATIONS:**  
ATIS - 126.02 Phone: (805) 484-3351  
CTAF (Pilot controlled lighting) - 128.20  
Clearance Delivery - 120.75  
Camarillo Ground Control - 121.80  
Camarillo Tower - 128.20 (7:00 a.m. - 9:00 p.m.)  
Point Mugu App/Dep Control - 124.70  
Los Angeles Center - 135.50  
Santa Barbara RCAG 327.10  
ASOS - 126.025 (ATIS freq.)  
Hawthorne FSS - 1-800-WX-BRIEF  
CMA VOR (on field) - 115.80

**LANDING FEE**  
Aircraft over 12,500 lbs. Fee is \$1.00 per 1,000 lbs.

**PARKING RATES:**  
Single-Engine= \$7.00  
Multi-Engine= \$9.00  
Aircraft over 12,500 lbs. \$1.00 per 1,000 lbs.



**Area Services**

|   |   |  |
|---|---|--|
| <b>Restaurant:</b><br>Waypoint Cafe<br>(805) 388-2535 | <b>Lodging:</b><br>Best Western's Camarillo Inn (805) 987-4991<br>Days Inn of Camarillo (805) 482-0761<br>Hampton Inn & Suites (805) 389-9898 | <b>Rental Cars:</b><br>Enterprise (805) 985-8888<br>Hertz (805) 985-0311 |
|---|---|--|

(Shopping center and outlet mall within 1 mile of airport)

**Full Service z**

|   |
|---|
| AvantaJet Jet Center (805) 432-7111, Jet-A, 100LL<br>ARNIC: 131.65 <a href="http://www.avantaJet.com">www.avantaJet.com</a><br>Cardinal Air Center (805) 482-2586, Unicom: 123.50<br>Phillips 66: Jet A, 100LL, <a href="http://www.westerncardinal.com">www.westerncardinal.com</a><br>Channel Islands Aviation (805) 987-1301, Unicom: 123.30<br>Chevron: Jet A, 100LL, <a href="http://www.flycia.com">www.flycia.com</a><br>Skyblue Air (805) 987-7700 <a href="http://www.skyblueair.com">www.skyblueair.com</a><br>Sun Air Jets (805) 389-9300, Unicom: 122.95<br>ARINC: 130.75, Exxon: Jet A, 100LL <a href="http://www.sunairjets.com">www.sunairjets.com</a> |
|---|

**NOISE ABATEMENT PROCEDURES:**

Aircraft operators are requested to practice noise abatement/fly quiet procedures whenever possible consistent with safety.

- No Aircraft departures between 0000-0500 without prior approval from the Airport Director.
- Remain as high as practical over residential areas during overflight, approaches, and departures.
- Use best rate of climb when departing any runway.
- No formation takeoffs or landings without prior permission from the Airport Director.
- Utilize low energy approaches.
- North traffic fly downwind over Highway U.S. 101.
- When departing Runway 26, remain on runway heading until beyond the departure end of runway and reaching 700' AGL before proceeding on course.
- Avoid straight-in VFR approaches to Runway 26 when ATCT is closed.
- Maintain pattern altitude until turning base leg for Runway 26 and Runway 8 traffic pattern.
- When departing Runway 8, use best rate of climb and when altitude permits turn so as to avoid residential overflight before proceeding on course.
- Exercise extreme caution when departing Runway 8 due to opposite direction instrument approach traffic.
- Runway 8 arrivals use RIGHT traffic to avoid overflight of the City.
- Aircraft should depart on Runway 26 when practicable.
- Fly at or above PAPI glide slope on final approach.
- Aircraft over published runway weight limit shall contact airport administration for approval and instructions.
- Propeller aircraft are requested to use AOPA "Noise Awareness Steps".
- Jets are requested to use N.B.A.A. Standard Noise Abatement Departure Procedures.
- Late night arrivals use GPS Runway 8 approach when wind, weather, and safety permit.

*Compliance with recommended noise abatement procedures is encouraged.  
No procedure should be allowed to compromise flight safety.*






November 2000



**Comment Letter 4**

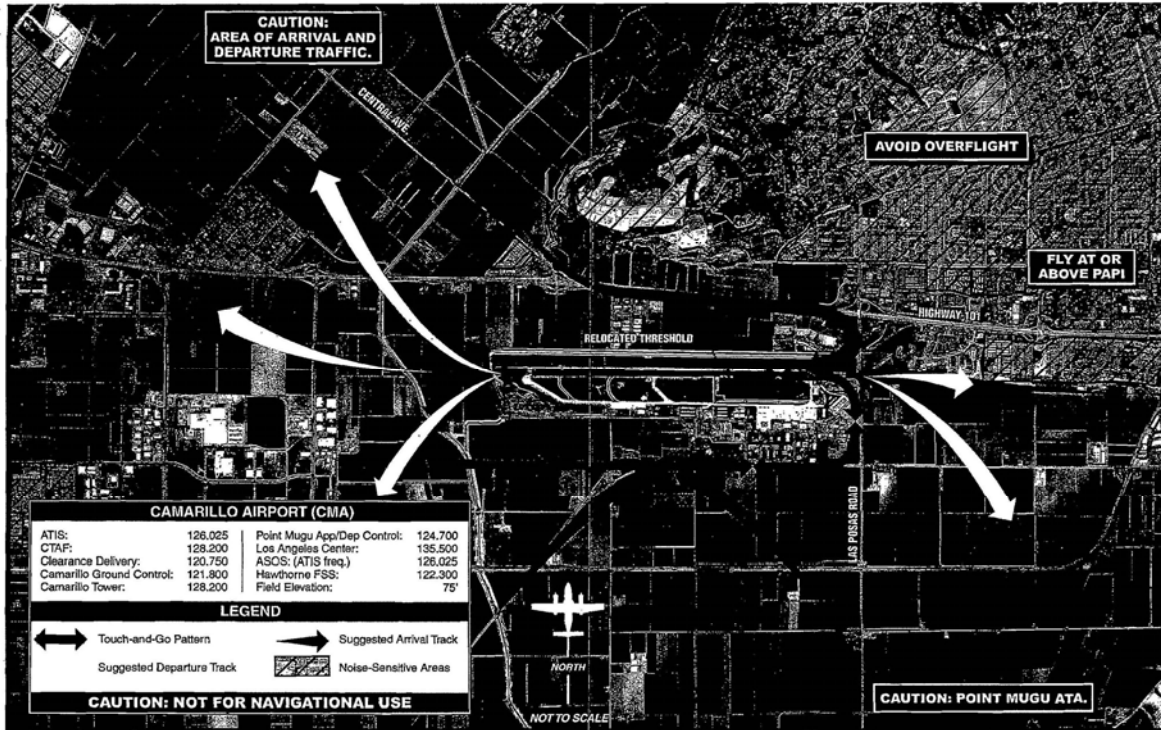

**A.O.P.A. NOISE AWARENESS STEPS**

1. If practical, avoid noise-sensitive areas such as residential areas, open-air assemblies (e.g., sporting events and concerts), and national park areas. Make every effort to fly at or above 2,000 feet over the surface of such areas when overflight cannot be avoided.
2. Consider using a reduced power setting if flight must be low because of cloud cover or overflying controlled airspace or when approaching the airport of destination. Propellers generate more noise than engines; flying with the lowest practical rpm setting will reduce the aircraft's noise level substantially.
3. Perform stalls, spins, and other practice maneuvers over uninhabited terrain.
4. Familiarize yourself and comply with airport noise abatement procedures.
5. Work with airport managers and fixed base operators to develop procedures to reduce the impact on noise-sensitive areas.
6. To contain aircraft noise within airport boundaries, avoid performing engine run-ups at the ends of runways near housing developments. Instead, select a location for engine run-ups closer to the center of the field.
7. On takeoff, gain altitude as quickly as possible without compromising safety. Begin takeoffs at the start of a runway, not at an intersection.

8. Retract the landing gear either as soon as a landing straight ahead on the runway can no longer be accomplished or as soon as the aircraft achieves a positive rate of climb. If practical, maintain best-angle-of-climb airspeed until reaching 50 feet or an altitude that provides clearance from terrain or obstacles. Then accelerate to best-rate-of-climb airspeed. If consistent with safety, make the first power reduction at 500 feet.
9. Fly a tight landing pattern to keep noise as close to the airport as possible. Practice descent to the runway at low power setting and with as few power changes as possible.
10. If a VASI or other visual approach guidance system is available, use it. These devices will indicate a safe glidepath and allow a smooth, quiet descent to the runway.
11. If possible, do not adjust the propeller control for flat pitch on the downwind leg; instead, wait until short final. This practice not only provides a quieter approach, but also reduces stress on the engine and propeller governor.
12. Avoid low-level, high-power approaches, which not only create high noise impacts, but also limit options in the event of engine failure.
13. Flying between 11 p.m. and 7 a.m. should be avoided whenever possible. (Most aircraft noise complaints are registered by residents whose sleep has been disturbed by noisy, low-flying aircraft.)

*Note: These recommendations are general in nature; some may not be advisable for every aircraft in every situation. No noise reduction measures should be allowed to compromise flight safety.*

5



DONALD L. WOLFE, Director

**COUNTY OF LOS ANGELES**

**DEPARTMENT OF PUBLIC WORKS**

*"To Enrich Lives Through Effective and Caring Service"*

900 SOUTH FREMONT AVENUE  
ALHAMBRA, CALIFORNIA 91803-1331  
Telephone: (626) 458-5100  
<http://dpw.lacounty.gov>

ADDRESS ALL CORRESPONDENCE TO:  
P.O. BOX 1460  
ALHAMBRA, CALIFORNIA 91802-1460

IN REPLY PLEASE  
REFER TO FILE: LD-0

November 29, 2007

Ms. Karen Hoo  
Los Angeles World Airports  
Environmental Planning  
7301 World Way West, 3rd Floor  
Los Angeles, CA 90045

Dear Ms. Hoo:

**NOTICE OF PREPARATION FOR A DRAFT FOCUSED ENVIRONMENTAL IMPACT  
REPORT–VAN NUYS AIRPORT PHASE-OUT OF NOISIER AIRCRAFT  
CITY OF LOS ANGELES**

Thank you for the opportunity to review the Notice of Preparation for the above Draft Environmental Impact Report (DEIR). Public Works has reviewed the environmental document and has no comments.

When it is ready, please send a copy of the DEIR to:

Mr. Conal McNamara, AICP  
County of Los Angeles  
Department of Public Works  
Land Development Division  
P.O. Box 1460  
Alhambra, CA 91802-1460

If the DEIR is available electronically or on-line, please forward it or the link to Mr. McNamara at [cmcnamara@dpw.lacounty.gov](mailto:cmcnamara@dpw.lacounty.gov).

Comment Letter 5

Ms. Karen Hoo  
November 29, 2007  
Page 2

If you have any questions, please contact Mr. McNamara at (626) 458-4948.

Very truly yours,

DONALD L. WOLFE  
Director of Public Works

 DENNIS HUNTER  
Assistant Deputy Director  
Land Development Division

CDM:ca  
P:\LDPUB\ICEQA\CDM\VanNuysAirportNoisePhaseoutNOP.doc

cc: Supervisor Zev Yaroslavsky (Maria Chong-Castillo)

**Comment Letter 6**

**COMMITTEE ON  
FOREIGN AFFAIRS**  
SUBCOMMITTEES:  
**CHAIRMAN,  
INTERNATIONAL TERRORISM,  
NONPROLIFERATION AND TRADE**  
  
THE MIDDLE EAST  
AND SOUTH ASIA

**Brad Sherman**  
**Congress of the United States**  
**27th District, California**  
**SERVING THE SAN FERNANDO VALLEY**

'07 NOV 19 AM 10:20 CR  
**COMMITTEE ON  
FINANCIAL SERVICES**  
SUBCOMMITTEES:  
CAPITAL MARKETS AND INSURANCE  
FINANCIAL INSTITUTIONS  
MONETARY POLICY  
**COMMITTEE ON THE  
JUDICIARY**  
SUBCOMMITTEE ON INTELLECTUAL  
PROPERTY AND THE INTERNET

6

November 15, 2007

Ms. Karen Hoo  
Environmental Planning  
Los Angeles World Airports  
7301 World Way West, 3<sup>rd</sup> Floor  
Los Angeles, CA 90045

**Re: Van Nuys Airport Stage 2 Phase-out – Focused EIR**

Dear Ms. Hoo:

I am writing in support of a phase-out of aircraft at Van Nuys Airport that generate noise in excess of the established level of 77 dBA. Los Angeles World Airports (LAWA) is preparing a Focused Environmental Impact Report (EIR) to analyze the potential environmental effects and community benefits of a proposed phase-out.

With the advent of new technology and the emergence of the next generation of aircraft, communities across the country will benefit from cleaner and quieter jets. We must take immediate steps in reducing the overall impact of noisy aircraft over communities in the San Fernando Valley.

LAWA's multi-pronged approach in addressing the environmental impacts of Van Nuys Airport will result in positive actions in meeting our objective of noise reduction. In addition to this process, LAWA is seeking to phase-out noisy aircraft at Van Nuys Airport through a Part 161 study. Furthermore, Congress is debating the reauthorization of the Federal Aviation Administration (H.R. 2881 and S. 1300), which includes a five-year phase-out of aircraft weighing less than 75,000 pounds or less not complying with Stage 3 noise levels.

In preparing the Focused EIR, I encourage LAWA to adopt the City's pre-ANCA Stage 2 phase-out proposal, as well as a provision to allow the temporary operation of Stage 2 aircraft if operators obtain modifications to the aircraft to meet Stage 3 noise levels. A thorough analysis of the environmental effects of a phase-out should yield long-term benefits for the surrounding communities.

**WASHINGTON, DC OFFICE**  
2242 RAYBURN HOUSE OFFICE BUILDING  
WASHINGTON, DC 20515  
**(202) 225-5911**  
FAX: (202) 225-5879



PRINTED ON RECYCLED PAPER

**SAN FERNANDO VALLEY OFFICE**  
5000 VAN NUYS BOULEVARD, SUITE 420  
SHERMAN OAKS, CA 91403  
**(818) 501-9200**  
FAX: (818) 501-1554

E-MAIL: [SHERMAN.PERSONAL@MAIL.HOUSE.GOV](mailto:SHERMAN.PERSONAL@MAIL.HOUSE.GOV)

[HTTP://BRAD.SHERMAN.HOUSE.GOV](http://BRAD.SHERMAN.HOUSE.GOV)


Comment Letter 6

Van Nuys Airport Stage 2 Phase-out – Focused EIR  
November 15, 2007  
Page 2

I recognize the importance of the airport in generating jobs and taxes for our local economy. Van Nuys Airport generates over \$1 billion in economic activity throughout the San Fernando Valley and Southern California. The airport includes more than 100 businesses and creates over 10,000 jobs supporting our economic growth. We must continue to balance the needs of the airport with the desire of the community to live, work and play in their homes in relative peace and quiet.

Thank you for the opportunity to offer comments on the Draft Focused Environmental Impact Report for the Van Nuys Airport Phase-out of Noisier Aircraft. Please contact me and my Policy Deputy, Michael Tou, with any updates on the study and add our San Fernando Valley District Office to your mailing list.

Sincerely,



BRAD SHERMAN  
Member of Congress

cc: Mayor Antonio Villaraigosa  
Councilmember Tony Cardenas  
Councilmember Jack Weiss  
Councilmember Greig Smith  
Councilmember Wendy Greuel  
Los Angeles Board of Airport Commissioners  
Gina Marie Lindsey, LAWA  
Homeowners of Encino  
Sherman Oaks Homeowners Association

7

ZUCKERT SCOUTT & RASENBERGER, L.L.P.

ATTORNEYS AT LAW

888 Seventeenth Street, NW, Washington, DC 20006-3509  
Telephone [202] 298-8660 Fax [202] 542-0685  
www.zsrlaw.com

November 30, 2007

Karen Hoo  
Los Angeles World Airports  
Environmental Planning  
7301 World Way West, 3<sup>rd</sup> Floor  
Los Angeles, CA 90045

**Re: NOP for the Proposed Van Nuys Airport Phase-Out of Certain Aircraft, File No. AD 016-07**

Dear Ms. Hoo:

On behalf of the National Business Aviation Association, Inc. (NBAA) and its more than 8,000 member companies, we offer these comments on the proposed banning of operations at Van Nuys Airport (KVNy) of aircraft generating takeoff noise in excess of 77 dBA. As NBAA understands the proposal, aircraft exceeding takeoff noise levels of 77 dBA would be banned in four phases over a period of seven years. The 77 dBA level would include all Stage 2 business jets and possibly some retrofitted business jets that meet the FAA's Stage 3 standards. NBAA believes that this proposal, if implemented, would be both unlawful and unwise. It obviously would be inconsistent with the best interests of business aviation, but it also would have a serious adverse impact on the local economy while having almost no positive environmental impact.

**1. The Proposed Phase-Out Is Not Grandfathered Under ANCA and Part 161.**

More than seventeen years ago, the Airport Board adopted Resolution 17154 which included a date-specific phase-out. The phase-out never was implemented. The banning of operations at KVNy by Stage 2 aircraft also is an option presently under consideration in the LAWA Part 161 study. LAWA now takes the position that because a phase-out was proposed before October 2, 1990, it does not have to meet the requirements of ANCA and Part 161. That is not a correct reading of the law or the facts.

While a proposal that was the subject of a formal "regulatory or legislative process before October 2, 1990" is not subject to the requirements of ANCA and Part 161, 49 U.S.C. § 47533(2), there has to be continuity of identity between what originally was proposed and the current proposal. There is no such continuity here. The 1990 proposal, which was the product of a regulatory process that began in 1989, provided for a phase-out ending on January 1, 1998. The new proposal is the product of a new

ZUCKERT SCOUTT &amp; RASENBERGER, L.L.P.

2

regulatory process the culminated in a new resolution last year and that would phase-out aircraft over a future seven-year period. There are similarities in the process and the proposal, but neither is identical. When the FAA cautioned LAWA in 2000 about proceeding with an immediate phase-out, it made it clear that any new proposal would have to be “essentially the same as originally proposed or less restrictive.”<sup>1</sup> It most decidedly did not give a green light to proceed with a new phase-out.

Additionally, the proposal cannot be grandfathered with respect to any restriction on Stage 3 aircraft operations even if it was the subject of an earlier regulatory or legislative process, *i.e.*, § 47524(c) trumps § 47533(2) in that regard.<sup>2</sup> Since a 77 dBA bright line might encompass certain retrofitted aircraft that meet Stage 3 requirements, it is by its very terms outside the grandfather exception to ANCA and Part 161.

**2. The Proposed Phase-Out Would Violate The Grant Assurances, The Federal Aviation Act and the Commerce and Supremacy Clause of the U.S. Constitution.**

In its 2000 letter to LAWA, the FAA emphasized that ANCA and Part 161 establish process requirements and that any proposal would have to meet the substantive requirements of the grant assurances and federal law even if it was grandfathered. Specifically, the FAA noted as follows:

Such restrictions must be fair and reasonable, may not be unjustly discriminatory, and may not impose an undue burden on interstate or foreign commerce. Based upon the information available, FAA has serious concerns about the ability of the “phase-out” rule to meet these requirements.”

*Id.* At 2.<sup>3</sup>

A phase-out of Stage 2 aircraft (and some Stage 3 aircraft) would be completely unfair and highly discriminatory and create obvious burdens on commerce. There is no evidence that there is a perceived noise problem at KVMY that would be alleviated to any significant extent by a ban on such operations. As the world’s largest general aviation airport, KVMY is the beneficiary of the commitment of general aviation manufacturers and operators to be good neighbors. As operations by the newest generation of business jets, all of which exceed Stage 4 standards, are on the increase, operations by the older

<sup>1</sup> Letter dated April 17, 2000, from Woodie Woodward, FAA Acting Associate Administrator for Airports, to Breton Lobner, Senior Assistant City Attorney.

<sup>2</sup> See Letter dated July 17, 1996, from Susan L. Kurland, FAA Associate Administrator for Airports, to the Honorable John Ferraro.

<sup>3</sup> The FAA further stated that the “City of Los Angeles would have to thoroughly examine these requirements as part of the local process to consider its adoption.” *Id.* NBAA submits that, at the very least, LAWA should use the Part 161.305 analytical template as the basis for its study, including a detailed cost-benefit analysis and an examination of all alternatives to a phase-out.

## Comment Letter 7

ZUCKERT SCOUTT &amp; RASENBERGER, L.L.P.

3

Stage 2 aircraft are decreasing. A locally imposed mandatory phase-out interferes with that free market process and most likely would have unintended consequences. One of those consequences would be the impact on surrounding communities as aircraft forced out of KVNY would have to use other airports in the region. Another possible consequence is the loss of Stage 3 and Stage 4 business jet operations at KVNY if operators decide not to split their operations between two airports in the region. The possible scenarios, most of which are adverse to the community and the operators, are endless, but all are driven by this truism: locally imposed restrictions on aircraft operations do not work.

That touches on our final point, federal preemption. The wisdom underlying ANCA was the recognition that we cannot have a national air transportation system if it is Balkanized by local regulation. A proposal such as that contained in the captioned NOP would, if implemented, slash a hole in that national system to the great detriment of all of the beneficiaries of that system.

As always, NBAA remains willing to answer any questions.

Sincerely,



Frank J. Costello  
Counsel for the National Business  
Aviation Association, Inc.



8



# Homeowners of Encino

◆ Serving the Homeowners of Encino ◆

November 4, 2007

Karen Hoo, Environmental Planning  
Los Angeles World Airports  
7301 World Way West, 3<sup>rd</sup> floor  
Los Angeles, CA, 90045

GERALD A. SILVER  
President  
PO BOX 260205  
ENCINO, CA 91426  
Phone (818)990-2757

Hearing date: Nov. 15, 2007 6 pm

Subject: Scoping Meeting – VNY Stage 2 jet phase-out - Focused EIR

We support the establishment of a 77 dBA maximum noise level for all aircraft arriving at and departing from Van Nuys Airport (VNY). This should be accomplished by gradually phasing out aircraft that generate noise in excess of the established level of 77 dBA beginning with the noisiest aircraft and periodically lowering the maximum noise level.

We believe that this project will have no negative impacts—to the contrary, it will have significant environmental benefits. The project proposes no physical development or change in land use, only operational modifications at the existing facility.

A phase-out of Stage 2 jets at VNY will not increase air traffic at other airports in the region. It will not cause any redistribution of air traffic and thus will not have any potential environmental effects related to aircraft noise. If noisy jets are banned from VNY they will not go elsewhere, rather quieter Stage 3 jets will be used instead. People fly to VNY because of its location. If Stage 2 jets are banned, then newer, quieter planes will be used. This will force noisy Stage 2 jet operators to install hush kits, thus improving the environmental effects across the country.

The Focused EIR must provide an analysis of the potential aircraft noise effects associated with the proposed project as well as considering the improved environmental consequences on residents living near VNY.

While the Focused EIR is required to consider alternatives to the proposed project, including a No Project Alternative, there are no other alternatives that can be deemed acceptable to a complete phase-out of Stage 2 jets at VNY.

The Non-Addition Rule that precluded adding more Stage 2 jets to the VNY fleet has been a failure because it does not require a phase-out of noisy jets, nor did it address the growing number of itinerant Stage 2 jets using VNY. In fact the Non-Addition Rule works the other way by guaranteeing that noisy, outmoded jets can operate from VNY indefinitely. It does nothing to stop the continued and indefinite use of the airfield by itinerant Stage 2 Jets.

The proposed phase-out of Stage 2 jets will significantly mitigate the noise problems at VNY, while allowing the newer, quieter jets to continue to operate. This is consistent with the City's policy to phase-out Stage 2 jets that is part of the recently adopted VNY Master Plan.

## Comment Letter 8

Page 2

It is imperative that the BOAC move forward immediately with the grand fathered course of action. This action will provide a date certain when these aircraft will no longer be able to use VNY. This grand fathered proposal allows a seven-year Stage 2 jet phase-out to be undertaken, *without* the FAA's permission, a significant difference compared to the Part 161 Study that may take years to complete, and has no certainty.

The precedent for this is already clearly based on other similar VNY pre-ANCA proposals that include; the curfew on Stage 2 Jets, and the Non-Addition Rule both implemented by the City after the passage of ANCA. Woodie Woodward of the FAA stated in his letter to Bret Lobner on April 17, 2000; the "proposal would have to be essentially the same as originally proposed or less restrictive than originally proposed to retain its grand father status under ANCA." If the city acts now, we will be certain Stage 2 jets will no longer use VNY after 2013 at the latest.


Your Focused EIR must be confined to environmental issues only—not economic issues. The operators of noisy Stage 2 jets may raise bogus complaints of 'dire economic consequences' if Stage 2 jets are not allowed to use VNY. Issues of commerce and business are inappropriate in a Focused EIR. You must not address claims that are not relevant, such as bogus economic issues.

Regardless, Stage 2 jet operators have many options, including retrofitting these aircraft with hush-kits that will bring them into compliance with current FAA noise standards. Once a jet has been retrofitted, it *increases* its value because the aircraft can operate at airports all over the country that now ban them.

A seven-year phase-out has the full support of key elected officials, the residents, the local homeowner associations, the Sherman Oaks and Encino neighborhood councils and Councilmember Jack Weiss as well as Congressman Brad Sherman. Most importantly this measure has the full support of Mayor Antonio Villaraigosa.

The time is long overdue for a phase-out of Stage 2 jets from Van Nuys Airport (VNY). Residents around VNY have suffered from jet noise for decades and have been given promise after promise that something would be done to address this issue. You must move promptly to finish the work on the Focused EIR.

Cordially yours,



Gerald A. Silver  
Pres. Homeowners of Encino

## Comment Letter 9

⑨

Los Angeles World Airports  
 Environmental Planning  
 7301 World Way West 3rd Floor  
 LA CA 90045

Re: EIR for UNY stage 2 jets Nov 16 07

Please add my opinion to the list of Los Angeles residents requesting phase-out of stage 2 jets. When these pass overhead it sounds like the 1980's all over again.

Sometimes they can be heard for 5 minutes after they pass; they don't belong in a modern US city.

Joel Marks  
 jrm

3757 Sheridige Dr  
 Sherman Oaks CA 91403

Comment Letter 10

10

Nov. 24, 2007

Valerie Kurokawa  
4816 Norwich Ave.  
Sherman Oaks, CA 91403

Karen Hoo  
L.A. World Airports  
7301 World Way W., 3rd Floor  
Los Angeles, CA 90045

Dear Karen Hoo:

I have been a resident of Sherman Oaks since 1984. Since 1984 the noise level has increased over the years, and has reached an intolerable level to date. It's definitely affecting our quality of life in this area, by being constantly bombarded by noise from these extremely noisy Stage 2 jets.

Please support our quality of life here in Sherman Oaks by supporting the phase out of Stage 2 jets.

Thank you,



Valerie Kurokawa

Comment Letter 11

11

November 26, 2007

Los Angeles World Airports  
Environmental Planning  
7301 World Way West, 3<sup>rd</sup> Floor  
Los Angeles, CA 90045

RE: Stage 2 Jets Phase Out /Van Nuys Airport


Dear Sir or Madam,

I am in complete support of the Phase Out of noisy stage 2 jets flying into and out of Van Nuys Airport. As a homeowner in the city of Sherman Oaks, I have observed and been painfully aware of the noise for the last 7 years. These jets need to be phased out as they are creating noise pollution at the highest level !

Thank you



Robert B Greene and Family  
4012 Sumac Dr  
Sherman Oaks, CA 91403

|   |                   |                  |                |
|---|-------------------|------------------|----------------|
| <br><b>Van Nuys Airport</b><br><b>Scoping Meeting for the Phaseout of Noisier Aircraft EIR</b><br>Public Scoping Meeting<br>November 15, 2007<br>Airtel Plaza Hotel, Van Nuys  |                   |                  |                |
| Date  | 11-26-07          | Name             | DANIEL PRIST   |
| Address   | 16648 Calahans St | City             | North Hills    |
|   |                   | Zip              | 91343          |
| Phone (optional)  | 818-266-8764      | Email (optional) | DRP345@aol.com |
| <b>Comments:</b>  |                   |                  |                |
| <p>Please only make comments regarding the content of the Focused EIR being prepared for the potential Phaseout of Noisier Aircraft at Van Nuys Airport (VNY). The project being evaluated in this EIR is separate from the ongoing Part 161 Study at VNY. If you would like to provide comments on the VNY Part 161 Study or other noise-related issues, please visit either the VNY Part 161 website at <a href="http://www.lawa.org/vny/vnyEnvironment.cfm">www.lawa.org/vny/vnyEnvironment.cfm</a> or the Los Angeles World Airports (LAWA) website at <a href="http://www.lawa.org">www.lawa.org</a>. Thank you.</p> |                   |                  |                |
| <p>I have been at the above Address since 1989, at this time there were no three minute intervals between Loud &amp; Low Jet Craft blowing thru the sky above my house. This is very disruptive and almost impossible to do anything outside. One can not even make a short video outside without the blowing jets. Let alone devalue the Area.</p>   |                   |                  |                |
| If needed, please continue on the back side of this page or attach additional pages   |                   |                  |                |
| <b>Submit Comments by November 30, 2007 to:</b><br>Karen Hoo<br>Los Angeles World Airports<br>(Fold this sheet in thirds with the address on reverse side showing. Add a stamp and send.)<br>Or submit comments via Email: <a href="mailto:VNYPhaseoutEIR@lawa.org">VNYPhaseoutEIR@lawa.org</a><br>or submit comments on the study website: <a href="http://www.lawa.org/vny/vnyEnvironment.cfm">www.lawa.org/vny/vnyEnvironment.cfm</a>  |                   |                  |                |

# **APPENDIX D**

## **AIR QUALITY MATERIALS**





Diversion Analysis (DWL-Sept08).xls  
Aircraft-Engine List

|      |                            | 3/13/08 Doc  | 3/13/08 Doc | EDMS  | EDMS                    |
|------|----------------------------|--------------|-------------|---|-------------------------|
| Code | Aircraft Name              | Engine       | MTOW        | Aircraft  | Engine                  |
| B721 | Boeing 727-100             | JT8D-9       | 169000      | Boeing 727-100 Series                           | JT8D-9 Series Smoke Fix |
| B722 | Boeing 727-200             | JT8D-17      | 197000      | Boeing 727-200 Series                           | JT8D-17 Smoke Fix       |
| B727 | Boeing 727                 | JT8D-17      | 197000      | Boeing 727-200 Series                           | JT8D-17 Smoke Fix       |
| F5   | US-made military F5        | (NO DATA)    | (NO DATA)   | Northrup F-5E/F Tiger II                        | J85-GE-5F               |
| GLF2 | Gulfstream II/G200         | (NO DATA)    | 62000       | Gulfstream II                                   | SPEY MK.511-8           |
| GLF3 | Gulfstream III/G300        | GIIB/GIII    | 69700       | Gulfstream G300                                 | SPEY MK.511-8           |
| H25A | BAe HS 125-600A            | Viper 601-22 | (NO DATA)   | Hawker HS-125 Series 600                        | TFE731-2-2B             |
| L39  | Czech L39 Albatros trainer | (NO DATA)    | (NO DATA)   | Not in EDMS; used same engine as for T-38 Talon | J85-GE-5H (w/AB)        |
| LJ24 | Bombadier Learjet 24D      | CJ610-6      | 13500       | Bombadier Learjet 24                            | CJ610-6                 |
| LJ25 | Bombadier Learjet 25D      | CJ610-8A     | (NO DATA)   | Bombadier Learjet 25                            | CJ610-6                 |
| LJ28 | Bombadier Learjet 28       | (NO DATA)    | (NO DATA)   | Bombadier Learjet 28                            | CJ610-6                 |
| LJ35 | Bombadier Learjet 35/36    | (NO DATA)    | (NO DATA)   | Bombadier Learjet 35                            | TFE731-2-2B             |
| SBR1 | Rockwell Sabre 60          | JT12A-8      | 20100       | Rockwell Sabreliner 60                          | CF700-2D                |
| T38  | US-made military T38       | (NO DATA)    | (NO DATA)   | T-38 Talon                                      | J85-GE-5H (w/AB)        |

These aircraft are not being relocated from VNY, so are not included in the analysis.

|      |                            |            |       |                        |          |
|------|----------------------------|------------|-------|------------------------|----------|
| FA20 | Dassault Falcon/Mystere 20 | CF700-2D-2 | 28600 | Dassault Falcon 20-G   | CF700-2D |
| SBR2 | Rockwell Sabre 75A         | CF700-2D-2 | 77700 | Rockwell Sabreliner 80 | CF700-2D |



Diversion Analysis (DWL-Sept08).xls

Aircraft Operations per year

| Airport      | VNY   | VNY  | VNY  | VNY  | BUR  | CMA  | LAX  | CNO  | WJF  | Total | VNY  | BUR  | CMA  | LAX  | CNO  | WJF  | Total |
|--------------|-------|------|------|------|------|------|------|------|------|-------|------|------|------|------|------|------|-------|
| Year         | 2009  | 2014 | 2016 | 2014 | 2014 | 2014 | 2014 | 2014 | 2014 | 2014  | 2016 | 2016 | 2016 | 2016 | 2016 | 2016 | 2016  |
| Project      | No    | No   | No   | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  | Yes   | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  | Yes   |
| GLF3         | 1,540 | 792  | 597  | 664  | 73   | 44   | 12   | -    | -    | 792   | 523  | 42   | 25   | 7    | -    | -    | 597   |
| GLF3**       | 130   | 130  | 130  | 130  | -    | -    | -    | -    | -    | 130   | -    | -    | -    | -    | -    | 130  | 130   |
| Tot GLF3     | 1,670 | 922  | 727  | 794  | 73   | 44   | 12   | -    | -    | 922   | 523  | 42   | 25   | 7    | -    | 130  | 727   |
| GLF2         | 1,118 | 636  | 501  | -    | 22   | 13   | 4    | -    | -    | 39    | -    | -    | -    | -    | -    | -    | 0     |
| GLF3*        | -     | -    | -    | 597  | -    | -    | -    | -    | -    | 597   | 492  | -    | -    | -    | -    | -    | 492   |
| GLF2**       | 130   | 130  | 130  | 130  | -    | -    | -    | -    | -    | 130   | -    | 5    | 3    | 1    | -    | 130  | 139   |
| Tot GLF2     | 1,248 | 766  | 631  | 727  | 22   | 13   | 4    | -    | -    | 766   | 492  | 5    | 3    | 1    | -    | 130  | 631   |
| LJ25         | 742   | 489  | 414  | -    | 75   | 45   | 12   | -    | -    | 132   | -    | 64   | 38   | 10   | -    | -    | 112   |
| LJ35         | -     | -    | -    | 357  | -    | -    | -    | -    | -    | 357   | 302  | -    | -    | -    | -    | -    | 302   |
| Tot LJ25/35  | 742   | 489  | 414  | 357  | 75   | 45   | 12   | -    | -    | 489   | 302  | 64   | 38   | 10   | -    | -    | 414   |
| F5           | 4     | 4    | 4    | 4    | -    | -    | -    | -    | -    | 4     | -    | -    | -    | -    | 4    | -    | 4     |
| L39          | 58    | 58   | 58   | 58   | -    | -    | -    | -    | -    | 58    | -    | -    | -    | -    | 58   | -    | 58    |
| T38          | 38    | 38   | 38   | 38   | -    | -    | -    | -    | -    | 38    | -    | -    | -    | -    | 38   | -    | 38    |
| Tot Military | 100   | 100  | 100  | 100  | -    | -    | -    | -    | -    | 100   | -    | -    | -    | -    | 100  | -    | 100   |
| LJ24         | 93    | 31   | 20   | -    | 18   | 11   | 3    | -    | -    | 31    | -    | 11   | 7    | 2    | -    | -    | 20    |
| B727         | 18    | 15   | 9    | -    | -    | -    | 15   | -    | -    | 15    | -    | -    | -    | 9    | -    | -    | 9     |
| B721         | 14    | 12   | 7    | -    | -    | -    | 12   | -    | -    | 12    | -    | -    | -    | 7    | -    | -    | 7     |
| B722         | 6     | 5    | 3    | -    | -    | -    | 5    | -    | -    | 5     | -    | -    | -    | 3    | -    | -    | 3     |
| H25A         | 10    | 4    | 3    | -    | 2    | 1    | 0    | -    | -    | 4     | -    | 2    | 1    | 0    | -    | -    | 3     |
| SBR1         | 11    | 3    | 2    | -    | 2    | 1    | 0    | -    | -    | 3     | -    | 1    | 1    | 0    | -    | -    | 2     |
| LJ28         | 9     | 2    | 1    | -    | 1    | 1    | 0    | -    | -    | 2     | -    | 1    | 0    | 0    | -    | -    | 1     |
| Tot Other    | 161   | 72   | 45   | -    | 23   | 14   | 36   | -    | -    | 72    | -    | 15   | 9    | 21   | -    | -    | 45    |

\*- GLF3 replacements for GLF2

\*\* GLF2 and GLF3 maintenance

|                                 |                      |
|---------------------------------|----------------------|
| Aircraft operations (provided)  | from SH&E, 3/13/2008 |
| Vertical sum                    |                      |
| Horizontal sum                  |                      |
| Calculated value (not provided) |                      |
| Value based on 2016 data        |                      |

These aircraft will not be relocated from VNY, so are not being included in the study.

|      |     |    |    |    |   |   |   |   |   |    |    |   |   |   |   |   |    |
|------|-----|----|----|----|---|---|---|---|---|----|----|---|---|---|---|---|----|
| SBR2 | 9   | 7  | 7  | 7  | 0 | 0 | 0 | 0 | 0 | 7  | 7  | 0 | 0 | 0 | 0 | 0 | 7  |
| FA20 | 123 | 77 | 63 | 77 | 0 | 0 | 0 | 0 | 0 | 77 | 63 | 0 | 0 | 0 | 0 | 0 | 63 |



Diversion Analysis (DWL-Sept08).xls  
Operations per peak day

| Airport             | VNY  | VNY  | VNY  | VNY  | VNY  | BUR  | BUR  | CMA  | CMA  | LAX  | LAX  | CNO  | CNO  | WJF  | WJF  |
|---------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Year                | 2009 | 2014 | 2016 | 2014 | 2016 | 2014 | 2016 | 2014 | 2016 | 2014 | 2016 | 2014 | 2016 | 2014 | 2016 |
| Project             | No   | No   | No   | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  |
| B721                | 1    | 1    | 1    | -    | -    |      |      |      |      |      |      |      |      |      |      |
| B722                | 1    | 1    | 1    | -    | -    |      |      |      |      |      |      |      |      |      |      |
| B727                | 1    | 1    | 1    | -    | -    |      |      |      |      |      |      |      |      |      |      |
| F5                  | 1    | 1    | 1    | 1    | -    |      |      |      |      |      |      |      |      |      |      |
| GLF2                | 4    | 3    | 2    | 1    | -    |      |      |      |      |      |      |      |      |      |      |
| GLF3                | 5    | 3    | 2    | 4    | 3    |      |      |      |      |      |      |      |      |      |      |
| H25A                | 1    | 1    | 1    | -    | -    |      |      |      |      |      |      |      |      |      |      |
| L39                 | 1    | 1    | 1    | 1    | -    |      |      |      |      |      |      |      |      |      |      |
| LJ24                | 1    | 1    | 1    | -    | -    |      |      |      |      |      |      |      |      |      |      |
| LJ25                | 3    | 2    | 2    | -    | -    |      |      |      |      |      |      |      |      |      |      |
| LJ28                | 1    | 1    | 1    | -    | -    |      |      |      |      |      |      |      |      |      |      |
| LJ35                | -    | -    | -    | 1    | 1    |      |      |      |      |      |      |      |      |      |      |
| SBR1                | 1    | 1    | 1    | -    | -    |      |      |      |      |      |      |      |      |      |      |
| T38                 | 1    | 1    | 1    | 1    | -    |      |      |      |      |      |      |      |      |      |      |
| Total operations    | 22   | 18   | 16   | 9    | 4    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| # of Aircraft Types | 13   | 13   | 13   | 6    | 2    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |

For VNY airport only:

Daily operations = Annual operations divided by 365.25, rounded up to nearest whole number.

This assumes that take-offs and landings are distributed evenly throughout the year.

This table shows the number of take-offs and landings per peak day.



Diversion Analysis (DWL-Sept08).xls  
 Operations per peak day-Sept08

| Airport             | VNY  | VNY  | VNY  | VNY  | VNY  | BUR  | BUR  | CMA  | CMA  | LAX  | LAX  | CNO  | CNO  | WJF  | WJF  |
|---------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Year                | 2009 | 2014 | 2016 | 2014 | 2016 | 2014 | 2016 | 2014 | 2016 | 2014 | 2016 | 2014 | 2016 | 2014 | 2016 |
| Project             | No   | No   | No   | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  |
| B721                |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| B722                |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| B727                |      |      |      |      |      | 0.6  |      | 0.3  |      | 0.1  |      |      |      |      |      |
| F5                  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| GLF2                |      |      |      |      |      | 2.3  |      | 1.4  |      | 0.4  |      |      |      | 2.0  |      |
| GLF3                |      |      |      |      |      | 2.3  |      | 1.4  |      | 0.4  |      |      |      | 3.0  |      |
| H25A                |      |      |      |      |      | 1.1  |      | 0.7  |      | 0.2  |      |      |      |      |      |
| L39                 |      |      |      |      |      |      |      |      |      |      |      | 1.0  |      |      |      |
| LJ24                |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| LJ25                |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| LJ28                |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| LJ35                |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| SBR1                |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| T38                 |      |      |      |      |      |      |      |      |      |      |      | 2.0  |      |      |      |
| Total operations    | -    | -    | -    | -    | -    | 6    | -    | 4    | -    | 1    | -    | 3    | -    | 5    | -    |
| # of Aircraft Types | -    | -    | -    | -    | -    | 4    | -    | 4    | -    | 4    | -    | 2    | -    | 2    | -    |

For all airports except VNY:

Daily operations were provided by Peter Stumpp, SH&E, on 9/18/2008.

This table shows the number of take-offs and landings per peak day.





# EDMS 5.0.2 Model Inputs for Van Noise Phaseout Study

Study Created: Tue May 13 16:55:24 2008  
Report Date: Wed Jul 02 12:50:53 2008  
Study Pathname: G:\10\_Staff\Air Quality Staff\VNY\VNY Airport\VNY Airport.edm

## Study Setup

Unit System: English  
Dispersion Modeling: Dispersion is not enabled for this study  
Analysis Years: 2009 2014 2016

## Scenarios

|   |   |  |
|---|---|--|
| Scenario Name:<br>Baseline 2009/14/16     | Description:                            | Current activity in CY 2009 and projected activity in CY 2014 and CY 2016 under status quo (i.e., including noisy jet operations, maintenance activities, and privately-owned military aircraft operations).                     |
|   | Aircraft Times in Mode Basis:           | ICAO/EPA Times in Mode   |
|   | Taxi Time Modeling:                     | User-specified Taxi Times  |
|   | FOA3 Sulfur-to-Sulfate Conversion Rate: | 0.500000 %   |
| Scenario Name:<br>With Project 2009/14/16 | Description:                            | Current activity in CY 2009 and projected activity in CY 2014 and CY 2016 with phaseout of noisy jet operations in 2014 and further phaseout of maintenance activities and privately-owned military aircraft operations in 2016. |
|   | Aircraft Times in Mode Basis:           | ICAO/EPA Times in Mode   |
|   | Taxi Time Modeling:                     | User-specified Taxi Times  |
|   | FOA3 Sulfur-to-Sulfate Conversion Rate: | 0.500000 %   |

## Airports

|                          |  |
|--------------------------|--|
| Airport Name:            | Bob Hope   |
| IATA Code:               | BUR  |
| ICAO Code:               | KBUR   |
| FAA Code:                |  |
| Country:                 | US   |
| State:                   | California   |
| City:                    | Burbank  |
| Airport Description:     | Bob Hope   |
| Latitude:                | 34.201°  |
| Longitude:               | -118.359°  |
| Northing:                | 3785240.25   |
| Easting:                 | 374821.50  |
| UTM Zone:                | 11   |
| Elevation:               | 778.00 feet  |
| PM Modeling Methodology: | FOA3a (Sulfur-to-Sulfate Conversion Rate = 5.0%, Fuel Sulfur Content = 0.068%) |
| Airport Name:            | Camarillo  |
| IATA Code:               | CMA  |
| ICAO Code:               | KCMA   |
| FAA Code:                |  |
| Country:                 | US   |
| State:                   | California   |
| City:                    | Camarillo  |
| Airport Description:     | Camarillo  |
| Latitude:                | 34.214°  |
| Longitude:               | -119.094°  |
| Northing:                | 3787840.36   |
| Easting:                 | 307063.40  |
| UTM Zone:                | 11   |
| Elevation:               | 75.00 feet   |
| PM Modeling Methodology: | FOA3a (Sulfur-to-Sulfate Conversion Rate = 5.0%, Fuel Sulfur Content = 0.068%) |
| Airport Name:            | Chino  |
| IATA Code:               | CNO  |
| ICAO Code:               | KCNO   |
| FAA Code:                |  |
| Country:                 | US   |
| State:                   | California   |
| City:                    | Chino  |
| Airport Description:     | Chino  |
| Latitude:                | 33.975°  |
| Longitude:               | -117.637°  |
| Northing:                | 3759532.68   |
| Easting:                 | 441192.47  |
| UTM Zone:                | 11   |
| Elevation:               | 652.00 feet  |
| PM Modeling Methodology: | FOA3a (Sulfur-to-Sulfate Conversion Rate = 5.0%, Fuel Sulfur Content = 0.068%) |
| Airport Name:            | General Wm J Fox Airfield  |
| IATA Code:               | WJF  |

ICAO Code: KWJF  
 FAA Code:  
 Country: US  
 State: California  
 City: Lancaster  
 Airport Description: General Wm J Fox Airfield  
 Latitude: 34.741°  
 Longitude: -118.219°  
 Northing: 3845002.56  
 Easting: 388445.28  
 UTM Zone: 11  
 Elevation: 2348.00 feet  
 PM Modeling Methodology: FOA3a (Sulfur-to-Sulfate Conversion Rate = 5.0%, Fuel Sulfur Content = 0.068%)  
 Airport Name: Los Angeles Intl  
 IATA Code: LAX  
 ICAO Code: KLAX  
 FAA Code:  
 Country: US  
 State: California  
 City: Los Angeles  
 Airport Description: Los Angeles Intl  
 Latitude: 33.943°  
 Longitude: -118.408°  
 Northing: 3756677.41  
 Easting: 369874.86  
 UTM Zone: 11  
 Elevation: 126.00 feet  
 PM Modeling Methodology: FOA3a (Sulfur-to-Sulfate Conversion Rate = 5.0%, Fuel Sulfur Content = 0.068%)  
 Airport Name: Van Nuys  
 IATA Code: VNY  
 ICAO Code: KVNy  
 FAA Code:  
 Country: US  
 State: California  
 City: Van Nuys  
 Airport Description: Van Nuys  
 Latitude: 34.210°  
 Longitude: -118.490°  
 Northing: 3786423.37  
 Easting: 362737.79  
 UTM Zone: 11  
 Elevation: 802.00 feet  
 PM Modeling Methodology: FOA3a (Sulfur-to-Sulfate Conversion Rate = 5.0%, Fuel Sulfur Content = 0.068%)

---

## Scenario-Airport: Baseline 2009/14/16, Bob Hope

---

### Weather

Baseline 2009/14/16, Bob Hope

Mixing Height: 3000.00 feet  
 Temperature: 64.00 °F  
 Daily High Temperature: 74.35 °F  
 Daily Low Temperature: 53.65 °F  
 Pressure: 29.92 inches of Hg  
 Sea Level Pressure: 29.95 inches of Hg  
 Relative Humidity: 59.36  
 Wind Speed: 4.97 knots  
 Wind Direction: 0.00 °  
 Ceiling: 99999.99 feet  
 Visibility: 50.00 miles  
 The user has used annual averages.  
 Base Elevation: 777.99 feet  
 Date Range: Thursday, January 01, 2004 to Friday, December 31, 2004  
 Source Data File Location:  
 Upper Air Data File Location:

---

### Quarter-Hourly Operational Profiles

Baseline 2009/14/16, Bob Hope

Name: DEFAULT

| Quarter-Hour | Weight | Quarter-Hour | Weight | Quarter-Hour | Weight | Quarter-Hour | Weight |
|--------------|--------|--------------|--------|--------------|--------|--------------|--------|
|--------------|--------|--------------|--------|--------------|--------|--------------|--------|

|                     |          |                    |          |                     |          |                    |          |
|---------------------|----------|--------------------|----------|---------------------|----------|--------------------|----------|
| 12:00am to 12:14 am | 1.000000 | 6:00am to 6:14am   | 1.000000 | 12:00pm to 12:14 pm | 1.000000 | 6:00pm to 6:14pm   | 1.000000 |
| 12:15am to 12:29 am | 1.000000 | 6:15am to 6:29am   | 1.000000 | 12:15pm to 12:29 pm | 1.000000 | 6:15pm to 6:29pm   | 1.000000 |
| 12:30am to 12:44 am | 1.000000 | 6:30am to 6:44am   | 1.000000 | 12:30pm to 12:44 pm | 1.000000 | 6:30pm to 6:44pm   | 1.000000 |
| 12:45am to 12:59 am | 1.000000 | 6:45am to 6:59am   | 1.000000 | 12:45pm to 12:59 pm | 1.000000 | 6:45pm to 6:59pm   | 1.000000 |
| 1:00am to 1:14am    | 1.000000 | 7:00am to 7:14am   | 1.000000 | 1:00pm to 1:14pm    | 1.000000 | 7:00pm to 7:14pm   | 1.000000 |
| 1:15am to 1:29am    | 1.000000 | 7:15am to 7:29am   | 1.000000 | 1:15pm to 1:29pm    | 1.000000 | 7:15pm to 7:29pm   | 1.000000 |
| 1:30am to 1:44am    | 1.000000 | 7:30am to 7:44am   | 1.000000 | 1:30pm to 1:44pm    | 1.000000 | 7:30pm to 7:44pm   | 1.000000 |
| 1:45am to 1:59am    | 1.000000 | 7:45am to 7:59am   | 1.000000 | 1:45pm to 1:59pm    | 1.000000 | 7:45pm to 7:59pm   | 1.000000 |
| 2:00am to 2:14am    | 1.000000 | 8:00am to 8:14am   | 1.000000 | 2:00pm to 2:14pm    | 1.000000 | 8:00pm to 8:14pm   | 1.000000 |
| 2:15am to 2:29am    | 1.000000 | 8:15am to 8:29am   | 1.000000 | 2:15pm to 2:29pm    | 1.000000 | 8:15pm to 8:29pm   | 1.000000 |
| 2:30am to 2:44am    | 1.000000 | 8:30am to 8:44am   | 1.000000 | 2:30pm to 2:44pm    | 1.000000 | 8:30pm to 8:44pm   | 1.000000 |
| 2:45am to 2:59am    | 1.000000 | 8:45am to 8:59am   | 1.000000 | 2:45pm to 2:59pm    | 1.000000 | 8:45pm to 8:59pm   | 1.000000 |
| 3:00am to 3:14am    | 1.000000 | 9:00am to 9:14am   | 1.000000 | 3:00pm to 3:14pm    | 1.000000 | 9:00pm to 9:14pm   | 1.000000 |
| 3:15am to 3:29am    | 1.000000 | 9:15am to 9:29am   | 1.000000 | 3:15pm to 3:29pm    | 1.000000 | 9:15pm to 9:29pm   | 1.000000 |
| 3:30am to 3:44am    | 1.000000 | 9:30am to 9:44am   | 1.000000 | 3:30pm to 3:44pm    | 1.000000 | 9:30pm to 9:44pm   | 1.000000 |
| 3:45am to 3:59am    | 1.000000 | 9:45am to 9:59am   | 1.000000 | 3:45pm to 3:59pm    | 1.000000 | 9:45pm to 9:59pm   | 1.000000 |
| 4:00am to 4:14am    | 1.000000 | 10:00am to 10:14am | 1.000000 | 4:00pm to 4:14pm    | 1.000000 | 10:00pm to 10:14pm | 1.000000 |
| 4:15am to 4:29am    | 1.000000 | 10:15am to 10:29am | 1.000000 | 4:15pm to 4:29pm    | 1.000000 | 10:15pm to 10:29pm | 1.000000 |
| 4:30am to 4:44am    | 1.000000 | 10:30am to 10:44am | 1.000000 | 4:30pm to 4:44pm    | 1.000000 | 10:30pm to 10:44pm | 1.000000 |
| 4:45am to 4:59am    | 1.000000 | 10:45am to 10:59am | 1.000000 | 4:45pm to 4:59pm    | 1.000000 | 10:45pm to 10:59pm | 1.000000 |
| 5:00am to 5:14am    | 1.000000 | 11:00am to 11:14am | 1.000000 | 5:00pm to 5:14pm    | 1.000000 | 11:00pm to 11:14pm | 1.000000 |
| 5:15am to 5:29am    | 1.000000 | 11:15am to 11:29am | 1.000000 | 5:15pm to 5:29pm    | 1.000000 | 11:15pm to 11:29pm | 1.000000 |
| 5:30am to 5:44am    | 1.000000 | 11:30am to 11:44am | 1.000000 | 5:30pm to 5:44pm    | 1.000000 | 11:30pm to 11:44pm | 1.000000 |
| 5:45am to 5:59am    | 1.000000 | 11:45am to 11:59am | 1.000000 | 5:45pm to 5:59pm    | 1.000000 | 11:45pm to 11:59pm | 1.000000 |

## Daily Operational Profiles

Baseline 2009/14/16, Bob Hope

Name: DEFAULT

| Day       | Weight   | Day      | Weight   |
|-----------|----------|----------|----------|
| Monday    | 1.000000 | Friday   | 1.000000 |
| Tuesday   | 1.000000 | Saturday | 1.000000 |
| Wednesday | 1.000000 | Sunday   | 1.000000 |
| Thursday  | 1.000000 |          |          |

## Monthly Operational Profiles

Baseline 2009/14/16, Bob Hope

Name: DEFAULT

| Month    | Weight   | Month     | Weight   |
|----------|----------|-----------|----------|
| January  | 1.000000 | July      | 1.000000 |
| February | 1.000000 | August    | 1.000000 |
| March    | 1.000000 | September | 1.000000 |
| April    | 1.000000 | October   | 1.000000 |
| May      | 1.000000 | November  | 1.000000 |
| June     | 1.000000 | December  | 1.000000 |

## Aircraft

Baseline 2009/14/16, Bob Hope

|                        |               |
|------------------------|---------------|
| Default Taxi Out Time: | 19.000000 min |
| Default Taxi In Time:  | 7.000000 min  |

|              |                       |                           |
|--------------|-----------------------|---------------------------|
| <u>Year:</u> | <u>Uses Schedule?</u> | <u>Schedule Filename:</u> |
| 2009         | No                    | (None)                    |
| 2014         | No                    | (None)                    |
| 2016         | No                    | (None)                    |

|   |                        |             |
|---|------------------------|-------------|
| Aircraft Name:<br>Bombardier Learjet 24 | Take Off weight:       | 6804.00 Kgs |
| Engine Type:<br>CJ610-6                 | Approach Weight:       | 5534.00 Kgs |
| Identification:<br>LJ24                 | Glide Slope:           | 3.00°       |
| Category:<br>SGJB                       | APU Assignment:        | None        |
|   | APU Departure OP Time: | 13.00 min   |
|   | APU Arrival OP Time:   | 13.00 min   |
|   | Gate Assignment:       | None        |

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

|                      |                    |                                |
|----------------------|--------------------|--------------------------------|
| <u>Year:</u><br>2009 | Annual Departures: | 0                              |
|                      | Annual Arrivals:   | 0                              |
|                      | Annual TGOs:       | 0                              |
|                      | Taxi Out Time:     | Determined by Sequencing model |
|                      | Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

|                      |                    |                                |
|----------------------|--------------------|--------------------------------|
| <u>Year:</u><br>2014 | Annual Departures: | 0                              |
|                      | Annual Arrivals:   | 0                              |
|                      | Annual TGOs:       | 0                              |
|                      | Taxi Out Time:     | Determined by Sequencing model |
|                      | Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

|                      |                    |                                |
|----------------------|--------------------|--------------------------------|
| <u>Year:</u><br>2016 | Annual Departures: | 0                              |
|                      | Annual Arrivals:   | 0                              |
|                      | Annual TGOs:       | 0                              |
|                      | Taxi Out Time:     | Determined by Sequencing model |
|                      | Taxi In Time:      | Determined by Sequencing model |

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
 Bombardier Learjet 25  
 Engine Type:  
 CJ610-6  
 Identification:  
 LJ25  
 Category:  
 SGJB

Take Off weight: 6804.00 Kgs  
 Approach Weight: 5534.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

Year: 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

---

Year: 2014

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT

Year: 2016

Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name: Bombardier Learjet 28  
 Engine Type: CJ610-6  
 Identification: LJ28  
 Category: SGJB

Take Off weight: 6804.00 Kgs  
 Approach Weight: 5534.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

Year: 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2014

Annual Departures: 0  
 Annual Arrivals: 0

Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
Gulfstream G300  
 Engine Type:  
SPEY MK511-8  
 Identification:  
GLF3  
 Category:  
LCJP

Take Off weight: 26873.00 Kgs  
 Approach Weight: 23882.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP 36-100  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Diesel   | 15.00                  | 15.00                    | 71.00           | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year: 2009  
Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year: 2014  
Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year: 2016  
Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name: Gulfstream II  
Engine Type: SPEY MK511-8  
Identification: GLF2  
Category:  
Take Off weight: 25401.00 Kgs  
Approach Weight: 23882.00 Kgs  
Glide Slope: 3.00°  
APU Assignment: APU GTCP 36-100  
APU Departure OP Time: 13.00 min



LCJP

APU Arrival OP Time: 13.00 min  
Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 15.00                  | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year: 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2014

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2016

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
 Hawker HS-125 Series 600  
 Engine Type:  
 TFE731-2-2B  
 Identification:  
 H25A  
 Category:  
 SGJB

Take Off weight: 6804.00 Kgs  
 Approach Weight: 5534.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

Year:  
 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

---

Year:  
 2014

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational

profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Rockwell Sabreliner 60  
 Engine Type:  
 CF700-2D  
 Identification:  
 SBR1  
 Category:  
 SCJP

Take Off weight: 13000.00 Kgs  
 Approach Weight: 11140.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 0.00                   | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 0.00                   | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chassis)                                  | Diesel   | 0.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 0.00                   | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 0.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year:  
2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT

Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT  
 Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Year:  
2014

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT  
 Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Year:  
2016

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

|                    |                               |
|--------------------|-------------------------------|
| GSE Population     | Baseline 2009/14/16, Bob Hope |
| None.              |                               |
| Parking Facilities | Baseline 2009/14/16, Bob Hope |
| None.              |                               |
| Roadways           | Baseline 2009/14/16, Bob Hope |
| None.              |                               |
| Stationary Sources | Baseline 2009/14/16, Bob Hope |
| None.              |                               |
| Training Fires     | Baseline 2009/14/16, Bob Hope |
| None.              |                               |
| Gates              | Baseline 2009/14/16, Bob Hope |
| None.              |                               |

|                              |                               |
|------------------------------|-------------------------------|
| Taxiways                     | Baseline 2009/14/16, Bob Hope |
| None.                        |                               |
| Runways                      | Baseline 2009/14/16, Bob Hope |
| None.                        |                               |
| Taxipaths                    | Baseline 2009/14/16, Bob Hope |
| None.                        |                               |
| Configurations               | Baseline 2009/14/16, Bob Hope |
| None.                        |                               |
| Buildings                    | Baseline 2009/14/16, Bob Hope |
| None.                        |                               |
| Discrete Cartesian Receptors | Baseline 2009/14/16, Bob Hope |
| None.                        |                               |
| Discrete Polar Receptors     | Baseline 2009/14/16, Bob Hope |
| None.                        |                               |
| Cartesian Receptor Networks  | Baseline 2009/14/16, Bob Hope |
| None.                        |                               |
| Polar Receptor Networks      | Baseline 2009/14/16, Bob Hope |
| None.                        |                               |
| User-Created Aircraft        | Baseline 2009/14/16, Bob Hope |

Aircraft Name: My Aircraft  
Size: Large  
Designation: Civil  
Engine: Jet  
Usage: Passenger  
European Group: Medium Jet  
Number of Engines: 2  
Aircraft Flight Profile: Agusta A-109  
Engine Flight Profile: 250B17B

The user has NOT used the following system emission indices and fuel flow rates

Aircraft Emissions Profile

Engine Emissions Profile

The user has edited the following emission factors:

| Mode:     | Time (mins): | Fuel Flow(Kg/s) | CO (EI) | HC (EI) | NOx (EI) | SOx (EI) | Smoke Number |
|-----------|--------------|-----------------|---------|---------|----------|----------|--------------|
| Startup   | 0            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi Out  | 19           | 0               | 0       | 0       | 0        | -1       | 0            |
| Takeoff   | 0.7          | 0               | 0       | 0       | 0        | -1       | 0            |
| Climb Out | 2.2          | 0               | 0       | 0       | 0        | -1       | 0            |
| Approach  | 4            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi In   | 7            | 0               | 0       | 0       | 0        | -1       | 0            |

|                  |                               |
|------------------|-------------------------------|
| User-Created GSE | Baseline 2009/14/16, Bob Hope |
| None.            |                               |
| User-Created APU | Baseline 2009/14/16, Bob Hope |
| None.            |                               |

Scenario-Airport: Baseline 2009/14/16, Camarillo

---

**Weather**

Baseline 2009/14/16, Camarillo

Mixing Height: 3000.00 feet  
Temperature: 60.00 °F  
Daily High Temperature: 70.35 °F  
Daily Low Temperature: 49.65 °F  
Pressure: 29.92 inches of Hg  
Sea Level Pressure: 30.01 inches of Hg  
Relative Humidity: 69.06  
Wind Speed: 5.27 knots  
Wind Direction: 0.00 °  
Ceiling: 99999.99 feet  
Visibility: 50.00 miles  
The user has used annual averages.  
Base Elevation: 75.00 feet  
Date Range: Thursday, January 01, 2004 to Friday, December 31, 2004  
Source Data File Location:  
Upper Air Data File Location:

---

**Quarter-Hourly Operational Profiles**

Baseline 2009/14/16, Camarillo

Name: DEFAULT

| Quarter-Hour        | Weight   | Quarter-Hour       | Weight   | Quarter-Hour        | Weight   | Quarter-Hour       | Weight   |
|---------------------|----------|--------------------|----------|---------------------|----------|--------------------|----------|
| 12:00am to 12:14 am | 1.000000 | 6:00am to 6:14am   | 1.000000 | 12:00pm to 12:14 pm | 1.000000 | 6:00pm to 6:14pm   | 1.000000 |
| 12:15am to 12:29 am | 1.000000 | 6:15am to 6:29am   | 1.000000 | 12:15pm to 12:29 pm | 1.000000 | 6:15pm to 6:29pm   | 1.000000 |
| 12:30am to 12:44 am | 1.000000 | 6:30am to 6:44am   | 1.000000 | 12:30pm to 12:44 pm | 1.000000 | 6:30pm to 6:44pm   | 1.000000 |
| 12:45am to 12:59 am | 1.000000 | 6:45am to 6:59am   | 1.000000 | 12:45pm to 12:59 pm | 1.000000 | 6:45pm to 6:59pm   | 1.000000 |
| 1:00am to 1:14am    | 1.000000 | 7:00am to 7:14am   | 1.000000 | 1:00pm to 1:14pm    | 1.000000 | 7:00pm to 7:14pm   | 1.000000 |
| 1:15am to 1:29am    | 1.000000 | 7:15am to 7:29am   | 1.000000 | 1:15pm to 1:29pm    | 1.000000 | 7:15pm to 7:29pm   | 1.000000 |
| 1:30am to 1:44am    | 1.000000 | 7:30am to 7:44am   | 1.000000 | 1:30pm to 1:44pm    | 1.000000 | 7:30pm to 7:44pm   | 1.000000 |
| 1:45am to 1:59am    | 1.000000 | 7:45am to 7:59am   | 1.000000 | 1:45pm to 1:59pm    | 1.000000 | 7:45pm to 7:59pm   | 1.000000 |
| 2:00am to 2:14am    | 1.000000 | 8:00am to 8:14am   | 1.000000 | 2:00pm to 2:14pm    | 1.000000 | 8:00pm to 8:14pm   | 1.000000 |
| 2:15am to 2:29am    | 1.000000 | 8:15am to 8:29am   | 1.000000 | 2:15pm to 2:29pm    | 1.000000 | 8:15pm to 8:29pm   | 1.000000 |
| 2:30am to 2:44am    | 1.000000 | 8:30am to 8:44am   | 1.000000 | 2:30pm to 2:44pm    | 1.000000 | 8:30pm to 8:44pm   | 1.000000 |
| 2:45am to 2:59am    | 1.000000 | 8:45am to 8:59am   | 1.000000 | 2:45pm to 2:59pm    | 1.000000 | 8:45pm to 8:59pm   | 1.000000 |
| 3:00am to 3:14am    | 1.000000 | 9:00am to 9:14am   | 1.000000 | 3:00pm to 3:14pm    | 1.000000 | 9:00pm to 9:14pm   | 1.000000 |
| 3:15am to 3:29am    | 1.000000 | 9:15am to 9:29am   | 1.000000 | 3:15pm to 3:29pm    | 1.000000 | 9:15pm to 9:29pm   | 1.000000 |
| 3:30am to 3:44am    | 1.000000 | 9:30am to 9:44am   | 1.000000 | 3:30pm to 3:44pm    | 1.000000 | 9:30pm to 9:44pm   | 1.000000 |
| 3:45am to 3:59am    | 1.000000 | 9:45am to 9:59am   | 1.000000 | 3:45pm to 3:59pm    | 1.000000 | 9:45pm to 9:59pm   | 1.000000 |
| 4:00am to 4:14am    | 1.000000 | 10:00am to 10:14am | 1.000000 | 4:00pm to 4:14pm    | 1.000000 | 10:00pm to 10:14pm | 1.000000 |
| 4:15am to 4:29am    | 1.000000 | 10:15am to 10:29am | 1.000000 | 4:15pm to 4:29pm    | 1.000000 | 10:15pm to 10:29pm | 1.000000 |
| 4:30am to 4:44am    | 1.000000 | 10:30am to 10:44am | 1.000000 | 4:30pm to 4:44pm    | 1.000000 | 10:30pm to 10:44pm | 1.000000 |
| 4:45am to 4:59am    | 1.000000 | 10:45am to 10:59am | 1.000000 | 4:45pm to 4:59pm    | 1.000000 | 10:45pm to 10:59pm | 1.000000 |
| 5:00am to 5:14am    | 1.000000 | 11:00am to 11:14am | 1.000000 | 5:00pm to 5:14pm    | 1.000000 | 11:00pm to 11:14pm | 1.000000 |
| 5:15am to 5:29am    | 1.000000 | 11:15am to 11:29am | 1.000000 | 5:15pm to 5:29pm    | 1.000000 | 11:15pm to 11:29pm | 1.000000 |
| 5:30am to 5:44am    | 1.000000 | 11:30am to 11:44am | 1.000000 | 5:30pm to 5:44pm    | 1.000000 | 11:30pm to 11:44pm | 1.000000 |
| 5:45am to 5:59am    | 1.000000 | 11:45am to 11:59am | 1.000000 | 5:45pm to 5:59pm    | 1.000000 | 11:45pm to 11:59pm | 1.000000 |

---

**Daily Operational Profiles**

Baseline 2009/14/16, Camarillo

Name: DEFAULT

|           |          |          |          |
|-----------|----------|----------|----------|
| Day       | Weight   | Day      | Weight   |
| Monday    | 1.000000 | Friday   | 1.000000 |
| Tuesday   | 1.000000 | Saturday | 1.000000 |
| Wednesday | 1.000000 | Sunday   | 1.000000 |
| Thursday  | 1.000000 |          |          |

### Monthly Operational Profiles

Baseline 2009/14/16, Camarillo

Name: DEFAULT

|          |          |           |          |
|----------|----------|-----------|----------|
| Month    | Weight   | Month     | Weight   |
| January  | 1.000000 | July      | 1.000000 |
| February | 1.000000 | August    | 1.000000 |
| March    | 1.000000 | September | 1.000000 |
| April    | 1.000000 | October   | 1.000000 |
| May      | 1.000000 | November  | 1.000000 |
| June     | 1.000000 | December  | 1.000000 |

### Aircraft

Baseline 2009/14/16, Camarillo

|                        |   |
|------------------------|---|
| Default Taxi Out Time: | 19.000000 min                                   |
| Default Taxi In Time:  | 7.000000 min                                    |
| <u>Year:</u>           | <u>Uses Schedule?</u> <u>Schedule Filename:</u> |
| 2009                   | No      (None)                                  |
| 2014                   | No      (None)                                  |
| 2016                   | No      (None)                                  |

|                       |                        |             |
|-----------------------|------------------------|-------------|
| Aircraft Name:        | Take Off weight:       | 6804.00 Kgs |
| Bombardier Learjet 24 | Approach Weight:       | 5534.00 Kgs |
| Engine Type:          | Glide Slope:           | 3.00°       |
| CJ610-6               | APU Assignment:        | None        |
| Identification:       | APU Departure OP Time: | 13.00 min   |
| LJ24                  | APU Arrival OP Time:   | 13.00 min   |
| Category:             | Gate Assignment:       | None        |
| SGJB                  |                        |             |

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

|       |                    |                                |
|-------|--------------------|--------------------------------|
| Year: | Annual Departures: | 0                              |
| 2009  | Annual Arrivals:   | 0                              |
|       | Annual TGOs:       | 0                              |
|       | Taxi Out Time:     | Determined by Sequencing model |
|       | Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational                 | DEFAULT |

Year: 2014

Profile:

Annual Departures: 0

Annual Arrivals: 0

Annual TGOs: 0

Taxi Out Time: Determined by Sequencing model

Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT

Departure Daily Operational Profile: DEFAULT

Departure Monthly Operational Profile: DEFAULT

Arrival Quarter-Hourly Operational profile: DEFAULT

Arrival Daily Operational Profile: DEFAULT

Arrival Monthly Operational Profile: DEFAULT

Touch & Go Quarter-Hourly Operational profile: DEFAULT

Touch & Go Daily Operational Profile: DEFAULT

Touch & Go Monthly Operational Profile: DEFAULT

Year: 2016

Annual Departures: 0

Annual Arrivals: 0

Annual TGOs: 0

Taxi Out Time: Determined by Sequencing model

Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT

Departure Daily Operational Profile: DEFAULT

Departure Monthly Operational Profile: DEFAULT

Arrival Quarter-Hourly Operational profile: DEFAULT

Arrival Daily Operational Profile: DEFAULT

Arrival Monthly Operational Profile: DEFAULT

Touch & Go Quarter-Hourly Operational profile: DEFAULT

Touch & Go Daily Operational Profile: DEFAULT

Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name: Bombardier Learjet 25

Engine Type: CJ610-6

Identification: LJ25

Category: SGJB

Take Off weight: 6804.00 Kgs

Approach Weight: 5534.00 Kgs

Glide Slope: 3.00°

APU Assignment: None

APU Departure OP Time: 13.00 min

APU Arrival OP Time: 13.00 min

Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

Year: 2009

Annual Departures: 0

Annual Arrivals: 0

Annual TGOs: 0

Taxi Out Time: Determined by Sequencing model

Taxi In Time: Determined by Sequencing model

---



|       |  |                                |
|-------|--|--------------------------------|
|       | Departure Quarter-Hourly Operational profile:  | DEFAULT                        |
|       | Departure Daily Operational Profile:           | DEFAULT                        |
|       | Departure Monthly Operational Profile:         | DEFAULT                        |
|       | Arrival Quarter-Hourly Operational profile:    | DEFAULT                        |
|       | Arrival Daily Operational Profile:             | DEFAULT                        |
|       | Arrival Monthly Operational Profile:           | DEFAULT                        |
|       | Touch & Go Quarter-Hourly Operational profile: | DEFAULT                        |
|       | Touch & Go Daily Operational Profile:          | DEFAULT                        |
|       | Touch & Go Monthly Operational Profile:        | DEFAULT                        |
| Year: | Annual Departures:                             | 0                              |
| 2014  | Annual Arrivals:                               | 0                              |
|       | Annual TGOs:                                   | 0                              |
|       | Taxi Out Time:                                 | Determined by Sequencing model |
|       | Taxi In Time:                                  | Determined by Sequencing model |

---

|       |  |                                |
|-------|--|--------------------------------|
|       | Departure Quarter-Hourly Operational profile:  | DEFAULT                        |
|       | Departure Daily Operational Profile:           | DEFAULT                        |
|       | Departure Monthly Operational Profile:         | DEFAULT                        |
|       | Arrival Quarter-Hourly Operational profile:    | DEFAULT                        |
|       | Arrival Daily Operational Profile:             | DEFAULT                        |
|       | Arrival Monthly Operational Profile:           | DEFAULT                        |
|       | Touch & Go Quarter-Hourly Operational profile: | DEFAULT                        |
|       | Touch & Go Daily Operational Profile:          | DEFAULT                        |
|       | Touch & Go Monthly Operational Profile:        | DEFAULT                        |
| Year: | Annual Departures:                             | 0                              |
| 2016  | Annual Arrivals:                               | 0                              |
|       | Annual TGOs:                                   | 0                              |
|       | Taxi Out Time:                                 | Determined by Sequencing model |
|       | Taxi In Time:                                  | Determined by Sequencing model |

---

|  |  |         |
|--|--|---------|
|  | Departure Quarter-Hourly Operational profile:  | DEFAULT |
|  | Departure Daily Operational Profile:           | DEFAULT |
|  | Departure Monthly Operational Profile:         | DEFAULT |
|  | Arrival Quarter-Hourly Operational profile:    | DEFAULT |
|  | Arrival Daily Operational Profile:             | DEFAULT |
|  | Arrival Monthly Operational Profile:           | DEFAULT |
|  | Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
|  | Touch & Go Daily Operational Profile:          | DEFAULT |
|  | Touch & Go Monthly Operational Profile:        | DEFAULT |

Aircraft Name:  
Bombardier Learjet 28  
Engine Type:  
CJ610-6  
Identification:  
LJ28  
Category:  
SGJB

|                        |             |
|------------------------|-------------|
| Take Off weight:       | 6804.00 Kgs |
| Approach Weight:       | 5534.00 Kgs |
| Glide Slope:           | 3.00°       |
| APU Assignment:        | None        |
| APU Departure OP Time: | 13.00 min   |
| APU Arrival OP Time:   | 13.00 min   |
| Gate Assignment:       | None        |

---

| Assigned GSE/AGE: | FUEL | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year        |
|-------------------|------|------------------------|--------------------------|-----------------|-----------------|--------------------------|
|                   |      |                        |                          |                 |                 | Fuel Truck (F750, Dukes) |

|  |          |      |       |        |       |
|--|----------|------|-------|--------|-------|
| Transportation Services,<br>DART 3000 to 6000<br>gallon) | Diesel   | 0.00 | 20.00 | 175.00 | 25.00 |
| Ground Power Unit (TLD)                                  | Gasoline | 0.00 | 40.00 | 107.00 | 75.00 |

---

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2014

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2016

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

---

Aircraft Name:  
 Gulfstream G300  
 Engine Type:  
 SPEY MK511-8  
 Identification:  
 GLF3  
 Category:  
 LCJP

Take Off weight: 26873.00 Kgs  
 Approach Weight: 23882.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP 36-100  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Diesel   | 15.00                  | 15.00                    | 71.00           | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukas Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year:  
 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
 2014

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:

2016

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Gulfstream II  
 Engine Type:  
 SPEY MK511-8  
 Identification:  
 GLF2  
 Category:  
 LCJP

Take Off weight: 25401.00 Kgs  
 Approach Weight: 23882.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP 36-100  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 15.00                  | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year:  
 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT

Year: 2014

Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT  
 Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2016

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Hawker HS-125 Series 600  
 Engine Type:  
 TFE731-2-2B  
 Identification:  
 H25A  
 Category:  
 SGJB

Take Off weight: 6804.00 Kgs  
 Approach Weight: 5534.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

Year: 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0

Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
Rockwell Sabreliner 60  
Engine Type:  
CF700-2D  
Identification:  
SBR1  
Category:  
SCJP

Take Off weight: 13000.00 Kgs  
Approach Weight: 11140.00 Kgs  
Glide Slope: 3.00°  
APU Assignment: None  
APU Departure OP Time: 13.00 min  
APU Arrival OP Time: 13.00 min  
Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 0.00                   | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 0.00                   | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 0.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 0.00                   | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 0.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year:  
2009

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT

Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

|                               |   |
|-------------------------------|---|
| GSE Population                | Baseline 2009/14/16, Camarillo  |
| None.                         |   |
| Parking Facilities            | Baseline 2009/14/16, Camarillo  |
| None.                         |   |
| Roadways                      | Baseline 2009/14/16, Camarillo  |
| None.                         |   |
| Stationary Sources            | Baseline 2009/14/16, Camarillo  |
| None.                         |   |
| Training Fires                | Baseline 2009/14/16, Camarillo  |
| None.                         |   |
| Gates                         | Baseline 2009/14/16, Camarillo  |
| None.                         |   |
| Taxiways                      | Baseline 2009/14/16, Camarillo  |
| None.                         |   |
| Runways                       | Baseline 2009/14/16, Camarillo  |
| None.                         |   |
| Taxipaths                     | Baseline 2009/14/16, Camarillo  |
| None.                         |   |
| Configurations                | Baseline 2009/14/16, Camarillo  |
| None.                         |   |
| Buildings                     | Baseline 2009/14/16, Camarillo  |
| None.                         |   |
| Discrete Cartesian Receptors  | Baseline 2009/14/16, Camarillo  |
| None.                         |   |
| Discrete Polar Receptors      | Baseline 2009/14/16, Camarillo  |
| None.                         |   |
| Cartesian Receptor Networks   | Baseline 2009/14/16, Camarillo  |
| None.                         |   |
| Polar Receptor Networks       | Baseline 2009/14/16, Camarillo  |
| None.                         |   |
| User-Created Aircraft         | Baseline 2009/14/16, Camarillo  |
| Aircraft Name:<br>My Aircraft | Size: Large<br>Designation: Civil<br>Engine: Jet<br>Usage: Passenger<br>European Group: Medium Jet<br>Number of Engines: 2<br>Aircraft Flight Profile: Agusta A-109<br>Engine Flight Profile: 250B17B |



---

The user has NOT used the following sytem emission indices and fuel flow rates

Aircraft Emissions  
Profile

Engine Emissions  
Profile

The user has edited the following emission factors:

| Mode:     | Time (mins): | Fuel Flow(Kg/s) | CO (EI) | HC (EI) | NOx (EI) | SOx (EI) | Smoke Number |
|-----------|--------------|-----------------|---------|---------|----------|----------|--------------|
| Startup   | 0            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi Out  | 19           | 0               | 0       | 0       | 0        | -1       | 0            |
| Takeoff   | 0.7          | 0               | 0       | 0       | 0        | -1       | 0            |
| Climb Out | 2.2          | 0               | 0       | 0       | 0        | -1       | 0            |
| Approach  | 4            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi In   | 7            | 0               | 0       | 0       | 0        | -1       | 0            |

---

---

User-Created GSE

Baseline 2009/14/16, Camarillo

None.

---

User-Created APU

Baseline 2009/14/16, Camarillo

None.

---

---

## Scenario-Airport: Baseline 2009/14/16, Chino

---

---

Weather

Baseline 2009/14/16, Chino

---

Mixing Height: 3000.00 feet  
Temperature: 64.00 °F  
Daily High Temperature: 74.35 °F  
Daily Low Temperature: 53.65 °F  
Pressure: 29.92 inches of Hg  
Sea Level Pressure: 29.98 inches of Hg  
Relative Humidity: 64.41  
Wind Speed: 5.02 knots  
Wind Direction: 0.00 °  
Ceiling: 99999.99 feet  
Visibility: 50.00 miles  
The user has used annual averages.  
Base Elevation: 652.00 feet  
Date Range: Thursday, January 01, 2004 to Friday, December 31, 2004  
Source Data File Location:  
Upper Air Data File Location:

---

---

Quarter-Hourly Operational Profiles

Baseline 2009/14/16, Chino

Name: DEFAULT

| Quarter-Hour        | Weight   | Quarter-Hour     | Weight   | Quarter-Hour        | Weight   | Quarter-Hour     | Weight   |
|---------------------|----------|------------------|----------|---------------------|----------|------------------|----------|
| 12:00am to 12:14 am | 1.000000 | 6:00am to 6:14am | 1.000000 | 12:00pm to 12:14 pm | 1.000000 | 6:00pm to 6:14pm | 1.000000 |
| 12:15am to 12:29 am | 1.000000 | 6:15am to 6:29am | 1.000000 | 12:15pm to 12:29 pm | 1.000000 | 6:15pm to 6:29pm | 1.000000 |
| 12:30am to 12:44 am | 1.000000 | 6:30am to 6:44am | 1.000000 | 12:30pm to 12:44 pm | 1.000000 | 6:30pm to 6:44pm | 1.000000 |
| 12:45am to 12:59 am | 1.000000 | 6:45am to 6:59am | 1.000000 | 12:45pm to 12:59 pm | 1.000000 | 6:45pm to 6:59pm | 1.000000 |
| 1:00am to 1:14am    | 1.000000 | 7:00am to 7:14am | 1.000000 | 1:00pm to 1:14pm    | 1.000000 | 7:00pm to 7:14pm | 1.000000 |
| 1:15am to 1:29am    | 1.000000 | 7:15am to 7:29am | 1.000000 | 1:15pm to 1:29pm    | 1.000000 | 7:15pm to 7:29pm | 1.000000 |

|                  |          |                    |          |                  |          |                    |          |
|------------------|----------|--------------------|----------|------------------|----------|--------------------|----------|
| 1:30am to 1:44am | 1.000000 | 7:30am to 7:44am   | 1.000000 | 1:30pm to 1:44pm | 1.000000 | 7:30pm to 7:44pm   | 1.000000 |
| 1:45am to 1:59am | 1.000000 | 7:45am to 7:59am   | 1.000000 | 1:45pm to 1:59pm | 1.000000 | 7:45pm to 7:59pm   | 1.000000 |
| 2:00am to 2:14am | 1.000000 | 8:00am to 8:14am   | 1.000000 | 2:00pm to 2:14pm | 1.000000 | 8:00pm to 8:14pm   | 1.000000 |
| 2:15am to 2:29am | 1.000000 | 8:15am to 8:29am   | 1.000000 | 2:15pm to 2:29pm | 1.000000 | 8:15pm to 8:29pm   | 1.000000 |
| 2:30am to 2:44am | 1.000000 | 8:30am to 8:44am   | 1.000000 | 2:30pm to 2:44pm | 1.000000 | 8:30pm to 8:44pm   | 1.000000 |
| 2:45am to 2:59am | 1.000000 | 8:45am to 8:59am   | 1.000000 | 2:45pm to 2:59pm | 1.000000 | 8:45pm to 8:59pm   | 1.000000 |
| 3:00am to 3:14am | 1.000000 | 9:00am to 9:14am   | 1.000000 | 3:00pm to 3:14pm | 1.000000 | 9:00pm to 9:14pm   | 1.000000 |
| 3:15am to 3:29am | 1.000000 | 9:15am to 9:29am   | 1.000000 | 3:15pm to 3:29pm | 1.000000 | 9:15pm to 9:29pm   | 1.000000 |
| 3:30am to 3:44am | 1.000000 | 9:30am to 9:44am   | 1.000000 | 3:30pm to 3:44pm | 1.000000 | 9:30pm to 9:44pm   | 1.000000 |
| 3:45am to 3:59am | 1.000000 | 9:45am to 9:59am   | 1.000000 | 3:45pm to 3:59pm | 1.000000 | 9:45pm to 9:59pm   | 1.000000 |
| 4:00am to 4:14am | 1.000000 | 10:00am to 10:14am | 1.000000 | 4:00pm to 4:14pm | 1.000000 | 10:00pm to 10:14pm | 1.000000 |
| 4:15am to 4:29am | 1.000000 | 10:15am to 10:29am | 1.000000 | 4:15pm to 4:29pm | 1.000000 | 10:15pm to 10:29pm | 1.000000 |
| 4:30am to 4:44am | 1.000000 | 10:30am to 10:44am | 1.000000 | 4:30pm to 4:44pm | 1.000000 | 10:30pm to 10:44pm | 1.000000 |
| 4:45am to 4:59am | 1.000000 | 10:45am to 10:59am | 1.000000 | 4:45pm to 4:59pm | 1.000000 | 10:45pm to 10:59pm | 1.000000 |
| 5:00am to 5:14am | 1.000000 | 11:00am to 11:14am | 1.000000 | 5:00pm to 5:14pm | 1.000000 | 11:00pm to 11:14pm | 1.000000 |
| 5:15am to 5:29am | 1.000000 | 11:15am to 11:29am | 1.000000 | 5:15pm to 5:29pm | 1.000000 | 11:15pm to 11:29pm | 1.000000 |
| 5:30am to 5:44am | 1.000000 | 11:30am to 11:44am | 1.000000 | 5:30pm to 5:44pm | 1.000000 | 11:30pm to 11:44pm | 1.000000 |
| 5:45am to 5:59am | 1.000000 | 11:45am to 11:59am | 1.000000 | 5:45pm to 5:59pm | 1.000000 | 11:45pm to 11:59pm | 1.000000 |

### Daily Operational Profiles

Baseline 2009/14/16, Chino

Name: DEFAULT

| Day       | Weight   | Day      | Weight   |
|-----------|----------|----------|----------|
| Monday    | 1.000000 | Friday   | 1.000000 |
| Tuesday   | 1.000000 | Saturday | 1.000000 |
| Wednesday | 1.000000 | Sunday   | 1.000000 |
| Thursday  | 1.000000 |          |          |

### Monthly Operational Profiles

Baseline 2009/14/16, Chino

Name: DEFAULT

| Month    | Weight   | Month     | Weight   |
|----------|----------|-----------|----------|
| January  | 1.000000 | July      | 1.000000 |
| February | 1.000000 | August    | 1.000000 |
| March    | 1.000000 | September | 1.000000 |
| April    | 1.000000 | October   | 1.000000 |
| May      | 1.000000 | November  | 1.000000 |
| June     | 1.000000 | December  | 1.000000 |

### Aircraft

Baseline 2009/14/16, Chino

|                        |                       |                           |  |
|------------------------|-----------------------|---------------------------|--|
| Default Taxi Out Time: | 19.000000 min         |                           |  |
| Default Taxi In Time:  | 7.000000 min          |                           |  |
| <u>Year:</u>           | <u>Uses Schedule?</u> | <u>Schedule Filename:</u> |  |
| 2009                   | No                    | (None)                    |  |
| 2014                   | No                    | (None)                    |  |
| 2016                   | No                    | (None)                    |  |

|                 |                        |             |
|-----------------|------------------------|-------------|
| Aircraft Name:  | Take Off weight:       | 2599.00 Kgs |
| My Aircraft     | Approach Weight:       | 2599.00 Kgs |
| Engine Type:    | Glide Slope:           | 3.00°       |
| User-Created    | APU Assignment:        | None        |
| Identification: | APU Departure OP Time: | 13.00 min   |
| L-39            |                        |             |
| Category:       |                        |             |

LCJP

APU Arrival OP Time: 13.00 min  
Gate Assignment: None

---

| Assigned GSE/AGE: | FUEL | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|-------------------|------|------------------------|--------------------------|-----------------|-----------------|-------------------|
|-------------------|------|------------------------|--------------------------|-----------------|-----------------|-------------------|

---

Year:  
2009

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
 Northrop F-5E/F Tiger II  
 Engine Type:  
 J85-GE-5F  
 Identification:  
 F-5  
 Category:  
 SMJA

Take Off weight: 23587.00 Kgs  
 Approach Weight: 18144.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

---

| Assigned GSE/AGE:   | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---------------------|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Cart (Taylor Dunn)  | Diesel | 5.00                   | 5.00                     | 25.00           | 50.00           |                   |
| Generator (Generic) | Diesel | 0.00                   | 120.00                   | 158.00          | 82.00           |                   |
| Lift (Generic)      | Diesel | 5.00                   | 5.00                     | 115.00          | 50.00           |                   |
| Other (Generic)     | Diesel | 0.00                   | 0.00                     | 140.00          | 50.00           |                   |

---

Year:  
 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
 2014

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
 2016

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT

Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 T-38 Talon  
 Engine Type:  
 J85-GE-5H (w/AB)  
 Identification:  
 T-38  
 Category:  
 LMJO

Take Off weight: 23587.00 Kgs  
 Approach Weight: 18144.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:   | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---------------------|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Cart (Taylor Dunn)  | Diesel | 0.00                   | 5.00                     | 25.00           | 50.00           |                   |
| Generator (Generic) | Diesel | 0.00                   | 120.00                   | 158.00          | 82.00           |                   |
| Lift (Generic)      | Diesel | 0.00                   | 5.00                     | 115.00          | 50.00           |                   |
| Other (Generic)     | Diesel | 0.00                   | 0.00                     | 140.00          | 50.00           |                   |

Year:  
2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2016

Profile:

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

---

|                              |                            |
|------------------------------|----------------------------|
| GSE Population               | Baseline 2009/14/16, Chino |
| None.                        |                            |
| Parking Facilities           | Baseline 2009/14/16, Chino |
| None.                        |                            |
| Roadways                     | Baseline 2009/14/16, Chino |
| None.                        |                            |
| Stationary Sources           | Baseline 2009/14/16, Chino |
| None.                        |                            |
| Training Fires               | Baseline 2009/14/16, Chino |
| None.                        |                            |
| Gates                        | Baseline 2009/14/16, Chino |
| None.                        |                            |
| Taxiways                     | Baseline 2009/14/16, Chino |
| None.                        |                            |
| Runways                      | Baseline 2009/14/16, Chino |
| None.                        |                            |
| Taxipaths                    | Baseline 2009/14/16, Chino |
| None.                        |                            |
| Configurations               | Baseline 2009/14/16, Chino |
| None.                        |                            |
| Buildings                    | Baseline 2009/14/16, Chino |
| None.                        |                            |
| Discrete Cartesian Receptors | Baseline 2009/14/16, Chino |
| None.                        |                            |
| Discrete Polar Receptors     | Baseline 2009/14/16, Chino |
| None.                        |                            |
| Cartesian Receptor Networks  | Baseline 2009/14/16, Chino |
| None.                        |                            |
| Polar Receptor Networks      | Baseline 2009/14/16, Chino |
| None.                        |                            |
| User-Created Aircraft        | Baseline 2009/14/16, Chino |

Aircraft Name:  
My Aircraft

Size: Large  
Designation: Civil  
Engine: Jet  
Usage: Passenger  
European Group: Medium Jet  
Number of Engines: 2  
Aircraft Flight Profile: Agusta A-109  
Engine Flight Profile: 250B17B

The user has NOT used the following system emission indices and fuel flow rates

Aircraft Emissions  
Profile

Engine Emissions  
Profile

The user has edited the following emission factors:

| Mode:     | Time (mins): | Fuel Flow(Kg/s) | CO (EI) | HC (EI) | NOx (EI) | SOx (EI) | Smoke Number |
|-----------|--------------|-----------------|---------|---------|----------|----------|--------------|
| Startup   | 0            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi Out  | 19           | 0               | 0       | 0       | 0        | -1       | 0            |
| Takeoff   | 0.7          | 0               | 0       | 0       | 0        | -1       | 0            |
| Climb Out | 2.2          | 0               | 0       | 0       | 0        | -1       | 0            |
| Approach  | 4            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi In   | 7            | 0               | 0       | 0       | 0        | -1       | 0            |

---

#### User-Created GSE

Baseline 2009/14/16, Chino

None.

---

#### User-Created APU

Baseline 2009/14/16, Chino

None.

---

### Scenario-Airport: Baseline 2009/14/16, General Wm J Fox Airfield

---

#### Weather

Baseline 2009/14/16, General Wm J Fox Airfield

Mixing Height: 3000.00 feet  
Temperature: 60.00 °F  
Daily High Temperature: 70.35 °F  
Daily Low Temperature: 49.65 °F  
Pressure: 29.92 inches of Hg  
Sea Level Pressure: 29.99 inches of Hg  
Relative Humidity: 37.86  
Wind Speed: 9.66 knots  
Wind Direction: 0.00 °  
Ceiling: 99999.99 feet  
Visibility: 50.00 miles

The user has used annual averages.

Base Elevation: 2348.00 feet  
Date Range: Thursday, January 01, 2004 to Friday, December 31, 2004  
Source Data File Location:  
Upper Air Data File Location:

---

#### Quarter-Hourly Operational Profiles

Baseline 2009/14/16, General Wm J Fox Airfield

Name: DEFAULT

| Quarter-Hour     | Weight   | Quarter-Hour     | Weight   | Quarter-Hour     | Weight   | Quarter-Hour     | Weight   |
|------------------|----------|------------------|----------|------------------|----------|------------------|----------|
| 12:00am to 12:14 | 1.000000 | 6:00am to 6:14am | 1.000000 | 12:00pm to 12:14 | 1.000000 | 6:00pm to 6:14pm | 1.000000 |

| am                 |          |                    |          | pm                 |          |                    |          |
|--------------------|----------|--------------------|----------|--------------------|----------|--------------------|----------|
| 12:15am to 12:29am | 1.000000 | 6:15am to 6:29am   | 1.000000 | 12:15pm to 12:29pm | 1.000000 | 6:15pm to 6:29pm   | 1.000000 |
| 12:30am to 12:44am | 1.000000 | 6:30am to 6:44am   | 1.000000 | 12:30pm to 12:44pm | 1.000000 | 6:30pm to 6:44pm   | 1.000000 |
| 12:45am to 12:59am | 1.000000 | 6:45am to 6:59am   | 1.000000 | 12:45pm to 12:59pm | 1.000000 | 6:45pm to 6:59pm   | 1.000000 |
| 1:00am to 1:14am   | 1.000000 | 7:00am to 7:14am   | 1.000000 | 1:00pm to 1:14pm   | 1.000000 | 7:00pm to 7:14pm   | 1.000000 |
| 1:15am to 1:29am   | 1.000000 | 7:15am to 7:29am   | 1.000000 | 1:15pm to 1:29pm   | 1.000000 | 7:15pm to 7:29pm   | 1.000000 |
| 1:30am to 1:44am   | 1.000000 | 7:30am to 7:44am   | 1.000000 | 1:30pm to 1:44pm   | 1.000000 | 7:30pm to 7:44pm   | 1.000000 |
| 1:45am to 1:59am   | 1.000000 | 7:45am to 7:59am   | 1.000000 | 1:45pm to 1:59pm   | 1.000000 | 7:45pm to 7:59pm   | 1.000000 |
| 2:00am to 2:14am   | 1.000000 | 8:00am to 8:14am   | 1.000000 | 2:00pm to 2:14pm   | 1.000000 | 8:00pm to 8:14pm   | 1.000000 |
| 2:15am to 2:29am   | 1.000000 | 8:15am to 8:29am   | 1.000000 | 2:15pm to 2:29pm   | 1.000000 | 8:15pm to 8:29pm   | 1.000000 |
| 2:30am to 2:44am   | 1.000000 | 8:30am to 8:44am   | 1.000000 | 2:30pm to 2:44pm   | 1.000000 | 8:30pm to 8:44pm   | 1.000000 |
| 2:45am to 2:59am   | 1.000000 | 8:45am to 8:59am   | 1.000000 | 2:45pm to 2:59pm   | 1.000000 | 8:45pm to 8:59pm   | 1.000000 |
| 3:00am to 3:14am   | 1.000000 | 9:00am to 9:14am   | 1.000000 | 3:00pm to 3:14pm   | 1.000000 | 9:00pm to 9:14pm   | 1.000000 |
| 3:15am to 3:29am   | 1.000000 | 9:15am to 9:29am   | 1.000000 | 3:15pm to 3:29pm   | 1.000000 | 9:15pm to 9:29pm   | 1.000000 |
| 3:30am to 3:44am   | 1.000000 | 9:30am to 9:44am   | 1.000000 | 3:30pm to 3:44pm   | 1.000000 | 9:30pm to 9:44pm   | 1.000000 |
| 3:45am to 3:59am   | 1.000000 | 9:45am to 9:59am   | 1.000000 | 3:45pm to 3:59pm   | 1.000000 | 9:45pm to 9:59pm   | 1.000000 |
| 4:00am to 4:14am   | 1.000000 | 10:00am to 10:14am | 1.000000 | 4:00pm to 4:14pm   | 1.000000 | 10:00pm to 10:14pm | 1.000000 |
| 4:15am to 4:29am   | 1.000000 | 10:15am to 10:29am | 1.000000 | 4:15pm to 4:29pm   | 1.000000 | 10:15pm to 10:29pm | 1.000000 |
| 4:30am to 4:44am   | 1.000000 | 10:30am to 10:44am | 1.000000 | 4:30pm to 4:44pm   | 1.000000 | 10:30pm to 10:44pm | 1.000000 |
| 4:45am to 4:59am   | 1.000000 | 10:45am to 10:59am | 1.000000 | 4:45pm to 4:59pm   | 1.000000 | 10:45pm to 10:59pm | 1.000000 |
| 5:00am to 5:14am   | 1.000000 | 11:00am to 11:14am | 1.000000 | 5:00pm to 5:14pm   | 1.000000 | 11:00pm to 11:14pm | 1.000000 |
| 5:15am to 5:29am   | 1.000000 | 11:15am to 11:29am | 1.000000 | 5:15pm to 5:29pm   | 1.000000 | 11:15pm to 11:29pm | 1.000000 |
| 5:30am to 5:44am   | 1.000000 | 11:30am to 11:44am | 1.000000 | 5:30pm to 5:44pm   | 1.000000 | 11:30pm to 11:44pm | 1.000000 |
| 5:45am to 5:59am   | 1.000000 | 11:45am to 11:59am | 1.000000 | 5:45pm to 5:59pm   | 1.000000 | 11:45pm to 11:59pm | 1.000000 |

### Daily Operational Profiles

Baseline 2009/14/16, General Wm J Fox Airfield

Name: DEFAULT

| Day       | Weight   | Day      | Weight   |
|-----------|----------|----------|----------|
| Monday    | 1.000000 | Friday   | 1.000000 |
| Tuesday   | 1.000000 | Saturday | 1.000000 |
| Wednesday | 1.000000 | Sunday   | 1.000000 |
| Thursday  | 1.000000 |          |          |

### Monthly Operational Profiles

Baseline 2009/14/16, General Wm J Fox Airfield

Name: DEFAULT

| Month    | Weight   | Month     | Weight   |
|----------|----------|-----------|----------|
| January  | 1.000000 | July      | 1.000000 |
| February | 1.000000 | August    | 1.000000 |
| March    | 1.000000 | September | 1.000000 |
| April    | 1.000000 | October   | 1.000000 |
| May      | 1.000000 | November  | 1.000000 |
| June     | 1.000000 | December  | 1.000000 |

### Aircraft

Baseline 2009/14/16, General Wm J Fox Airfield

|                        |                       |                           |
|------------------------|-----------------------|---------------------------|
| Default Taxi Out Time: | 19.000000 min         |                           |
| Default Taxi In Time:  | 7.000000 min          |                           |
| Year:                  | <u>Uses Schedule?</u> | <u>Schedule Filename:</u> |
| 2009                   | No                    | (None)                    |
| 2014                   | No                    | (None)                    |



2016

No

(None)

Aircraft Name:  
Gulfstream G300  
Engine Type:  
SPEY MK511-8  
Identification:  
GLF3  
Category:  
LCJP

Take Off weight: 26873.00 Kgs  
Approach Weight: 23882.00 Kgs  
Glide Slope: 3.00°  
APU Assignment: APU GTCP 36-100  
APU Departure OP Time: 13.00 min  
APU Arrival OP Time: 13.00 min  
Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Diesel   | 15.00                  | 15.00                    | 71.00           | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year:  
2009

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT

Year: 2016

Touch & Go Monthly Operational Profile: DEFAULT

Annual Departures: 0

Annual Arrivals: 0

Annual TGOs: 0

Taxi Out Time: Determined by Sequencing model

Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT

Departure Daily Operational Profile: DEFAULT

Departure Monthly Operational Profile: DEFAULT

Arrival Quarter-Hourly Operational profile: DEFAULT

Arrival Daily Operational Profile: DEFAULT

Arrival Monthly Operational Profile: DEFAULT

Touch & Go Quarter-Hourly Operational profile: DEFAULT

Touch & Go Daily Operational Profile: DEFAULT

Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name: Gulfstream II  
 Engine Type: SPEY MK511-8  
 Identification: GLF2  
 Category: LCJP

Take Off weight: 25401.00 Kgs

Approach Weight: 23882.00 Kgs

Glide Slope: 3.00°

APU Assignment: APU GTCP 36-100

APU Departure OP Time: 13.00 min

APU Arrival OP Time: 13.00 min

Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 15.00                  | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

---

Year: 2009

Annual Departures: 0

Annual Arrivals: 0

Annual TGOs: 0

Taxi Out Time: Determined by Sequencing model

Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT

Departure Daily Operational Profile: DEFAULT

Departure Monthly Operational Profile: DEFAULT

Arrival Quarter-Hourly Operational profile: DEFAULT

Arrival Daily Operational Profile: DEFAULT

Arrival Monthly Operational Profile: DEFAULT

|            |  |                                |
|------------|--|--------------------------------|
|            | Touch & Go Quarter-Hourly Operational profile: | DEFAULT                        |
|            | Touch & Go Daily Operational Profile:          | DEFAULT                        |
|            | Touch & Go Monthly Operational Profile:        | DEFAULT                        |
| Year: 2014 | Annual Departures:                             | 0                              |
|            | Annual Arrivals:                               | 0                              |
|            | Annual TGOs:                                   | 0                              |
|            | Taxi Out Time:                                 | Determined by Sequencing model |
|            | Taxi In Time:                                  | Determined by Sequencing model |

---

|  |  |         |
|--|--|---------|
|  | Departure Quarter-Hourly Operational profile:  | DEFAULT |
|  | Departure Daily Operational Profile:           | DEFAULT |
|  | Departure Monthly Operational Profile:         | DEFAULT |
|  | Arrival Quarter-Hourly Operational profile:    | DEFAULT |
|  | Arrival Daily Operational Profile:             | DEFAULT |
|  | Arrival Monthly Operational Profile:           | DEFAULT |
|  | Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
|  | Touch & Go Daily Operational Profile:          | DEFAULT |
|  | Touch & Go Monthly Operational Profile:        | DEFAULT |

|            |                    |                                |
|------------|--------------------|--------------------------------|
| Year: 2016 | Annual Departures: | 0                              |
|            | Annual Arrivals:   | 0                              |
|            | Annual TGOs:       | 0                              |
|            | Taxi Out Time:     | Determined by Sequencing model |
|            | Taxi In Time:      | Determined by Sequencing model |

---

|  |  |         |
|--|--|---------|
|  | Departure Quarter-Hourly Operational profile:  | DEFAULT |
|  | Departure Daily Operational Profile:           | DEFAULT |
|  | Departure Monthly Operational Profile:         | DEFAULT |
|  | Arrival Quarter-Hourly Operational profile:    | DEFAULT |
|  | Arrival Daily Operational Profile:             | DEFAULT |
|  | Arrival Monthly Operational Profile:           | DEFAULT |
|  | Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
|  | Touch & Go Daily Operational Profile:          | DEFAULT |
|  | Touch & Go Monthly Operational Profile:        | DEFAULT |

---

|                           |  |
|---------------------------|--|
| <b>GSE Population</b>     | Baseline 2009/14/16, General Wm J Fox Airfield |
| None.                     |  |
| <b>Parking Facilities</b> | Baseline 2009/14/16, General Wm J Fox Airfield |
| None.                     |  |
| <b>Roadways</b>           | Baseline 2009/14/16, General Wm J Fox Airfield |
| None.                     |  |
| <b>Stationary Sources</b> | Baseline 2009/14/16, General Wm J Fox Airfield |
| None.                     |  |
| <b>Training Fires</b>     | Baseline 2009/14/16, General Wm J Fox Airfield |
| None.                     |  |
| <b>Gates</b>              | Baseline 2009/14/16, General Wm J Fox Airfield |
| None.                     |  |
| <b>Taxiways</b>           | Baseline 2009/14/16, General Wm J Fox Airfield |
| None.                     |  |

|                              |  |
|------------------------------|--|
| Runways                      | Baseline 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Taxipaths                    | Baseline 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Configurations               | Baseline 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Buildings                    | Baseline 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Discrete Cartesian Receptors | Baseline 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Discrete Polar Receptors     | Baseline 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Cartesian Receptor Networks  | Baseline 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Polar Receptor Networks      | Baseline 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |

**User-Created Aircraft** Baseline 2009/14/16, General Wm J Fox Airfield

|                               |                         |              |
|-------------------------------|-------------------------|--------------|
| Aircraft Name:<br>My Aircraft | Size:                   | Large        |
|                               | Designation:            | Civil        |
|                               | Engine:                 | Jet          |
|                               | Usage:                  | Passenger    |
|                               | European Group:         | Medium Jet   |
|                               | Number of Engines       | 2            |
|                               | Aircraft Flight Profile | Agusta A-109 |
|                               | Engine Flight Profile   | 250B17B      |

The user has NOT used the following system emission indices and fuel flow rates

Aircraft Emissions Profile

Engine Emissions Profile

The user has edited the following emission factors:

| Mode:     | Time (mins): | Fuel Flow(Kg/s) | CO (EI) | HC (EI) | NOx (EI) | SOx (EI) | Smoke Number |
|-----------|--------------|-----------------|---------|---------|----------|----------|--------------|
| Startup   | 0            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi Out  | 19           | 0               | 0       | 0       | 0        | -1       | 0            |
| Takeoff   | 0.7          | 0               | 0       | 0       | 0        | -1       | 0            |
| Climb Out | 2.2          | 0               | 0       | 0       | 0        | -1       | 0            |
| Approach  | 4            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi In   | 7            | 0               | 0       | 0       | 0        | -1       | 0            |

**User-Created GSE** Baseline 2009/14/16, General Wm J Fox Airfield

None.

**User-Created APU** Baseline 2009/14/16, General Wm J Fox Airfield

None.

**Scenario-Airport: Baseline 2009/14/16, Los Angeles Intl**

**Weather** Baseline 2009/14/16, Los Angeles Intl

|                |              |
|----------------|--------------|
| Mixing Height: | 3000.00 feet |
| Temperature:   | 63.00 °F     |

Daily High Temperature: 73.35 °F  
 Daily Low Temperature: 52.65 °F  
 Pressure: 29.86 inches of Hg  
 Sea Level Pressure: 29.98 inches of Hg  
 Relative Humidity: 73.47  
 Wind Speed: 6.67 knots  
 Wind Direction: 0.00 °  
 Ceiling: 99999.99 feet  
 Visibility: 50.00 miles  
 The user has used annual averages.  
 Base Elevation: 125.98 feet  
 Date Range: Thursday, January 01, 2004 to Friday, December 31, 2004  
 Source Data File Location:  
 Upper Air Data File Location:

### Quarter-Hourly Operational Profiles

Baseline 2009/14/16, Los Angeles Intl

Name: DEFAULT

| Quarter-Hour        | Weight   | Quarter-Hour       | Weight   | Quarter-Hour        | Weight   | Quarter-Hour       | Weight   |
|---------------------|----------|--------------------|----------|---------------------|----------|--------------------|----------|
| 12:00am to 12:14 am | 1.000000 | 6:00am to 6:14am   | 1.000000 | 12:00pm to 12:14 pm | 1.000000 | 6:00pm to 6:14pm   | 1.000000 |
| 12:15am to 12:29 am | 1.000000 | 6:15am to 6:29am   | 1.000000 | 12:15pm to 12:29 pm | 1.000000 | 6:15pm to 6:29pm   | 1.000000 |
| 12:30am to 12:44 am | 1.000000 | 6:30am to 6:44am   | 1.000000 | 12:30pm to 12:44 pm | 1.000000 | 6:30pm to 6:44pm   | 1.000000 |
| 12:45am to 12:59 am | 1.000000 | 6:45am to 6:59am   | 1.000000 | 12:45pm to 12:59 pm | 1.000000 | 6:45pm to 6:59pm   | 1.000000 |
| 1:00am to 1:14am    | 1.000000 | 7:00am to 7:14am   | 1.000000 | 1:00pm to 1:14pm    | 1.000000 | 7:00pm to 7:14pm   | 1.000000 |
| 1:15am to 1:29am    | 1.000000 | 7:15am to 7:29am   | 1.000000 | 1:15pm to 1:29pm    | 1.000000 | 7:15pm to 7:29pm   | 1.000000 |
| 1:30am to 1:44am    | 1.000000 | 7:30am to 7:44am   | 1.000000 | 1:30pm to 1:44pm    | 1.000000 | 7:30pm to 7:44pm   | 1.000000 |
| 1:45am to 1:59am    | 1.000000 | 7:45am to 7:59am   | 1.000000 | 1:45pm to 1:59pm    | 1.000000 | 7:45pm to 7:59pm   | 1.000000 |
| 2:00am to 2:14am    | 1.000000 | 8:00am to 8:14am   | 1.000000 | 2:00pm to 2:14pm    | 1.000000 | 8:00pm to 8:14pm   | 1.000000 |
| 2:15am to 2:29am    | 1.000000 | 8:15am to 8:29am   | 1.000000 | 2:15pm to 2:29pm    | 1.000000 | 8:15pm to 8:29pm   | 1.000000 |
| 2:30am to 2:44am    | 1.000000 | 8:30am to 8:44am   | 1.000000 | 2:30pm to 2:44pm    | 1.000000 | 8:30pm to 8:44pm   | 1.000000 |
| 2:45am to 2:59am    | 1.000000 | 8:45am to 8:59am   | 1.000000 | 2:45pm to 2:59pm    | 1.000000 | 8:45pm to 8:59pm   | 1.000000 |
| 3:00am to 3:14am    | 1.000000 | 9:00am to 9:14am   | 1.000000 | 3:00pm to 3:14pm    | 1.000000 | 9:00pm to 9:14pm   | 1.000000 |
| 3:15am to 3:29am    | 1.000000 | 9:15am to 9:29am   | 1.000000 | 3:15pm to 3:29pm    | 1.000000 | 9:15pm to 9:29pm   | 1.000000 |
| 3:30am to 3:44am    | 1.000000 | 9:30am to 9:44am   | 1.000000 | 3:30pm to 3:44pm    | 1.000000 | 9:30pm to 9:44pm   | 1.000000 |
| 3:45am to 3:59am    | 1.000000 | 9:45am to 9:59am   | 1.000000 | 3:45pm to 3:59pm    | 1.000000 | 9:45pm to 9:59pm   | 1.000000 |
| 4:00am to 4:14am    | 1.000000 | 10:00am to 10:14am | 1.000000 | 4:00pm to 4:14pm    | 1.000000 | 10:00pm to 10:14pm | 1.000000 |
| 4:15am to 4:29am    | 1.000000 | 10:15am to 10:29am | 1.000000 | 4:15pm to 4:29pm    | 1.000000 | 10:15pm to 10:29pm | 1.000000 |
| 4:30am to 4:44am    | 1.000000 | 10:30am to 10:44am | 1.000000 | 4:30pm to 4:44pm    | 1.000000 | 10:30pm to 10:44pm | 1.000000 |
| 4:45am to 4:59am    | 1.000000 | 10:45am to 10:59am | 1.000000 | 4:45pm to 4:59pm    | 1.000000 | 10:45pm to 10:59pm | 1.000000 |
| 5:00am to 5:14am    | 1.000000 | 11:00am to 11:14am | 1.000000 | 5:00pm to 5:14pm    | 1.000000 | 11:00pm to 11:14pm | 1.000000 |
| 5:15am to 5:29am    | 1.000000 | 11:15am to 11:29am | 1.000000 | 5:15pm to 5:29pm    | 1.000000 | 11:15pm to 11:29pm | 1.000000 |
| 5:30am to 5:44am    | 1.000000 | 11:30am to 11:44am | 1.000000 | 5:30pm to 5:44pm    | 1.000000 | 11:30pm to 11:44pm | 1.000000 |
| 5:45am to 5:59am    | 1.000000 | 11:45am to 11:59am | 1.000000 | 5:45pm to 5:59pm    | 1.000000 | 11:45pm to 11:59pm | 1.000000 |

### Daily Operational Profiles

Baseline 2009/14/16, Los Angeles Intl

Name: DEFAULT

| Day       | Weight   | Day      | Weight   |
|-----------|----------|----------|----------|
| Monday    | 1.000000 | Friday   | 1.000000 |
| Tuesday   | 1.000000 | Saturday | 1.000000 |
| Wednesday | 1.000000 | Sunday   | 1.000000 |

Monthly Operational Profiles

Baseline 2009/14/16, Los Angeles Intl

Name: DEFAULT

| Month    | Weight   | Month     | Weight   |
|----------|----------|-----------|----------|
| January  | 1.000000 | July      | 1.000000 |
| February | 1.000000 | August    | 1.000000 |
| March    | 1.000000 | September | 1.000000 |
| April    | 1.000000 | October   | 1.000000 |
| May      | 1.000000 | November  | 1.000000 |
| June     | 1.000000 | December  | 1.000000 |

Aircraft

Baseline 2009/14/16, Los Angeles Intl

Default Taxi Out Time: 19.000000 min

Default Taxi In Time: 7.000000 min

| Year: | Uses Schedule? | Schedule Filename: |
|-------|----------------|--------------------|
| 2009  | No             | (None)             |
| 2014  | No             | (None)             |
| 2016  | No             | (None)             |

|                         |                        |                        |
|-------------------------|------------------------|------------------------|
| Aircraft Name:          | Take Off weight:       | 68039.00 Kgs           |
| Boeing 727-100 Series   | Approach Weight:       | 58173.00 Kgs           |
| Engine Type:            | Glide Slope:           | 3.00°                  |
| JT8D-9 series Smoke fix | APU Assignment:        | APU GTCP85-98 (200 HP) |
| Identification:         | APU Departure OP Time: | 13.00 min              |
| B721                    | APU Arrival OP Time:   | 13.00 min              |
| Category:               | Gate Assignment:       | None                   |
| LCJP                    |                        |                        |

| Assigned GSE/AGE:   | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Air Conditioner (Generic)   | Electric | 7.00                   | 23.00                    | 0.00            | 75.00           |                   |
| Air Start (ACE 180)   | Diesel   | 0.00                   | 7.00                     | 425.00          | 90.00           |                   |
| Aircraft Tractor (Stewart & Stevenson TUG GT-35, Douglas TBL-180) | Diesel   | 0.00                   | 8.00                     | 88.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                   | Gasoline | 37.00                  | 38.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                         | Gasoline | 24.00                  | 24.00                    | 107.00          | 50.00           |                   |
| Cabin Service Truck (Hi-Way F650)                                 | Diesel   | 10.00                  | 10.00                    | 210.00          | 53.00           |                   |
| Catering Truck (Hi-Way F650)                                      | Diesel   | 7.00                   | 8.00                     | 210.00          | 53.00           |                   |
| Hydrant Truck (F250 / F350)                                       | Diesel   | 0.00                   | 12.00                    | 235.00          | 70.00           |                   |
| Lavatory Truck (TLD 1410)   | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)                                       | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |
| Water Service (Gate Service)                                      | Electric | 0.00                   | 12.00                    | 0.00            | 20.00           |                   |

|       |                    |                                |
|-------|--------------------|--------------------------------|
| Year: | Annual Departures: | 0                              |
| 2009  | Annual Arrivals:   | 0                              |
|       | Annual TGOs:       | 0                              |
|       | Taxi Out Time:     | Determined by Sequencing model |
|       | Taxi In Time:      | Determined by Sequencing model |

Departure Quarter-Hourly Operational DEFAULT

profile:  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2014  
 Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2016  
 Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Boeing 727-200 Series  
 Engine Type:  
 JT8D-17 Smoke fix  
 Identification:  
 B722  
 Category:  
 LCJP

Take Off weight: 81647.00 Kgs  
 Approach Weight: 68991.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP85-98 (200 HP)  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:         | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---------------------------|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Air Conditioner (Generic) | Electric | 7.00                   | 23.00                    | 0.00            | 75.00           |                   |
| Air Start (ACE 180)       | Diesel   | 0.00                   | 7.00                     | 425.00          | 90.00           |                   |

|   |          |       |       |        |       |
|---|----------|-------|-------|--------|-------|
| Aircraft Tractor (Stewart & Stevenson TUG GT-35, Douglas TBL-180) | Diesel   | 0.00  | 8.00  | 88.00  | 80.00 |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                   | Gasoline | 37.00 | 38.00 | 107.00 | 55.00 |
| Belt Loader (Stewart & Stevenson TUG 660)                         | Gasoline | 24.00 | 24.00 | 107.00 | 50.00 |
| Cabin Service Truck (Hi-Way F650)                                 | Diesel   | 10.00 | 10.00 | 210.00 | 53.00 |
| Catering Truck (Hi-Way F650)                                      | Diesel   | 7.00  | 8.00  | 210.00 | 53.00 |
| Hydrant Truck (F250 / F350)                                       | Diesel   | 0.00  | 12.00 | 235.00 | 70.00 |
| Lavatory Truck (TLD 1410)   | Diesel   | 15.00 | 0.00  | 56.00  | 25.00 |
| Service Truck (F250 / F350)                                       | Diesel   | 7.00  | 8.00  | 235.00 | 20.00 |
| Water Service (Gate Service)                                      | Electric | 0.00  | 12.00 | 0.00   | 20.00 |

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2014

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2016

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|   |         |
|---|---------|
| Departure Quarter-Hourly Operational profile: | DEFAULT |
|---|---------|



Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Boeing 727-200 Series  
 Engine Type:  
 JT8D-17 Smoke fix  
 Identification:  
 B727  
 Category:  
 LCJP

Take Off weight: 81647.00 Kgs  
 Approach Weight: 68991.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP85-98 (200 HP)  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:   | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Air Conditioner (Generic)   | Electric | 7.00                   | 23.00                    | 0.00            | 75.00           |                   |
| Air Start (ACE 180)   | Diesel   | 0.00                   | 7.00                     | 425.00          | 90.00           |                   |
| Aircraft Tractor (Stewart & Stevenson TUG GT-35, Douglas TBL-180) | Diesel   | 0.00                   | 8.00                     | 88.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                   | Gasoline | 37.00                  | 38.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                         | Gasoline | 24.00                  | 24.00                    | 107.00          | 50.00           |                   |
| Cabin Service Truck (Hi-Way F650)                                 | Diesel   | 10.00                  | 10.00                    | 210.00          | 53.00           |                   |
| Catering Truck (Hi-Way F650)                                      | Diesel   | 7.00                   | 8.00                     | 210.00          | 53.00           |                   |
| Hydrant Truck (F250 / F350)                                       | Diesel   | 0.00                   | 12.00                    | 235.00          | 70.00           |                   |
| Lavatory Truck (TLD 1410)   | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)                                       | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |
| Water Service (Gate Service)                                      | Electric | 0.00                   | 12.00                    | 0.00            | 20.00           |                   |

Year: 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2014

Annual Departures: 0

Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
Bombardier Learjet 24  
 Engine Type:  
CJ610-6  
 Identification:  
LJ24  
 Category:  
SGJB

Take Off weight: 6804.00 Kgs  
 Approach Weight: 5534.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

Year:  
2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT

Year: 2014

Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Year: 2016

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name: Bombardier Learjet 25  
 Engine Type: CJ610-6  
 Identification: LJ25  
 Category: SGJB

Take Off weight: 6804.00 Kgs  
 Approach Weight: 5534.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

|       |                    |                                |
|-------|--------------------|--------------------------------|
| Year: | Annual Departures: | 0                              |
| 2009  | Annual Arrivals:   | 0                              |
|       | Annual TGOs:       | 0                              |
|       | Taxi Out Time:     | Determined by Sequencing model |
|       | Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

|       |                    |                                |
|-------|--------------------|--------------------------------|
| Year: | Annual Departures: | 0                              |
| 2014  | Annual Arrivals:   | 0                              |
|       | Annual TGOs:       | 0                              |
|       | Taxi Out Time:     | Determined by Sequencing model |
|       | Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

|       |                    |                                |
|-------|--------------------|--------------------------------|
| Year: | Annual Departures: | 0                              |
| 2016  | Annual Arrivals:   | 0                              |
|       | Annual TGOs:       | 0                              |
|       | Taxi Out Time:     | Determined by Sequencing model |
|       | Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

---

|                       |                  |             |
|-----------------------|------------------|-------------|
| Aircraft Name:        | Take Off weight: | 6804.00 Kgs |
| Bombardier Learjet 28 | Approach Weight: | 5534.00 Kgs |
| Engine Type:          | Glide Slope:     | 3.00°       |
| CJ610-6               |                  |             |
| Identification:       |                  |             |

LJ28  
Category:  
SGJB

APU Assignment: None  
APU Departure OP Time: 13.00 min  
APU Arrival OP Time: 13.00 min  
Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

Year:  
2009

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT

Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Gulfstream G300  
 Engine Type:  
 SPEY MK511-8  
 Identification:  
 GLF3  
 Category:  
 LCJP

Take Off weight: 26873.00 Kgs  
 Approach Weight: 23882.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP 36-100  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Diesel   | 15.00                  | 15.00                    | 71.00           | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year:  
 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
 2014

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational

profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Gulfstream II  
 Engine Type:  
 SPEY MK511-8  
 Identification:  
 GLF2  
 Category:  
 LCJP

Take Off weight: 25401.00 Kgs  
 Approach Weight: 23882.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP 36-100  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 15.00                  | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chassis)                                  | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year:  
2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT

Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
 Hawker HS-125 Series 600  
 Engine Type:  
 TFE731-2-2B  
 Identification:  
 H25A  
 Category:  
 SGJB

Take Off weight: 6804.00 Kgs  
 Approach Weight: 5534.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

---

| Assigned GSE/AGE:                             | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC) | Diesel | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Fuel Truck (F750, Dukes)                      |        |                        |                          |                 |                 |                   |



|  |          |      |       |        |       |
|--|----------|------|-------|--------|-------|
| Transportation Services,<br>DART 3000 to 6000<br>gallon) | Diesel   | 0.00 | 20.00 | 175.00 | 25.00 |
| Ground Power Unit (TLD)                                  | Gasoline | 0.00 | 40.00 | 107.00 | 75.00 |

---

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2014

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2016

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

---

Aircraft Name:  
 Rockwell Sabreliner 60  
 Engine Type:  
 CF700-2D  
 Identification:  
 SBR1  
 Category:  
 SCJP

Take Off weight: 13000.00 Kgs  
 Approach Weight: 11140.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 0.00                   | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 0.00                   | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 0.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukas Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 0.00                   | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 0.00                   | 8.00                     | 235.00          | 20.00           |                   |

---

Year:  
 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
 2014

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:

2016

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

---

GSE Population Baseline 2009/14/16, Los Angeles Intl

None.

---

Parking Facilities Baseline 2009/14/16, Los Angeles Intl

None.

---

Roadways Baseline 2009/14/16, Los Angeles Intl

None.

---

Stationary Sources Baseline 2009/14/16, Los Angeles Intl

None.

---

Training Fires Baseline 2009/14/16, Los Angeles Intl

None.

---

Gates Baseline 2009/14/16, Los Angeles Intl

None.

---

Taxiways Baseline 2009/14/16, Los Angeles Intl

None.

---

Runways Baseline 2009/14/16, Los Angeles Intl

None.

---

Taxipaths Baseline 2009/14/16, Los Angeles Intl

None.

---

Configurations Baseline 2009/14/16, Los Angeles Intl

None.

---

Buildings Baseline 2009/14/16, Los Angeles Intl

None.

---

Discrete Cartesian Receptors Baseline 2009/14/16, Los Angeles Intl

None.

---

Discrete Polar Receptors Baseline 2009/14/16, Los Angeles Intl

None.

---

Cartesian Receptor Networks Baseline 2009/14/16, Los Angeles Intl

None.

---

Polar Receptor Networks Baseline 2009/14/16, Los Angeles Intl

None.

---

User-Created Aircraft Baseline 2009/14/16, Los Angeles Intl

Aircraft Name: My Aircraft      Size: Large

Designation: Civil  
 Engine: Jet  
 Usage: Passenger  
 European Group: Medium Jet  
 Number of Engines: 2  
 Aircraft Flight Profile: Agusta A-109  
 Engine Flight Profile: 250B17B

The user has NOT used the following system emission indices and fuel flow rates

Aircraft Emissions Profile

Engine Emissions Profile

The user has edited the following emission factors:

| Mode:     | Time (mins): | Fuel Flow(Kg/s) | CO (EI) | HC (EI) | NOx (EI) | SOx (EI) | Smoke Number |
|-----------|--------------|-----------------|---------|---------|----------|----------|--------------|
| Startup   | 0            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi Out  | 19           | 0               | 0       | 0       | 0        | -1       | 0            |
| Takeoff   | 0.7          | 0               | 0       | 0       | 0        | -1       | 0            |
| Climb Out | 2.2          | 0               | 0       | 0       | 0        | -1       | 0            |
| Approach  | 4            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi In   | 7            | 0               | 0       | 0       | 0        | -1       | 0            |

**User-Created GSE**

Baseline 2009/14/16, Los Angeles Intl

None.

**User-Created APU**

Baseline 2009/14/16, Los Angeles Intl

None.

**Scenario-Airport: Baseline 2009/14/16, Van Nuys**

**Weather**

Baseline 2009/14/16, Van Nuys

Mixing Height: 3000.00 feet  
 Temperature: 59.00 °F  
 Daily High Temperature: 69.35 °F  
 Daily Low Temperature: 48.65 °F  
 Pressure: 29.92 inches of Hg  
 Sea Level Pressure: 29.96 inches of Hg  
 Relative Humidity: 54.66  
 Wind Speed: 5.22 knots  
 Wind Direction: 0.00 °  
 Ceiling: 99999.99 feet  
 Visibility: 50.00 miles

The user has used annual averages.

Base Elevation: 802.00 feet  
 Date Range: Thursday, January 01, 2004 to Friday, December 31, 2004

Source Data File Location:

Upper Air Data File Location:

**Quarter-Hourly Operational Profiles**

Baseline 2009/14/16, Van Nuys

Name: DEFAULT

| Quarter-Hour        | Weight   | Quarter-Hour     | Weight   | Quarter-Hour        | Weight   | Quarter-Hour     | Weight   |
|---------------------|----------|------------------|----------|---------------------|----------|------------------|----------|
| 12:00am to 12:14 am | 1.000000 | 6:00am to 6:14am | 1.000000 | 12:00pm to 12:14 pm | 1.000000 | 6:00pm to 6:14pm | 1.000000 |

|                     |          |                    |          |                     |          |                    |          |
|---------------------|----------|--------------------|----------|---------------------|----------|--------------------|----------|
| 12:15am to 12:29 am | 1.000000 | 6:15am to 6:29am   | 1.000000 | 12:15pm to 12:29 pm | 1.000000 | 6:15pm to 6:29pm   | 1.000000 |
| 12:30am to 12:44 am | 1.000000 | 6:30am to 6:44am   | 1.000000 | 12:30pm to 12:44 pm | 1.000000 | 6:30pm to 6:44pm   | 1.000000 |
| 12:45am to 12:59 am | 1.000000 | 6:45am to 6:59am   | 1.000000 | 12:45pm to 12:59 pm | 1.000000 | 6:45pm to 6:59pm   | 1.000000 |
| 1:00am to 1:14am    | 1.000000 | 7:00am to 7:14am   | 1.000000 | 1:00pm to 1:14pm    | 1.000000 | 7:00pm to 7:14pm   | 1.000000 |
| 1:15am to 1:29am    | 1.000000 | 7:15am to 7:29am   | 1.000000 | 1:15pm to 1:29pm    | 1.000000 | 7:15pm to 7:29pm   | 1.000000 |
| 1:30am to 1:44am    | 1.000000 | 7:30am to 7:44am   | 1.000000 | 1:30pm to 1:44pm    | 1.000000 | 7:30pm to 7:44pm   | 1.000000 |
| 1:45am to 1:59am    | 1.000000 | 7:45am to 7:59am   | 1.000000 | 1:45pm to 1:59pm    | 1.000000 | 7:45pm to 7:59pm   | 1.000000 |
| 2:00am to 2:14am    | 1.000000 | 8:00am to 8:14am   | 1.000000 | 2:00pm to 2:14pm    | 1.000000 | 8:00pm to 8:14pm   | 1.000000 |
| 2:15am to 2:29am    | 1.000000 | 8:15am to 8:29am   | 1.000000 | 2:15pm to 2:29pm    | 1.000000 | 8:15pm to 8:29pm   | 1.000000 |
| 2:30am to 2:44am    | 1.000000 | 8:30am to 8:44am   | 1.000000 | 2:30pm to 2:44pm    | 1.000000 | 8:30pm to 8:44pm   | 1.000000 |
| 2:45am to 2:59am    | 1.000000 | 8:45am to 8:59am   | 1.000000 | 2:45pm to 2:59pm    | 1.000000 | 8:45pm to 8:59pm   | 1.000000 |
| 3:00am to 3:14am    | 1.000000 | 9:00am to 9:14am   | 1.000000 | 3:00pm to 3:14pm    | 1.000000 | 9:00pm to 9:14pm   | 1.000000 |
| 3:15am to 3:29am    | 1.000000 | 9:15am to 9:29am   | 1.000000 | 3:15pm to 3:29pm    | 1.000000 | 9:15pm to 9:29pm   | 1.000000 |
| 3:30am to 3:44am    | 1.000000 | 9:30am to 9:44am   | 1.000000 | 3:30pm to 3:44pm    | 1.000000 | 9:30pm to 9:44pm   | 1.000000 |
| 3:45am to 3:59am    | 1.000000 | 9:45am to 9:59am   | 1.000000 | 3:45pm to 3:59pm    | 1.000000 | 9:45pm to 9:59pm   | 1.000000 |
| 4:00am to 4:14am    | 1.000000 | 10:00am to 10:14am | 1.000000 | 4:00pm to 4:14pm    | 1.000000 | 10:00pm to 10:14pm | 1.000000 |
| 4:15am to 4:29am    | 1.000000 | 10:15am to 10:29am | 1.000000 | 4:15pm to 4:29pm    | 1.000000 | 10:15pm to 10:29pm | 1.000000 |
| 4:30am to 4:44am    | 1.000000 | 10:30am to 10:44am | 1.000000 | 4:30pm to 4:44pm    | 1.000000 | 10:30pm to 10:44pm | 1.000000 |
| 4:45am to 4:59am    | 1.000000 | 10:45am to 10:59am | 1.000000 | 4:45pm to 4:59pm    | 1.000000 | 10:45pm to 10:59pm | 1.000000 |
| 5:00am to 5:14am    | 1.000000 | 11:00am to 11:14am | 1.000000 | 5:00pm to 5:14pm    | 1.000000 | 11:00pm to 11:14pm | 1.000000 |
| 5:15am to 5:29am    | 1.000000 | 11:15am to 11:29am | 1.000000 | 5:15pm to 5:29pm    | 1.000000 | 11:15pm to 11:29pm | 1.000000 |
| 5:30am to 5:44am    | 1.000000 | 11:30am to 11:44am | 1.000000 | 5:30pm to 5:44pm    | 1.000000 | 11:30pm to 11:44pm | 1.000000 |
| 5:45am to 5:59am    | 1.000000 | 11:45am to 11:59am | 1.000000 | 5:45pm to 5:59pm    | 1.000000 | 11:45pm to 11:59pm | 1.000000 |

## Daily Operational Profiles

Baseline 2009/14/16, Van Nuys

Name: DEFAULT

| Day       | Weight   | Day      | Weight   |
|-----------|----------|----------|----------|
| Monday    | 1.000000 | Friday   | 1.000000 |
| Tuesday   | 1.000000 | Saturday | 1.000000 |
| Wednesday | 1.000000 | Sunday   | 1.000000 |
| Thursday  | 1.000000 |          |          |

## Monthly Operational Profiles

Baseline 2009/14/16, Van Nuys

Name: DEFAULT

| Month    | Weight   | Month     | Weight   |
|----------|----------|-----------|----------|
| January  | 1.000000 | July      | 1.000000 |
| February | 1.000000 | August    | 1.000000 |
| March    | 1.000000 | September | 1.000000 |
| April    | 1.000000 | October   | 1.000000 |
| May      | 1.000000 | November  | 1.000000 |
| June     | 1.000000 | December  | 1.000000 |

## Aircraft

Baseline 2009/14/16, Van Nuys

|                        |                       |                           |  |
|------------------------|-----------------------|---------------------------|--|
| Default Taxi Out Time: | 19.000000 min         |                           |  |
| Default Taxi In Time:  | 7.000000 min          |                           |  |
| <u>Year:</u>           | <u>Uses Schedule?</u> | <u>Schedule Filename:</u> |  |
| 2009                   | No                    | (None)                    |  |
| 2014                   | No                    | (None)                    |  |
| 2016                   | No                    | (None)                    |  |

Aircraft Name:  
Boeing 727-100 Series  
Engine Type:  
JT8D-9 series Smoke fix  
Identification:  
B721  
Category:  
LCJP

Take Off weight: 68039.00 Kgs  
Approach Weight: 58173.00 Kgs  
Glide Slope: 3.00°  
APU Assignment: APU GTCP85-98 (200 HP)  
APU Departure OP Time: 13.00 min  
APU Arrival OP Time: 13.00 min  
Gate Assignment: None

| Assigned GSE/AGE:   | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Air Conditioner (Generic)   | Electric | 7.00                   | 23.00                    | 0.00            | 75.00           |                   |
| Air Start (ACE 180)   | Diesel   | 0.00                   | 7.00                     | 425.00          | 90.00           |                   |
| Aircraft Tractor (Stewart & Stevenson TUG GT-35, Douglas TBL-180) | Diesel   | 0.00                   | 8.00                     | 88.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                   | Gasoline | 37.00                  | 38.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                         | Gasoline | 24.00                  | 24.00                    | 107.00          | 50.00           |                   |
| Cabin Service Truck (Hi-Way F650)                                 | Diesel   | 10.00                  | 10.00                    | 210.00          | 53.00           |                   |
| Catering Truck (Hi-Way F650)                                      | Diesel   | 7.00                   | 8.00                     | 210.00          | 53.00           |                   |
| Hydrant Truck (F250 / F350)                                       | Diesel   | 0.00                   | 12.00                    | 235.00          | 70.00           |                   |
| Lavatory Truck (TLD 1410)   | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)                                       | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |
| Water Service (Gate Service)                                      | Electric | 0.00                   | 12.00                    | 0.00            | 20.00           |                   |

Year:  
2009

Annual Departures: 7  
Annual Arrivals: 7  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 6  
Annual Arrivals: 6  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly

Year:  
2016

Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT  
 Annual Departures: 4  
 Annual Arrivals: 3  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
Boeing 727-200 Series  
 Engine Type:  
JT8D-17 Smoke fix  
 Identification:  
B722  
 Category:  
LCJP

Take Off weight: 81647.00 Kgs  
 Approach Weight: 68991.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP85-98 (200 HP)  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:   | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Air Conditioner (Generic)   | Electric | 7.00                   | 23.00                    | 0.00            | 75.00           |                   |
| Air Start (ACE 180)   | Diesel   | 0.00                   | 7.00                     | 425.00          | 90.00           |                   |
| Aircraft Tractor (Stewart & Stevenson TUG GT-35, Douglas TBL-180) | Diesel   | 0.00                   | 8.00                     | 88.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                   | Gasoline | 37.00                  | 38.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                         | Gasoline | 24.00                  | 24.00                    | 107.00          | 50.00           |                   |
| Cabin Service Truck (Hi-Way F650)                                 | Diesel   | 10.00                  | 10.00                    | 210.00          | 53.00           |                   |
| Catering Truck (Hi-Way F650)                                      | Diesel   | 7.00                   | 8.00                     | 210.00          | 53.00           |                   |
| Hydrant Truck (F250 / F350)                                       | Diesel   | 0.00                   | 12.00                    | 235.00          | 70.00           |                   |
| Lavatory Truck (TLD 1410)   | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)                                       | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |
| Water Service (Gate Service)                                      | Electric | 0.00                   | 12.00                    | 0.00            | 20.00           |                   |

Year:  
2009

Annual Departures: 3  
 Annual Arrivals: 3  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT

Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT  
 Annual Departures: 3  
 Annual Arrivals: 2  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Year:  
2014

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 2  
 Annual Arrivals: 1  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Boeing 727-200 Series  
 Engine Type:  
 JT8D-17 Smoke fix  
 Identification:  
 B727  
 Category:  
 LCJP

Take Off weight: 81647.00 Kgs  
 Approach Weight: 68991.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP85-98 (200 HP)  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

---

| Assigned GSE/AGE:           | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|-----------------------------|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Air Conditioner (Generic)   | Electric | 7.00                   | 23.00                    | 0.00            | 75.00           |                   |
| Air Start (ACE 180)         | Diesel   | 0.00                   | 7.00                     | 425.00          | 90.00           |                   |
| Aircraft Tractor (Stewart & |          |                        |                          |                 |                 |                   |



|   |          |       |       |        |       |
|---|----------|-------|-------|--------|-------|
| Stevenson TUG GT-35, Douglas TBL-180)           | Diesel   | 0.00  | 8.00  | 88.00  | 80.00 |
| Baggage Tractor (Stewart & Stevenson TUG MA 50) | Gasoline | 37.00 | 38.00 | 107.00 | 55.00 |
| Belt Loader (Stewart & Stevenson TUG 660)       | Gasoline | 24.00 | 24.00 | 107.00 | 50.00 |
| Cabin Service Truck (Hi-Way F650)               | Diesel   | 10.00 | 10.00 | 210.00 | 53.00 |
| Catering Truck (Hi-Way F650)                    | Diesel   | 7.00  | 8.00  | 210.00 | 53.00 |
| Hydrant Truck (F250 / F350)                     | Diesel   | 0.00  | 12.00 | 235.00 | 70.00 |
| Lavatory Truck (TLD 1410)                       | Diesel   | 15.00 | 0.00  | 56.00  | 25.00 |
| Service Truck (F250 / F350)                     | Diesel   | 7.00  | 8.00  | 235.00 | 20.00 |
| Water Service (Gate Service)                    | Electric | 0.00  | 12.00 | 0.00   | 20.00 |

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 9                              |
| Annual Arrivals:   | 9                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2014

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 8                              |
| Annual Arrivals:   | 7                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2016

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 5                              |
| Annual Arrivals:   | 4                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|   |         |
|---|---------|
| Departure Quarter-Hourly Operational profile: | DEFAULT |
| Departure Daily Operational Profile:          | DEFAULT |

Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Bombardier Learjet 24  
 Engine Type:  
 CJ610-6  
 Identification:  
 LJ24  
 Category:  
 SGJB

Take Off weight: 6804.00 Kgs  
 Approach Weight: 5534.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

Year:  
 2009

Annual Departures: 47  
 Annual Arrivals: 46  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
 2014

Annual Departures: 16  
 Annual Arrivals: 15  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT

Year: 2016

Touch & Go Monthly Operational Profile: DEFAULT

Annual Departures: 10

Annual Arrivals: 10

Annual TGOs: 0

Taxi Out Time: Determined by Sequencing model

Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT

Departure Daily Operational Profile: DEFAULT

Departure Monthly Operational Profile: DEFAULT

Arrival Quarter-Hourly Operational profile: DEFAULT

Arrival Daily Operational Profile: DEFAULT

Arrival Monthly Operational Profile: DEFAULT

Touch & Go Quarter-Hourly Operational profile: DEFAULT

Touch & Go Daily Operational Profile: DEFAULT

Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name: Bombardier Learjet 25

Engine Type: CJ610-6

Identification: LJ25

Category: SGJB

Take Off weight: 6804.00 Kgs

Approach Weight: 5534.00 Kgs

Glide Slope: 3.00°

APU Assignment: None

APU Departure OP Time: 13.00 min

APU Arrival OP Time: 13.00 min

Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

Year: 2009

Annual Departures: 371

Annual Arrivals: 371

Annual TGOs: 0

Taxi Out Time: Determined by Sequencing model

Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT

Departure Daily Operational Profile: DEFAULT

Departure Monthly Operational Profile: DEFAULT

Arrival Quarter-Hourly Operational profile: DEFAULT

Arrival Daily Operational Profile: DEFAULT

Arrival Monthly Operational Profile: DEFAULT

Touch & Go Quarter-Hourly Operational profile: DEFAULT

Touch & Go Daily Operational Profile: DEFAULT

Touch & Go Monthly Operational Profile: DEFAULT

---

Year: 2014

Annual Departures: 245

Annual Arrivals: 244

Annual TGOs: 0

Taxi Out Time: Determined by Sequencing model

Taxi In Time: Determined by Sequencing model

---

|  |                                |
|--|--------------------------------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT                        |
| Departure Daily Operational Profile:           | DEFAULT                        |
| Departure Monthly Operational Profile:         | DEFAULT                        |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT                        |
| Arrival Daily Operational Profile:             | DEFAULT                        |
| Arrival Monthly Operational Profile:           | DEFAULT                        |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT                        |
| Touch & Go Daily Operational Profile:          | DEFAULT                        |
| Touch & Go Monthly Operational Profile:        | DEFAULT                        |
| Annual Departures:                             | 207                            |
| Annual Arrivals:                               | 207                            |
| Annual TGOs:                                   | 0                              |
| Taxi Out Time:                                 | Determined by Sequencing model |
| Taxi In Time:                                  | Determined by Sequencing model |

---

Year:  
2016

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

---

Aircraft Name:  
Bombardier Learjet 28  
Engine Type:  
CJ610-6  
Identification:  
LJ28  
Category:  
SGJB

|                        |             |
|------------------------|-------------|
| Take Off weight:       | 6804.00 Kgs |
| Approach Weight:       | 5534.00 Kgs |
| Glide Slope:           | 3.00°       |
| APU Assignment:        | None        |
| APU Departure OP Time: | 13.00 min   |
| APU Arrival OP Time:   | 13.00 min   |
| Gate Assignment:       | None        |

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 5                              |
| Annual Arrivals:   | 4                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|   |         |
|---|---------|
| Departure Quarter-Hourly Operational profile: | DEFAULT |
| Departure Daily Operational Profile:          | DEFAULT |
| Departure Monthly Operational Profile:        | DEFAULT |
| Arrival Quarter-Hourly Operational profile:   | DEFAULT |
| Arrival Daily Operational Profile:            | DEFAULT |

Year: 2014  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT  
 Annual Departures: 1  
 Annual Arrivals: 1  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2016  
 Annual Departures: 1  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name: Bombardier Learjet 35  
 Engine Type: TFE731-2-2B  
 Identification: LJ35  
 Category: SGJB  
 Take Off weight: 8301.00 Kgs  
 Approach Weight: 6260.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

Year: 2009  
 Annual Departures: 0  
 Annual Arrivals: 0

Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
Dassault Falcon 20-G  
Engine Type:  
CF700-2D  
Identification:  
FA20  
Category:  
SGJB

Take Off weight: 13000.00 Kgs  
Approach Weight: 11140.00 Kgs  
Glide Slope: 3.00°  
APU Assignment: APU GTCP 36-150[]  
APU Departure OP Time: 13.00 min  
APU Arrival OP Time: 13.00 min  
Gate Assignment: None

| Assigned GSE/AGE:  | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD, 28 VDC)  | Diesel | 0.00                   | 40.00                    | 71.00           | 75.00           |                   |

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 62                             |
| Annual Arrivals:   | 61                             |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2014

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 39                             |
| Annual Arrivals:   | 38                             |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2016

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 32                             |
| Annual Arrivals:   | 31                             |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|   |         |
|---|---------|
| Departure Quarter-Hourly Operational profile: | DEFAULT |
| Departure Daily Operational Profile:          | DEFAULT |
| Departure Monthly Operational Profile:        | DEFAULT |
| Arrival Quarter-Hourly Operational profile:   | DEFAULT |
| Arrival Daily Operational Profile:            | DEFAULT |
| Arrival Monthly Operational Profile:          | DEFAULT |
| Touch & Go Quarter-Hourly                     |         |

Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Gulfstream G300  
 Engine Type:  
 SPEY MK511-8  
 Identification:  
 GLF3  
 Category:  
 LCJP

Take Off weight: 26873.00 Kgs  
 Approach Weight: 23882.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP 36-100  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Diesel   | 15.00                  | 15.00                    | 71.00           | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chassis)                                  | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year:  
 2009

Annual Departures: 835  
 Annual Arrivals: 835  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
 2014

Annual Departures: 461  
 Annual Arrivals: 461  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT



Year:  
2016

Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT  
 Annual Departures: 364  
 Annual Arrivals: 363  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
Gulfstream II  
 Engine Type:  
SPEY MK511-8  
 Identification:  
GLF2  
 Category:  
LCJP

Take Off weight: 25401.00 Kgs  
 Approach Weight: 23882.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP 36-100  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 15.00                  | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year:  
2009

Annual Departures: 624  
 Annual Arrivals: 624  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT

Year: 2014

|  |                                |
|--|--------------------------------|
| Arrival Quarter-Hourly Operational profile:    | DEFAULT                        |
| Arrival Daily Operational Profile:             | DEFAULT                        |
| Arrival Monthly Operational Profile:           | DEFAULT                        |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT                        |
| Touch & Go Daily Operational Profile:          | DEFAULT                        |
| Touch & Go Monthly Operational Profile:        | DEFAULT                        |
| Annual Departures:                             | 383                            |
| Annual Arrivals:                               | 383                            |
| Annual TGOs:                                   | 0                              |
| Taxi Out Time:                                 | Determined by Sequencing model |
| Taxi In Time:                                  | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year: 2016

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 316                            |
| Annual Arrivals:   | 315                            |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Aircraft Name:  
Hawker HS-125 Series 600  
Engine Type:  
TFE731-2-2B  
Identification:  
H25A  
Category:  
SGJB

|                        |             |
|------------------------|-------------|
| Take Off weight:       | 6804.00 Kgs |
| Approach Weight:       | 5534.00 Kgs |
| Glide Slope:           | 3.00°       |
| APU Assignment:        | None        |
| APU Departure OP Time: | 13.00 min   |
| APU Arrival OP Time:   | 13.00 min   |
| Gate Assignment:       | None        |

---

| Assigned GSE/AGE:  | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |

Ground Power Unit (TLD) Gasoline 0.00 40.00 107.00 75.00

---

Year:  
2009

Annual Departures: 5  
Annual Arrivals: 5  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 2  
Annual Arrivals: 2  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 2  
Annual Arrivals: 1  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
Northrop F-5E/F Tiger II  
Engine Type:

Take Off weight: 23587.00 Kgs  
Approach Weight: 18144.00 Kgs

J85-GE-5F  
 Identification:  
 F-5  
 Category:  
 SMJA

Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

---

| Assigned GSE/AGE:   | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---------------------|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Cart (Taylor Dunn)  | Diesel | 5.00                   | 5.00                     | 25.00           | 50.00           |                   |
| Generator (Generic) | Diesel | 0.00                   | 120.00                   | 158.00          | 82.00           |                   |
| Lift (Generic)      | Diesel | 5.00                   | 5.00                     | 115.00          | 50.00           |                   |
| Other (Generic)     | Diesel | 0.00                   | 0.00                     | 140.00          | 50.00           |                   |

---

Year:  
 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
 2014

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
 2016

Annual Departures: 2  
 Annual Arrivals: 2  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT

Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name: Rockwell Sabreliner 60  
 Engine Type: CF700-2D  
 Identification: SBR1  
 Category: SCJP

Take Off weight: 13000.00 Kgs  
 Approach Weight: 11140.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 0.00                   | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 0.00                   | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 0.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 0.00                   | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 0.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year: 2009

Annual Departures: 6  
 Annual Arrivals: 5  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2014

Annual Departures: 2  
 Annual Arrivals: 1  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT

Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT  
 Annual Departures: 1  
 Annual Arrivals: 1  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Year:  
2016

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Rockwell Sabreliner 80  
 Engine Type:  
 CF700-2D  
 Identification:  
 SBR2  
 Category:  
 SGJB

Take Off weight: 13000.00 Kgs  
 Approach Weight: 11140.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

Year:  
2009

Annual Departures: 5  
 Annual Arrivals: 4  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT

Year: 2014

Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT  
 Annual Departures: 4  
 Annual Arrivals: 3  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2016

Annual Departures: 4  
 Annual Arrivals: 3  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name: T-38 Talon  
 Engine Type: J85-GE-5H (w/AB)  
 Identification: L-39  
 Category: LMJO

Take Off weight: 23587.00 Kgs  
 Approach Weight: 18144.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:   | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---------------------|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Cart (Taylor Dunn)  | Diesel | 0.00                   | 5.00                     | 25.00           | 50.00           |                   |
| Generator (Generic) | Diesel | 0.00                   | 120.00                   | 158.00          | 82.00           |                   |
| Lift (Generic)      | Diesel | 0.00                   | 5.00                     | 115.00          | 50.00           |                   |
| Other (Generic)     | Diesel | 0.00                   | 0.00                     | 140.00          | 50.00           |                   |

Year: 2009

Annual Departures: 29  
 Annual Arrivals: 29  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Year:  
2014

---

|  |                                |
|--|--------------------------------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT                        |
| Departure Daily Operational Profile:           | DEFAULT                        |
| Departure Monthly Operational Profile:         | DEFAULT                        |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT                        |
| Arrival Daily Operational Profile:             | DEFAULT                        |
| Arrival Monthly Operational Profile:           | DEFAULT                        |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT                        |
| Touch & Go Daily Operational Profile:          | DEFAULT                        |
| Touch & Go Monthly Operational Profile:        | DEFAULT                        |
| Annual Departures:                             | 29                             |
| Annual Arrivals:                               | 29                             |
| Annual TGOs:                                   | 0                              |
| Taxi Out Time:                                 | Determined by Sequencing model |
| Taxi In Time:                                  | Determined by Sequencing model |

---

Year:  
2016

|  |                                |
|--|--------------------------------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT                        |
| Departure Daily Operational Profile:           | DEFAULT                        |
| Departure Monthly Operational Profile:         | DEFAULT                        |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT                        |
| Arrival Daily Operational Profile:             | DEFAULT                        |
| Arrival Monthly Operational Profile:           | DEFAULT                        |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT                        |
| Touch & Go Daily Operational Profile:          | DEFAULT                        |
| Touch & Go Monthly Operational Profile:        | DEFAULT                        |
| Annual Departures:                             | 29                             |
| Annual Arrivals:                               | 29                             |
| Annual TGOs:                                   | 0                              |
| Taxi Out Time:                                 | Determined by Sequencing model |
| Taxi In Time:                                  | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

---

Aircraft Name:  
T-38 Talon  
Engine Type:  
J85-GE-5H (w/AB)  
Identification:  
T-38  
Category:  
LMJO

|                        |              |
|------------------------|--------------|
| Take Off weight:       | 23587.00 Kgs |
| Approach Weight:       | 18144.00 Kgs |
| Glide Slope:           | 3.00°        |
| APU Assignment:        | None         |
| APU Departure OP Time: | 13.00 min    |
| APU Arrival OP Time:   | 13.00 min    |
| Gate Assignment:       | None         |

---

|                   |      |                        |                          |                 |                 |                   |
|-------------------|------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Assigned GSE/AGE: | FUEL | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|-------------------|------|------------------------|--------------------------|-----------------|-----------------|-------------------|



|                     |        |      |        |        |       |
|---------------------|--------|------|--------|--------|-------|
| Cart (Taylor Dunn)  | Diesel | 0.00 | 5.00   | 25.00  | 50.00 |
| Generator (Generic) | Diesel | 0.00 | 120.00 | 158.00 | 82.00 |
| Lift (Generic)      | Diesel | 0.00 | 5.00   | 115.00 | 50.00 |
| Other (Generic)     | Diesel | 0.00 | 0.00   | 140.00 | 50.00 |

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2014

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2016

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 19                             |
| Annual Arrivals:   | 19                             |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

|                              |                               |
|------------------------------|-------------------------------|
| GSE Population               | Baseline 2009/14/16, Van Nuys |
| None.                        |                               |
| Parking Facilities           | Baseline 2009/14/16, Van Nuys |
| None.                        |                               |
| Roadways                     | Baseline 2009/14/16, Van Nuys |
| None.                        |                               |
| Stationary Sources           | Baseline 2009/14/16, Van Nuys |
| None.                        |                               |
| Training Fires               | Baseline 2009/14/16, Van Nuys |
| None.                        |                               |
| Gates                        | Baseline 2009/14/16, Van Nuys |
| None.                        |                               |
| Taxiways                     | Baseline 2009/14/16, Van Nuys |
| None.                        |                               |
| Runways                      | Baseline 2009/14/16, Van Nuys |
| None.                        |                               |
| Taxipaths                    | Baseline 2009/14/16, Van Nuys |
| None.                        |                               |
| Configurations               | Baseline 2009/14/16, Van Nuys |
| None.                        |                               |
| Buildings                    | Baseline 2009/14/16, Van Nuys |
| None.                        |                               |
| Discrete Cartesian Receptors | Baseline 2009/14/16, Van Nuys |
| None.                        |                               |
| Discrete Polar Receptors     | Baseline 2009/14/16, Van Nuys |
| None.                        |                               |
| Cartesian Receptor Networks  | Baseline 2009/14/16, Van Nuys |
| None.                        |                               |
| Polar Receptor Networks      | Baseline 2009/14/16, Van Nuys |
| None.                        |                               |
| User-Created Aircraft        | Baseline 2009/14/16, Van Nuys |

|                               |  |  |
|-------------------------------|--|--|
| Aircraft Name:<br>My Aircraft | Size:<br>Designation:<br>Engine:<br>Usage:<br>European Group:<br>Number of Engines<br>Aircraft Flight Profile<br>Engine Flight Profile | Large<br>Civil<br>Jet<br>Passenger<br>Medium Jet<br>2<br>Agusta A-109<br>250B17B |
|-------------------------------|--|--|

The user has NOT used the following sytem emission indices and fuel flow rates

Aircraft Emissions Profile  
Engine Emissions Profile

The user has edited the following emission factors:

| Mode:     | Time (mins): | Fuel Flow(Kg/s) | CO (EI) | HC (EI) | NOx (EI) | SOx (EI) | Smoke Number |
|-----------|--------------|-----------------|---------|---------|----------|----------|--------------|
| Startup   | 0            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi Out  | 19           | 0               | 0       | 0       | 0        | -1       | 0            |
| Takeoff   | 0.7          | 0               | 0       | 0       | 0        | -1       | 0            |
| Climb Out | 2.2          | 0               | 0       | 0       | 0        | -1       | 0            |
| Approach  | 4            | 0               | 0       | 0       | 0        | -1       | 0            |

User-Created GSE

Baseline 2009/14/16, Van Nuys

None.

User-Created APU

Baseline 2009/14/16, Van Nuys

None.

Scenario-Airport: With Project 2009/14/16, Bob Hope

Weather

With Project 2009/14/16, Bob Hope

Mixing Height: 3000.00 feet  
 Temperature: 64.00 °F  
 Daily High Temperature: 74.35 °F  
 Daily Low Temperature: 53.65 °F  
 Pressure: 29.92 inches of Hg  
 Sea Level Pressure: 29.95 inches of Hg  
 Relative Humidity: 59.36  
 Wind Speed: 4.97 knots  
 Wind Direction: 0.00 °  
 Ceiling: 99999.99 feet  
 Visibility: 50.00 miles  
 The user has used annual averages.  
 Base Elevation: 777.99 feet  
 Date Range: Thursday, January 01, 2004 to Friday, December 31, 2004  
 Source Data File Location:  
 Upper Air Data File Location:

Quarter-Hourly Operational Profiles

With Project 2009/14/16, Bob Hope

Name: DEFAULT

| Quarter-Hour        | Weight   | Quarter-Hour       | Weight   | Quarter-Hour        | Weight   | Quarter-Hour       | Weight   |
|---------------------|----------|--------------------|----------|---------------------|----------|--------------------|----------|
| 12:00am to 12:14 am | 1.000000 | 6:00am to 6:14am   | 1.000000 | 12:00pm to 12:14 pm | 1.000000 | 6:00pm to 6:14pm   | 1.000000 |
| 12:15am to 12:29 am | 1.000000 | 6:15am to 6:29am   | 1.000000 | 12:15pm to 12:29 pm | 1.000000 | 6:15pm to 6:29pm   | 1.000000 |
| 12:30am to 12:44 am | 1.000000 | 6:30am to 6:44am   | 1.000000 | 12:30pm to 12:44 pm | 1.000000 | 6:30pm to 6:44pm   | 1.000000 |
| 12:45am to 12:59 am | 1.000000 | 6:45am to 6:59am   | 1.000000 | 12:45pm to 12:59 pm | 1.000000 | 6:45pm to 6:59pm   | 1.000000 |
| 1:00am to 1:14am    | 1.000000 | 7:00am to 7:14am   | 1.000000 | 1:00pm to 1:14pm    | 1.000000 | 7:00pm to 7:14pm   | 1.000000 |
| 1:15am to 1:29am    | 1.000000 | 7:15am to 7:29am   | 1.000000 | 1:15pm to 1:29pm    | 1.000000 | 7:15pm to 7:29pm   | 1.000000 |
| 1:30am to 1:44am    | 1.000000 | 7:30am to 7:44am   | 1.000000 | 1:30pm to 1:44pm    | 1.000000 | 7:30pm to 7:44pm   | 1.000000 |
| 1:45am to 1:59am    | 1.000000 | 7:45am to 7:59am   | 1.000000 | 1:45pm to 1:59pm    | 1.000000 | 7:45pm to 7:59pm   | 1.000000 |
| 2:00am to 2:14am    | 1.000000 | 8:00am to 8:14am   | 1.000000 | 2:00pm to 2:14pm    | 1.000000 | 8:00pm to 8:14pm   | 1.000000 |
| 2:15am to 2:29am    | 1.000000 | 8:15am to 8:29am   | 1.000000 | 2:15pm to 2:29pm    | 1.000000 | 8:15pm to 8:29pm   | 1.000000 |
| 2:30am to 2:44am    | 1.000000 | 8:30am to 8:44am   | 1.000000 | 2:30pm to 2:44pm    | 1.000000 | 8:30pm to 8:44pm   | 1.000000 |
| 2:45am to 2:59am    | 1.000000 | 8:45am to 8:59am   | 1.000000 | 2:45pm to 2:59pm    | 1.000000 | 8:45pm to 8:59pm   | 1.000000 |
| 3:00am to 3:14am    | 1.000000 | 9:00am to 9:14am   | 1.000000 | 3:00pm to 3:14pm    | 1.000000 | 9:00pm to 9:14pm   | 1.000000 |
| 3:15am to 3:29am    | 1.000000 | 9:15am to 9:29am   | 1.000000 | 3:15pm to 3:29pm    | 1.000000 | 9:15pm to 9:29pm   | 1.000000 |
| 3:30am to 3:44am    | 1.000000 | 9:30am to 9:44am   | 1.000000 | 3:30pm to 3:44pm    | 1.000000 | 9:30pm to 9:44pm   | 1.000000 |
| 3:45am to 3:59am    | 1.000000 | 9:45am to 9:59am   | 1.000000 | 3:45pm to 3:59pm    | 1.000000 | 9:45pm to 9:59pm   | 1.000000 |
| 4:00am to 4:14am    | 1.000000 | 10:00am to 10:14am | 1.000000 | 4:00pm to 4:14pm    | 1.000000 | 10:00pm to 10:14pm | 1.000000 |
| 4:15am to 4:29am    | 1.000000 | 10:15am to 10:29am | 1.000000 | 4:15pm to 4:29pm    | 1.000000 | 10:15pm to 10:29pm | 1.000000 |

|                  |          |                    |          |                  |          |                    |          |
|------------------|----------|--------------------|----------|------------------|----------|--------------------|----------|
| 4:30am to 4:44am | 1.000000 | 10:30am to 10:44am | 1.000000 | 4:30pm to 4:44pm | 1.000000 | 10:30pm to 10:44pm | 1.000000 |
| 4:45am to 4:59am | 1.000000 | 10:45am to 10:59am | 1.000000 | 4:45pm to 4:59pm | 1.000000 | 10:45pm to 10:59pm | 1.000000 |
| 5:00am to 5:14am | 1.000000 | 11:00am to 11:14am | 1.000000 | 5:00pm to 5:14pm | 1.000000 | 11:00pm to 11:14pm | 1.000000 |
| 5:15am to 5:29am | 1.000000 | 11:15am to 11:29am | 1.000000 | 5:15pm to 5:29pm | 1.000000 | 11:15pm to 11:29pm | 1.000000 |
| 5:30am to 5:44am | 1.000000 | 11:30am to 11:44am | 1.000000 | 5:30pm to 5:44pm | 1.000000 | 11:30pm to 11:44pm | 1.000000 |
| 5:45am to 5:59am | 1.000000 | 11:45am to 11:59am | 1.000000 | 5:45pm to 5:59pm | 1.000000 | 11:45pm to 11:59pm | 1.000000 |

### Daily Operational Profiles

With Project 2009/14/16, Bob Hope

Name: DEFAULT

| Day       | Weight   | Day      | Weight   |
|-----------|----------|----------|----------|
| Monday    | 1.000000 | Friday   | 1.000000 |
| Tuesday   | 1.000000 | Saturday | 1.000000 |
| Wednesday | 1.000000 | Sunday   | 1.000000 |
| Thursday  | 1.000000 |          |          |

### Monthly Operational Profiles

With Project 2009/14/16, Bob Hope

Name: DEFAULT

| Month    | Weight   | Month     | Weight   |
|----------|----------|-----------|----------|
| January  | 1.000000 | July      | 1.000000 |
| February | 1.000000 | August    | 1.000000 |
| March    | 1.000000 | September | 1.000000 |
| April    | 1.000000 | October   | 1.000000 |
| May      | 1.000000 | November  | 1.000000 |
| June     | 1.000000 | December  | 1.000000 |

### Aircraft

With Project 2009/14/16, Bob Hope

|                        |                       |                           |
|------------------------|-----------------------|---------------------------|
| Default Taxi Out Time: | 19.000000 min         |                           |
| Default Taxi In Time:  | 7.000000 min          |                           |
| <u>Year:</u>           | <u>Uses Schedule?</u> | <u>Schedule Filename:</u> |
| 2009                   | No                    | (None)                    |
| 2014                   | No                    | (None)                    |
| 2016                   | No                    | (None)                    |

|                       |                        |             |
|-----------------------|------------------------|-------------|
| Aircraft Name:        | Take Off weight:       | 6804.00 Kgs |
| Bombardier Learjet 24 | Approach Weight:       | 5534.00 Kgs |
| Engine Type:          | Glide Slope:           | 3.00°       |
| CJ610-6               | APU Assignment:        | None        |
| Identification:       | APU Departure OP Time: | 13.00 min   |
| LJ24                  | APU Arrival OP Time:   | 13.00 min   |
| Category:             | Gate Assignment:       | None        |
| SGJB                  |                        |             |

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

|       |                    |   |
|-------|--------------------|---|
| Year: | Annual Departures: | 0 |
| 2009  | Annual Arrivals:   | 0 |
|       | Annual TGOs:       | 0 |

Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 9  
Annual Arrivals: 8  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 6  
Annual Arrivals: 5  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
Bombardier Learjet 25  
Engine Type:  
CJ610-6  
Identification:  
LJ25  
Category:  
SGJB

Take Off weight: 6804.00 Kgs  
Approach Weight: 5534.00 Kgs  
Glide Slope: 3.00°  
APU Assignment: None  
APU Departure OP Time: 13.00 min  
APU Arrival OP Time: 13.00 min  
Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2014

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 32                             |
| Annual Arrivals:   | 31                             |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2016

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 32                             |
| Annual Arrivals:   | 31                             |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational                 |         |

Profile: DEFAULT

Aircraft Name:  
Bombardier Learjet 28  
Engine Type:  
CJ610-6  
Identification:  
LJ28  
Category:  
SGJB

Take Off weight: 6804.00 Kgs  
Approach Weight: 5534.00 Kgs  
Glide Slope: 3.00°  
APU Assignment: None  
APU Departure OP Time: 13.00 min  
APU Arrival OP Time: 13.00 min  
Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

Year:  
2009

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 1  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 1  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name: Gulfstream G300  
 Engine Type: SPEY MK511-8  
 Identification: GLF3  
 Category: LCJP

Take Off weight: 26873.00 Kgs  
 Approach Weight: 23882.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP 36-100  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Diesel   | 15.00                  | 15.00                    | 71.00           | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year: 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2014

Annual Departures: 37  
 Annual Arrivals: 36  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model



Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 22  
 Annual Arrivals: 21  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
Gulfstream II  
 Engine Type:  
SPEY MK511-8  
 Identification:  
GLF2  
 Category:  
LCJP

Take Off weight: 25401.00 Kgs  
 Approach Weight: 23882.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP 36-100  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 15.00                  | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

---

Year:

Annual Departures: 0

2009

Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 12  
 Annual Arrivals: 11  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 3  
 Annual Arrivals: 2  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
 Hawker HS-125 Series 600  
 Engine Type:  
 TFE731-2-2B  
 Identification:  
 H25A  
 Category:  
 SGJB

Take Off weight: 6804.00 Kgs  
 Approach Weight: 5534.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min

Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

Year:  
2009

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 2  
Annual Arrivals: 1  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 1  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly

Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Rockwell Sabreliner 60  
 Engine Type:  
 CF700-2D  
 Identification:  
 SBR1  
 Category:  
 SCJP

Take Off weight: 13000.00 Kgs  
 Approach Weight: 11140.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 0.00                   | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 0.00                   | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chassis)                                  | Diesel   | 0.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 0.00                   | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 0.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year:  
 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
 2014

Annual Departures: 1  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT

Year:  
2016

Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT  
Annual Departures: 1  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

|                              |                                   |
|------------------------------|-----------------------------------|
| GSE Population               | With Project 2009/14/16, Bob Hope |
| None.                        |                                   |
| Parking Facilities           | With Project 2009/14/16, Bob Hope |
| None.                        |                                   |
| Roadways                     | With Project 2009/14/16, Bob Hope |
| None.                        |                                   |
| Stationary Sources           | With Project 2009/14/16, Bob Hope |
| None.                        |                                   |
| Training Fires               | With Project 2009/14/16, Bob Hope |
| None.                        |                                   |
| Gates                        | With Project 2009/14/16, Bob Hope |
| None.                        |                                   |
| Taxiways                     | With Project 2009/14/16, Bob Hope |
| None.                        |                                   |
| Runways                      | With Project 2009/14/16, Bob Hope |
| None.                        |                                   |
| Taxipaths                    | With Project 2009/14/16, Bob Hope |
| None.                        |                                   |
| Configurations               | With Project 2009/14/16, Bob Hope |
| None.                        |                                   |
| Buildings                    | With Project 2009/14/16, Bob Hope |
| None.                        |                                   |
| Discrete Cartesian Receptors | With Project 2009/14/16, Bob Hope |
| None.                        |                                   |
| Discrete Polar Receptors     | With Project 2009/14/16, Bob Hope |
| None.                        |                                   |
| Cartesian Receptor Networks  | With Project 2009/14/16, Bob Hope |
| None.                        |                                   |

---

**Polar Receptor Networks**

---

With Project 2009/14/16, Bob Hope

None.

---

**User-Created Aircraft**

---

With Project 2009/14/16, Bob Hope

Aircraft Name: My Aircraft  
Size: Large  
Designation: Civil  
Engine: Jet  
Usage: Passenger  
European Group: Medium Jet  
Number of Engines: 2  
Aircraft Flight Profile: Agusta A-109  
Engine Flight Profile: 250B17B

---

The user has NOT used the following system emission indices and fuel flow rates

Aircraft Emissions Profile

Engine Emissions Profile

The user has edited the following emission factors:

| Mode:     | Time (mins): | Fuel Flow(Kg/s) | CO (EI) | HC (EI) | NOx (EI) | SOx (EI) | Smoke Number |
|-----------|--------------|-----------------|---------|---------|----------|----------|--------------|
| Startup   | 0            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi Out  | 19           | 0               | 0       | 0       | 0        | -1       | 0            |
| Takeoff   | 0.7          | 0               | 0       | 0       | 0        | -1       | 0            |
| Climb Out | 2.2          | 0               | 0       | 0       | 0        | -1       | 0            |
| Approach  | 4            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi In   | 7            | 0               | 0       | 0       | 0        | -1       | 0            |

---

---

**User-Created GSE**

---

With Project 2009/14/16, Bob Hope

None.

---

**User-Created APU**

---

With Project 2009/14/16, Bob Hope

None.

---

---

**Scenario-Airport: With Project 2009/14/16, Camarillo**

---

---

**Weather**

---

With Project 2009/14/16, Camarillo

Mixing Height: 3000.00 feet  
Temperature: 60.00 °F  
Daily High Temperature: 70.35 °F  
Daily Low Temperature: 49.65 °F  
Pressure: 29.92 inches of Hg  
Sea Level Pressure: 30.01 inches of Hg  
Relative Humidity: 69.06  
Wind Speed: 5.27 knots  
Wind Direction: 0.00 °  
Ceiling: 99999.99 feet  
Visibility: 50.00 miles

The user has used annual averages.

Base Elevation: 75.00 feet

Date Range: Thursday, January 01, 2004 to Friday, December 31, 2004

Source Data File Location:

Upper Air Data File Location:

Quarter-Hourly Operational Profiles

With Project 2009/14/16, Camarillo

Name: DEFAULT

| Quarter-Hour        | Weight   | Quarter-Hour       | Weight   | Quarter-Hour        | Weight   | Quarter-Hour       | Weight   |
|---------------------|----------|--------------------|----------|---------------------|----------|--------------------|----------|
| 12:00am to 12:14 am | 1.000000 | 6:00am to 6:14am   | 1.000000 | 12:00pm to 12:14 pm | 1.000000 | 6:00pm to 6:14pm   | 1.000000 |
| 12:15am to 12:29 am | 1.000000 | 6:15am to 6:29am   | 1.000000 | 12:15pm to 12:29 pm | 1.000000 | 6:15pm to 6:29pm   | 1.000000 |
| 12:30am to 12:44 am | 1.000000 | 6:30am to 6:44am   | 1.000000 | 12:30pm to 12:44 pm | 1.000000 | 6:30pm to 6:44pm   | 1.000000 |
| 12:45am to 12:59 am | 1.000000 | 6:45am to 6:59am   | 1.000000 | 12:45pm to 12:59 pm | 1.000000 | 6:45pm to 6:59pm   | 1.000000 |
| 1:00am to 1:14am    | 1.000000 | 7:00am to 7:14am   | 1.000000 | 1:00pm to 1:14pm    | 1.000000 | 7:00pm to 7:14pm   | 1.000000 |
| 1:15am to 1:29am    | 1.000000 | 7:15am to 7:29am   | 1.000000 | 1:15pm to 1:29pm    | 1.000000 | 7:15pm to 7:29pm   | 1.000000 |
| 1:30am to 1:44am    | 1.000000 | 7:30am to 7:44am   | 1.000000 | 1:30pm to 1:44pm    | 1.000000 | 7:30pm to 7:44pm   | 1.000000 |
| 1:45am to 1:59am    | 1.000000 | 7:45am to 7:59am   | 1.000000 | 1:45pm to 1:59pm    | 1.000000 | 7:45pm to 7:59pm   | 1.000000 |
| 2:00am to 2:14am    | 1.000000 | 8:00am to 8:14am   | 1.000000 | 2:00pm to 2:14pm    | 1.000000 | 8:00pm to 8:14pm   | 1.000000 |
| 2:15am to 2:29am    | 1.000000 | 8:15am to 8:29am   | 1.000000 | 2:15pm to 2:29pm    | 1.000000 | 8:15pm to 8:29pm   | 1.000000 |
| 2:30am to 2:44am    | 1.000000 | 8:30am to 8:44am   | 1.000000 | 2:30pm to 2:44pm    | 1.000000 | 8:30pm to 8:44pm   | 1.000000 |
| 2:45am to 2:59am    | 1.000000 | 8:45am to 8:59am   | 1.000000 | 2:45pm to 2:59pm    | 1.000000 | 8:45pm to 8:59pm   | 1.000000 |
| 3:00am to 3:14am    | 1.000000 | 9:00am to 9:14am   | 1.000000 | 3:00pm to 3:14pm    | 1.000000 | 9:00pm to 9:14pm   | 1.000000 |
| 3:15am to 3:29am    | 1.000000 | 9:15am to 9:29am   | 1.000000 | 3:15pm to 3:29pm    | 1.000000 | 9:15pm to 9:29pm   | 1.000000 |
| 3:30am to 3:44am    | 1.000000 | 9:30am to 9:44am   | 1.000000 | 3:30pm to 3:44pm    | 1.000000 | 9:30pm to 9:44pm   | 1.000000 |
| 3:45am to 3:59am    | 1.000000 | 9:45am to 9:59am   | 1.000000 | 3:45pm to 3:59pm    | 1.000000 | 9:45pm to 9:59pm   | 1.000000 |
| 4:00am to 4:14am    | 1.000000 | 10:00am to 10:14am | 1.000000 | 4:00pm to 4:14pm    | 1.000000 | 10:00pm to 10:14pm | 1.000000 |
| 4:15am to 4:29am    | 1.000000 | 10:15am to 10:29am | 1.000000 | 4:15pm to 4:29pm    | 1.000000 | 10:15pm to 10:29pm | 1.000000 |
| 4:30am to 4:44am    | 1.000000 | 10:30am to 10:44am | 1.000000 | 4:30pm to 4:44pm    | 1.000000 | 10:30pm to 10:44pm | 1.000000 |
| 4:45am to 4:59am    | 1.000000 | 10:45am to 10:59am | 1.000000 | 4:45pm to 4:59pm    | 1.000000 | 10:45pm to 10:59pm | 1.000000 |
| 5:00am to 5:14am    | 1.000000 | 11:00am to 11:14am | 1.000000 | 5:00pm to 5:14pm    | 1.000000 | 11:00pm to 11:14pm | 1.000000 |
| 5:15am to 5:29am    | 1.000000 | 11:15am to 11:29am | 1.000000 | 5:15pm to 5:29pm    | 1.000000 | 11:15pm to 11:29pm | 1.000000 |
| 5:30am to 5:44am    | 1.000000 | 11:30am to 11:44am | 1.000000 | 5:30pm to 5:44pm    | 1.000000 | 11:30pm to 11:44pm | 1.000000 |
| 5:45am to 5:59am    | 1.000000 | 11:45am to 11:59am | 1.000000 | 5:45pm to 5:59pm    | 1.000000 | 11:45pm to 11:59pm | 1.000000 |

Daily Operational Profiles

With Project 2009/14/16, Camarillo

Name: DEFAULT

| Day       | Weight   | Day      | Weight   |
|-----------|----------|----------|----------|
| Monday    | 1.000000 | Friday   | 1.000000 |
| Tuesday   | 1.000000 | Saturday | 1.000000 |
| Wednesday | 1.000000 | Sunday   | 1.000000 |
| Thursday  | 1.000000 |          |          |

Monthly Operational Profiles

With Project 2009/14/16, Camarillo

Name: DEFAULT

| Month    | Weight   | Month     | Weight   |
|----------|----------|-----------|----------|
| January  | 1.000000 | July      | 1.000000 |
| February | 1.000000 | August    | 1.000000 |
| March    | 1.000000 | September | 1.000000 |
| April    | 1.000000 | October   | 1.000000 |
| May      | 1.000000 | November  | 1.000000 |
| June     | 1.000000 | December  | 1.000000 |

Aircraft

With Project 2009/14/16, Camarillo

Default Taxi Out Time: 19.000000 min

Default Taxi In Time: 7.000000 min

| Year: | Uses Schedule? | Schedule Filename: |
|-------|----------------|--------------------|
| 2009  | No             | (None)             |
| 2014  | No             | (None)             |
| 2016  | No             | (None)             |

Aircraft Name: Take Off weight: 6804.00 Kgs  
Bombardier Learjet 24 Approach Weight: 5534.00 Kgs  
Engine Type: CJ610-6 Glide Slope: 3.00°  
Identification: LJ24 APU Assignment: None  
Category: APU Departure OP Time: 13.00 min  
SGJB APU Arrival OP Time: 13.00 min  
Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

Year: 2009  
Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year: 2014  
Annual Departures: 6  
Annual Arrivals: 5  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year: 2016  
Annual Departures: 4  
Annual Arrivals: 3  
Annual TGOs: 0



Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
Bombardier Learjet 25  
Engine Type:  
CJ610-6  
Identification:  
LJ25  
Category:  
SGJB

Take Off weight: 6804.00 Kgs  
Approach Weight: 5534.00 Kgs  
Glide Slope: 3.00°  
APU Assignment: None  
APU Departure OP Time: 13.00 min  
APU Arrival OP Time: 13.00 min  
Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

Year:  
2009

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

Year:  
2014

Annual Departures: 23  
Annual Arrivals: 22  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT

Year: 2016

|  |                                |
|--|--------------------------------|
| Arrival Quarter-Hourly Operational profile:    | DEFAULT                        |
| Arrival Daily Operational Profile:             | DEFAULT                        |
| Arrival Monthly Operational Profile:           | DEFAULT                        |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT                        |
| Touch & Go Daily Operational Profile:          | DEFAULT                        |
| Touch & Go Monthly Operational Profile:        | DEFAULT                        |
| Annual Departures:                             | 19                             |
| Annual Arrivals:                               | 19                             |
| Annual TGOs:                                   | 0                              |
| Taxi Out Time:                                 | Determined by Sequencing model |
| Taxi In Time:                                  | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

|                 |                       |                        |             |
|-----------------|-----------------------|------------------------|-------------|
| Aircraft Name:  | Bombardier Learjet 28 | Take Off weight:       | 6804.00 Kgs |
| Engine Type:    | CJ610-6               | Approach Weight:       | 5534.00 Kgs |
| Identification: | LJ28                  | Glide Slope:           | 3.00°       |
| Category:       | SGJB                  | APU Assignment:        | None        |
|                 |                       | APU Departure OP Time: | 13.00 min   |
|                 |                       | APU Arrival OP Time:   | 13.00 min   |
|                 |                       | Gate Assignment:       | None        |

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

Year: 2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year: 2014

Profile:

Annual Departures: 1

Annual Arrivals: 0

Annual TGOs: 0

Taxi Out Time: Determined by Sequencing model

Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT

Departure Daily Operational Profile: DEFAULT

Departure Monthly Operational Profile: DEFAULT

Arrival Quarter-Hourly Operational profile: DEFAULT

Arrival Daily Operational Profile: DEFAULT

Arrival Monthly Operational Profile: DEFAULT

Touch & Go Quarter-Hourly Operational profile: DEFAULT

Touch & Go Daily Operational Profile: DEFAULT

Touch & Go Monthly Operational Profile: DEFAULT

Year: 2016

Annual Departures: 1

Annual Arrivals: 0

Annual TGOs: 0

Taxi Out Time: Determined by Sequencing model

Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT

Departure Daily Operational Profile: DEFAULT

Departure Monthly Operational Profile: DEFAULT

Arrival Quarter-Hourly Operational profile: DEFAULT

Arrival Daily Operational Profile: DEFAULT

Arrival Monthly Operational Profile: DEFAULT

Touch & Go Quarter-Hourly Operational profile: DEFAULT

Touch & Go Daily Operational Profile: DEFAULT

Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name: Gulfstream G300

Engine Type: SPEY MK511-8

Identification: GLF3

Category: LCJP

Take Off weight: 26873.00 Kgs

Approach Weight: 23882.00 Kgs

Glide Slope: 3.00°

APU Assignment: APU GTCP 36-100

APU Departure OP Time: 13.00 min

APU Arrival OP Time: 13.00 min

Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Diesel   | 15.00                  | 15.00                    | 71.00           | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |

|                             |        |      |      |        |       |
|-----------------------------|--------|------|------|--------|-------|
| Service Truck (F250 / F350) | Diesel | 7.00 | 8.00 | 235.00 | 20.00 |
|-----------------------------|--------|------|------|--------|-------|

---

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2014

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 22                             |
| Annual Arrivals:   | 21                             |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2016

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 13                             |
| Annual Arrivals:   | 12                             |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

---

Aircraft Name:  
Gulfstream II

Take Off weight: 25401.00 Kgs

Engine Type:  
SPEY MK511-8  
Identification:  
GLF2  
Category:  
LCJP

Approach Weight: 23882.00 Kgs  
Glide Slope: 3.00°  
APU Assignment: APU GTCP 36-100  
APU Departure OP Time: 13.00 min  
APU Arrival OP Time: 13.00 min  
Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 15.00                  | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year:  
2009

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 7  
Annual Arrivals: 6  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:

2016

Annual Departures: 2  
 Annual Arrivals: 1  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Hawker HS-125 Series 600  
 Engine Type:  
 TFE731-2-2B  
 Identification:  
 H25A  
 Category:  
 SGJB

Take Off weight: 6804.00 Kgs  
 Approach Weight: 5534.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

Year:  
2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 1  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 1  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name: Rockwell Sabreliner 60  
 Engine Type: CF700-2D  
 Identification: SBR1  
 Category: SCJP

Take Off weight: 13000.00 Kgs  
 Approach Weight: 11140.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 0.00                   | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 0.00                   | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 0.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 0.00                   | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 0.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year:  
2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model

Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 1  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 1  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

---

GSE Population With Project 2009/14/16, Camarillo

None.

---

Parking Facilities With Project 2009/14/16, Camarillo

None.

---

Roadways With Project 2009/14/16, Camarillo

None.

---

Stationary Sources With Project 2009/14/16, Camarillo

None.



|                              |                                    |
|------------------------------|------------------------------------|
| Training Fires               | With Project 2009/14/16, Camarillo |
| None.                        |                                    |
| Gates                        | With Project 2009/14/16, Camarillo |
| None.                        |                                    |
| Taxiways                     | With Project 2009/14/16, Camarillo |
| None.                        |                                    |
| Runways                      | With Project 2009/14/16, Camarillo |
| None.                        |                                    |
| Taxipaths                    | With Project 2009/14/16, Camarillo |
| None.                        |                                    |
| Configurations               | With Project 2009/14/16, Camarillo |
| None.                        |                                    |
| Buildings                    | With Project 2009/14/16, Camarillo |
| None.                        |                                    |
| Discrete Cartesian Receptors | With Project 2009/14/16, Camarillo |
| None.                        |                                    |
| Discrete Polar Receptors     | With Project 2009/14/16, Camarillo |
| None.                        |                                    |
| Cartesian Receptor Networks  | With Project 2009/14/16, Camarillo |
| None.                        |                                    |
| Polar Receptor Networks      | With Project 2009/14/16, Camarillo |
| None.                        |                                    |

**User-Created Aircraft** With Project 2009/14/16, Camarillo

|                |                         |              |
|----------------|-------------------------|--------------|
| Aircraft Name: | Size:                   | Large        |
| My Aircraft    | Designation:            | Civil        |
|                | Engine:                 | Jet          |
|                | Usage:                  | Passenger    |
|                | European Group:         | Medium Jet   |
|                | Number of Engines       | 2            |
|                | Aircraft Flight Profile | Agusta A-109 |
|                | Engine Flight Profile   | 250B17B      |

The user has NOT used the following sytem emission indices and fuel flow rates

Aircraft Emissions Profile

Engine Emissions Profile

The user has edited the following emission factors:

| Mode:     | Time (mins): | Fuel Flow(Kg/s) | CO (EI) | HC (EI) | NOx (EI) | SOx (EI) | Smoke Number |
|-----------|--------------|-----------------|---------|---------|----------|----------|--------------|
| Startup   | 0            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi Out  | 19           | 0               | 0       | 0       | 0        | -1       | 0            |
| Takeoff   | 0.7          | 0               | 0       | 0       | 0        | -1       | 0            |
| Climb Out | 2.2          | 0               | 0       | 0       | 0        | -1       | 0            |
| Approach  | 4            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi In   | 7            | 0               | 0       | 0       | 0        | -1       | 0            |

**User-Created GSE** With Project 2009/14/16, Camarillo

None.

**User-Created APU** With Project 2009/14/16, Camarillo

None.

# Scenario-Airport: With Project 2009/14/16, Chino

## Weather

With Project 2009/14/16, Chino

Mixing Height: 3000.00 feet  
 Temperature: 64.00 °F  
 Daily High Temperature: 74.35 °F  
 Daily Low Temperature: 53.65 °F  
 Pressure: 29.92 inches of Hg  
 Sea Level Pressure: 29.98 inches of Hg  
 Relative Humidity: 64.41  
 Wind Speed: 5.02 knots  
 Wind Direction: 0.00 °  
 Ceiling: 99999.99 feet  
 Visibility: 50.00 miles

The user has used annual averages.

Base Elevation: 652.00 feet

Date Range: Thursday, January 01, 2004 to Friday, December 31, 2004

Source Data File

Location:

Upper Air Data

File Location:

## Quarter-Hourly Operational Profiles

With Project 2009/14/16, Chino

Name: DEFAULT

| Quarter-Hour        | Weight   | Quarter-Hour       | Weight   | Quarter-Hour        | Weight   | Quarter-Hour       | Weight   |
|---------------------|----------|--------------------|----------|---------------------|----------|--------------------|----------|
| 12:00am to 12:14 am | 1.000000 | 6:00am to 6:14am   | 1.000000 | 12:00pm to 12:14 pm | 1.000000 | 6:00pm to 6:14pm   | 1.000000 |
| 12:15am to 12:29 am | 1.000000 | 6:15am to 6:29am   | 1.000000 | 12:15pm to 12:29 pm | 1.000000 | 6:15pm to 6:29pm   | 1.000000 |
| 12:30am to 12:44 am | 1.000000 | 6:30am to 6:44am   | 1.000000 | 12:30pm to 12:44 pm | 1.000000 | 6:30pm to 6:44pm   | 1.000000 |
| 12:45am to 12:59 am | 1.000000 | 6:45am to 6:59am   | 1.000000 | 12:45pm to 12:59 pm | 1.000000 | 6:45pm to 6:59pm   | 1.000000 |
| 1:00am to 1:14am    | 1.000000 | 7:00am to 7:14am   | 1.000000 | 1:00pm to 1:14pm    | 1.000000 | 7:00pm to 7:14pm   | 1.000000 |
| 1:15am to 1:29am    | 1.000000 | 7:15am to 7:29am   | 1.000000 | 1:15pm to 1:29pm    | 1.000000 | 7:15pm to 7:29pm   | 1.000000 |
| 1:30am to 1:44am    | 1.000000 | 7:30am to 7:44am   | 1.000000 | 1:30pm to 1:44pm    | 1.000000 | 7:30pm to 7:44pm   | 1.000000 |
| 1:45am to 1:59am    | 1.000000 | 7:45am to 7:59am   | 1.000000 | 1:45pm to 1:59pm    | 1.000000 | 7:45pm to 7:59pm   | 1.000000 |
| 2:00am to 2:14am    | 1.000000 | 8:00am to 8:14am   | 1.000000 | 2:00pm to 2:14pm    | 1.000000 | 8:00pm to 8:14pm   | 1.000000 |
| 2:15am to 2:29am    | 1.000000 | 8:15am to 8:29am   | 1.000000 | 2:15pm to 2:29pm    | 1.000000 | 8:15pm to 8:29pm   | 1.000000 |
| 2:30am to 2:44am    | 1.000000 | 8:30am to 8:44am   | 1.000000 | 2:30pm to 2:44pm    | 1.000000 | 8:30pm to 8:44pm   | 1.000000 |
| 2:45am to 2:59am    | 1.000000 | 8:45am to 8:59am   | 1.000000 | 2:45pm to 2:59pm    | 1.000000 | 8:45pm to 8:59pm   | 1.000000 |
| 3:00am to 3:14am    | 1.000000 | 9:00am to 9:14am   | 1.000000 | 3:00pm to 3:14pm    | 1.000000 | 9:00pm to 9:14pm   | 1.000000 |
| 3:15am to 3:29am    | 1.000000 | 9:15am to 9:29am   | 1.000000 | 3:15pm to 3:29pm    | 1.000000 | 9:15pm to 9:29pm   | 1.000000 |
| 3:30am to 3:44am    | 1.000000 | 9:30am to 9:44am   | 1.000000 | 3:30pm to 3:44pm    | 1.000000 | 9:30pm to 9:44pm   | 1.000000 |
| 3:45am to 3:59am    | 1.000000 | 9:45am to 9:59am   | 1.000000 | 3:45pm to 3:59pm    | 1.000000 | 9:45pm to 9:59pm   | 1.000000 |
| 4:00am to 4:14am    | 1.000000 | 10:00am to 10:14am | 1.000000 | 4:00pm to 4:14pm    | 1.000000 | 10:00pm to 10:14pm | 1.000000 |
| 4:15am to 4:29am    | 1.000000 | 10:15am to 10:29am | 1.000000 | 4:15pm to 4:29pm    | 1.000000 | 10:15pm to 10:29pm | 1.000000 |
| 4:30am to 4:44am    | 1.000000 | 10:30am to 10:44am | 1.000000 | 4:30pm to 4:44pm    | 1.000000 | 10:30pm to 10:44pm | 1.000000 |
| 4:45am to 4:59am    | 1.000000 | 10:45am to 10:59am | 1.000000 | 4:45pm to 4:59pm    | 1.000000 | 10:45pm to 10:59pm | 1.000000 |
| 5:00am to 5:14am    | 1.000000 | 11:00am to 11:14am | 1.000000 | 5:00pm to 5:14pm    | 1.000000 | 11:00pm to 11:14pm | 1.000000 |
| 5:15am to 5:29am    | 1.000000 | 11:15am to 11:29am | 1.000000 | 5:15pm to 5:29pm    | 1.000000 | 11:15pm to 11:29pm | 1.000000 |
| 5:30am to 5:44am    | 1.000000 | 11:30am to 11:44am | 1.000000 | 5:30pm to 5:44pm    | 1.000000 | 11:30pm to 11:44pm | 1.000000 |
| 5:45am to 5:59am    | 1.000000 | 11:45am to 11:59am | 1.000000 | 5:45pm to 5:59pm    | 1.000000 | 11:45pm to 11:59pm | 1.000000 |

Daily Operational Profiles

With Project 2009/14/16, China

Name: DEFAULT

| Day       | Weight   | Day      | Weight   |
|-----------|----------|----------|----------|
| Monday    | 1.000000 | Friday   | 1.000000 |
| Tuesday   | 1.000000 | Saturday | 1.000000 |
| Wednesday | 1.000000 | Sunday   | 1.000000 |
| Thursday  | 1.000000 |          |          |

Monthly Operational Profiles

With Project 2009/14/16, China

Name: DEFAULT

| Month    | Weight   | Month     | Weight   |
|----------|----------|-----------|----------|
| January  | 1.000000 | July      | 1.000000 |
| February | 1.000000 | August    | 1.000000 |
| March    | 1.000000 | September | 1.000000 |
| April    | 1.000000 | October   | 1.000000 |
| May      | 1.000000 | November  | 1.000000 |
| June     | 1.000000 | December  | 1.000000 |

Aircraft

With Project 2009/14/16, China

|                        |                       |                           |
|------------------------|-----------------------|---------------------------|
| Default Taxi Out Time: | 19.000000 min         |                           |
| Default Taxi In Time:  | 7.000000 min          |                           |
| <u>Year:</u>           | <u>Uses Schedule?</u> | <u>Schedule Filename:</u> |
| 2009                   | No                    | (None)                    |
| 2014                   | No                    | (None)                    |
| 2016                   | No                    | (None)                    |

|                          |                        |              |
|--------------------------|------------------------|--------------|
| Aircraft Name:           | Take Off weight:       | 23587.00 Kgs |
| Northrop F-5E/F Tiger II | Approach Weight:       | 18144.00 Kgs |
| Engine Type:             | Glide Slope:           | 3.00°        |
| J85-GE-5F                | APU Assignment:        | None         |
| Identification:          | APU Departure OP Time: | 13.00 min    |
| F-5                      | APU Arrival OP Time:   | 13.00 min    |
| Category:                | Gate Assignment:       | None         |
| SMJA                     |                        |              |

| Assigned GSE/AGE:   | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---------------------|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Cart (Taylor Dunn)  | Diesel | 5.00                   | 5.00                     | 25.00           | 50.00           |                   |
| Generator (Generic) | Diesel | 0.00                   | 120.00                   | 158.00          | 82.00           |                   |
| Lift (Generic)      | Diesel | 5.00                   | 5.00                     | 115.00          | 50.00           |                   |
| Other (Generic)     | Diesel | 0.00                   | 0.00                     | 140.00          | 50.00           |                   |

|       |                    |                                |
|-------|--------------------|--------------------------------|
| Year: | Annual Departures: | 0                              |
| 2009  | Annual Arrivals:   | 0                              |
|       | Annual TGOs:       | 0                              |
|       | Taxi Out Time:     | Determined by Sequencing model |
|       | Taxi In Time:      | Determined by Sequencing model |

|   |         |
|---|---------|
| Departure Quarter-Hourly Operational profile: | DEFAULT |
| Departure Daily Operational Profile:          | DEFAULT |
| Departure Monthly Operational Profile:        | DEFAULT |
| Arrival Quarter-Hourly Operational profile:   | DEFAULT |
| Arrival Daily Operational Profile:            | DEFAULT |
| Arrival Monthly Operational Profile:          | DEFAULT |
| Touch & Go Quarter-Hourly                     | DEFAULT |

Operational profile:  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT  
 Year: 2014  
 Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2016  
 Annual Departures: 2  
 Annual Arrivals: 2  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name: T-38 Talon  
 Engine Type: J85-GE-5H (w/AB)  
 Identification: L-39  
 Category: LMJO  
 Take Off weight: 23587.00 Kgs  
 Approach Weight: 18144.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:   | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---------------------|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Cart (Taylor Dunn)  | Diesel | 0.00                   | 5.00                     | 25.00           | 50.00           |                   |
| Generator (Generic) | Diesel | 0.00                   | 120.00                   | 158.00          | 82.00           |                   |
| Lift (Generic)      | Diesel | 0.00                   | 5.00                     | 115.00          | 50.00           |                   |
| Other (Generic)     | Diesel | 0.00                   | 0.00                     | 140.00          | 50.00           |                   |

Year: 2009  
 Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model

Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 29  
Annual Arrivals: 29  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
T-38 Talon  
Engine Type:  
J85-GE-5H (w/AB)  
Identification:  
T-38  
Category:  
LMJO

Take Off weight: 23587.00 Kgs  
Approach Weight: 18144.00 Kgs  
Glide Slope: 3.00°  
APU Assignment: None  
APU Departure OP Time: 13.00 min  
APU Arrival OP Time: 13.00 min  
Gate Assignment: None

---

| Assigned GSE/AGE:   | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---------------------|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Cart (Taylor Dunn)  | Diesel | 0.00                   | 5.00                     | 25.00           | 50.00           |                   |
| Generator (Generic) | Diesel | 0.00                   | 120.00                   | 158.00          | 82.00           |                   |
| Lift (Generic)      | Diesel | 0.00                   | 5.00                     | 115.00          | 50.00           |                   |
| Other (Generic)     | Diesel | 0.00                   | 0.00                     | 140.00          | 50.00           |                   |

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2014

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2016

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 19                             |
| Annual Arrivals:   | 19                             |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

---

GSE Population With Project 2009/14/16, Chino  
None.

---

Parking Facilities With Project 2009/14/16, Chino  
None.

---

Roadways With Project 2009/14/16, Chino  
None.

---

Stationary Sources With Project 2009/14/16, Chino  
None.

---

Training Fires With Project 2009/14/16, Chino  
None.

---

Gates With Project 2009/14/16, Chino  
None.

---

Taxiways With Project 2009/14/16, Chino  
None.

---

Runways With Project 2009/14/16, Chino  
None.

---

Taxipaths With Project 2009/14/16, Chino  
None.

---

Configurations With Project 2009/14/16, Chino  
None.

---

Buildings With Project 2009/14/16, Chino  
None.

---

Discrete Cartesian Receptors With Project 2009/14/16, Chino  
None.

---

Discrete Polar Receptors With Project 2009/14/16, Chino  
None.

---

Cartesian Receptor Networks With Project 2009/14/16, Chino  
None.

---

Polar Receptor Networks With Project 2009/14/16, Chino  
None.

---

User-Created Aircraft With Project 2009/14/16, Chino

---

Aircraft Name: My Aircraft  
Size: Large  
Designation: Civil  
Engine: Jet  
Usage: Passenger  
European Group: Medium Jet  
Number of Engines: 2  
Aircraft Flight Profile: Agusta A-109  
Engine Flight Profile: 250B17B

---

The user has NOT used the following system emission indices and fuel flow rates

Aircraft Emissions Profile

Engine Emissions Profile

The user has edited the following emission factors:

| Mode:    | Time (mins): | Fuel Flow(Kg/s) | CO (EI) | HC (EI) | NOx (EI) | SOx (EI) | Smoke Number |
|----------|--------------|-----------------|---------|---------|----------|----------|--------------|
| Startup  | 0            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi Out | 19           | 0               | 0       | 0       | 0        | -1       | 0            |
| Takeoff  | 0.7          | 0               | 0       | 0       | 0        | -1       | 0            |

|           |     |   |   |   |   |    |   |
|-----------|-----|---|---|---|---|----|---|
| Climb Out | 2.2 | 0 | 0 | 0 | 0 | -1 | 0 |
| Approach  | 4   | 0 | 0 | 0 | 0 | -1 | 0 |
| Taxi In   | 7   | 0 | 0 | 0 | 0 | -1 | 0 |

User-Created GSE

With Project 2009/14/16, Chino

None.

User-Created APU

With Project 2009/14/16, Chino

None.

Scenario-Airport: With Project 2009/14/16, General Wm J Fox Airfield

Weather

With Project 2009/14/16, General Wm J Fox Airfield

Mixing Height: 3000.00 feet  
 Temperature: 60.00 °F  
 Daily High Temperature: 70.35 °F  
 Daily Low Temperature: 49.65 °F  
 Pressure: 29.92 inches of Hg  
 Sea Level Pressure: 29.99 inches of Hg  
 Relative Humidity: 37.86  
 Wind Speed: 9.66 knots  
 Wind Direction: 0.00 °  
 Ceiling: 99999.99 feet  
 Visibility: 50.00 miles  
 The user has used annual averages.  
 Base Elevation: 2348.00 feet  
 Date Range: Thursday, January 01, 2004 to Friday, December 31, 2004  
 Source Data File Location:  
 Upper Air Data File Location:

Quarter-Hourly Operational Profiles

With Project 2009/14/16, General Wm J Fox Airfield

Name: DEFAULT

| Quarter-Hour        | Weight   | Quarter-Hour       | Weight   | Quarter-Hour        | Weight   | Quarter-Hour       | Weight   |
|---------------------|----------|--------------------|----------|---------------------|----------|--------------------|----------|
| 12:00am to 12:14 am | 1.000000 | 6:00am to 6:14am   | 1.000000 | 12:00pm to 12:14 pm | 1.000000 | 6:00pm to 6:14pm   | 1.000000 |
| 12:15am to 12:29 am | 1.000000 | 6:15am to 6:29am   | 1.000000 | 12:15pm to 12:29 pm | 1.000000 | 6:15pm to 6:29pm   | 1.000000 |
| 12:30am to 12:44 am | 1.000000 | 6:30am to 6:44am   | 1.000000 | 12:30pm to 12:44 pm | 1.000000 | 6:30pm to 6:44pm   | 1.000000 |
| 12:45am to 12:59 am | 1.000000 | 6:45am to 6:59am   | 1.000000 | 12:45pm to 12:59 pm | 1.000000 | 6:45pm to 6:59pm   | 1.000000 |
| 1:00am to 1:14am    | 1.000000 | 7:00am to 7:14am   | 1.000000 | 1:00pm to 1:14pm    | 1.000000 | 7:00pm to 7:14pm   | 1.000000 |
| 1:15am to 1:29am    | 1.000000 | 7:15am to 7:29am   | 1.000000 | 1:15pm to 1:29pm    | 1.000000 | 7:15pm to 7:29pm   | 1.000000 |
| 1:30am to 1:44am    | 1.000000 | 7:30am to 7:44am   | 1.000000 | 1:30pm to 1:44pm    | 1.000000 | 7:30pm to 7:44pm   | 1.000000 |
| 1:45am to 1:59am    | 1.000000 | 7:45am to 7:59am   | 1.000000 | 1:45pm to 1:59pm    | 1.000000 | 7:45pm to 7:59pm   | 1.000000 |
| 2:00am to 2:14am    | 1.000000 | 8:00am to 8:14am   | 1.000000 | 2:00pm to 2:14pm    | 1.000000 | 8:00pm to 8:14pm   | 1.000000 |
| 2:15am to 2:29am    | 1.000000 | 8:15am to 8:29am   | 1.000000 | 2:15pm to 2:29pm    | 1.000000 | 8:15pm to 8:29pm   | 1.000000 |
| 2:30am to 2:44am    | 1.000000 | 8:30am to 8:44am   | 1.000000 | 2:30pm to 2:44pm    | 1.000000 | 8:30pm to 8:44pm   | 1.000000 |
| 2:45am to 2:59am    | 1.000000 | 8:45am to 8:59am   | 1.000000 | 2:45pm to 2:59pm    | 1.000000 | 8:45pm to 8:59pm   | 1.000000 |
| 3:00am to 3:14am    | 1.000000 | 9:00am to 9:14am   | 1.000000 | 3:00pm to 3:14pm    | 1.000000 | 9:00pm to 9:14pm   | 1.000000 |
| 3:15am to 3:29am    | 1.000000 | 9:15am to 9:29am   | 1.000000 | 3:15pm to 3:29pm    | 1.000000 | 9:15pm to 9:29pm   | 1.000000 |
| 3:30am to 3:44am    | 1.000000 | 9:30am to 9:44am   | 1.000000 | 3:30pm to 3:44pm    | 1.000000 | 9:30pm to 9:44pm   | 1.000000 |
| 3:45am to 3:59am    | 1.000000 | 9:45am to 9:59am   | 1.000000 | 3:45pm to 3:59pm    | 1.000000 | 9:45pm to 9:59pm   | 1.000000 |
| 4:00am to 4:14am    | 1.000000 | 10:00am to 10:14am | 1.000000 | 4:00pm to 4:14pm    | 1.000000 | 10:00pm to 10:14pm | 1.000000 |



|                  |          |                    |          |                  |          |                    |          |
|------------------|----------|--------------------|----------|------------------|----------|--------------------|----------|
| 4:15am to 4:29am | 1.000000 | 10:15am to 10:29am | 1.000000 | 4:15pm to 4:29pm | 1.000000 | 10:15pm to 10:29pm | 1.000000 |
| 4:30am to 4:44am | 1.000000 | 10:30am to 10:44am | 1.000000 | 4:30pm to 4:44pm | 1.000000 | 10:30pm to 10:44pm | 1.000000 |
| 4:45am to 4:59am | 1.000000 | 10:45am to 10:59am | 1.000000 | 4:45pm to 4:59pm | 1.000000 | 10:45pm to 10:59pm | 1.000000 |
| 5:00am to 5:14am | 1.000000 | 11:00am to 11:14am | 1.000000 | 5:00pm to 5:14pm | 1.000000 | 11:00pm to 11:14pm | 1.000000 |
| 5:15am to 5:29am | 1.000000 | 11:15am to 11:29am | 1.000000 | 5:15pm to 5:29pm | 1.000000 | 11:15pm to 11:29pm | 1.000000 |
| 5:30am to 5:44am | 1.000000 | 11:30am to 11:44am | 1.000000 | 5:30pm to 5:44pm | 1.000000 | 11:30pm to 11:44pm | 1.000000 |
| 5:45am to 5:59am | 1.000000 | 11:45am to 11:59am | 1.000000 | 5:45pm to 5:59pm | 1.000000 | 11:45pm to 11:59pm | 1.000000 |

### Daily Operational Profiles

With Project 2009/14/16, General Wm J Fox Airfield

Name: DEFAULT

| Day       | Weight   | Day      | Weight   |
|-----------|----------|----------|----------|
| Monday    | 1.000000 | Friday   | 1.000000 |
| Tuesday   | 1.000000 | Saturday | 1.000000 |
| Wednesday | 1.000000 | Sunday   | 1.000000 |
| Thursday  | 1.000000 |          |          |

### Monthly Operational Profiles

With Project 2009/14/16, General Wm J Fox Airfield

Name: DEFAULT

| Month    | Weight   | Month     | Weight   |
|----------|----------|-----------|----------|
| January  | 1.000000 | July      | 1.000000 |
| February | 1.000000 | August    | 1.000000 |
| March    | 1.000000 | September | 1.000000 |
| April    | 1.000000 | October   | 1.000000 |
| May      | 1.000000 | November  | 1.000000 |
| June     | 1.000000 | December  | 1.000000 |

### Aircraft

With Project 2009/14/16, General Wm J Fox Airfield

|                        |                       |                           |  |
|------------------------|-----------------------|---------------------------|--|
| Default Taxi Out Time: | 19.000000 min         |                           |  |
| Default Taxi In Time:  | 7.000000 min          |                           |  |
| <u>Year:</u>           | <u>Uses Schedule?</u> | <u>Schedule Filename:</u> |  |
| 2009                   | No                    | (None)                    |  |
| 2014                   | No                    | (None)                    |  |
| 2016                   | No                    | (None)                    |  |

|                 |                        |                 |
|-----------------|------------------------|-----------------|
| Aircraft Name:  | Take Off weight:       | 26873.00 Kgs    |
| Gulfstream G300 | Approach Weight:       | 23882.00 Kgs    |
| Engine Type:    | Glide Slope:           | 3.00°           |
| SPEY MK511-8    | APU Assignment:        | APU GTCP 36-100 |
| Identification: | APU Departure OP Time: | 13.00 min       |
| GLF3            | APU Arrival OP Time:   | 13.00 min       |
| Category:       | Gate Assignment:       | None            |
| LCJP            |                        |                 |

| Assigned GSE/AGE:                               | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)   | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50) | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)       | Diesel   | 15.00                  | 15.00                    | 71.00           | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)        | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |

|  |        |       |       |        |       |
|--|--------|-------|-------|--------|-------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel | 0.00  | 20.00 | 175.00 | 25.00 |
| Lavatory Truck (TLD 1410)  | Diesel | 15.00 | 0.00  | 56.00  | 25.00 |
| Service Truck (F250 / F350)  | Diesel | 7.00  | 8.00  | 235.00 | 20.00 |

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2014

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2016

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 65                             |
| Annual Arrivals:   | 65                             |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational                 | DEFAULT |

Profile:

Aircraft Name:  
Gulfstream II  
Engine Type:  
SPEY MK511-8  
Identification:  
GLF2  
Category:  
LCJP

Take Off weight: 25401.00 Kgs  
Approach Weight: 23882.00 Kgs  
Glide Slope: 3.00°  
APU Assignment: APU GTCP 36-100  
APU Departure OP Time: 13.00 min  
APU Arrival OP Time: 13.00 min  
Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 15.00                  | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year:  
2009

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly

Year:  
2016

Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT  
Annual Departures: 65  
Annual Arrivals: 65  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

|                              |  |
|------------------------------|--|
| GSE Population               | With Project 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Parking Facilities           | With Project 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Roadways                     | With Project 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Stationary Sources           | With Project 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Training Fires               | With Project 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Gates                        | With Project 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Taxiways                     | With Project 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Runways                      | With Project 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Taxipaths                    | With Project 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Configurations               | With Project 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Buildings                    | With Project 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Discrete Cartesian Receptors | With Project 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Discrete Polar Receptors     | With Project 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Cartesian Receptor Networks  | With Project 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |
| Polar Receptor Networks      | With Project 2009/14/16, General Wm J Fox Airfield |
| None.                        |  |

---

**User-Created Aircraft**

With Project 2009/14/16, General Wm J Fox Airfield

---

|                |                         |              |
|----------------|-------------------------|--------------|
| Aircraft Name: | Size:                   | Large        |
| My Aircraft    | Designation:            | Civil        |
|                | Engine:                 | Jet          |
|                | Usage:                  | Passenger    |
|                | European Group:         | Medium Jet   |
|                | Number of Engines       | 2            |
|                | Aircraft Flight Profile | Agusta A-109 |
|                | Engine Flight Profile   | 250B17B      |

---

The user has NOT used the following sytem emission indices and fuel flow rates

Aircraft Emissions  
ProfileEngine Emissions  
Profile

The user has edited the following emission factors:

| Mode:     | Time (mins): | Fuel Flow(Kg/s) | CO (EI) | HC (EI) | NOx (EI) | SOx (EI) | Smoke Number |
|-----------|--------------|-----------------|---------|---------|----------|----------|--------------|
| Startup   | 0            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi Out  | 19           | 0               | 0       | 0       | 0        | -1       | 0            |
| Takeoff   | 0.7          | 0               | 0       | 0       | 0        | -1       | 0            |
| Climb Out | 2.2          | 0               | 0       | 0       | 0        | -1       | 0            |
| Approach  | 4            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi In   | 7            | 0               | 0       | 0       | 0        | -1       | 0            |

---

---

**User-Created GSE**

With Project 2009/14/16, General Wm J Fox Airfield

None.

---

**User-Created APU**

With Project 2009/14/16, General Wm J Fox Airfield

None.

---

**Scenario-Airport: With Project 2009/14/16, Los Angeles Intl**

---

---

**Weather**

With Project 2009/14/16, Los Angeles Intl

---

|                         |                    |
|-------------------------|--------------------|
| Mixing Height:          | 3000.00 feet       |
| Temperature:            | 63.00 °F           |
| Daily High Temperature: | 73.35 °F           |
| Daily Low Temperature:  | 52.65 °F           |
| Pressure:               | 29.86 inches of Hg |
| Sea Level Pressure:     | 29.98 inches of Hg |
| Relative Humidity:      | 73.47              |
| Wind Speed:             | 6.67 knots         |
| Wind Direction:         | 0.00 °             |
| Ceiling:                | 99999.99 feet      |
| Visibility:             | 50.00 miles        |

The user has used annual averages.

|                               |   |
|-------------------------------|---|
| Base Elevation:               | 125.98 feet   |
| Date Range:                   | Thursday, January 01, 2004 to Friday, December 31, 2004 |
| Source Data File Location:    |   |
| Upper Air Data File Location: |   |

---

---

**Quarter-Hourly Operational Profiles**

With Project 2009/14/16, Los Angeles Intl

Name: DEFAULT

| Quarter-Hour        | Weight   | Quarter-Hour       | Weight   | Quarter-Hour        | Weight   | Quarter-Hour       | Weight   |
|---------------------|----------|--------------------|----------|---------------------|----------|--------------------|----------|
| 12:00am to 12:14 am | 1.000000 | 6:00am to 6:14am   | 1.000000 | 12:00pm to 12:14 pm | 1.000000 | 6:00pm to 6:14pm   | 1.000000 |
| 12:15am to 12:29 am | 1.000000 | 6:15am to 6:29am   | 1.000000 | 12:15pm to 12:29 pm | 1.000000 | 6:15pm to 6:29pm   | 1.000000 |
| 12:30am to 12:44 am | 1.000000 | 6:30am to 6:44am   | 1.000000 | 12:30pm to 12:44 pm | 1.000000 | 6:30pm to 6:44pm   | 1.000000 |
| 12:45am to 12:59 am | 1.000000 | 6:45am to 6:59am   | 1.000000 | 12:45pm to 12:59 pm | 1.000000 | 6:45pm to 6:59pm   | 1.000000 |
| 1:00am to 1:14am    | 1.000000 | 7:00am to 7:14am   | 1.000000 | 1:00pm to 1:14pm    | 1.000000 | 7:00pm to 7:14pm   | 1.000000 |
| 1:15am to 1:29am    | 1.000000 | 7:15am to 7:29am   | 1.000000 | 1:15pm to 1:29pm    | 1.000000 | 7:15pm to 7:29pm   | 1.000000 |
| 1:30am to 1:44am    | 1.000000 | 7:30am to 7:44am   | 1.000000 | 1:30pm to 1:44pm    | 1.000000 | 7:30pm to 7:44pm   | 1.000000 |
| 1:45am to 1:59am    | 1.000000 | 7:45am to 7:59am   | 1.000000 | 1:45pm to 1:59pm    | 1.000000 | 7:45pm to 7:59pm   | 1.000000 |
| 2:00am to 2:14am    | 1.000000 | 8:00am to 8:14am   | 1.000000 | 2:00pm to 2:14pm    | 1.000000 | 8:00pm to 8:14pm   | 1.000000 |
| 2:15am to 2:29am    | 1.000000 | 8:15am to 8:29am   | 1.000000 | 2:15pm to 2:29pm    | 1.000000 | 8:15pm to 8:29pm   | 1.000000 |
| 2:30am to 2:44am    | 1.000000 | 8:30am to 8:44am   | 1.000000 | 2:30pm to 2:44pm    | 1.000000 | 8:30pm to 8:44pm   | 1.000000 |
| 2:45am to 2:59am    | 1.000000 | 8:45am to 8:59am   | 1.000000 | 2:45pm to 2:59pm    | 1.000000 | 8:45pm to 8:59pm   | 1.000000 |
| 3:00am to 3:14am    | 1.000000 | 9:00am to 9:14am   | 1.000000 | 3:00pm to 3:14pm    | 1.000000 | 9:00pm to 9:14pm   | 1.000000 |
| 3:15am to 3:29am    | 1.000000 | 9:15am to 9:29am   | 1.000000 | 3:15pm to 3:29pm    | 1.000000 | 9:15pm to 9:29pm   | 1.000000 |
| 3:30am to 3:44am    | 1.000000 | 9:30am to 9:44am   | 1.000000 | 3:30pm to 3:44pm    | 1.000000 | 9:30pm to 9:44pm   | 1.000000 |
| 3:45am to 3:59am    | 1.000000 | 9:45am to 9:59am   | 1.000000 | 3:45pm to 3:59pm    | 1.000000 | 9:45pm to 9:59pm   | 1.000000 |
| 4:00am to 4:14am    | 1.000000 | 10:00am to 10:14am | 1.000000 | 4:00pm to 4:14pm    | 1.000000 | 10:00pm to 10:14pm | 1.000000 |
| 4:15am to 4:29am    | 1.000000 | 10:15am to 10:29am | 1.000000 | 4:15pm to 4:29pm    | 1.000000 | 10:15pm to 10:29pm | 1.000000 |
| 4:30am to 4:44am    | 1.000000 | 10:30am to 10:44am | 1.000000 | 4:30pm to 4:44pm    | 1.000000 | 10:30pm to 10:44pm | 1.000000 |
| 4:45am to 4:59am    | 1.000000 | 10:45am to 10:59am | 1.000000 | 4:45pm to 4:59pm    | 1.000000 | 10:45pm to 10:59pm | 1.000000 |
| 5:00am to 5:14am    | 1.000000 | 11:00am to 11:14am | 1.000000 | 5:00pm to 5:14pm    | 1.000000 | 11:00pm to 11:14pm | 1.000000 |
| 5:15am to 5:29am    | 1.000000 | 11:15am to 11:29am | 1.000000 | 5:15pm to 5:29pm    | 1.000000 | 11:15pm to 11:29pm | 1.000000 |
| 5:30am to 5:44am    | 1.000000 | 11:30am to 11:44am | 1.000000 | 5:30pm to 5:44pm    | 1.000000 | 11:30pm to 11:44pm | 1.000000 |
| 5:45am to 5:59am    | 1.000000 | 11:45am to 11:59am | 1.000000 | 5:45pm to 5:59pm    | 1.000000 | 11:45pm to 11:59pm | 1.000000 |

### Daily Operational Profiles

With Project 2009/14/16, Los Angeles Intl

Name: DEFAULT

| Day       | Weight   | Day      | Weight   |
|-----------|----------|----------|----------|
| Monday    | 1.000000 | Friday   | 1.000000 |
| Tuesday   | 1.000000 | Saturday | 1.000000 |
| Wednesday | 1.000000 | Sunday   | 1.000000 |
| Thursday  | 1.000000 |          |          |

### Monthly Operational Profiles

With Project 2009/14/16, Los Angeles Intl

Name: DEFAULT

| Month    | Weight   | Month     | Weight   |
|----------|----------|-----------|----------|
| January  | 1.000000 | July      | 1.000000 |
| February | 1.000000 | August    | 1.000000 |
| March    | 1.000000 | September | 1.000000 |
| April    | 1.000000 | October   | 1.000000 |
| May      | 1.000000 | November  | 1.000000 |
| June     | 1.000000 | December  | 1.000000 |

### Aircraft

With Project 2009/14/16, Los Angeles Intl

Default Taxi Out Time: 19.000000 min  
 Default Taxi In Time: 7.000000 min  
 Year: Uses Schedule?

Schedule Filename:

|      |    |        |
|------|----|--------|
| 2009 | No | (None) |
| 2014 | No | (None) |
| 2016 | No | (None) |

|                         |                        |                        |
|-------------------------|------------------------|------------------------|
| Aircraft Name:          | Take Off weight:       | 68039.00 Kgs           |
| Boeing 727-100 Series   | Approach Weight:       | 58173.00 Kgs           |
| Engine Type:            | Glide Slope:           | 3.00°                  |
| JT8D-9 series Smoke fix | APU Assignment:        | APU GTCP85-98 (200 HP) |
| Identification:         | APU Departure OP Time: | 13.00 min              |
| B721                    | APU Arrival OP Time:   | 13.00 min              |
| Category:               | Gate Assignment:       | None                   |
| LCJP                    |                        |                        |

| Assigned GSE/AGE:   | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Air Conditioner (Generic)   | Electric | 7.00                   | 23.00                    | 0.00            | 75.00           |                   |
| Air Start (ACE 180)   | Diesel   | 0.00                   | 7.00                     | 425.00          | 90.00           |                   |
| Aircraft Tractor (Stewart & Stevenson TUG GT-35, Douglas TBL-180) | Diesel   | 0.00                   | 8.00                     | 88.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                   | Gasoline | 37.00                  | 38.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                         | Gasoline | 24.00                  | 24.00                    | 107.00          | 50.00           |                   |
| Cabin Service Truck (Hi-Way F650)                                 | Diesel   | 10.00                  | 10.00                    | 210.00          | 53.00           |                   |
| Catering Truck (Hi-Way F650)                                      | Diesel   | 7.00                   | 8.00                     | 210.00          | 53.00           |                   |
| Hydrant Truck (F250 / F350)                                       | Diesel   | 0.00                   | 12.00                    | 235.00          | 70.00           |                   |
| Lavatory Truck (TLD 1410)   | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)                                       | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |
| Water Service (Gate Service)                                      | Electric | 0.00                   | 12.00                    | 0.00            | 20.00           |                   |

|       |                    |                                |
|-------|--------------------|--------------------------------|
| Year: | Annual Departures: | 0                              |
| 2009  | Annual Arrivals:   | 0                              |
|       | Annual TGOs:       | 0                              |
|       | Taxi Out Time:     | Determined by Sequencing model |
|       | Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

|       |                    |                                |
|-------|--------------------|--------------------------------|
| Year: | Annual Departures: | 6                              |
| 2014  | Annual Arrivals:   | 6                              |
|       | Annual TGOs:       | 0                              |
|       | Taxi Out Time:     | Determined by Sequencing model |
|       | Taxi In Time:      | Determined by Sequencing model |

|   |         |
|---|---------|
| Departure Quarter-Hourly Operational profile: | DEFAULT |
| Departure Daily Operational Profile:          | DEFAULT |
| Departure Monthly Operational Profile:        | DEFAULT |

Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT  
 Annual Departures: 4  
 Annual Arrivals: 3  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Year:  
2016

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Boeing 727-200 Series  
 Engine Type:  
 JT8D-17 Smoke fix  
 Identification:  
 B722  
 Category:  
 LCJP

Take Off weight: 81647.00 Kgs  
 Approach Weight: 68991.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP85-98 (200 HP)  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

---

| Assigned GSE/AGE:   | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Air Conditioner (Generic)   | Electric | 7.00                   | 23.00                    | 0.00            | 75.00           |                   |
| Air Start (ACE 180)   | Diesel   | 0.00                   | 7.00                     | 425.00          | 90.00           |                   |
| Aircraft Tractor (Stewart & Stevenson TUG GT-35, Douglas TBL-180) | Diesel   | 0.00                   | 8.00                     | 88.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                   | Gasoline | 37.00                  | 38.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                         | Gasoline | 24.00                  | 24.00                    | 107.00          | 50.00           |                   |
| Cabin Service Truck (Hi-Way F650)                                 | Diesel   | 10.00                  | 10.00                    | 210.00          | 53.00           |                   |
| Catering Truck (Hi-Way F650)                                      | Diesel   | 7.00                   | 8.00                     | 210.00          | 53.00           |                   |
| Hydrant Truck (F250 / F350)                                       | Diesel   | 0.00                   | 12.00                    | 235.00          | 70.00           |                   |
| Lavatory Truck (TLD 1410)   | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)                                       | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |
| Water Service (Gate Service)                                      | Electric | 0.00                   | 12.00                    | 0.00            | 20.00           |                   |

Year:  
2009

---

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0



Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 3  
Annual Arrivals: 2  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 2  
Annual Arrivals: 1  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
Boeing 727-200 Series  
Engine Type:  
JT8D-17 Smoke fix  
Identification:  
B727  
Category:  
LCJP

Take Off weight: 81647.00 Kgs  
Approach Weight: 68991.00 Kgs  
Glide Slope: 3.00°  
APU Assignment: APU GTCP85-98 (200 HP)  
APU Departure OP Time: 13.00 min  
APU Arrival OP Time: 13.00 min  
Gate Assignment: None

| Assigned GSE/AGE:   | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Air Conditioner (Generic)   | Electric | 7.00                   | 23.00                    | 0.00            | 75.00           |                   |
| Air Start (ACE 180)   | Diesel   | 0.00                   | 7.00                     | 425.00          | 90.00           |                   |
| Aircraft Tractor (Stewart & Stevenson TUG GT-35, Douglas TBL-180) | Diesel   | 0.00                   | 8.00                     | 88.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                   | Gasoline | 37.00                  | 38.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                         | Gasoline | 24.00                  | 24.00                    | 107.00          | 50.00           |                   |
| Cabin Service Truck (Hi-Way F650)                                 | Diesel   | 10.00                  | 10.00                    | 210.00          | 53.00           |                   |
| Catering Truck (Hi-Way F650)                                      | Diesel   | 7.00                   | 8.00                     | 210.00          | 53.00           |                   |
| Hydrant Truck (F250 / F350)                                       | Diesel   | 0.00                   | 12.00                    | 235.00          | 70.00           |                   |
| Lavatory Truck (TLD 1410)   | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)                                       | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |
| Water Service (Gate Service)                                      | Electric | 0.00                   | 12.00                    | 0.00            | 20.00           |                   |

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2014

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 8                              |
| Annual Arrivals:   | 7                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2016

|                    |   |
|--------------------|---|
| Annual Departures: | 5 |
| Annual Arrivals:   | 4 |
| Annual TGOs:       | 0 |

Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
Bombardier Learjet 24  
Engine Type:  
CJ610-6  
Identification:  
LJ24  
Category:  
SGJB

Take Off weight: 6804.00 Kgs  
Approach Weight: 5534.00 Kgs  
Glide Slope: 3.00°  
APU Assignment: None  
APU Departure OP Time: 13.00 min  
APU Arrival OP Time: 13.00 min  
Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

Year:  
2009

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

Year:  
2014

Annual Departures: 2  
Annual Arrivals: 1  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT

Year: 2016

|  |                                |
|--|--------------------------------|
| Arrival Quarter-Hourly Operational profile:    | DEFAULT                        |
| Arrival Daily Operational Profile:             | DEFAULT                        |
| Arrival Monthly Operational Profile:           | DEFAULT                        |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT                        |
| Touch & Go Daily Operational Profile:          | DEFAULT                        |
| Touch & Go Monthly Operational Profile:        | DEFAULT                        |
| Annual Departures:                             | 1                              |
| Annual Arrivals:                               | 0                              |
| Annual TGOs:                                   | 0                              |
| Taxi Out Time:                                 | Determined by Sequencing model |
| Taxi In Time:                                  | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

|                 |                       |                        |             |
|-----------------|-----------------------|------------------------|-------------|
| Aircraft Name:  | Bombardier Learjet 25 | Take Off weight:       | 6804.00 Kgs |
| Engine Type:    | CJ610-6               | Approach Weight:       | 5534.00 Kgs |
| Identification: | LJ25                  | Glide Slope:           | 3.00°       |
| Category:       | SGJB                  | APU Assignment:        | None        |
|                 |                       | APU Departure OP Time: | 13.00 min   |
|                 |                       | APU Arrival OP Time:   | 13.00 min   |
|                 |                       | Gate Assignment:       | None        |

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

Year: 2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year: 2014

Profile:

Annual Departures: 6  
 Annual Arrivals: 5  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2016

Annual Departures: 5  
 Annual Arrivals: 5  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name: Bombardier Learjet 28  
 Engine Type: CJ610-6  
 Identification: LJ28  
 Category: SGJB

Take Off weight: 6804.00 Kgs  
 Approach Weight: 5534.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

Year: 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

|       |  |                                |
|-------|--|--------------------------------|
| Year: | Departure Quarter-Hourly Operational profile:  | DEFAULT                        |
| 2014  | Departure Daily Operational Profile:           | DEFAULT                        |
|       | Departure Monthly Operational Profile:         | DEFAULT                        |
|       | Arrival Quarter-Hourly Operational profile:    | DEFAULT                        |
|       | Arrival Daily Operational Profile:             | DEFAULT                        |
|       | Arrival Monthly Operational Profile:           | DEFAULT                        |
|       | Touch & Go Quarter-Hourly Operational profile: | DEFAULT                        |
|       | Touch & Go Daily Operational Profile:          | DEFAULT                        |
|       | Touch & Go Monthly Operational Profile:        | DEFAULT                        |
|       | Annual Departures:                             | 1                              |
|       | Annual Arrivals:                               | 0                              |
|       | Annual TGOs:                                   | 0                              |
|       | Taxi Out Time:                                 | Determined by Sequencing model |
|       | Taxi In Time:                                  | Determined by Sequencing model |

---

|       |  |                                |
|-------|--|--------------------------------|
| Year: | Departure Quarter-Hourly Operational profile:  | DEFAULT                        |
| 2016  | Departure Daily Operational Profile:           | DEFAULT                        |
|       | Departure Monthly Operational Profile:         | DEFAULT                        |
|       | Arrival Quarter-Hourly Operational profile:    | DEFAULT                        |
|       | Arrival Daily Operational Profile:             | DEFAULT                        |
|       | Arrival Monthly Operational Profile:           | DEFAULT                        |
|       | Touch & Go Quarter-Hourly Operational profile: | DEFAULT                        |
|       | Touch & Go Daily Operational Profile:          | DEFAULT                        |
|       | Touch & Go Monthly Operational Profile:        | DEFAULT                        |
|       | Annual Departures:                             | 0                              |
|       | Annual Arrivals:                               | 0                              |
|       | Annual TGOs:                                   | 0                              |
|       | Taxi Out Time:                                 | Determined by Sequencing model |
|       | Taxi In Time:                                  | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Aircraft Name:  
Gulfstream G300  
Engine Type:  
SPEY MK511-8  
Identification:  
GLF3  
Category:  
LCJP

|                        |                 |
|------------------------|-----------------|
| Take Off weight:       | 26873.00 Kgs    |
| Approach Weight:       | 23882.00 Kgs    |
| Glide Slope:           | 3.00°           |
| APU Assignment:        | APU GTCP 36-100 |
| APU Departure OP Time: | 13.00 min       |
| APU Arrival OP Time:   | 13.00 min       |
| Gate Assignment:       | None            |

---

| Assigned GSE/AGE:           | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|-----------------------------|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & | Diesel | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |

|  |          |       |       |        |       |
|--|----------|-------|-------|--------|-------|
| Stevenson TUG MC)  |          |       |       |        |       |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00 | 18.00 | 107.00 | 55.00 |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Diesel   | 15.00 | 15.00 | 71.00  | 50.00 |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00  | 5.00  | 71.00  | 53.00 |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00  | 20.00 | 175.00 | 25.00 |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00 | 0.00  | 56.00  | 25.00 |
| Service Truck (F250 / F350)  | Diesel   | 7.00  | 8.00  | 235.00 | 20.00 |

---

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2014

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 6                              |
| Annual Arrivals:   | 5                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2016

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 4                              |
| Annual Arrivals:   | 3                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|   |         |
|---|---------|
| Departure Quarter-Hourly Operational profile: | DEFAULT |
| Departure Daily Operational Profile:          | DEFAULT |
| Departure Monthly Operational Profile:        | DEFAULT |
| Arrival Quarter-Hourly Operational profile:   | DEFAULT |

Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name: Gulfstream II  
 Engine Type: SPEY MK511-8  
 Identification: GLF2  
 Category: LCJP

Take Off weight: 25401.00 Kgs  
 Approach Weight: 23882.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP 36-100  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 15.00                  | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year: 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2014

Annual Departures: 2  
 Annual Arrivals: 1  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT



Year: 2016

Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT  
 Annual Departures: 1  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Hawker HS-125 Series 600  
 Engine Type:  
 TFE731-2-2B  
 Identification:  
 H25A  
 Category:  
 SGJB

Take Off weight: 6804.00 Kgs  
 Approach Weight: 5534.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

Year: 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT

Operational profile:  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT  
 Year: 2014  
 Annual Departures: 1  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2016  
 Annual Departures: 1  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name: Rockwell Sabreliner 60  
 Engine Type: CF700-2D  
 Identification: SBR1  
 Category: SCJP  
 Take Off weight: 13000.00 Kgs  
 Approach Weight: 11140.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:   | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                       | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                     | Gasoline | 0.00                   | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                           | Gasoline | 0.00                   | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                            | Diesel   | 0.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |

|                             |        |      |      |        |       |
|-----------------------------|--------|------|------|--------|-------|
| gallon)                     |        |      |      |        |       |
| Lavatory Truck (TLD 1410)   | Diesel | 0.00 | 0.00 | 56.00  | 25.00 |
| Service Truck (F250 / F350) | Diesel | 0.00 | 8.00 | 235.00 | 20.00 |

---

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2014

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 1                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2016

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 1                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

---

|                              |   |
|------------------------------|---|
| GSE Population               | With Project 2009/14/16, Los Angeles Intl |
| None.                        |   |
| Parking Facilities           | With Project 2009/14/16, Los Angeles Intl |
| None.                        |   |
| Roadways                     | With Project 2009/14/16, Los Angeles Intl |
| None.                        |   |
| Stationary Sources           | With Project 2009/14/16, Los Angeles Intl |
| None.                        |   |
| Training Fires               | With Project 2009/14/16, Los Angeles Intl |
| None.                        |   |
| Gates                        | With Project 2009/14/16, Los Angeles Intl |
| None.                        |   |
| Taxiways                     | With Project 2009/14/16, Los Angeles Intl |
| None.                        |   |
| Runways                      | With Project 2009/14/16, Los Angeles Intl |
| None.                        |   |
| Taxipaths                    | With Project 2009/14/16, Los Angeles Intl |
| None.                        |   |
| Configurations               | With Project 2009/14/16, Los Angeles Intl |
| None.                        |   |
| Buildings                    | With Project 2009/14/16, Los Angeles Intl |
| None.                        |   |
| Discrete Cartesian Receptors | With Project 2009/14/16, Los Angeles Intl |
| None.                        |   |
| Discrete Polar Receptors     | With Project 2009/14/16, Los Angeles Intl |
| None.                        |   |
| Cartesian Receptor Networks  | With Project 2009/14/16, Los Angeles Intl |
| None.                        |   |
| Polar Receptor Networks      | With Project 2009/14/16, Los Angeles Intl |
| None.                        |   |
| User-Created Aircraft        | With Project 2009/14/16, Los Angeles Intl |

|                               |                         |              |
|-------------------------------|-------------------------|--------------|
| Aircraft Name:<br>My Aircraft | Size:                   | Large        |
|                               | Designation:            | Civil        |
|                               | Engine:                 | Jet          |
|                               | Usage:                  | Passenger    |
|                               | European Group:         | Medium Jet   |
|                               | Number of Engines       | 2            |
|                               | Aircraft Flight Profile | Agusta A-109 |
|                               | Engine Flight Profile   | 250B17B      |

The user has NOT used the following sytem emission indices and fuel flow rates

Aircraft Emissions Profile

Engine Emissions Profile

The user has edited the following emission factors:

| Mode:     | Time (mins): | Fuel Flow(Kg/s) | CO (EI) | HC (EI) | NOx (EI) | SOx (EI) | Smoke Number |
|-----------|--------------|-----------------|---------|---------|----------|----------|--------------|
| Startup   | 0            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi Out  | 19           | 0               | 0       | 0       | 0        | -1       | 0            |
| Takeoff   | 0.7          | 0               | 0       | 0       | 0        | -1       | 0            |
| Climb Out | 2.2          | 0               | 0       | 0       | 0        | -1       | 0            |
| Approach  | 4            | 0               | 0       | 0       | 0        | -1       | 0            |

User-Created GSE

With Project 2009/14/16, Los Angeles Intl

None.

User-Created APU

With Project 2009/14/16, Los Angeles Intl

None.

Scenario-Airport: With Project 2009/14/16, Van Nuys

Weather

With Project 2009/14/16, Van Nuys

Mixing Height: 3000.00 feet  
 Temperature: 59.00 °F  
 Daily High Temperature: 69.35 °F  
 Daily Low Temperature: 48.65 °F  
 Pressure: 29.92 inches of Hg  
 Sea Level Pressure: 29.96 inches of Hg  
 Relative Humidity: 54.66  
 Wind Speed: 5.22 knots  
 Wind Direction: 0.00 °  
 Ceiling: 99999.99 feet  
 Visibility: 50.00 miles  
 The user has used annual averages.  
 Base Elevation: 802.00 feet  
 Date Range: Thursday, January 01, 2004 to Friday, December 31, 2004  
 Source Data File Location:  
 Upper Air Data File Location:

Quarter-Hourly Operational Profiles

With Project 2009/14/16, Van Nuys

Name: DEFAULT

| Quarter-Hour        | Weight   | Quarter-Hour       | Weight   | Quarter-Hour        | Weight   | Quarter-Hour       | Weight   |
|---------------------|----------|--------------------|----------|---------------------|----------|--------------------|----------|
| 12:00am to 12:14 am | 1.000000 | 6:00am to 6:14am   | 1.000000 | 12:00pm to 12:14 pm | 1.000000 | 6:00pm to 6:14pm   | 1.000000 |
| 12:15am to 12:29 am | 1.000000 | 6:15am to 6:29am   | 1.000000 | 12:15pm to 12:29 pm | 1.000000 | 6:15pm to 6:29pm   | 1.000000 |
| 12:30am to 12:44 am | 1.000000 | 6:30am to 6:44am   | 1.000000 | 12:30pm to 12:44 pm | 1.000000 | 6:30pm to 6:44pm   | 1.000000 |
| 12:45am to 12:59 am | 1.000000 | 6:45am to 6:59am   | 1.000000 | 12:45pm to 12:59 pm | 1.000000 | 6:45pm to 6:59pm   | 1.000000 |
| 1:00am to 1:14am    | 1.000000 | 7:00am to 7:14am   | 1.000000 | 1:00pm to 1:14pm    | 1.000000 | 7:00pm to 7:14pm   | 1.000000 |
| 1:15am to 1:29am    | 1.000000 | 7:15am to 7:29am   | 1.000000 | 1:15pm to 1:29pm    | 1.000000 | 7:15pm to 7:29pm   | 1.000000 |
| 1:30am to 1:44am    | 1.000000 | 7:30am to 7:44am   | 1.000000 | 1:30pm to 1:44pm    | 1.000000 | 7:30pm to 7:44pm   | 1.000000 |
| 1:45am to 1:59am    | 1.000000 | 7:45am to 7:59am   | 1.000000 | 1:45pm to 1:59pm    | 1.000000 | 7:45pm to 7:59pm   | 1.000000 |
| 2:00am to 2:14am    | 1.000000 | 8:00am to 8:14am   | 1.000000 | 2:00pm to 2:14pm    | 1.000000 | 8:00pm to 8:14pm   | 1.000000 |
| 2:15am to 2:29am    | 1.000000 | 8:15am to 8:29am   | 1.000000 | 2:15pm to 2:29pm    | 1.000000 | 8:15pm to 8:29pm   | 1.000000 |
| 2:30am to 2:44am    | 1.000000 | 8:30am to 8:44am   | 1.000000 | 2:30pm to 2:44pm    | 1.000000 | 8:30pm to 8:44pm   | 1.000000 |
| 2:45am to 2:59am    | 1.000000 | 8:45am to 8:59am   | 1.000000 | 2:45pm to 2:59pm    | 1.000000 | 8:45pm to 8:59pm   | 1.000000 |
| 3:00am to 3:14am    | 1.000000 | 9:00am to 9:14am   | 1.000000 | 3:00pm to 3:14pm    | 1.000000 | 9:00pm to 9:14pm   | 1.000000 |
| 3:15am to 3:29am    | 1.000000 | 9:15am to 9:29am   | 1.000000 | 3:15pm to 3:29pm    | 1.000000 | 9:15pm to 9:29pm   | 1.000000 |
| 3:30am to 3:44am    | 1.000000 | 9:30am to 9:44am   | 1.000000 | 3:30pm to 3:44pm    | 1.000000 | 9:30pm to 9:44pm   | 1.000000 |
| 3:45am to 3:59am    | 1.000000 | 9:45am to 9:59am   | 1.000000 | 3:45pm to 3:59pm    | 1.000000 | 9:45pm to 9:59pm   | 1.000000 |
| 4:00am to 4:14am    | 1.000000 | 10:00am to 10:14am | 1.000000 | 4:00pm to 4:14pm    | 1.000000 | 10:00pm to 10:14pm | 1.000000 |
| 4:15am to 4:29am    | 1.000000 | 10:15am to 10:29am | 1.000000 | 4:15pm to 4:29pm    | 1.000000 | 10:15pm to 10:29pm | 1.000000 |

|                  |          |                    |          |                  |          |                    |          |
|------------------|----------|--------------------|----------|------------------|----------|--------------------|----------|
| 4:30am to 4:44am | 1.000000 | 10:30am to 10:44am | 1.000000 | 4:30pm to 4:44pm | 1.000000 | 10:30pm to 10:44pm | 1.000000 |
| 4:45am to 4:59am | 1.000000 | 10:45am to 10:59am | 1.000000 | 4:45pm to 4:59pm | 1.000000 | 10:45pm to 10:59pm | 1.000000 |
| 5:00am to 5:14am | 1.000000 | 11:00am to 11:14am | 1.000000 | 5:00pm to 5:14pm | 1.000000 | 11:00pm to 11:14pm | 1.000000 |
| 5:15am to 5:29am | 1.000000 | 11:15am to 11:29am | 1.000000 | 5:15pm to 5:29pm | 1.000000 | 11:15pm to 11:29pm | 1.000000 |
| 5:30am to 5:44am | 1.000000 | 11:30am to 11:44am | 1.000000 | 5:30pm to 5:44pm | 1.000000 | 11:30pm to 11:44pm | 1.000000 |
| 5:45am to 5:59am | 1.000000 | 11:45am to 11:59am | 1.000000 | 5:45pm to 5:59pm | 1.000000 | 11:45pm to 11:59pm | 1.000000 |

## Daily Operational Profiles

With Project 2009/14/16, Van Nuys

Name: DEFAULT

| Day       | Weight   | Day      | Weight   |
|-----------|----------|----------|----------|
| Monday    | 1.000000 | Friday   | 1.000000 |
| Tuesday   | 1.000000 | Saturday | 1.000000 |
| Wednesday | 1.000000 | Sunday   | 1.000000 |
| Thursday  | 1.000000 |          |          |

## Monthly Operational Profiles

With Project 2009/14/16, Van Nuys

Name: DEFAULT

| Month    | Weight   | Month     | Weight   |
|----------|----------|-----------|----------|
| January  | 1.000000 | July      | 1.000000 |
| February | 1.000000 | August    | 1.000000 |
| March    | 1.000000 | September | 1.000000 |
| April    | 1.000000 | October   | 1.000000 |
| May      | 1.000000 | November  | 1.000000 |
| June     | 1.000000 | December  | 1.000000 |

## Aircraft

With Project 2009/14/16, Van Nuys

|                        |                       |                           |
|------------------------|-----------------------|---------------------------|
| Default Taxi Out Time: | 19.000000 min         |                           |
| Default Taxi In Time:  | 7.000000 min          |                           |
| <u>Year:</u>           | <u>Uses Schedule?</u> | <u>Schedule Filename:</u> |
| 2009                   | No                    | (None)                    |
| 2014                   | No                    | (None)                    |
| 2016                   | No                    | (None)                    |

|                 |                         |                        |                        |
|-----------------|-------------------------|------------------------|------------------------|
| Aircraft Name:  | Boeing 727-100 Series   | Take Off weight:       | 68039.00 Kgs           |
| Engine Type:    | JT8D-9 series Smoke fix | Approach Weight:       | 58173.00 Kgs           |
| Identification: | B721                    | Glide Slope:           | 3.00°                  |
| Category:       | LCJP                    | APU Assignment:        | APU GTCP85-98 (200 HP) |
|                 |                         | APU Departure OP Time: | 13.00 min              |
|                 |                         | APU Arrival OP Time:   | 13.00 min              |
|                 |                         | Gate Assignment:       | None                   |

| Assigned GSE/AGE:   | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Air Conditioner (Generic)   | Electric | 7.00                   | 23.00                    | 0.00            | 75.00           |                   |
| Air Start (ACE 180)   | Diesel   | 0.00                   | 7.00                     | 425.00          | 90.00           |                   |
| Aircraft Tractor (Stewart & Stevenson TUG GT-35, Douglas TBL-180) | Diesel   | 0.00                   | 8.00                     | 88.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                   | Gasoline | 37.00                  | 38.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                         | Gasoline | 24.00                  | 24.00                    | 107.00          | 50.00           |                   |
| Cabin Service Truck (Hi-  |          |                        |                          |                 |                 |                   |

|                              |          |       |       |        |       |
|------------------------------|----------|-------|-------|--------|-------|
| Way F650)                    | Diesel   | 10.00 | 10.00 | 210.00 | 53.00 |
| Catering Truck (Hi-Way F650) | Diesel   | 7.00  | 8.00  | 210.00 | 53.00 |
| Hydrant Truck (F250 / F350)  | Diesel   | 0.00  | 12.00 | 235.00 | 70.00 |
| Lavatory Truck (TLD 1410)    | Diesel   | 15.00 | 0.00  | 56.00  | 25.00 |
| Service Truck (F250 / F350)  | Diesel   | 7.00  | 8.00  | 235.00 | 20.00 |
| Water Service (Gate Service) | Electric | 0.00  | 12.00 | 0.00   | 20.00 |

---

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 7                              |
| Annual Arrivals:   | 7                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2014

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2016

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 0                              |
| Annual Arrivals:   | 0                              |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|   |         |
|---|---------|
| Departure Quarter-Hourly Operational profile: | DEFAULT |
| Departure Daily Operational Profile:          | DEFAULT |
| Departure Monthly Operational Profile:        | DEFAULT |
| Arrival Quarter-Hourly Operational profile:   | DEFAULT |
| Arrival Daily Operational Profile:            | DEFAULT |
| Arrival Monthly Operational Profile:          | DEFAULT |
| Touch & Go Quarter-Hourly                     |         |

Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Boeing 727-200 Series  
 Engine Type:  
 JT8D-17 Smoke fix  
 Identification:  
 B722  
 Category:  
 LCJP

Take Off weight: 81647.00 Kgs  
 Approach Weight: 68991.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP85-98 (200 HP)  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:   | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Air Conditioner (Generic)   | Electric | 7.00                   | 23.00                    | 0.00            | 75.00           |                   |
| Air Start (ACE 180)   | Diesel   | 0.00                   | 7.00                     | 425.00          | 90.00           |                   |
| Aircraft Tractor (Stewart & Stevenson TUG GT-35, Douglas TBL-180) | Diesel   | 0.00                   | 8.00                     | 88.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                   | Gasoline | 37.00                  | 38.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                         | Gasoline | 24.00                  | 24.00                    | 107.00          | 50.00           |                   |
| Cabin Service Truck (Hi-Way F650)                                 | Diesel   | 10.00                  | 10.00                    | 210.00          | 53.00           |                   |
| Catering Truck (Hi-Way F650)                                      | Diesel   | 7.00                   | 8.00                     | 210.00          | 53.00           |                   |
| Hydrant Truck (F250 / F350)                                       | Diesel   | 0.00                   | 12.00                    | 235.00          | 70.00           |                   |
| Lavatory Truck (TLD 1410)   | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)                                       | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |
| Water Service (Gate Service)                                      | Electric | 0.00                   | 12.00                    | 0.00            | 20.00           |                   |

Year:  
 2009

Annual Departures: 3  
 Annual Arrivals: 3  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
 2014

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT



Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Boeing 727-200 Series  
 Engine Type:  
 JT8D-17 Smoke fix  
 Identification:  
 B727  
 Category:  
 LCJP

Take Off weight: 81647.00 Kgs  
 Approach Weight: 68991.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP85-98 (200 HP)  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:   | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Air Conditioner (Generic)   | Electric | 7.00                   | 23.00                    | 0.00            | 75.00           |                   |
| Air Start (ACE 180)   | Diesel   | 0.00                   | 7.00                     | 425.00          | 90.00           |                   |
| Aircraft Tractor (Stewart & Stevenson TUG GT-35, Douglas TBL-180) | Diesel   | 0.00                   | 8.00                     | 88.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                   | Gasoline | 37.00                  | 38.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                         | Gasoline | 24.00                  | 24.00                    | 107.00          | 50.00           |                   |
| Cabin Service Truck (Hi-Way F650)                                 | Diesel   | 10.00                  | 10.00                    | 210.00          | 53.00           |                   |
| Catering Truck (Hi-Way F650)                                      | Diesel   | 7.00                   | 8.00                     | 210.00          | 53.00           |                   |
| Hydrant Truck (F250 / F350)                                       | Diesel   | 0.00                   | 12.00                    | 235.00          | 70.00           |                   |
| Lavatory Truck (TLD 1410)   | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)                                       | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |
| Water Service (Gate Service)                                      | Electric | 0.00                   | 12.00                    | 0.00            | 20.00           |                   |

Year:  
2009

Annual Departures: 9

Annual Arrivals: 9  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
Bombardier Learjet 24  
Engine Type:  
CJ610-6  
Identification:  
LJ24  
Category:  
SGJB

Take Off weight: 6804.00 Kgs  
Approach Weight: 5534.00 Kgs  
Glide Slope: 3.00°  
APU Assignment: None  
APU Departure OP Time: 13.00 min  
APU Arrival OP Time: 13.00 min

Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

Year:  
2009

Annual Departures: 47  
Annual Arrivals: 46  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT

Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
Bombardier Learjet 25  
Engine Type:  
CJ610-6  
Identification:  
LJ25  
Category:  
SGJB

Take Off weight: 6804.00 Kgs  
Approach Weight: 5534.00 Kgs  
Glide Slope: 3.00°  
APU Assignment: None  
APU Departure OP Time: 13.00 min  
APU Arrival OP Time: 13.00 min  
Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

Year:  
2009

Annual Departures: 371  
Annual Arrivals: 371  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
 Bombardier Learjet 28  
 Engine Type:  
 CJ610-6  
 Identification:  
 LJ28  
 Category:  
 SGJB

Take Off weight: 6804.00 Kgs  
 Approach Weight: 5534.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

---

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

---

Year: 2009

Annual Departures: 5  
 Annual Arrivals: 4  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2014

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT

Year: 2016

Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name: Bombardier Learjet 35  
 Engine Type: TFE731-2-2B  
 Identification: LJ35  
 Category: SGJB

Take Off weight: 8301.00 Kgs  
 Approach Weight: 6260.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

Year: 2009

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2014

Annual Departures: 179  
 Annual Arrivals: 178

Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 152  
 Annual Arrivals: 151  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
Dassault Falcon 20-G  
 Engine Type:  
CF700-2D  
 Identification:  
FA20  
 Category:  
SGJB

Take Off weight: 13000.00 Kgs  
 Approach Weight: 11140.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP 36-150[]  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD, 28 VDC)  | Diesel | 0.00                   | 40.00                    | 71.00           | 75.00           |                   |

Year:  
2009

Annual Departures: 62  
 Annual Arrivals: 61  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational DEFAULT

profile:  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 39  
 Annual Arrivals: 38  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 32  
 Annual Arrivals: 31  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
Gulfstream G300  
 Engine Type:  
SPEY MK511-8  
 Identification:  
GLF3  
 Category:  
LCJP

Take Off weight: 26873.00 Kgs  
 Approach Weight: 23882.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP 36-100  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

---

| Assigned GSE/AGE:                             | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC) | Diesel | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |



|  |          |       |       |        |       |
|--|----------|-------|-------|--------|-------|
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00 | 18.00 | 107.00 | 55.00 |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Diesel   | 15.00 | 15.00 | 71.00  | 50.00 |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00  | 5.00  | 71.00  | 53.00 |
| Fuel Truck (F750, Dukas Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00  | 20.00 | 175.00 | 25.00 |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00 | 0.00  | 56.00  | 25.00 |
| Service Truck (F250 / F350)  | Diesel   | 7.00  | 8.00  | 235.00 | 20.00 |

---

Year:  
2009

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 835                            |
| Annual Arrivals:   | 835                            |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2014

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 696                            |
| Annual Arrivals:   | 695                            |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

Year:  
2016

|                    |                                |
|--------------------|--------------------------------|
| Annual Departures: | 508                            |
| Annual Arrivals:   | 507                            |
| Annual TGOs:       | 0                              |
| Taxi Out Time:     | Determined by Sequencing model |
| Taxi In Time:      | Determined by Sequencing model |

---

|   |         |
|---|---------|
| Departure Quarter-Hourly Operational profile: | DEFAULT |
| Departure Daily Operational Profile:          | DEFAULT |
| Departure Monthly Operational Profile:        | DEFAULT |
| Arrival Quarter-Hourly Operational profile:   | DEFAULT |
| Arrival Daily Operational Profile:            | DEFAULT |

Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Gulfstream II  
 Engine Type:  
 SPEY MK511-8  
 Identification:  
 GLF2  
 Category:  
 LCJP

Take Off weight: 25401.00 Kgs  
 Approach Weight: 23882.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: APU GTCP 36-100  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 17.00                  | 18.00                    | 107.00          | 55.00           |                   |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 15.00                  | 15.00                    | 107.00          | 50.00           |                   |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 5.00                   | 5.00                     | 71.00           | 53.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |
| Lavatory Truck (TLD 1410)  | Diesel   | 15.00                  | 0.00                     | 56.00           | 25.00           |                   |
| Service Truck (F250 / F350)  | Diesel   | 7.00                   | 8.00                     | 235.00          | 20.00           |                   |

Year:  
 2009

Annual Departures: 624  
 Annual Arrivals: 624  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
 2014

Annual Departures: 65  
 Annual Arrivals: 65  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT

Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT  
 Year: 2016  
 Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Hawker HS-125 Series 600  
 Engine Type:  
 TFE731-2-2B  
 Identification:  
 H25A  
 Category:  
 SGJB

Take Off weight: 6804.00 Kgs  
 Approach Weight: 5534.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

Year: 2009  
 Annual Departures: 5  
 Annual Arrivals: 5  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT

Year: 2014

Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT  
 Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2016

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name: Northrop F-5E/F Tiger II  
 Engine Type: J85-GE-5F  
 Identification: F-5  
 Category: SMJA

Take Off weight: 23587.00 Kgs  
 Approach Weight: 18144.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:   | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---------------------|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Cart (Taylor Dunn)  | Diesel | 5.00                   | 5.00                     | 25.00           | 50.00           |                   |
| Generator (Generic) | Diesel | 0.00                   | 120.00                   | 158.00          | 82.00           |                   |
| Lift (Generic)      | Diesel | 5.00                   | 5.00                     | 115.00          | 50.00           |                   |
| Other (Generic)     | Diesel | 0.00                   | 0.00                     | 140.00          | 50.00           |                   |

Year: 2009

Annual Departures: 2  
 Annual Arrivals: 2  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Year:  
2014

---

|  |                                |
|--|--------------------------------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT                        |
| Departure Daily Operational Profile:           | DEFAULT                        |
| Departure Monthly Operational Profile:         | DEFAULT                        |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT                        |
| Arrival Daily Operational Profile:             | DEFAULT                        |
| Arrival Monthly Operational Profile:           | DEFAULT                        |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT                        |
| Touch & Go Daily Operational Profile:          | DEFAULT                        |
| Touch & Go Monthly Operational Profile:        | DEFAULT                        |
| Annual Departures:                             | 2                              |
| Annual Arrivals:                               | 2                              |
| Annual TGOs:                                   | 0                              |
| Taxi Out Time:                                 | Determined by Sequencing model |
| Taxi In Time:                                  | Determined by Sequencing model |

---

Year:  
2016

|  |                                |
|--|--------------------------------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT                        |
| Departure Daily Operational Profile:           | DEFAULT                        |
| Departure Monthly Operational Profile:         | DEFAULT                        |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT                        |
| Arrival Daily Operational Profile:             | DEFAULT                        |
| Arrival Monthly Operational Profile:           | DEFAULT                        |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT                        |
| Touch & Go Daily Operational Profile:          | DEFAULT                        |
| Touch & Go Monthly Operational Profile:        | DEFAULT                        |
| Annual Departures:                             | 0                              |
| Annual Arrivals:                               | 0                              |
| Annual TGOs:                                   | 0                              |
| Taxi Out Time:                                 | Determined by Sequencing model |
| Taxi In Time:                                  | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

---

Aircraft Name:  
Rockwell Sabreliner 60  
Engine Type:  
CF700-2D  
Identification:  
SBR1  
Category:  
SCJP

|                        |              |
|------------------------|--------------|
| Take Off weight:       | 13000.00 Kgs |
| Approach Weight:       | 11140.00 Kgs |
| Glide Slope:           | 3.00°        |
| APU Assignment:        | None         |
| APU Departure OP Time: | 13.00 min    |
| APU Arrival OP Time:   | 13.00 min    |
| Gate Assignment:       | None         |

---

|                   |      |                        |                          |                 |                 |                   |
|-------------------|------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Assigned GSE/AGE: | FUEL | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|-------------------|------|------------------------|--------------------------|-----------------|-----------------|-------------------|

|  |          |      |       |        |       |
|--|----------|------|-------|--------|-------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00 | 5.00  | 86.00  | 80.00 |
| Baggage Tractor (Stewart & Stevenson TUG MA 50)                            | Gasoline | 0.00 | 18.00 | 107.00 | 55.00 |
| Belt Loader (Stewart & Stevenson TUG 660)                                  | Gasoline | 0.00 | 15.00 | 107.00 | 50.00 |
| Catering Truck (Hi-Way / TUG 660 chasis)                                   | Diesel   | 0.00 | 5.00  | 71.00  | 53.00 |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00 | 20.00 | 175.00 | 25.00 |
| Lavatory Truck (TLD 1410)  | Diesel   | 0.00 | 0.00  | 56.00  | 25.00 |
| Service Truck (F250 / F350)  | Diesel   | 0.00 | 8.00  | 235.00 | 20.00 |

Year:  
2009

Annual Departures: 6  
Annual Arrivals: 5  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2014

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational profile: DEFAULT  
Arrival Daily Operational Profile: DEFAULT  
Arrival Monthly Operational Profile: DEFAULT  
Touch & Go Quarter-Hourly Operational profile: DEFAULT  
Touch & Go Daily Operational Profile: DEFAULT  
Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
Annual Arrivals: 0  
Annual TGOs: 0  
Taxi Out Time: Determined by Sequencing model  
Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
Departure Daily Operational Profile: DEFAULT  
Departure Monthly Operational Profile: DEFAULT  
Arrival Quarter-Hourly Operational

profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Aircraft Name:  
 Rockwell Sabreliner 80  
 Engine Type:  
 CF700-2D  
 Identification:  
 SBR2  
 Category:  
 SGJB

Take Off weight: 13000.00 Kgs  
 Approach Weight: 11140.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

| Assigned GSE/AGE:  | FUEL     | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|--|----------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Aircraft Tractor (Stewart & Stevenson TUG MC)                              | Diesel   | 0.00                   | 5.00                     | 86.00           | 80.00           |                   |
| Fuel Truck (F750, Dukes Transportation Services, DART 3000 to 6000 gallon) | Diesel   | 0.00                   | 20.00                    | 175.00          | 25.00           |                   |
| Ground Power Unit (TLD)  | Gasoline | 0.00                   | 40.00                    | 107.00          | 75.00           |                   |

Year: 2009

Annual Departures: 5  
 Annual Arrivals: 4  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year: 2014

Annual Departures: 4  
 Annual Arrivals: 3  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT

Year: 2016

Touch & Go Monthly Operational Profile: DEFAULT

Annual Departures: 4

Annual Arrivals: 3

Annual TGOs: 0

Taxi Out Time: Determined by Sequencing model

Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT

Departure Daily Operational Profile: DEFAULT

Departure Monthly Operational Profile: DEFAULT

Arrival Quarter-Hourly Operational profile: DEFAULT

Arrival Daily Operational Profile: DEFAULT

Arrival Monthly Operational Profile: DEFAULT

Touch & Go Quarter-Hourly Operational profile: DEFAULT

Touch & Go Daily Operational Profile: DEFAULT

Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name: T-38 Talon  
 Engine Type: J85-GE-5H (w/AB)  
 Identification: L-39  
 Category: LMJO

Take Off weight: 23587.00 Kgs

Approach Weight: 18144.00 Kgs

Glide Slope: 3.00°

APU Assignment: None

APU Departure OP Time: 13.00 min

APU Arrival OP Time: 13.00 min

Gate Assignment: None

---

| Assigned GSE/AGE:   | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---------------------|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Cart (Taylor Dunn)  | Diesel | 0.00                   | 5.00                     | 25.00           | 50.00           |                   |
| Generator (Generic) | Diesel | 0.00                   | 120.00                   | 158.00          | 82.00           |                   |
| Lift (Generic)      | Diesel | 0.00                   | 5.00                     | 115.00          | 50.00           |                   |
| Other (Generic)     | Diesel | 0.00                   | 0.00                     | 140.00          | 50.00           |                   |

---

Year: 2009

Annual Departures: 29

Annual Arrivals: 29

Annual TGOs: 0

Taxi Out Time: Determined by Sequencing model

Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT

Departure Daily Operational Profile: DEFAULT

Departure Monthly Operational Profile: DEFAULT

Arrival Quarter-Hourly Operational profile: DEFAULT

Arrival Daily Operational Profile: DEFAULT

Arrival Monthly Operational Profile: DEFAULT

Touch & Go Quarter-Hourly Operational profile: DEFAULT

Touch & Go Daily Operational Profile: DEFAULT

Touch & Go Monthly Operational Profile: DEFAULT

---

Year: 2014

Annual Departures: 29

Annual Arrivals: 29

Annual TGOs: 0

Taxi Out Time: Determined by Sequencing model

Taxi In Time: Determined by Sequencing model



---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

Year:  
2016

Annual Departures: 0  
 Annual Arrivals: 0  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT  
 Arrival Monthly Operational Profile: DEFAULT  
 Touch & Go Quarter-Hourly Operational profile: DEFAULT  
 Touch & Go Daily Operational Profile: DEFAULT  
 Touch & Go Monthly Operational Profile: DEFAULT

---

Aircraft Name:  
 T-38 Talon  
 Engine Type:  
 J85-GE-5H (w/AB)  
 Identification:  
 T-38  
 Category:  
 LMJO

Take Off weight: 23587.00 Kgs  
 Approach Weight: 18144.00 Kgs  
 Glide Slope: 3.00°  
 APU Assignment: None  
 APU Departure OP Time: 13.00 min  
 APU Arrival OP Time: 13.00 min  
 Gate Assignment: None

---

| Assigned GSE/AGE:   | FUEL   | Arrival Op Time (mins) | Departure Op Time (mins) | Horsepower (hp) | Load Factor (%) | Manufactured Year |
|---------------------|--------|------------------------|--------------------------|-----------------|-----------------|-------------------|
| Cart (Taylor Dunn)  | Diesel | 0.00                   | 5.00                     | 25.00           | 50.00           |                   |
| Generator (Generic) | Diesel | 0.00                   | 120.00                   | 158.00          | 82.00           |                   |
| Lift (Generic)      | Diesel | 0.00                   | 5.00                     | 115.00          | 50.00           |                   |
| Other (Generic)     | Diesel | 0.00                   | 0.00                     | 140.00          | 50.00           |                   |

---

Year:  
2009

Annual Departures: 19  
 Annual Arrivals: 19  
 Annual TGOs: 0  
 Taxi Out Time: Determined by Sequencing model  
 Taxi In Time: Determined by Sequencing model

---

Departure Quarter-Hourly Operational profile: DEFAULT  
 Departure Daily Operational Profile: DEFAULT  
 Departure Monthly Operational Profile: DEFAULT  
 Arrival Quarter-Hourly Operational profile: DEFAULT  
 Arrival Daily Operational Profile: DEFAULT

|               |  |                                |
|---------------|--|--------------------------------|
|               | Arrival Monthly Operational Profile:           | DEFAULT                        |
|               | Touch & Go Quarter-Hourly Operational profile: | DEFAULT                        |
|               | Touch & Go Daily Operational Profile:          | DEFAULT                        |
|               | Touch & Go Monthly Operational Profile:        | DEFAULT                        |
| Year:<br>2014 | Annual Departures:                             | 19                             |
|               | Annual Arrivals:                               | 19                             |
|               | Annual TGOs:                                   | 0                              |
|               | Taxi Out Time:                                 | Determined by Sequencing model |
|               | Taxi In Time:                                  | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

|               |                    |                                |
|---------------|--------------------|--------------------------------|
| Year:<br>2016 | Annual Departures: | 0                              |
|               | Annual Arrivals:   | 0                              |
|               | Annual TGOs:       | 0                              |
|               | Taxi Out Time:     | Determined by Sequencing model |
|               | Taxi In Time:      | Determined by Sequencing model |

---

|  |         |
|--|---------|
| Departure Quarter-Hourly Operational profile:  | DEFAULT |
| Departure Daily Operational Profile:           | DEFAULT |
| Departure Monthly Operational Profile:         | DEFAULT |
| Arrival Quarter-Hourly Operational profile:    | DEFAULT |
| Arrival Daily Operational Profile:             | DEFAULT |
| Arrival Monthly Operational Profile:           | DEFAULT |
| Touch & Go Quarter-Hourly Operational profile: | DEFAULT |
| Touch & Go Daily Operational Profile:          | DEFAULT |
| Touch & Go Monthly Operational Profile:        | DEFAULT |

---

|                    |                                   |
|--------------------|-----------------------------------|
| GSE Population     | With Project 2009/14/16, Van Nuys |
| None.              |                                   |
| Parking Facilities | With Project 2009/14/16, Van Nuys |
| None.              |                                   |
| Roadways           | With Project 2009/14/16, Van Nuys |
| None.              |                                   |
| Stationary Sources | With Project 2009/14/16, Van Nuys |
| None.              |                                   |
| Training Fires     | With Project 2009/14/16, Van Nuys |
| None.              |                                   |
| Gates              | With Project 2009/14/16, Van Nuys |
| None.              |                                   |
| Taxiways           | With Project 2009/14/16, Van Nuys |
| None.              |                                   |

|                              |                                   |
|------------------------------|-----------------------------------|
| Runways                      | With Project 2009/14/16, Van Nuys |
| None.                        |                                   |
| Taxipaths                    | With Project 2009/14/16, Van Nuys |
| None.                        |                                   |
| Configurations               | With Project 2009/14/16, Van Nuys |
| None.                        |                                   |
| Buildings                    | With Project 2009/14/16, Van Nuys |
| None.                        |                                   |
| Discrete Cartesian Receptors | With Project 2009/14/16, Van Nuys |
| None.                        |                                   |
| Discrete Polar Receptors     | With Project 2009/14/16, Van Nuys |
| None.                        |                                   |
| Cartesian Receptor Networks  | With Project 2009/14/16, Van Nuys |
| None.                        |                                   |
| Polar Receptor Networks      | With Project 2009/14/16, Van Nuys |
| None.                        |                                   |

|                              |                                   |
|------------------------------|-----------------------------------|
| <b>User-Created Aircraft</b> | With Project 2009/14/16, Van Nuys |
|------------------------------|-----------------------------------|

|                               |                         |              |
|-------------------------------|-------------------------|--------------|
| Aircraft Name:<br>My Aircraft | Size:                   | Large        |
|                               | Designation:            | Civil        |
|                               | Engine:                 | Jet          |
|                               | Usage:                  | Passenger    |
|                               | European Group:         | Medium Jet   |
|                               | Number of Engines       | 2            |
|                               | Aircraft Flight Profile | Agusta A-109 |
|                               | Engine Flight Profile   | 250B17B      |

The user has NOT used the following system emission indices and fuel flow rates

Aircraft Emissions  
Profile

Engine Emissions  
Profile

The user has edited the following emission factors:

| Mode:     | Time (mins): | Fuel Flow(Kg/s) | CO (EI) | HC (EI) | NOx (EI) | SOx (EI) | Smoke Number |
|-----------|--------------|-----------------|---------|---------|----------|----------|--------------|
| Startup   | 0            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi Out  | 19           | 0               | 0       | 0       | 0        | -1       | 0            |
| Takeoff   | 0.7          | 0               | 0       | 0       | 0        | -1       | 0            |
| Climb Out | 2.2          | 0               | 0       | 0       | 0        | -1       | 0            |
| Approach  | 4            | 0               | 0       | 0       | 0        | -1       | 0            |
| Taxi In   | 7            | 0               | 0       | 0       | 0        | -1       | 0            |

|                         |                                   |
|-------------------------|-----------------------------------|
| <b>User-Created GSE</b> | With Project 2009/14/16, Van Nuys |
|-------------------------|-----------------------------------|

None.

|                         |                                   |
|-------------------------|-----------------------------------|
| <b>User-Created APU</b> | With Project 2009/14/16, Van Nuys |
|-------------------------|-----------------------------------|

None.

